

6" LED Closet Lights with PIR Motion Sensor

Turns Lights ON/OFF Automatically


Lights turn ON automatically when motion is detected and OFF after 30 seconds when no motion is detected, Ideal for closets, workrooms, basements, storage areas, utility rooms and attics etc.

Model # CSC3025



Turns Lights ON/OFF Automatically



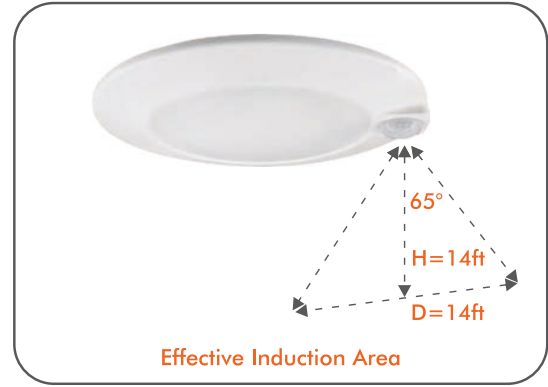

PIR Motion Sensor

Turn on when detecting movement, not only in dark, but also daytime. Turn off after 30 seconds (customized is also available) delay if no more motion

• When motion is detected, it automatically turning lights ON and turns the lights off after 30 seconds when the room is vacated

- Input voltage: AC 120V 50/60Hz
- The light features a 15W LED module, making it the energy efficient, popular alternative to incandescent and CFL fixtures
- The light incorporates today's most wanted features and meets NFPA 70, NEC Section 410.16 C (1) requirements
- It is easy to install with keyholes for multiple ceiling box configurations
- Designed for indoor use only

1. Automatically turn to bright light when walk into the reaction range

2. Automatically turn to standby mode when people walk out of the reaction range

Color Temperature Options

- Soft White: 3000K
- Neutral White: 4000K
- Cool White: 5000K



Wattage



Lumens




Beam Angle




Lifespan



Color Rendering Index

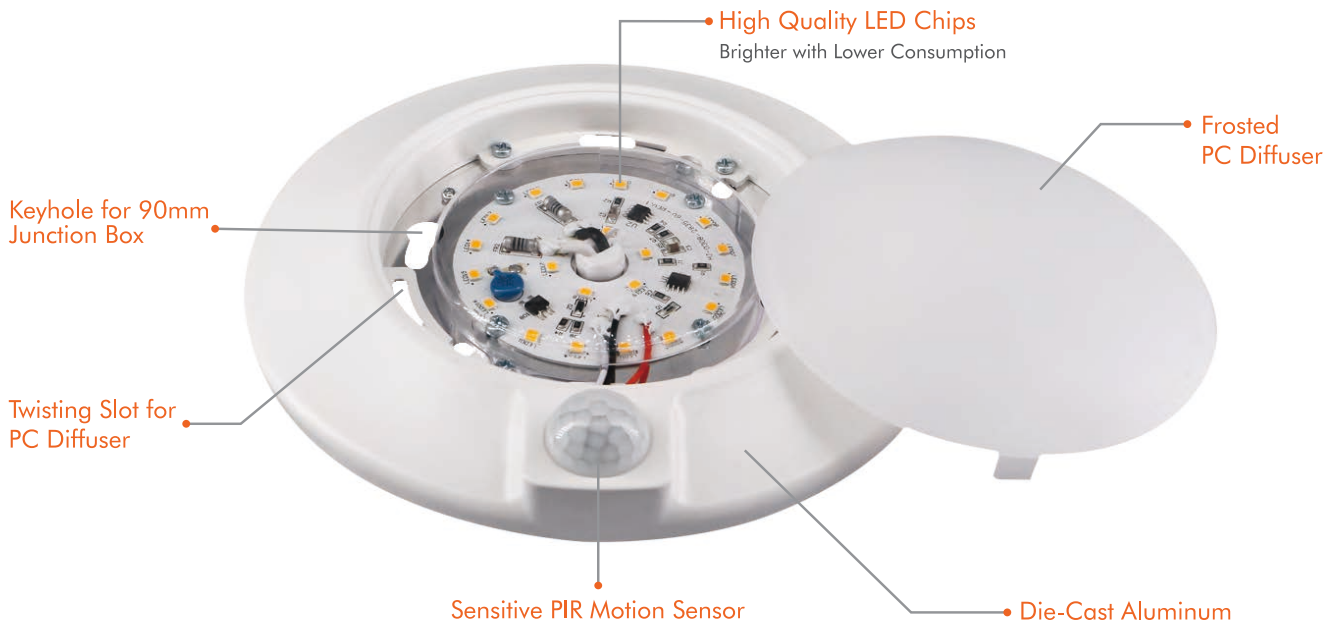

Dimensions

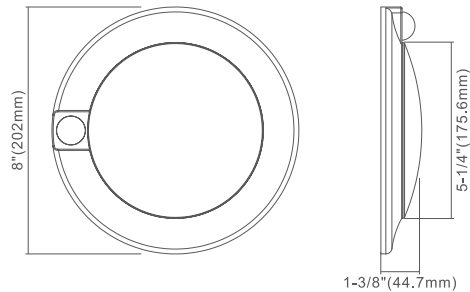

6" PIR Closet Light

Installation (Junction Box)

LED closets with PIR motion sensor provide surface mount light for new construction applications. Unit fits most 4" junction boxes and can replace 4", 5", 6" recessed can lights to eliminate baffles & Fire rated boxes.


Step 1: Prior to installation please install two screws (furnished) into the junction box. Do not drive screws completely to the end of the junction box.

Step 2: Connect supply wires to wires in fixture wiring box with proper size wire nuts or push wires into "push-in" connector. Connect white to white, black to black, and green or bare copper wire to bare copper wire.

Step 3: The ground wire at the service junction box may need to be secured to a ground screw.

Step 4: With a screwdriver, attach the disk light tightly to the j-box.

Step 5: Complete the installation by twisting the diffuser on the disk light metal enclosure and lock the diffuser in place.



Ordering Guide

Picture	Model	Description
	6" LED Closet Lights with PIR Motion Sensor - Soft White	
	CSC3025-3KWH	6" 15W 3000K 900Lm White Finish
	CSC3025-3KBK	6" 15W 3000K 900Lm Black Finish
	CSC3025-3KBN	6" 15W 3000K 900Lm Brushed Nickel Finish
	6" LED Closet Lights with PIR Motion Sensor - Neutral White	
	CSC3025-4KWH	6" 15W 4000K 920Lm White Finish
	CSC3025-4KBK	6" 15W 4000K 920Lm Black Finish
	CSC3025-4KBN	6" 15W 4000K 920Lm Brushed Nickel Finish
	6" LED Closet Lights with PIR Motion Sensor - Cool White	
	CSC3025-5KWH	6" 15W 5000K 940Lm White Finish
	CSC3025-5KBK	6" 15W 5000K 940Lm Black Finish
	CSC3025-5KBN	6" 15W 5000K 940Lm Brushed Nickel Finish

Accessories

	Mounting Clips Kit AD114-MC	Wire Nuts and Screws
--	---------------------------------------	----------------------