





DESCRIPTION

Smart Wi-Fi dimmer for controlling LED, CFL and incandescent light fixtures

FEATURES & BENEFITS

- No hub needed
- Installs like regular single pole dimmer, neutral wire required
- Can be paired with up to 10 remote kinetic switches
- Controlled via:
 - push button
 - kinetic self-powered remote switch cat # EU1254
 - phone app "Kinetic Switch", WiFi 2.4 GHz needed
 - voice control with most smart speakers

INSTALLATION & DIMENSIONS

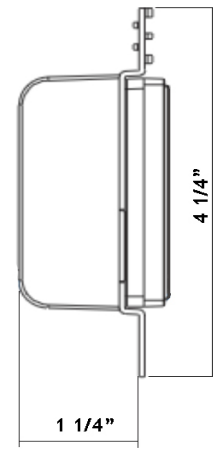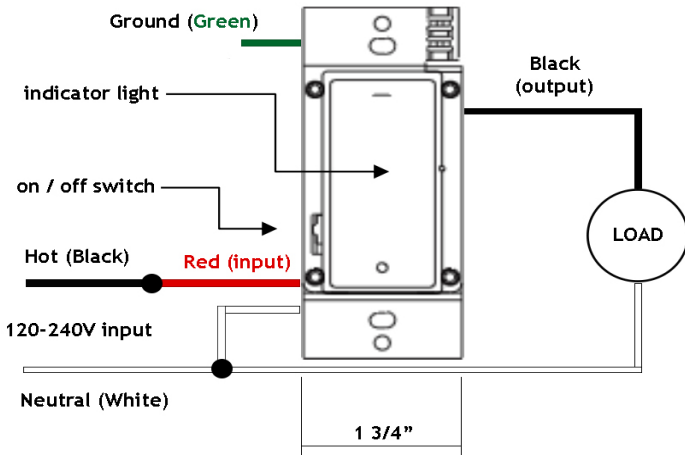

- Top button:**
- short push to turn on full brightness
 - long press to increase brightness
- Bottom button:**
- short push to turn off
 - long press to decrease brightness



Project: _____

Location: _____

Qty: _____

Notes: _____

SPECIFICATION	
Input Voltage	100 - 240 V AC 50/60 Hz
Approved Location	Indoor / dry locations
Maximum Load	LED / CFL 200 W
	Incandescent 250 W
Wireless Communication	WiFi 2.4GHz
	RF 902 MHz
Kinetic Remote Distance	100 ft (30m) indoor
	160 ft (50m) outdoor
Pairing Capacity	maximum of 10 kinetic switches paired
Operating Temperature	-15°C to + 45°C (5°F to 113°F)
Certifications	c ETL us, FCC
Warranty	3 Year

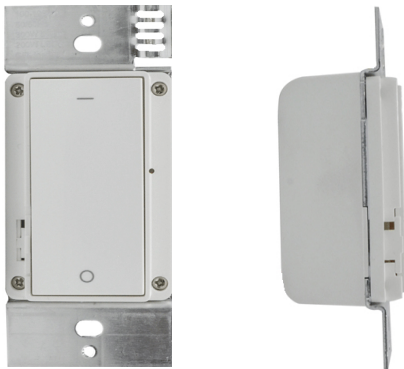

ACCESSORIES

Sold separately



Kinetic self-powered switch cat # EU1254

ORDERING GUIDE

model ERC111

Decora wall plate not included

Available in White only

