

# LBL-DC24V30W

# 24V Class 2 Power Supply 30W Dimmable



#### DESCRIPTION


24V Class 2 Power Supply 30W For Residential Applications at 80% Load

#### FEATURES & BENEFITS

7/8" Deep - Fits Where Space Is Limited Triac Dimmable Wet Location Certified


### WIRING DIAGRAM

The below diagram is for information purpose only. Always use the wiring diagram of dimmer manufacturer. Do not connect other light fixtures in the same circuit.

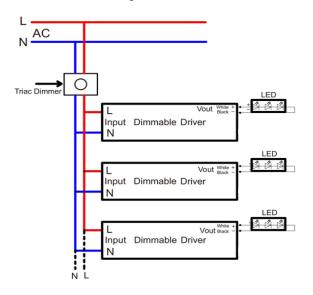

| Project:  |  |  |  |
|-----------|--|--|--|
| Location: |  |  |  |
| Qty:      |  |  |  |
| Notes:    |  |  |  |

| SPECIFICATION       |                                 |  |  |  |
|---------------------|---------------------------------|--|--|--|
| Applications        | LED Tape, 24V Ceiling Fixtures  |  |  |  |
| Power               | 30 W                            |  |  |  |
| Input               | 120V                            |  |  |  |
| Output              | 24V DC                          |  |  |  |
| Dimmability         | Triac down to 20%               |  |  |  |
| Approved Location   | Wet Location IP67               |  |  |  |
| Ambient Temperature | -40°F (-40°C) to +104°F (+40°C) |  |  |  |
| Warranty            | 3 Year                          |  |  |  |
| Certification       | c ETL us File # 501062          |  |  |  |

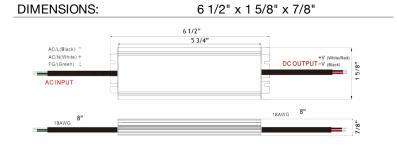

#### ORDERING GUIDE

Hard Wired LBL-DC24V30W

Plug-in

LBL-DC24V30W-PLUG

#### COMPLIANCE



## WARNING:

Ambient operating temperature is -40°F (-40°C) to +104°F (+40°C). Please mount in a shaded area or when mounted indoors install in a well-ventilated area. Failure to follow these instructions could lead to overheating, short life and void the warranty.

### Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500 Hainesport NJ, Naples FL, Dallas TX, Vancouver WA

www.LotusLEDLights.com

shts.comLotus LED Lights CANADA800-15355 24 Ave Box 200, SurreyBC V4A 2H9 tel 604-538-3090Delta BC & Mississauga ON