

Project: _____

Location: _____

Qty: _____

Notes: _____

DESCRIPTION

Code-compliant new construction 2 hour fire rated standard size octagon junction box.

Designed for surface mount ceiling light fixtures 5" diameter & up

FEATURES & BENEFITS

Fire & Air-Tight rated


Innovative design allows for versatile installation while retaining key features that are easy to specify, install & maintain

Mounts on 1/2" to 1" 1/2 thick drywall (pre-adjusted for 5/8")


Fits in 2" ceiling space - ideal for limited plenum areas

Expandable bars fit 16" to 24" spaced joists


| SPECIFICATION | |
|------------------|---------------------------------------|
| Applications | Multi-Family Residential & Commercial |
| Fire Rating | 2 Hour |
| Air-Tight | Yes |
| Box Volume | 33.7 in ³ |
| Box Weight | 1.33 lbs |
| Truss Span | 16" to 24" |
| Weight Limit | 50 lbs |
| Certification | c ETL us, file # 3193488 |
| Safety Standards | UL-514A, CAN/CSA-C22.2 No. 18.1 |
| Fire Standard | UL 263 |
| Warranty | 3 Year |

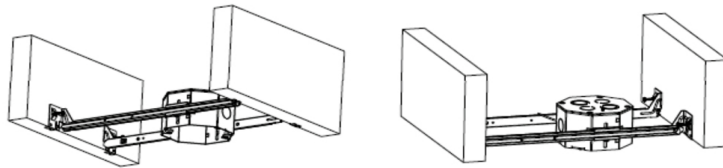





1. Position hanger bar/junction box assembly on wooden joist as shown

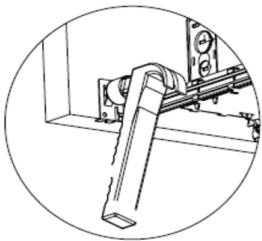

2. Attach hanger bars to wooden joist

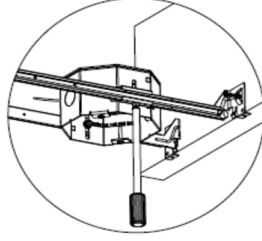

3. Slide junction box to desired location along and then fix into place along channels with screws

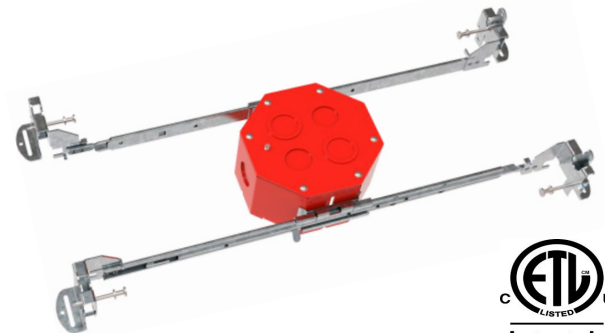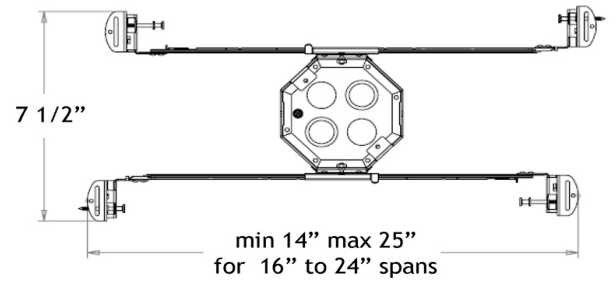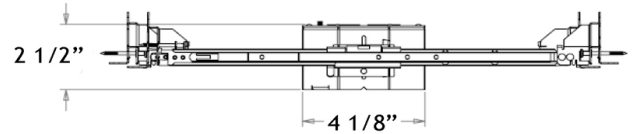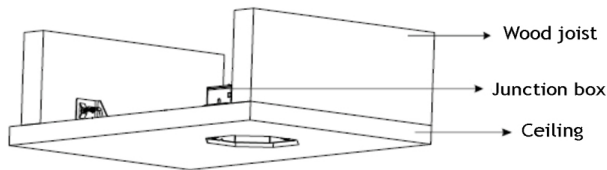

ORDERING GUIDE

model LBL-FRB

Package contains box and mounting bars

Case quantity 24 pieces

Compatible fixtures supplied by Lotus LED Lights

LL4RBX, CSC3017, CSC3025, ADS7R9, ADS12R8