



LLL-LD1535T3

120V-347V input 0-10V Dimmable Driver 15W Slim Box



Project: _____

Location: _____

Qty: _____

Notes: _____

DESCRIPTION

120-347V Input Driver 0-10V Dimmable for Lotus LED Lights Models LD3R & LD3S.

Output 18-40 V DC, Constant Current 330 mA, PF > 0.95

Connection box wire capacity: Maximum of 5 No 12 AWG or 8 No 14 AWG

DIMENSIONS: 3 1/2" x 2 1/4" x 1 1/2"


COMPATIBLE FIXTURES

LD3R

LD3R-4RSL

LD3S

LD3S-5SSL

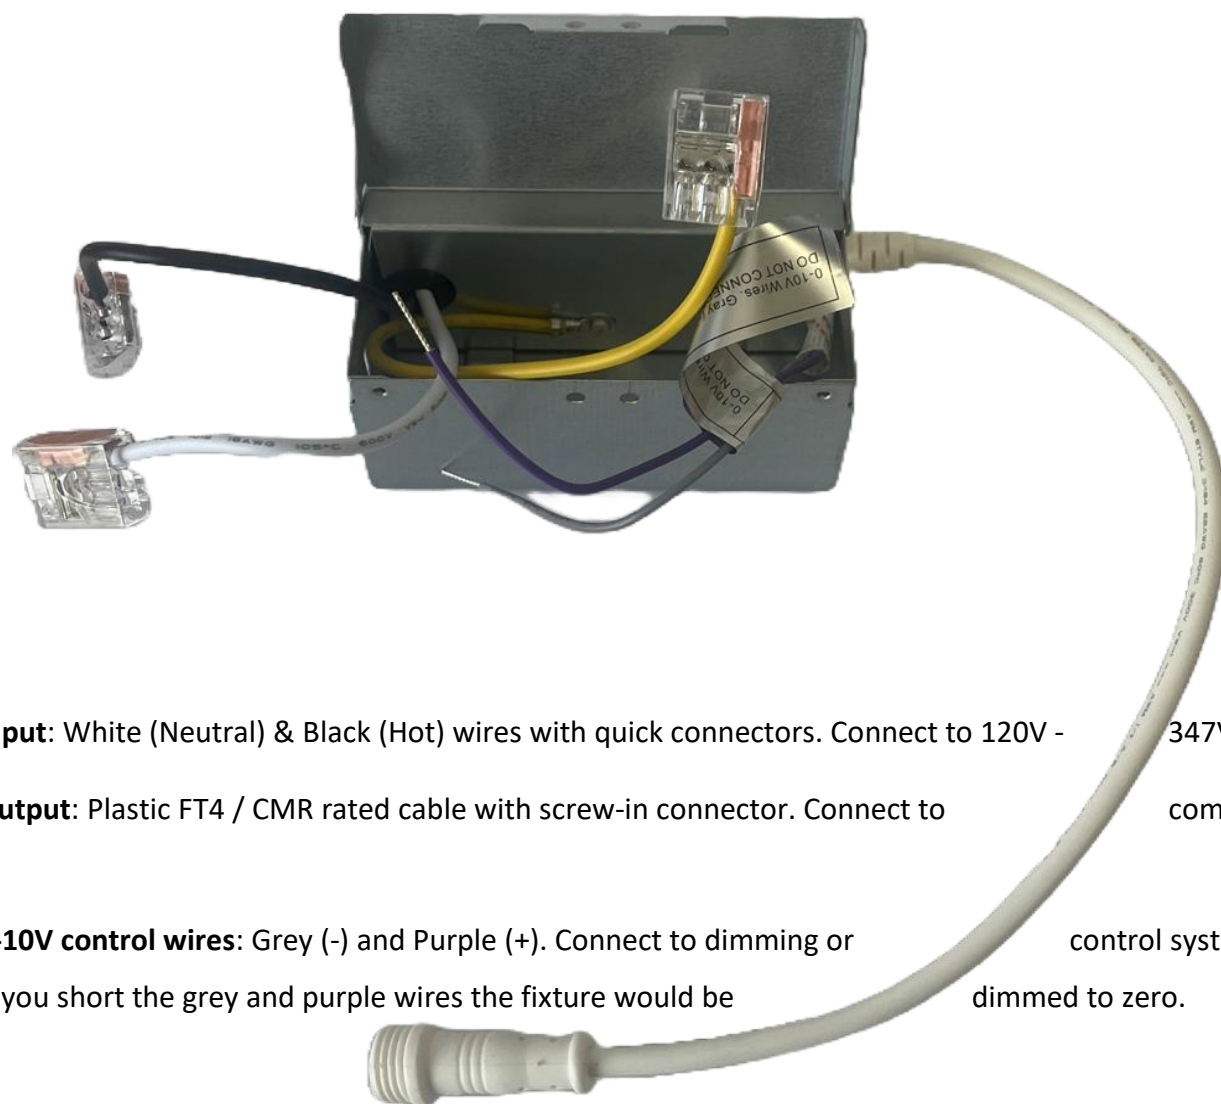

CABLE CONNECTORS

1 knock-out 7/8"

2 Romex quick connectors

MOUNTING

on Lotus **FRP** plates

on Lotus **RIP** plates

directly on joist

ORDERING GUIDE

model # LLL-LD1535T3

Input: White (Neutral) & Black (Hot) wires with quick connectors. Connect to 120V -

347V AC according to the Dimmer Manufacturer's Instructions.

Output: Plastic FT4 / CMR rated cable with screw-in connector. Connect to

compatible Lotus LED fixture from the list above

0-10V control wires: Grey (-) and Purple (+). Connect to dimming or

control system 0-10V only. DO NOT CONNECT TO LINE VOLTAGE.

If you short the grey and purple wires the fixture would be

dimmed to zero.

Warning: This driver is UL / cUL certified to be used only with Lotus LED Lights fixtures.

Connecting it to any other manufacturer's fixtures will void certification and warranty and may cause overheating and fire.

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON