

4" Round Slim Recessed LED 12W Wet Location



Type IC, Wet & Air-Tight

DESCRIPTION

4" Round Recessed LED With Integral Driver In Connection Box


FEATURES & BENEFITS

- 1" Deep - Install Where Ceiling Space Is Limited
- Driver Inside Connection Box - No Junction Box Needed
- Fast & Easy To Install - Save On Labor
- Type IC Rated - No Housing Required

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required For Driver: 2"

DIMENSIONS: ID 4" OD 5" Cut Out 4" to 4 1/2"

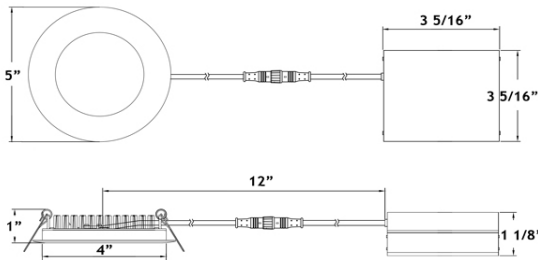

120V TRIAC Dimmable

Optional 120V - 347V

Driver Included

Driver 0-10V Dimmable



Order Separately as
Cat # **LLL-LD1535T**

AVAILABLE TRIMS



White

ORDERING GUIDE Example: **LY41RCD / 30K / WH / WET**

	CCT	Trim Finish	
LY41RCD	/	/	/ WET
3000K	30K	WH	
4100K	41K	White	

Project:

Location:

Cat #:

Qty:

Notes:

SPECIFICATION

Applications	Recessed Ceiling, Showers & Soffits	
Energy Used	12 W	
Colour Temperature	3000	4100
Light Output	700	800
Halogen Equivalent	65 W	
Beam Angle	110°	
CRI	80	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG	
Power Factor	0.95	
Approved Location	Insulated Ceiling & Wet Locations	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 50,000 Hours	
Certification	cULus	
Warranty	10 Year Residential / 5 Year Commercial	

ACCESSORIES

Sold Separately



Low Voltage Extension Cables
6ft - cat # **EXC6**, 20ft - cat # **EXC20**
Max 40 ft Allowed. FT4 / CMR rated



26" Flat Rough-In Plates - cat # **RIP4**



13" Flat Rough-In Plate - cat # **MP4-2**



13" Flanged Rough-In Plate - cat # **MP4**



Flanged Plate with Hanger Bars - cat # **FRP4**



Goof Ring White OD 5 3/4" cat # **GR4**

COMPLIANCE



Type IC
Air-Tight