


6" Square Slim Recessed LED 14W



Type IC, Wet & Air-Tight

DESCRIPTION

6" Square Slim Recessed LED With
Integral Driver In Connection Box


FEATURES & BENEFITS

- 1 1/2" Deep - Install Where Ceiling Space Is Limited
- Driver Inside Connection Box - No Junction Box Needed
- Fast & Easy To Install - Save On Labor
- Type IC Rated - No Housing Required

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached
Spring Clips. Ceiling Clearance Required For Driver: 1 1/2"

DIMENSIONS: ID 6 3/16" OD 6 3/4" Cut Out 6 1/4" to 6 1/2"

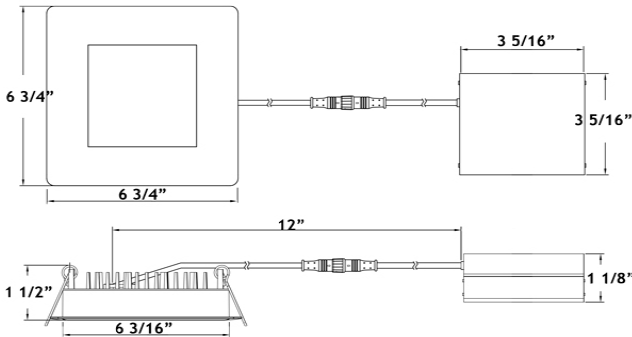

120V TRIAC Dimmable

Optional 120V - 347V

Driver Included

Driver 0-10V Dimmable



Order Separately as
Cat # **LLL-LD1535T**

AVAILABLE TRIMS



White



Black

ORDERING GUIDE Example: **LY6S / 30K / WH**

	CCT	Trim Finish	
LY6S	/	/	
3000K	30K	WH	White
4100K	41K	BK	Black

Project: _____

Location: _____

Cat #: _____ Qty: _____

Notes: _____

SPECIFICATION

Applications	Recessed Ceiling	
Energy Used	14 W	
Colour Temperature	3000	4100
Light Output	900	950
Halogen Equivalent	75 W	
Beam Angle	110°	
CRI	80	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG	
Power Factor	0.95	
Approved Location	Insulated Ceiling, Wet & Damp Locations	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 36,000 Hours	
Certification	cULus, Energy Star	
Warranty	5 Year	

ACCESSORIES

Sold Separately



Low Voltage Extension Cables
6ft - cat # **EXC6**, 20ft - cat # **EXC20**
Max 40 ft Allowed. FT4 / CMR rated



26" Flat Rough-In Plates - cat # **RIP6**



13" Flat Rough-In Plate - cat # **MP6-2**



Flanged Plate with Hanger Bars - cat # **FRP6**

COMPLIANCE



Type IC
Air-Tight