



Project: _____

Location: _____

Qty: _____

Notes: _____


DESCRIPTION

347V Input Driver 0-10V Dimmable for Lotus LED Lights model LL8R
Output 35-42 V DC, Constant Current 920 mA, PF > 0.9
Connection box wire capacity: Maximum of 5 No 12 AWG or 8 No 14 AWG

DIMENSIONS: 5" x 3 1/2" x 1 1/2"

COMPATIBLE FIXTURES

LL8R

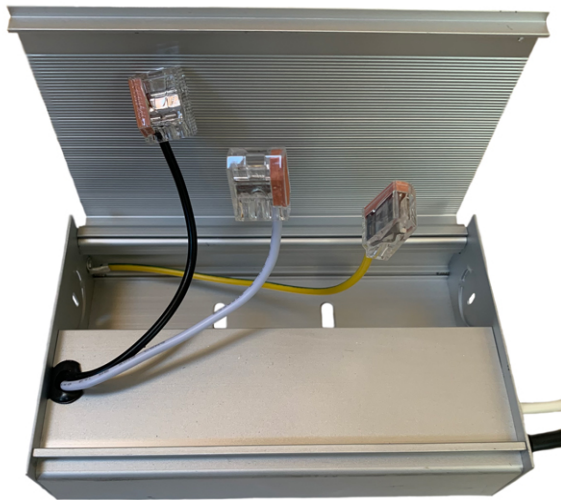

CABLE CONNECTORS

2 knock-outs 7/8"

MOUNTING

directly on joist

ORDERING GUIDE

cat # **LLL-LD40WH**

Input: White (Neutral) & Black (Hot) wires with quick connectors. Connect to 347V AC according to the Dimmer Manufacturer's Instructions.

Output: Plastic FT4 / CMR rated cable with screw-in connector. Connect to compatible Lotus LED fixture from the list above

0-10V control wires: Black (-) and Red (+). Connect to dimming or control system 0-10V only. **DO NOT CONNECT TO LINE VOLTAGE.**
If you short the Black and Red wires the driver would shut off.

Warning: This driver is UL / cUL certified to be used only with Lotus LED Lights fixtures.
Connecting it to any other manufacturer's fixtures will void certification and warranty and may cause overheating and fire.