
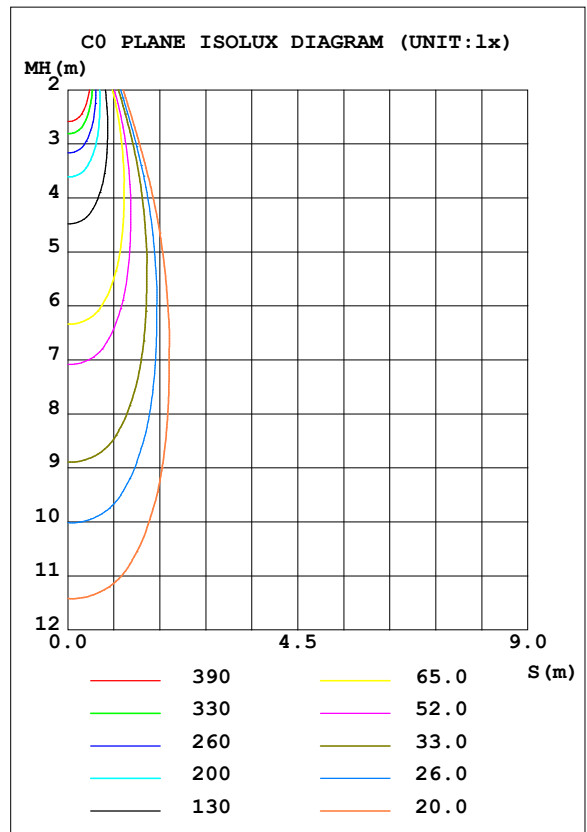


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:119.92V I:0.1143A P:13.530W PF:0.9524 Freq:59.98Hz Lamp Flux:812.264x1 lm		
NAME: 2RPHWH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:2
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 60.03 lm/W			
MODEL		I <sub>max</sub> (cd)	2582	S/MH (C0/180)	0.50
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.48
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	812.26	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.7
NOMINAL FLUX (lm)	812.264	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.3
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.50

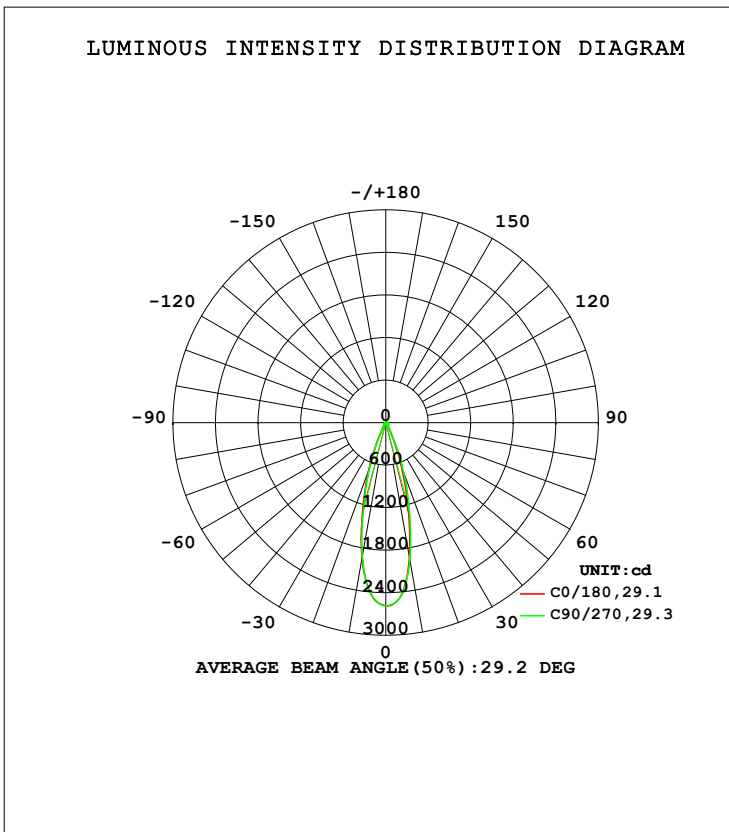

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-06-22

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1932	1954	1963	1947	1939	1920	1918	1932	0- 10	216.8	216.8	26.7,26.7
20	633.3	694.2	733.5	719.4	698.9	691.6	654.3	621.1	10- 20	340.1	556.9	68.6,68.6
30	94.04	96.30	100.1	98.68	100.3	100.0	101.0	95.54	20- 30	136.5	693.4	85.4,85.4
40	37.88	38.12	38.66	38.62	38.40	37.81	37.97	38.61	30- 40	35.62	729.0	89.7,89.7
50	28.99	29.00	29.17	29.06	28.97	28.69	29.01	29.13	40- 50	25.51	754.5	92.9,92.9
60	22.25	22.16	22.11	21.98	21.97	21.84	22.27	22.48	50- 60	22.84	777.3	95.7,95.7
70	15.62	15.41	15.34	15.27	15.47	15.45	15.75	15.90	60- 70	18.64	796.0	98,98
80	8.185	8.115	8.108	8.107	8.288	8.224	8.339	8.374	70- 80	12.69	808.6	99.6,99.6
90	0.0456	0.0349	0.0401	0.0336	0.0681	0.0586	0.0622	0.0528	80- 90	3.625	812.3	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-06-22

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:119.92V I:0.1143A P:13.530W PF:0.9524 Freq:59.98Hz Lamp Flux:812.264x1 lm		
NAME: 2RPHWH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:2
MFR.:	SUR.:	Shielding Angle:

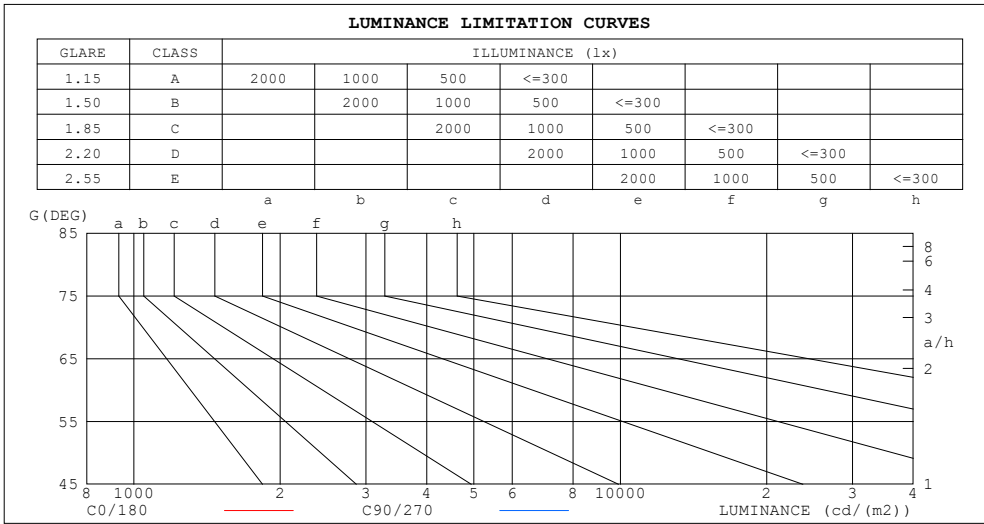

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	87	375
80	428	420
75	427	414
70	415	403
65	407	398
60	404	397
55	406	401
50	410	408
45	416	419


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-06-22

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.92V I:0.1143A P:13.530W PF:0.9524 Freq:59.98Hz Lamp Flux:812.264x1 lm		
NAME: 2RPHWH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:2
MFR.:	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.01	.98	1.03	.99	.97	.00	.97	.94	.97	.94	.92	.94	.92	.90	.89
3.0	.99	.94	.91	.97	.93	.90	.95	.91	.89	.92	.90	.87	.90	.88	.86	.84
4.0	.94	.89	.85	.93	.88	.85	.91	.87	.84	.89	.85	.83	.87	.84	.82	.81
5.0	.89	.85	.81	.89	.84	.80	.87	.83	.80	.85	.82	.79	.84	.81	.78	.77
6.0	.86	.81	.77	.85	.80	.77	.84	.79	.76	.82	.79	.76	.81	.78	.75	.74
7.0	.82	.77	.74	.82	.77	.74	.80	.76	.73	.79	.76	.73	.78	.75	.72	.71
8.0	.79	.74	.71	.79	.74	.71	.78	.73	.70	.77	.73	.70	.76	.72	.70	.69
9.0	.76	.72	.68	.76	.71	.68	.75	.71	.68	.74	.71	.68	.74	.70	.68	.66
10.0	.74	.69	.66	.73	.69	.66	.73	.69	.66	.72	.68	.66	.71	.68	.65	.64

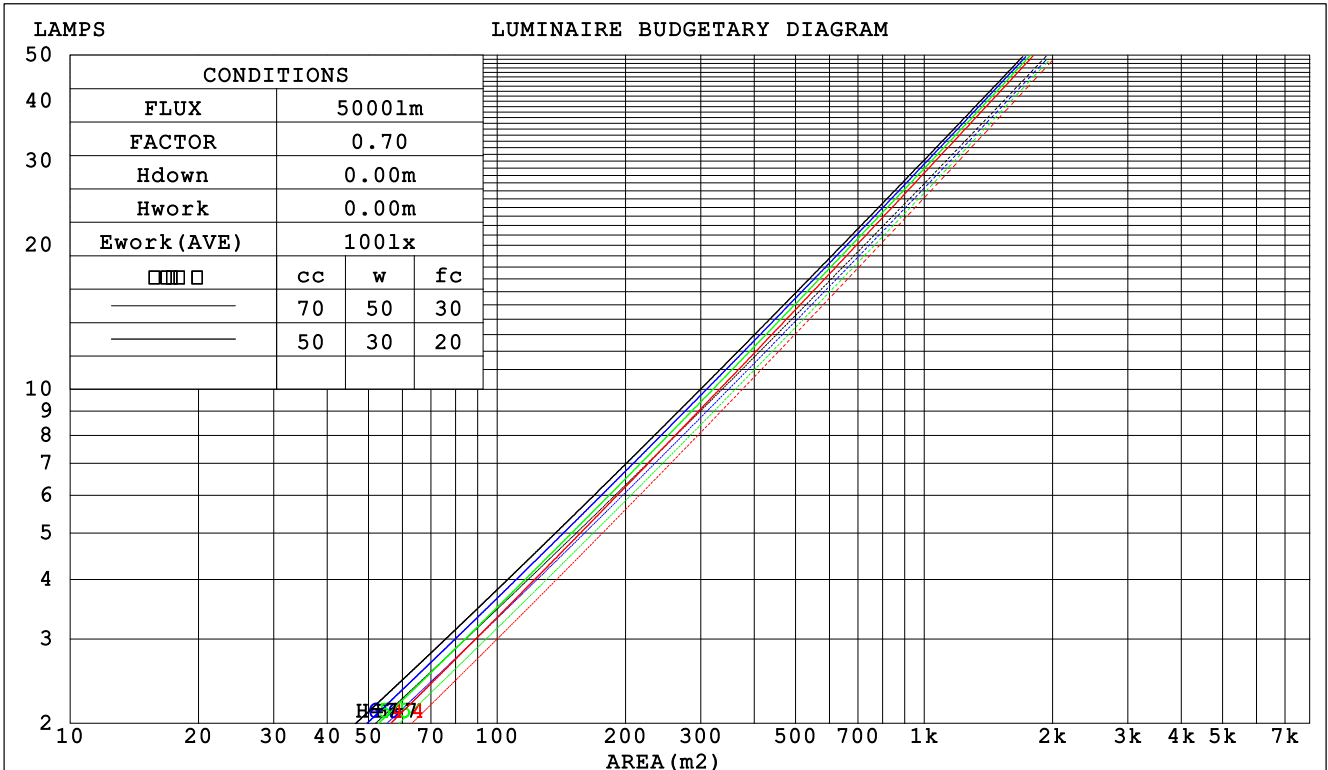

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-06-22

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:119.92V I:0.1143A P:13.530W PF:0.9524 Freq:59.98Hz Lamp Flux:812.264x1 lm		
NAME: 2RPHWH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:2
MFR.:	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.170 .097 .031	.163 .093 .030	.151 .086 .028	.139 .080 .026	.128 .074 .024	
2.0	.157 .086 .026	.152 .084 .026	.141 .079 .024	.132 .074 .023	.123 .069 .022	
3.0	.146 .078 .023	.141 .076 .023	.132 .072 .022	.124 .068 .021	.117 .065 .020	
4.0	.136 .071 .021	.132 .069 .020	.124 .066 .020	.117 .063 .019	.111 .060 .018	
5.0	.127 .065 .019	.124 .064 .018	.117 .061 .018	.111 .059 .017	.106 .056 .017	
6.0	.120 .060 .017	.117 .059 .017	.111 .057 .017	.106 .055 .016	.101 .053 .016	
7.0	.113 .056 .016	.110 .055 .016	.105 .053 .015	.101 .052 .015	.096 .050 .015	
8.0	.107 .052 .015	.105 .052 .015	.100 .050 .014	.096 .049 .014	.092 .047 .014	
9.0	.102 .049 .014	.100 .049 .014	.096 .047 .013	.092 .046 .013	.089 .045 .013	
10.0	.097 .046 .013	.095 .046 .013	.092 .045 .013	.088 .044 .012	.085 .043 .012	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.154 .133 .114	.132 .114 .099	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.141 .113 .092	.121 .098 .080	.083 .068 .056	.048 .040 .033	.015 .013 .011	
4.0	.129 .098 .075	.111 .085 .065	.076 .059 .046	.044 .035 .027	.014 .011 .009	
5.0	.119 .086 .063	.102 .075 .054	.070 .052 .038	.041 .031 .023	.013 .010 .008	
6.0	.110 .077 .053	.095 .067 .046	.065 .047 .032	.038 .027 .019	.012 .009 .006	
7.0	.103 .069 .045	.089 .060 .039	.061 .042 .028	.036 .025 .017	.011 .008 .005	
8.0	.096 .062 .039	.083 .054 .034	.057 .038 .024	.033 .022 .014	.011 .007 .005	
9.0	.091 .057 .034	.078 .049 .029	.054 .035 .021	.032 .020 .012	.010 .007 .004	
10.0	.086 .052 .030	.074 .045 .026	.051 .032 .018	.030 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-06-22

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.92V I:0.1143A P:13.530W PF:0.9524 Freq:59.98Hz Lamp Flux:812.264x1 lm										
NAME: 2RPHWH				TYPE:			WEIGHT:			
SPEC.:3000K 90				DIM.:			SERIAL No.:2			
MFR.:				SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.8	5.6	5.0	5.7	5.9	4.7	5.5	5.0	5.7	5.9
3H	6.6	7.3	6.8	7.5	7.7	6.5	7.3	6.8	7.5	7.7
4H	7.4	8.2	7.7	8.4	8.6	7.4	8.1	7.6	8.3	8.5
6H	8.2	8.9	8.5	9.1	9.3	8.1	8.7	8.4	9.0	9.2
8H	8.4	9.0	8.7	9.3	9.5	8.3	9.0	8.6	9.2	9.5
12H	8.4	9.0	8.7	9.3	9.5	8.5	9.1	8.8	9.4	9.7
4H 2H	5.5	6.2	5.8	6.4	6.6	5.5	6.2	5.7	6.4	6.6
3H	7.5	8.1	7.8	8.4	8.7	7.5	8.1	7.8	8.3	8.6
4H	8.5	9.1	8.9	9.4	9.7	8.4	9.0	8.8	9.3	9.6
6H	9.4	9.9	9.7	10.2	10.6	9.3	9.8	9.7	10.1	10.5
8H	9.6	10.1	10.0	10.4	10.8	9.6	10.1	10.0	10.4	10.8
12H	9.6	10.1	10.0	10.4	10.8	9.8	10.3	10.2	10.6	11.0
8H 4H	8.9	9.4	9.3	9.7	10.1	8.8	9.3	9.2	9.6	10.0
6H	9.9	10.3	10.3	10.7	11.1	9.8	10.2	10.2	10.6	11.0
8H	10.2	10.6	10.7	11.0	11.5	10.2	10.6	10.7	11.0	11.4
12H	10.3	10.6	10.8	11.1	11.6	10.6	10.9	11.0	11.3	11.8
12H 4H	8.9	9.3	9.3	9.7	10.1	8.8	9.3	9.2	9.7	10.0
6H	10.0	10.3	10.4	10.8	11.2	9.9	10.3	10.4	10.7	11.1
8H	10.4	10.7	10.8	11.1	11.6	10.4	10.7	10.8	11.1	11.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
2.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.3				

CIE Pub.117, 812.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.7)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-06-22

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.92V I:0.1143A P:13.530W PF:0.9524 Freq:59.98Hz Lamp Flux:812.264x1 lm		
NAME: 2RPHWH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:2
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	85	79	75	85	78	75	84	78	74	71
0.80	93	86	82	92	86	82	91	85	82	78
1.00	97	91	87	96	91	87	95	91	86	82
1.25	101	96	92	100	95	91	98	94	91	86
1.50	104	99	95	103	98	95	101	97	94	89
2.00	107	102	99	106	101	98	103	99	97	91
2.50	109	105	102	107	104	101	104	101	99	93
3.00	111	107	104	109	106	103	105	103	101	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	107	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-06-22

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.92V I:0.1143A P:13.530W PF:0.9524 Freq:59.98Hz Lamp Flux:812.264x1 lm		
NAME: 2RPHWH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:2
MFR.:	SUR.:	Shielding Angle:

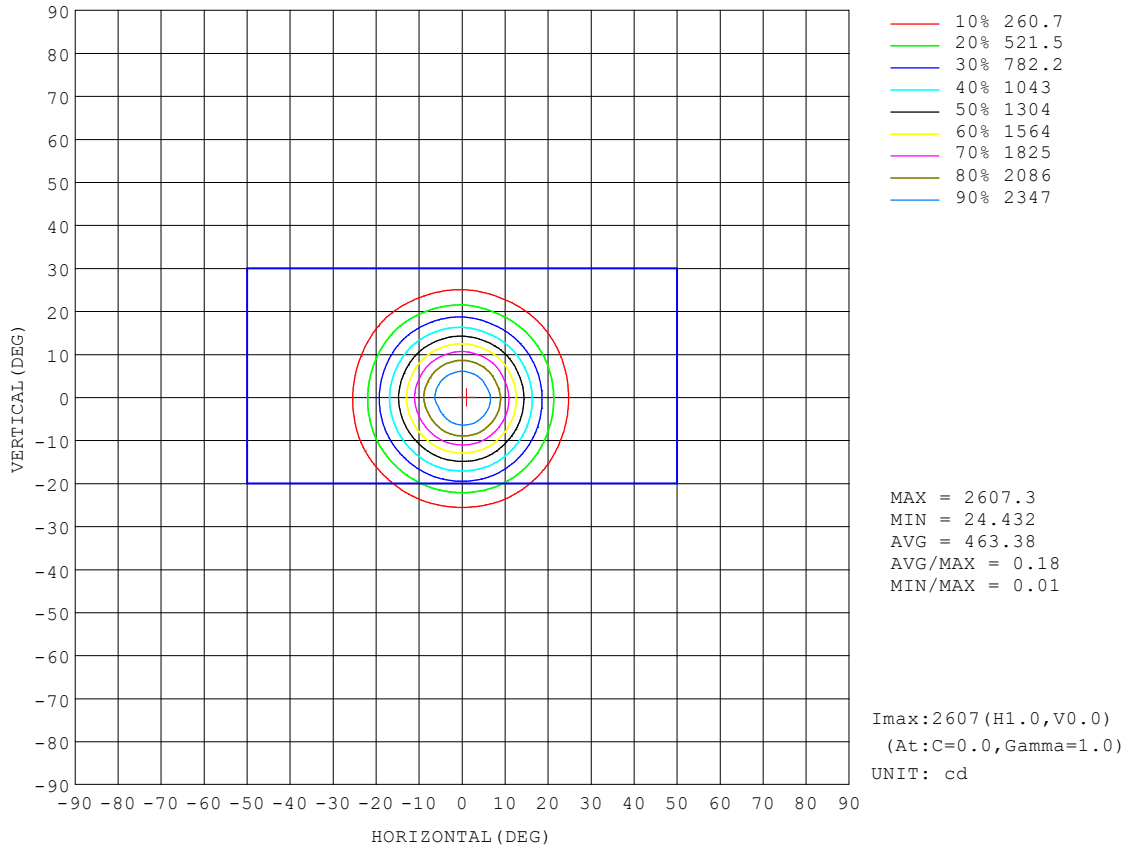


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-06-22

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.92V I:0.1143A P:13.530W PF:0.9524 Freq:59.98Hz Lamp Flux:812.264x1 lm		
NAME: 2RPHWH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:2
MFR.:	SUR.:	Shielding Angle:

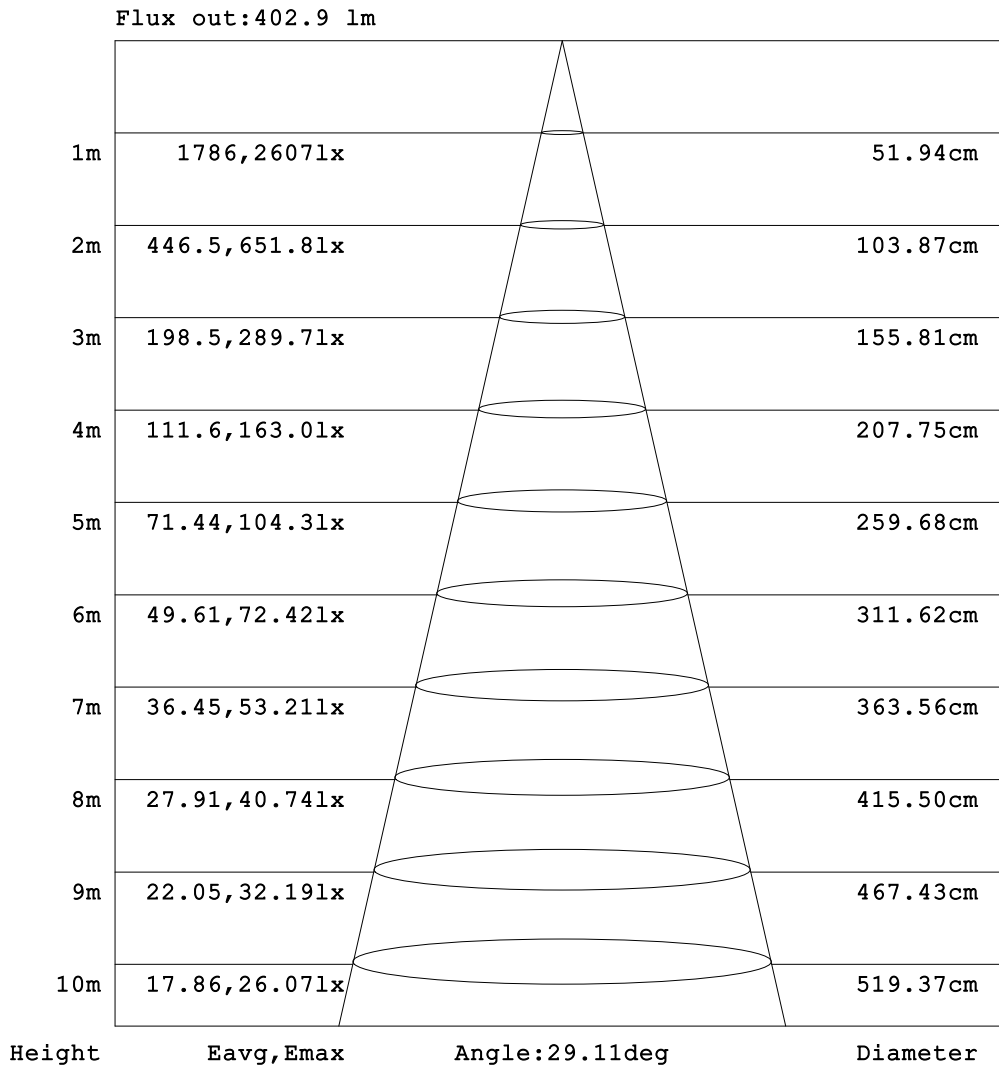


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-06-22

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.92V I:0.1143A P:13.530W PF:0.9524 Freq:59.98Hz Lamp Flux:812.264x1 lm		
NAME: 2RPHWH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:2
MFR.:	SUR.:	Shielding Angle:

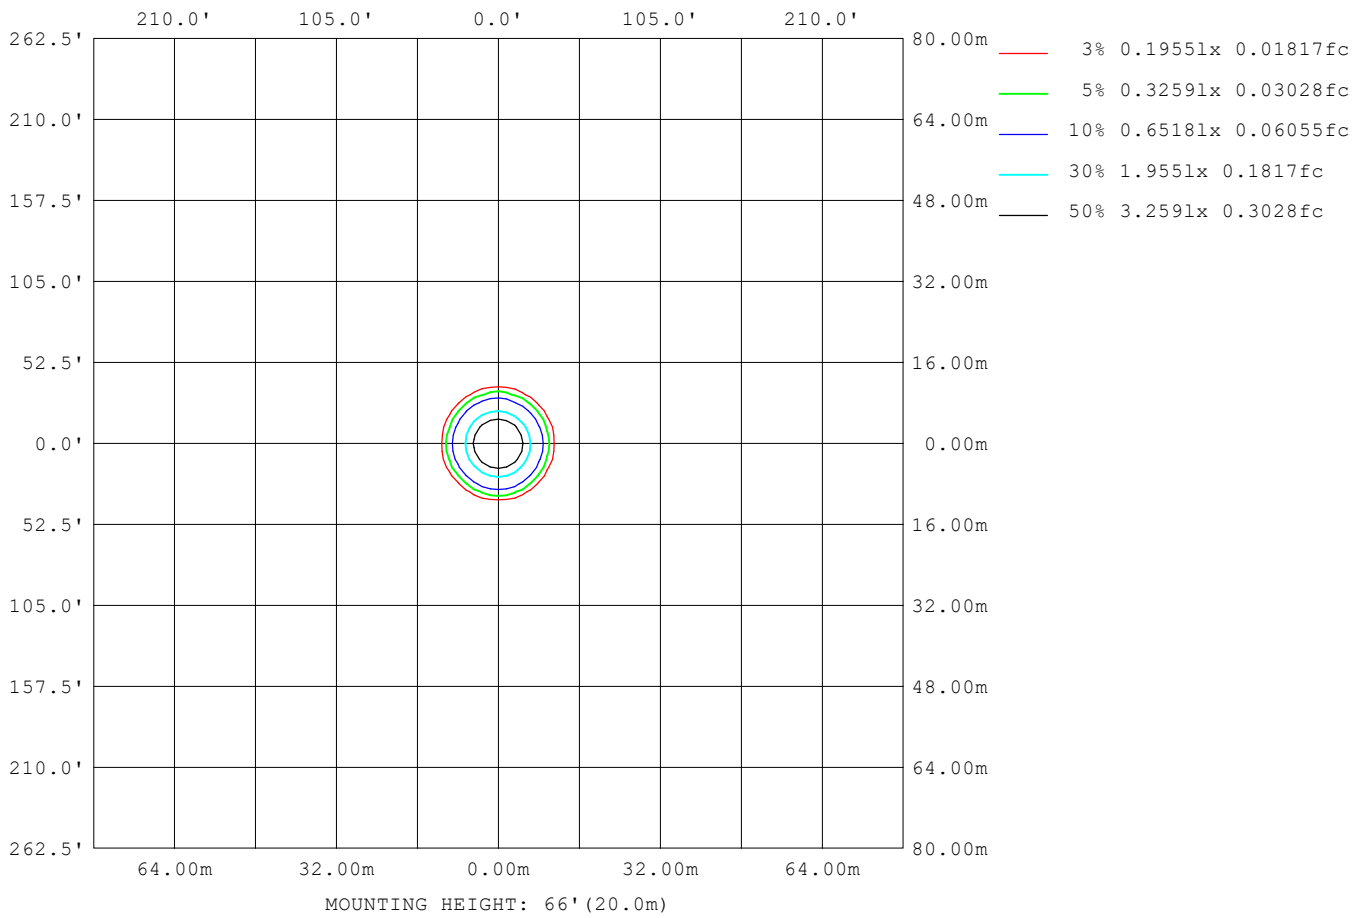

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-06-22

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.92V I:0.1143A P:13.530W PF:0.9524 Freq:59.98Hz Lamp Flux:812.264x1 lm		
NAME: 2RPHWH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:2
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	401
L_0~180 (75) av	422
L_0~180 (85) av	92
L_90~270 (65) av	402
L_90~270 (75) av	421
L_90~270 (85) av	377
L_45 (65) av	401
L_45 (75) av	420
L_45 (85) av	378

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-06-22

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

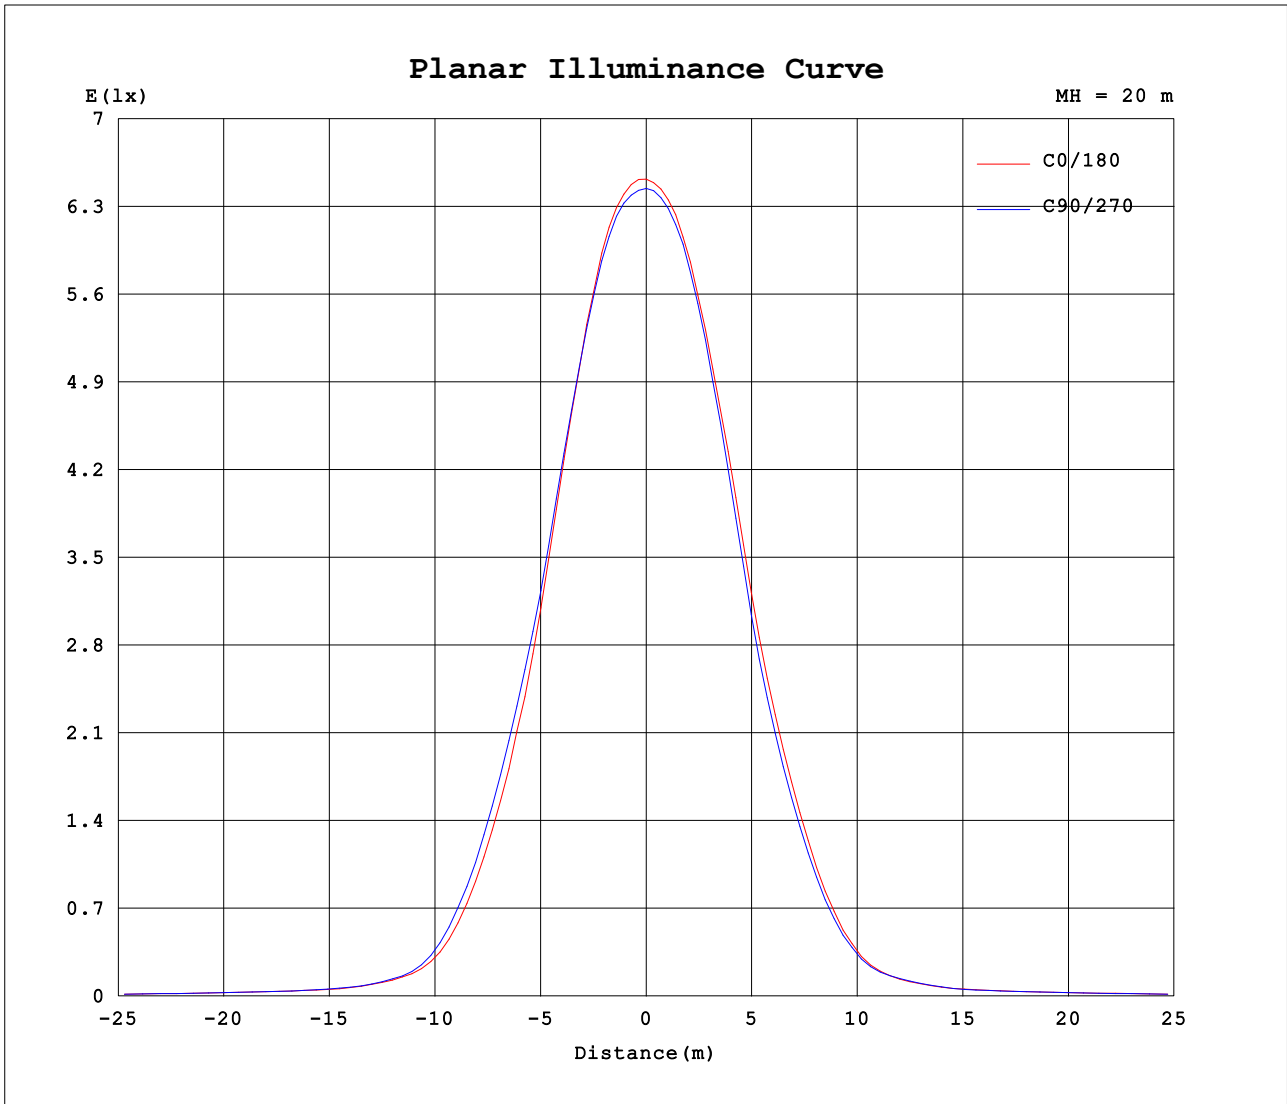

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-06-22

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.92V I:0.1143A P:13.530W PF:0.9524 Freq:59.98Hz Lamp Flux:812.264x1 lm		
NAME: 2RPHWH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:2
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2582	2582	2582	2582	2582	2582	2582	2582	2582	2582	2582	2582	2582	2582	2582	2582			
5	2458	2461	2459	2459	2457	2450	2436	2429	2426	2421	2426	2423	2432	2438	2453	2455			
10	1932	1944	1954	1970	1963	1964	1947	1951	1939	1923	1920	1911	1918	1913	1932	1923			
15	1200	1221	1248	1294	1294	1292	1271	1274	1259	1234	1231	1208	1197	1171	1191	1195			
20	633	656	694	728	733	731	719	725	699	687	692	662	654	618	621	630			
25	243	251	273	293	297	295	290	299	281	274	279	264	262	242	249	248			
30	94.0	91.6	96.3	97.9	100	101	98.7	100	100	99.2	100	99.2	101	97.8	95.5	96.8			
35	49.9	49.8	51.3	52.6	53.4	53.9	51.4	52.5	53.0	51.3	51.8	52.5	54.6	53.5	53.9	53.0			
40	37.9	38.0	38.1	38.2	38.7	39.1	38.6	38.5	38.4	38.0	37.8	37.6	38.0	38.1	38.6	38.3			
45	32.4	32.5	32.6	32.9	33.0	33.2	33.0	33.0	32.9	32.5	32.5	32.4	32.6	32.6	32.7	32.4			
50	29.0	29.0	29.0	29.2	29.2	29.2	29.1	29.0	29.0	28.7	28.7	28.7	29.0	29.1	29.1	29.0			
55	25.6	25.6	25.6	25.7	25.6	25.6	25.5	25.4	25.4	25.1	25.2	25.3	25.6	25.7	25.8	25.7			
60	22.2	22.2	22.2	22.2	22.1	22.1	22.0	22.0	22.0	21.7	21.8	22.0	22.3	22.4	22.5	22.3			
65	18.9	18.9	18.8	18.9	18.7	18.7	18.6	18.7	18.7	18.5	18.7	18.7	19.0	19.1	19.2	19.0			
70	15.6	15.6	15.4	15.5	15.3	15.4	15.3	15.4	15.5	15.3	15.5	15.5	15.7	15.7	15.9	15.7			
75	12.2	12.1	12.0	12.0	11.9	12.0	11.9	12.0	12.1	12.0	12.1	12.1	12.3	12.3	12.4	12.2			
80	8.18	8.17	8.12	8.16	8.11	8.13	8.11	8.20	8.29	8.16	8.22	8.21	8.34	8.33	8.37	8.26			
85	0.83	3.66	3.63	3.68	3.63	3.61	3.57	3.64	0.96	3.67	3.71	3.60	3.68	3.65	3.73	3.67			
90	0.05	0.04	0.03	0.04	0.04	0.04	0.03	0.04	0.07	0.06	0.06	0.06	0.06	0.06	0.05	0.06			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-06-22

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks: