
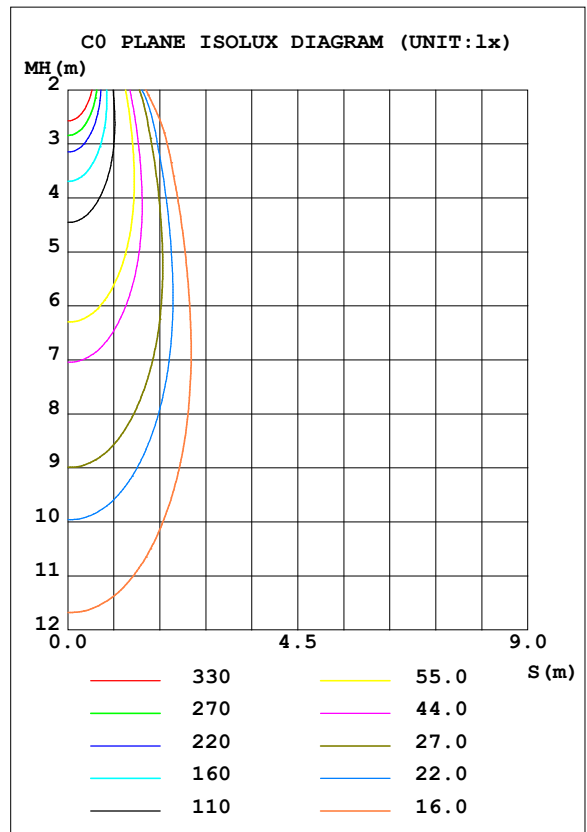


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:120.04V I:0.1270A P:11.719W PF:0.9253 Freq:59.98Hz Lamp Flux:919.903x1 lm		
NAME: AD-35-S12W-5CCT-WH-REY	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 78.50 lm/W			
MODEL		I <sub>max</sub> (cd)	2182	S/MH (C0/180)	0.54
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	0.52
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	919.90	<input type="checkbox"/> UP, DN (C0-180)	0.0, 52.6
NOMINAL FLUX (lm)	919.903	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 47.4
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	12	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.55

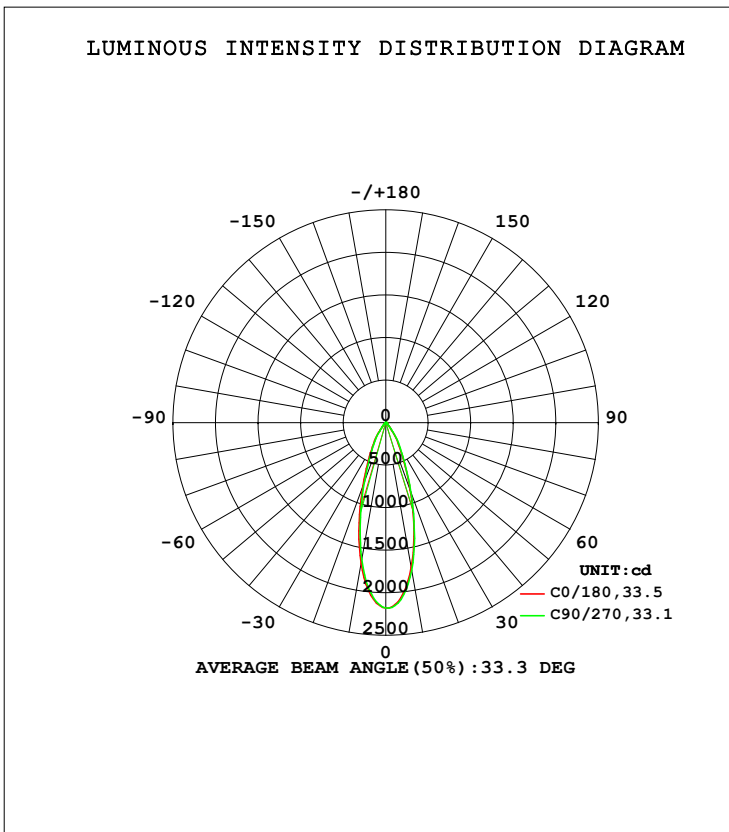

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1727	1745	1760	1741	1678	1629	1634	1675	0- 10	184.2	184.2	20,20
20	845.1	860.6	864.5	857.3	787.7	734.9	732.5	783.5	10- 20	339.4	523.6	56.9,56.9
30	315.1	331.7	338.8	321.5	299.6	279.5	276.9	294.8	20- 30	231.9	755.5	82.1,82.1
40	88.96	90.47	96.16	91.14	80.17	72.46	72.76	78.43	30- 40	112.0	867.5	94.3,94.3
50	23.09	24.33	24.45	22.77	20.26	19.00	18.63	20.44	40- 50	35.51	903.0	98.2,98.2
60	6.834	7.043	6.945	6.627	6.144	6.020	6.124	6.415	50- 60	10.21	913.2	99.3,99.3
70	3.751	3.664	3.397	3.383	3.306	3.150	3.055	3.447	60- 70	4.747	918.0	99.8,99.8
80	0.4870	0.4190	0.2609	0.3350	0.4209	0.2369	0.1509	0.2483	70- 80	1.841	919.8	100,100
90	0.0320	0.0394	0.0314	0.0117	0.0260	0.0150	0.0170	0.0134	80- 90	0.0857	919.9	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:120.04V I:0.1270A P:11.719W PF:0.9253 Freq:59.98Hz Lamp Flux:919.903x1 lm		
NAME: AD-35-S12W-5CCT-WH-REY	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

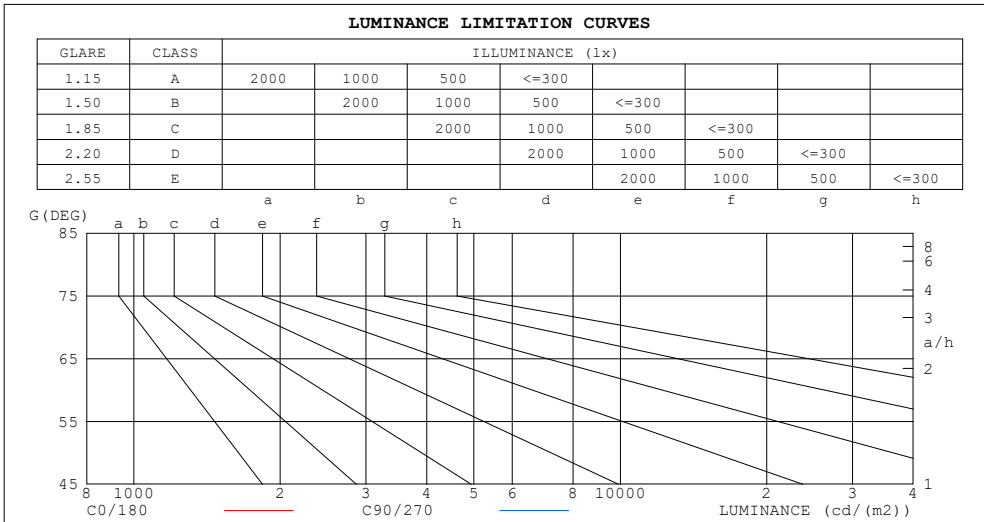

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7	4
80	25	14
75	82	51
70	99	89
65	107	103
60	123	125
55	170	177
50	324	342
45	596	620


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.04V I:0.1270A P:11.719W PF:0.9253 Freq:59.98Hz Lamp Flux:919.903x1 lm		
NAME: AD-35-S12W-5CCT-WH-REY	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.09	1.07	1.09	1.07	1.06	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95
2.0	1.05	1.01	.98	1.03	.00	.97	.00	.97	.95	.97	.95	.93	.94	.93	.91	.90
3.0	.99	.94	.91	.98	.93	.90	.95	.92	.89	.93	.90	.87	.90	.88	.86	.85
4.0	.94	.89	.85	.92	.88	.84	.90	.86	.83	.88	.85	.82	.87	.84	.82	.80
5.0	.89	.84	.80	.88	.83	.79	.86	.82	.79	.84	.81	.78	.83	.80	.77	.76
6.0	.84	.79	.75	.84	.79	.75	.82	.78	.75	.81	.77	.74	.80	.76	.74	.72
7.0	.80	.75	.71	.80	.75	.71	.79	.74	.71	.77	.73	.71	.76	.73	.70	.69
8.0	.77	.72	.68	.76	.71	.68	.75	.71	.68	.74	.70	.67	.73	.70	.67	.66
9.0	.73	.68	.65	.73	.68	.65	.72	.68	.65	.71	.67	.64	.70	.67	.64	.63
10.0	.70	.65	.62	.70	.65	.62	.69	.65	.62	.68	.64	.62	.68	.64	.61	.60

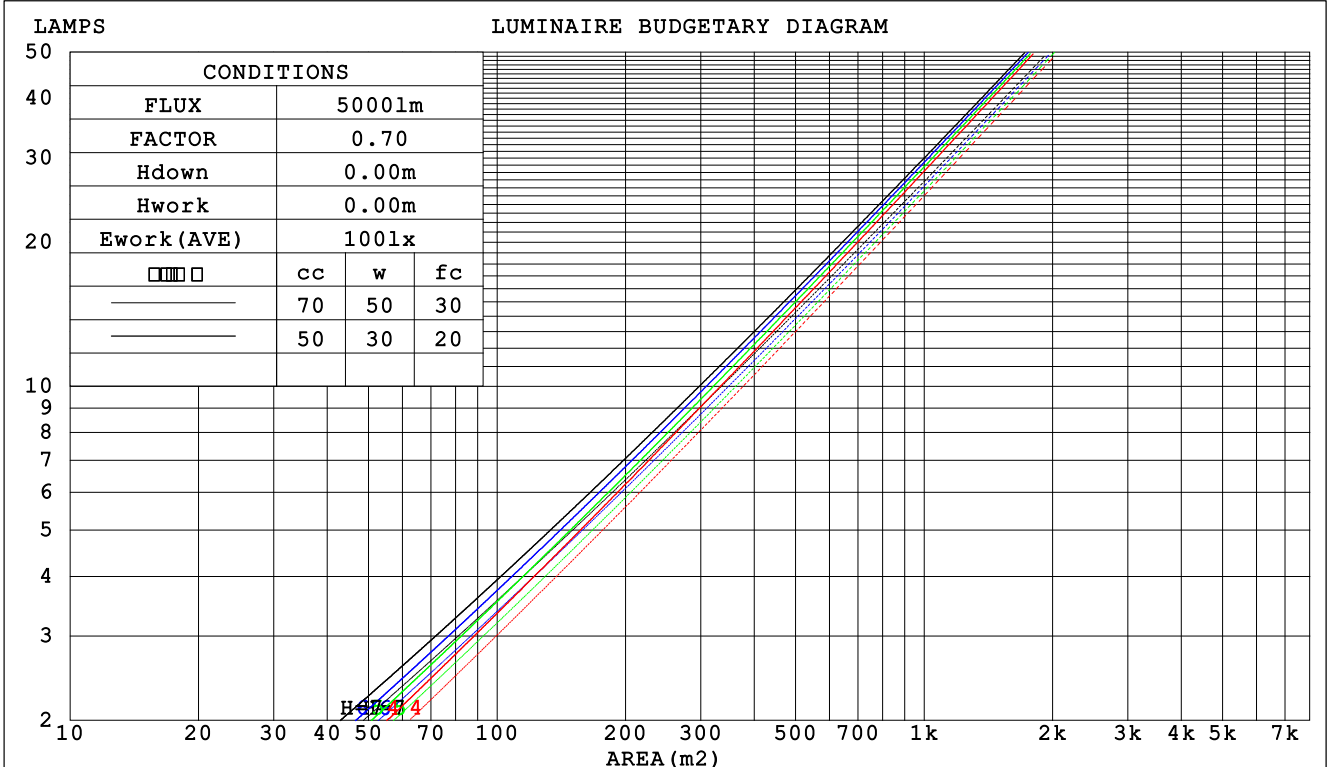

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:120.04V I:0.1270A P:11.719W PF:0.9253 Freq:59.98Hz Lamp Flux:919.903x1 lm		
NAME: AD-35-S12W-5CCT-WH-REY	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.162 .092 .029	.155 .088 .028	.143 .082 .026	.131 .076 .024	.121 .070 .023	
2.0	.153 .084 .026	.148 .081 .025	.137 .076 .024	.128 .072 .022	.119 .067 .021	
3.0	.145 .077 .023	.140 .075 .023	.131 .071 .022	.123 .068 .021	.116 .064 .020	
4.0	.137 .071 .021	.133 .070 .021	.126 .067 .020	.119 .064 .019	.112 .061 .019	
5.0	.130 .066 .019	.127 .065 .019	.120 .063 .018	.114 .060 .018	.109 .058 .017	
6.0	.124 .062 .018	.121 .061 .018	.115 .059 .017	.110 .057 .017	.105 .055 .016	
7.0	.118 .058 .017	.116 .058 .016	.111 .056 .016	.106 .054 .016	.101 .053 .015	
8.0	.113 .055 .016	.111 .054 .015	.106 .053 .015	.102 .052 .015	.098 .050 .015	
9.0	.108 .052 .015	.106 .052 .015	.102 .050 .014	.098 .049 .014	.095 .048 .014	
10.0	.104 .050 .014	.102 .049 .014	.098 .048 .014	.095 .047 .013	.092 .046 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.170 .157 .146	.146 .135 .126	.100 .093 .087	.057 .054 .051	.018 .017 .016	
2.0	.154 .133 .115	.132 .114 .099	.090 .079 .069	.052 .046 .041	.017 .015 .013	
3.0	.140 .113 .092	.120 .098 .080	.083 .068 .056	.048 .040 .033	.015 .013 .011	
4.0	.129 .098 .075	.111 .085 .065	.076 .059 .046	.044 .035 .027	.014 .011 .009	
5.0	.120 .087 .062	.103 .075 .054	.071 .052 .038	.041 .031 .023	.013 .010 .007	
6.0	.112 .077 .052	.096 .067 .045	.066 .047 .032	.038 .027 .019	.012 .009 .006	
7.0	.105 .069 .044	.090 .060 .039	.062 .042 .027	.036 .025 .016	.012 .008 .005	
8.0	.099 .063 .038	.085 .054 .033	.059 .038 .023	.034 .023 .014	.011 .007 .005	
9.0	.094 .057 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.089 .053 .029	.077 .046 .025	.053 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:120.04V I:0.1270A P:11.719W PF:0.9253 Freq:59.98Hz Lamp Flux:919.903x1 lm										
NAME: AD-35-S12W-5CCT-WH-REY					TYPE:			WEIGHT:		
SPEC.:5000K 90					DIM.:			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.3	6.1	5.5	6.3	6.4	5.6	6.4	5.8	6.6	6.8
3H	5.2	6.0	5.5	6.2	6.4	5.5	6.3	5.8	6.5	6.7
4H	5.2	5.9	5.5	6.2	6.4	5.5	6.2	5.7	6.4	6.6
6H	5.1	5.8	5.4	6.1	6.3	5.4	6.1	5.7	6.3	6.6
8H	5.1	5.8	5.4	6.0	6.3	5.3	6.0	5.6	6.3	6.5
12H	5.0	5.7	5.4	5.9	6.2	5.3	5.9	5.6	6.2	6.5
4H 2H	5.1	5.8	5.4	6.1	6.3	5.4	6.1	5.7	6.4	6.6
3H	5.1	5.7	5.4	6.0	6.3	5.4	6.0	5.7	6.3	6.5
4H	5.1	5.7	5.4	5.9	6.3	5.3	5.9	5.7	6.2	6.5
6H	5.0	5.5	5.4	5.8	6.2	5.2	5.7	5.6	6.1	6.4
8H	5.0	5.4	5.3	5.8	6.1	5.2	5.6	5.6	6.0	6.4
12H	4.9	5.3	5.3	5.7	6.1	5.1	5.5	5.5	5.9	6.3
8H 4H	5.0	5.4	5.3	5.8	6.1	5.2	5.7	5.6	6.0	6.4
6H	4.9	5.3	5.3	5.7	6.1	5.1	5.5	5.5	5.9	6.3
8H	4.8	5.2	5.3	5.6	6.0	5.0	5.4	5.5	5.8	6.2
12H	4.8	5.1	5.2	5.5	6.0	5.0	5.3	5.4	5.7	6.2
12H 4H	4.9	5.3	5.3	5.7	6.1	5.1	5.6	5.5	5.9	6.3
6H	4.8	5.2	5.3	5.6	6.0	5.0	5.4	5.5	5.8	6.2
8H	4.8	5.1	5.2	5.5	6.0	5.0	5.3	5.4	5.7	6.2
Variations with the observer position at spacings:										
S = 1.0H	+ 2.8 / - 5.7					+ 3.0 / - 6.5				
1.5H	+ 4.4 / - 5.1					+ 4.7 / - 5.6				
2.0H	+ 4.7 / - 3.4					+ 5.0 / - 3.9				

CIE Pub.117, 919.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.3)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:120.04V I:0.1270A P:11.719W PF:0.9253 Freq:59.98Hz Lamp Flux:919.903x1 lm		
NAME: AD-35-S12W-5CCT-WH-REY	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	88	82	78	87	82	78	87	81	78	74
0.80	95	90	86	95	89	86	94	89	85	82
1.00	100	94	91	99	94	90	97	94	90	86
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	98	105	101	98	103	99	97	92
2.00	109	105	102	107	104	101	105	102	99	94
2.50	110	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:120.04V I:0.1270A P:11.719W PF:0.9253 Freq:59.98Hz Lamp Flux:919.903x1 lm		
NAME: AD-35-S12W-5CCT-WH-REY	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

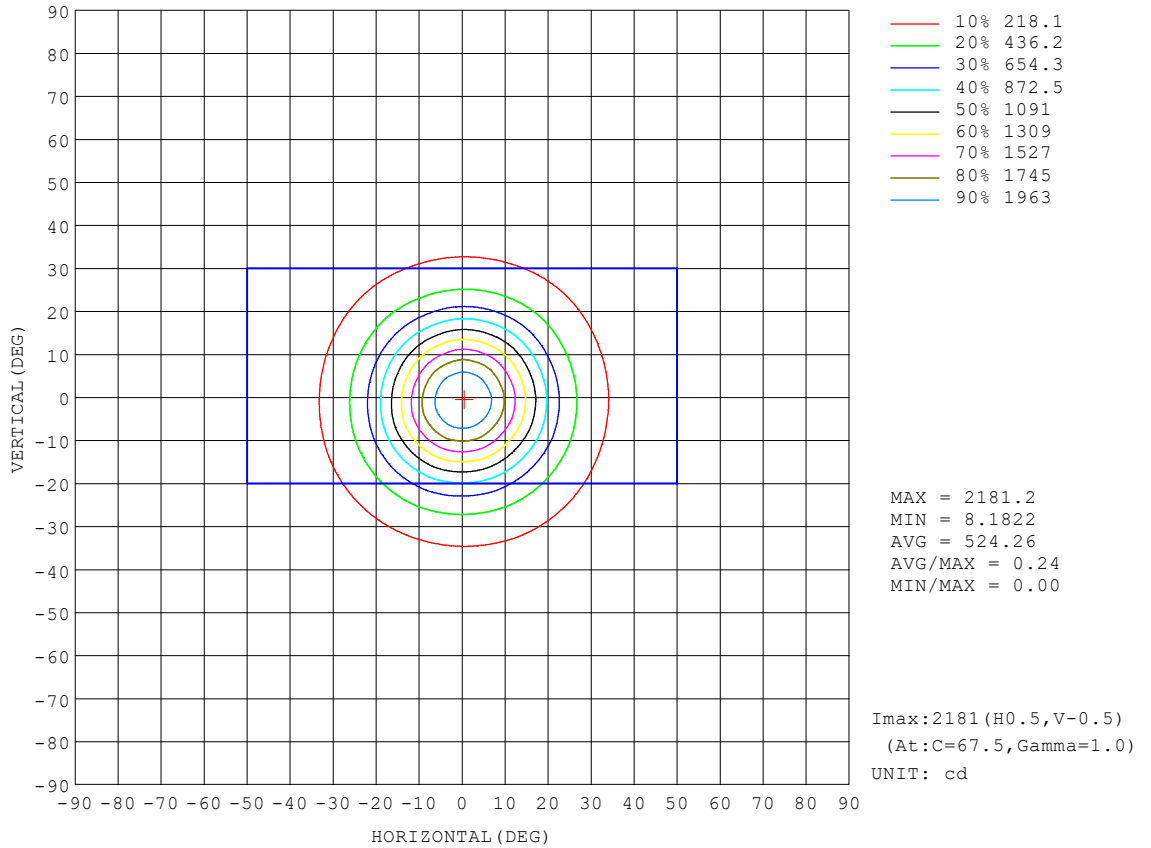


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:120.04V I:0.1270A P:11.719W PF:0.9253 Freq:59.98Hz Lamp Flux:919.903x1 lm		
NAME: AD-35-S12W-5CCT-WH-REY	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

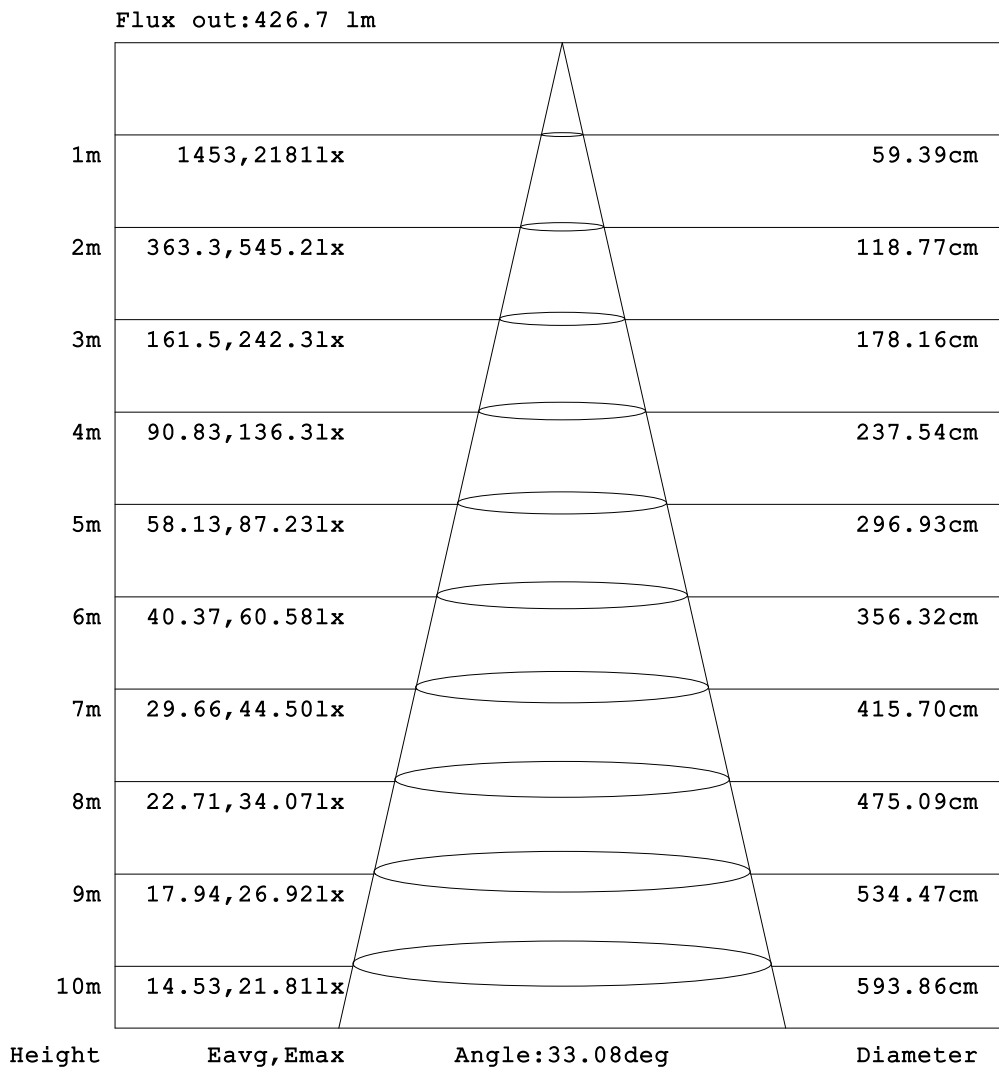


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:120.04V I:0.1270A P:11.719W PF:0.9253 Freq:59.98Hz Lamp Flux:919.903x1 lm		
NAME: AD-35-S12W-5CCT-WH-REY	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

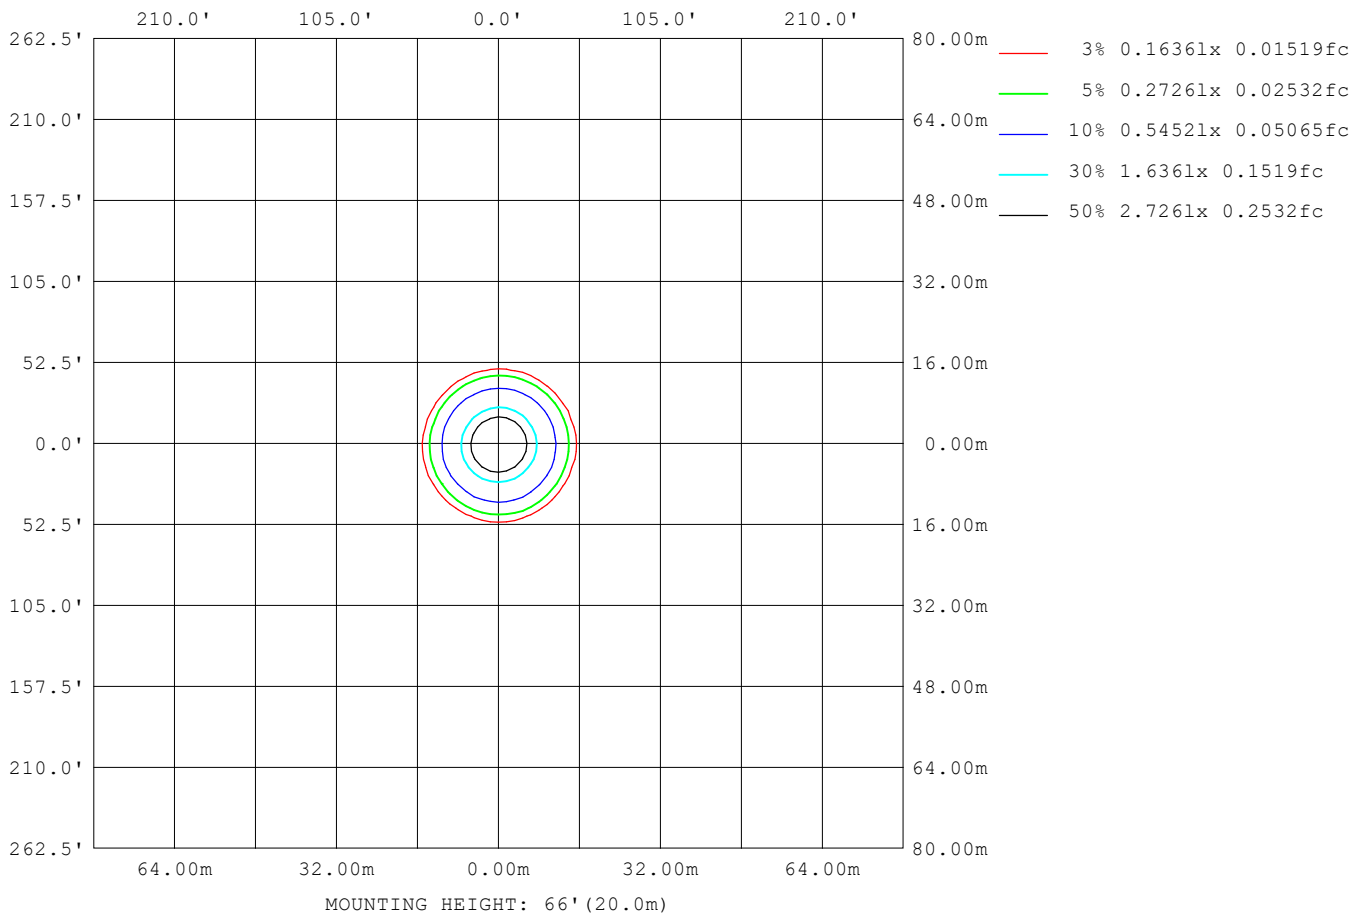

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:120.04V I:0.1270A P:11.719W PF:0.9253 Freq:59.98Hz Lamp Flux:919.903x1 lm		
NAME: AD-35-S12W-5CCT-WH-REY	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	101
L_0~180 (75) av	74
L_0~180 (85) av	7
L_90~270 (65) av	99
L_90~270 (75) av	42
L_90~270 (85) av	3
L_45 (65) av	101
L_45 (75) av	60
L_45 (85) av	3

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

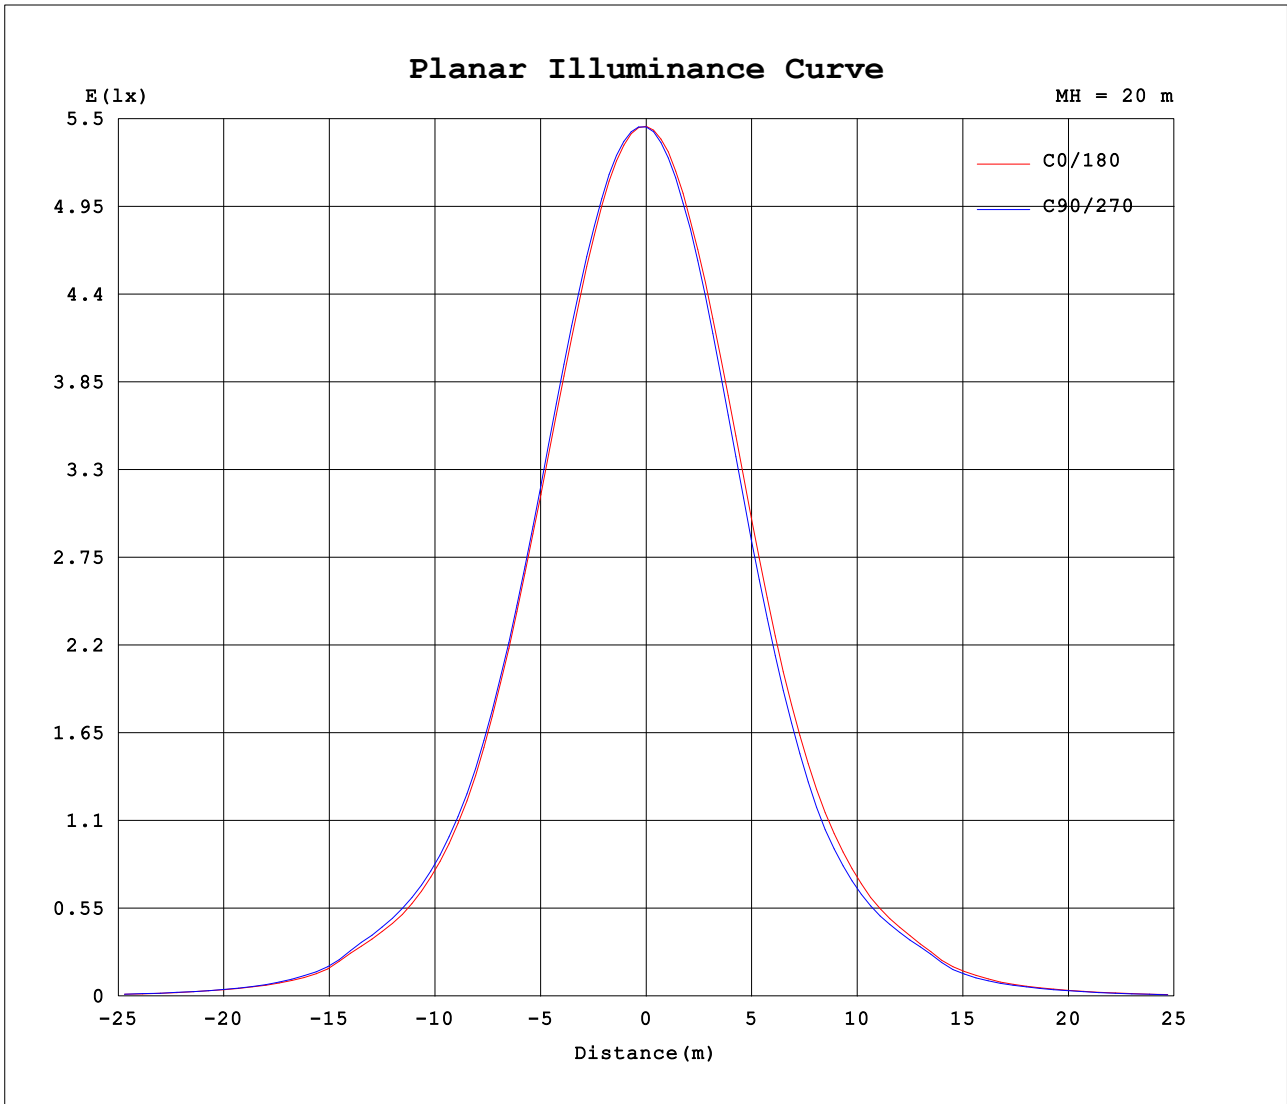

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINOUS DISTRIBUTION INTENSITY DATA**

Test:U:120.04V I:0.1270A P:11.719W PF:0.9253 Freq:59.98Hz Lamp Flux:919.903x1 lm		
NAME: AD-35-S12W-5CCT-WH-REY	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2179	2179	2179	2179	2179	2179	2179	2179	2179	2179	2179	2179	2179	2179	2179	2179			
5	2066	2077	2079	2086	2084	2080	2065	2055	2035	2018	2010	2007	2011	2021	2039	2044			
10	1727	1745	1745	1763	1760	1761	1741	1724	1678	1641	1629	1615	1634	1644	1675	1691			
15	1286	1300	1295	1311	1306	1314	1296	1275	1218	1174	1155	1141	1159	1176	1217	1243			
20	845	866	861	869	864	873	857	831	788	753	735	718	733	751	783	803			
25	514	532	530	539	537	543	533	512	485	463	449	433	440	452	473	486			
30	315	325	332	341	339	335	321	312	300	286	280	273	277	283	295	304			
35	196	197	200	209	208	199	185	178	165	150	145	145	155	159	172	182			
40	89.0	89.7	90.5	94.3	96.2	93.6	91.1	87.4	80.2	74.2	72.5	71.1	72.8	74.2	78.4	82.8			
45	46.8	48.3	48.3	48.6	48.7	48.3	46.7	45.1	41.8	39.8	39.4	38.5	39.0	40.0	41.9	43.5			
50	23.1	24.3	24.3	24.7	24.5	24.0	22.8	22.1	20.3	18.8	19.0	18.4	18.6	19.1	20.4	21.2			
55	10.9	11.4	11.4	11.6	11.3	11.0	10.8	10.1	9.51	9.21	9.10	9.07	9.19	9.33	9.77	10.3			
60	6.83	7.01	7.04	7.04	6.95	6.81	6.63	6.39	6.14	6.02	6.02	6.05	6.12	6.25	6.42	6.60			
65	5.02	5.08	5.06	4.97	4.86	4.79	4.74	4.62	4.46	4.40	4.42	4.43	4.48	4.59	4.76	4.87			
70	3.75	3.79	3.66	3.55	3.40	3.38	3.38	3.43	3.31	3.24	3.15	3.07	3.06	3.23	3.45	3.63			
75	2.37	2.45	2.09	1.64	1.45	1.53	1.83	2.06	1.92	1.75	1.39	1.02	0.94	1.05	1.57	2.03			
80	0.49	0.65	0.42	0.29	0.26	0.26	0.33	0.40	0.42	0.40	0.24	0.16	0.15	0.16	0.25	0.36			
85	0.07	0.09	0.06	0.04	0.04	0.03	0.02	0.03	0.07	0.04	0.02	0.02	0.03	0.02	0.02	0.03			
90	0.03	0.03	0.04	0.03	0.03	0.02	0.01	0.01	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks: