
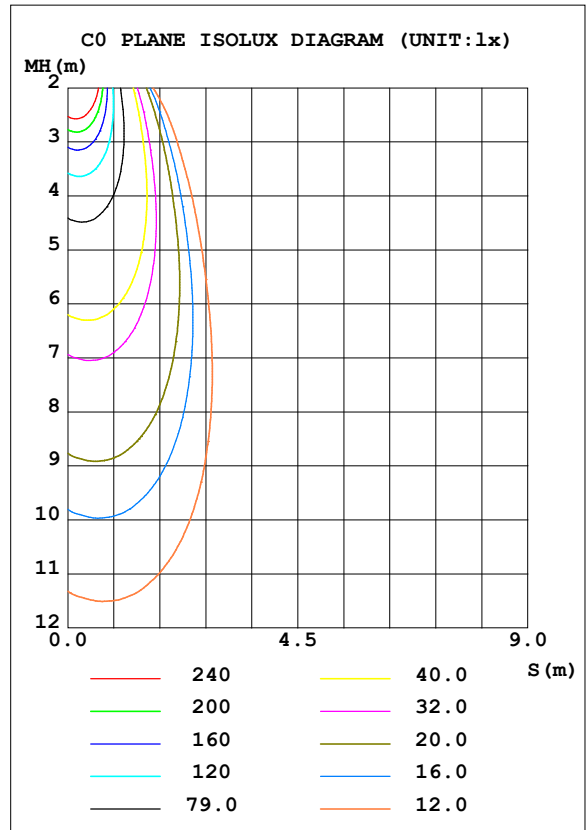


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:119.55V I:0.1369A P:11.025W PF:1.0389 Freq:59.98Hz Lamp Flux:680.898x1 lm		
NAME: AD-35-S12W-DTW-WH-REY	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 61.76 lm/W			
MODEL		Imax (cd)	1606	S/MH (C0/180)	0.44
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	0.64
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	680.90	<input type="checkbox"/> UP, DN (C0-180)	0.0, 45.4
NOMINAL FLUX (lm)	680.898	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 54.6
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	12	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.60

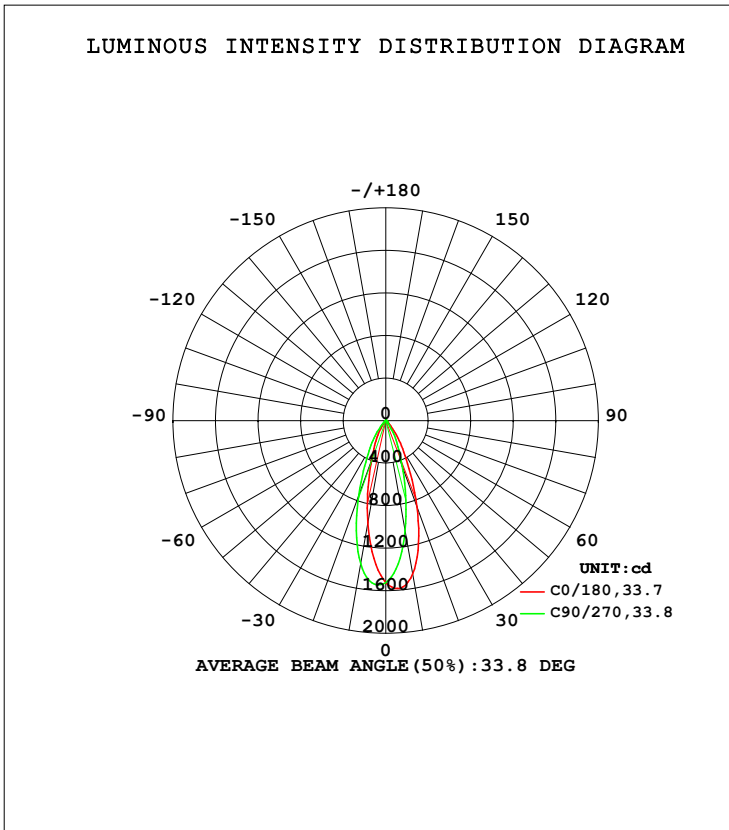

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1462	1262	1052	938.7	974.2	1137	1365	1525	0- 10	130.2	130.2	19.1,19.1
20	856.9	649.8	455.5	366.8	389.3	530.0	740.8	921.1	10- 20	249.6	379.8	55.8,55.8
30	342.1	237.3	168.7	122.5	141.7	206.7	296.9	374.0	20- 30	179.5	559.2	82.1,82.1
40	101.9	57.54	39.17	30.08	33.37	45.23	80.07	115.5	30- 40	82.84	642.1	94.3,94.3
50	25.70	16.99	10.69	8.131	8.682	12.62	20.76	26.80	40- 50	25.77	667.8	98.1,98.1
60	6.242	5.436	4.551	4.113	4.095	4.510	5.184	6.149	50- 60	8.019	675.8	99.3,99.3
70	3.128	2.954	2.480	2.123	2.225	2.302	2.355	2.808	60- 70	3.629	679.5	99.8,99.8
80	0.5906	0.2821	0.2377	0.2894	0.2749	0.1957	0.1605	0.3189	70- 80	1.333	680.8	100,100
90	0.0079	0.0020	0.0057	0.0007	0.0089	0.0056	0.0074	0.0013	80- 90	0.0918	680.9	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:119.55V I:0.1369A P:11.025W PF:1.0389 Freq:59.98Hz Lamp Flux:680.898x1 lm		
NAME: AD-35-S12W-DTW-WH-REY	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

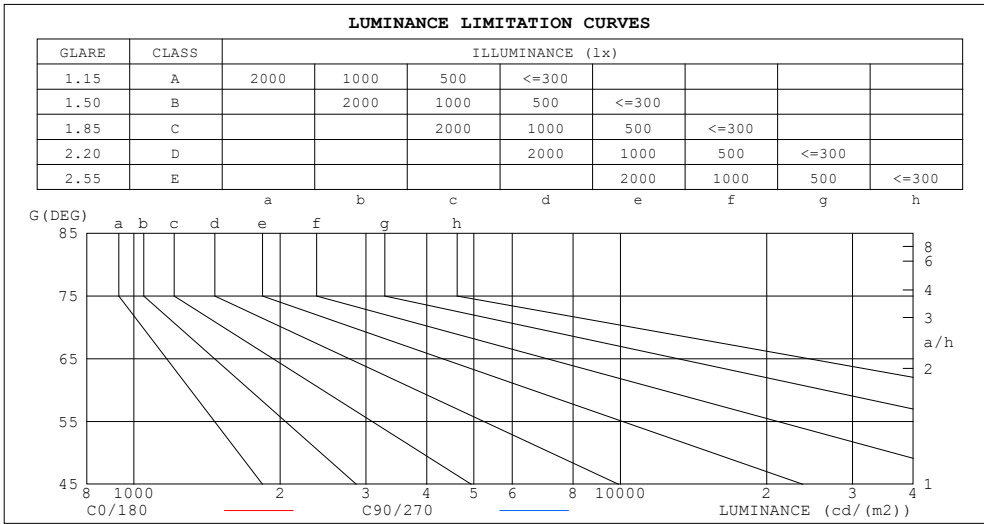

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6	6
80	31	12
75	75	27
70	83	65
65	92	75
60	114	82
55	186	97
50	364	150
45	611	265


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.55V I:0.1369A P:11.025W PF:1.0389 Freq:59.98Hz Lamp Flux:680.898x1 lm		
NAME: AD-35-S12W-DTW-WH-REY	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.09	1.07	1.09	1.07	1.06	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95
2.0	1.05	1.01	.98	1.03	.90	.97	.90	.97	.95	.97	.95	.93	.94	.92	.91	.89
3.0	.99	.94	.91	.97	.93	.90	.95	.91	.89	.92	.90	.87	.90	.88	.86	.84
4.0	.93	.88	.85	.92	.88	.84	.90	.86	.83	.88	.85	.82	.86	.84	.81	.80
5.0	.88	.83	.79	.88	.83	.79	.86	.82	.78	.84	.81	.78	.83	.80	.77	.76
6.0	.84	.79	.75	.83	.78	.75	.82	.77	.74	.80	.77	.74	.79	.76	.73	.72
7.0	.80	.75	.71	.79	.74	.71	.78	.74	.70	.77	.73	.70	.76	.72	.70	.68
8.0	.76	.71	.67	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.67	.65
9.0	.73	.68	.64	.73	.68	.64	.72	.67	.64	.71	.67	.64	.70	.66	.64	.62
10.0	.70	.65	.61	.69	.65	.61	.69	.64	.61	.68	.64	.61	.67	.64	.61	.60

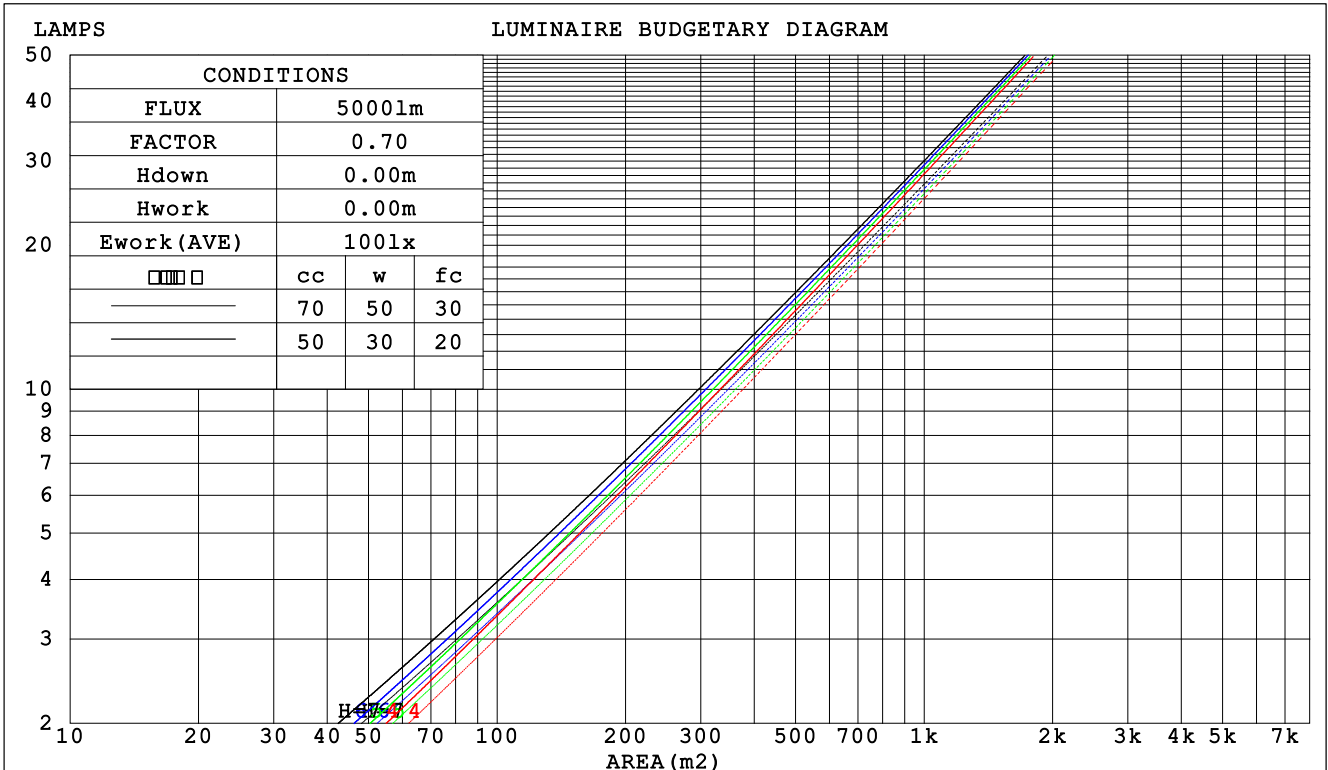

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:119.55V I:0.1369A P:11.025W PF:1.0389 Freq:59.98Hz Lamp Flux:680.898x1 lm		
NAME: AD-35-S12W-DTW-WH-REY	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.163 .093 .029	.156 .089 .028	.144 .082 .026	.132 .076 .024	.121 .070 .023	
2.0	.154 .085 .026	.149 .082 .025	.138 .077 .024	.129 .072 .023	.120 .068 .021	
3.0	.146 .078 .023	.141 .076 .023	.132 .072 .022	.124 .068 .021	.117 .065 .020	
4.0	.138 .072 .021	.134 .070 .021	.127 .067 .020	.120 .064 .019	.113 .061 .019	
5.0	.131 .067 .019	.128 .066 .019	.121 .063 .019	.115 .061 .018	.109 .059 .018	
6.0	.125 .063 .018	.122 .062 .018	.116 .060 .017	.111 .058 .017	.106 .056 .017	
7.0	.119 .059 .017	.117 .058 .017	.111 .056 .016	.107 .055 .016	.102 .053 .016	
8.0	.114 .056 .016	.112 .055 .016	.107 .054 .015	.103 .052 .015	.099 .051 .015	
9.0	.109 .053 .015	.107 .052 .015	.103 .051 .014	.099 .050 .014	.096 .049 .014	
10.0	.105 .050 .014	.103 .050 .014	.099 .049 .014	.096 .048 .014	.093 .047 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.170 .157 .146	.146 .135 .126	.100 .093 .087	.057 .054 .051	.018 .017 .016	
2.0	.154 .133 .115	.132 .114 .099	.090 .079 .069	.052 .046 .041	.017 .015 .013	
3.0	.141 .113 .092	.121 .098 .080	.083 .068 .056	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .075	.111 .085 .065	.076 .059 .046	.044 .035 .027	.014 .011 .009	
5.0	.120 .087 .062	.103 .075 .054	.071 .052 .038	.041 .031 .023	.013 .010 .007	
6.0	.112 .077 .052	.096 .067 .045	.067 .047 .032	.039 .027 .019	.012 .009 .006	
7.0	.105 .069 .044	.091 .060 .038	.063 .042 .027	.036 .025 .016	.012 .008 .005	
8.0	.099 .063 .038	.086 .055 .033	.059 .038 .023	.034 .023 .014	.011 .007 .005	
9.0	.094 .058 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.089 .053 .029	.077 .046 .025	.053 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.55V I:0.1369A P:11.025W PF:1.0389 Freq:59.98Hz Lamp Flux:680.898x1 lm		
NAME: AD-35-S12W-DTW-WH-REY	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.9	7.8	7.1	7.9	8.1	3.4	4.2	3.6	4.4	4.5
3H	6.9	7.6	7.1	7.8	8.0	3.4	4.2	3.6	4.3	4.5
4H	6.8	7.5	7.1	7.8	8.0	3.3	4.1	3.6	4.3	4.5
6H	6.7	7.4	7.0	7.7	7.9	3.3	3.9	3.5	4.2	4.4
8H	6.7	7.4	7.0	7.6	7.9	3.2	3.9	3.5	4.1	4.4
12H	6.7	7.3	7.0	7.6	7.8	3.2	3.8	3.5	4.1	4.3
4H 2H	6.7	7.5	7.0	7.7	7.9	3.3	4.0	3.5	4.2	4.4
3H	6.7	7.3	7.0	7.6	7.8	3.3	4.0	3.6	4.2	4.5
4H	6.6	7.2	7.0	7.5	7.8	3.3	3.9	3.6	4.2	4.5
6H	6.6	7.1	7.0	7.4	7.8	3.2	3.7	3.6	4.0	4.4
8H	6.5	7.0	6.9	7.3	7.7	3.1	3.6	3.5	4.0	4.3
12H	6.5	6.9	6.9	7.3	7.7	3.1	3.5	3.5	3.9	4.3
8H 4H	6.5	7.0	6.9	7.3	7.7	3.2	3.7	3.6	4.0	4.4
6H	6.4	6.8	6.9	7.2	7.6	3.1	3.5	3.5	3.9	4.3
8H	6.4	6.7	6.8	7.1	7.6	3.0	3.4	3.5	3.8	4.2
12H	6.3	6.6	6.8	7.1	7.5	3.0	3.3	3.4	3.7	4.2
12H 4H	6.5	6.9	6.9	7.3	7.7	3.1	3.6	3.5	3.9	4.3
6H	6.4	6.7	6.8	7.1	7.6	3.0	3.4	3.5	3.8	4.2
8H	6.3	6.6	6.8	7.1	7.5	3.0	3.3	3.4	3.7	4.2
Variations with the observer position at spacings:										
S = 1.0H	+ 4.2 / - 6.4					+ 2.1 / - 4.4				
1.5H	+ 6.0 / - 6.0					+ 3.1 / - 3.7				
2.0H	+ 5.4 / - 4.0					+ 3.7 / - 2.6				

CIE Pub.117, 680.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.3)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.55V I:0.1369A P:11.025W PF:1.0389 Freq:59.98Hz Lamp Flux:680.898x1 lm		
NAME: AD-35-S12W-DTW-WH-REY	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	88	82	78	87	82	78	87	81	78	74
0.80	95	90	86	95	89	86	94	89	85	82
1.00	100	94	91	99	94	90	97	94	90	86
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	98	105	101	98	103	99	97	92
2.00	109	105	102	107	104	101	105	102	99	94
2.50	110	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.55V I:0.1369A P:11.025W PF:1.0389 Freq:59.98Hz Lamp Flux:680.898x1 lm		
NAME: AD-35-S12W-DTW-WH-REY	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

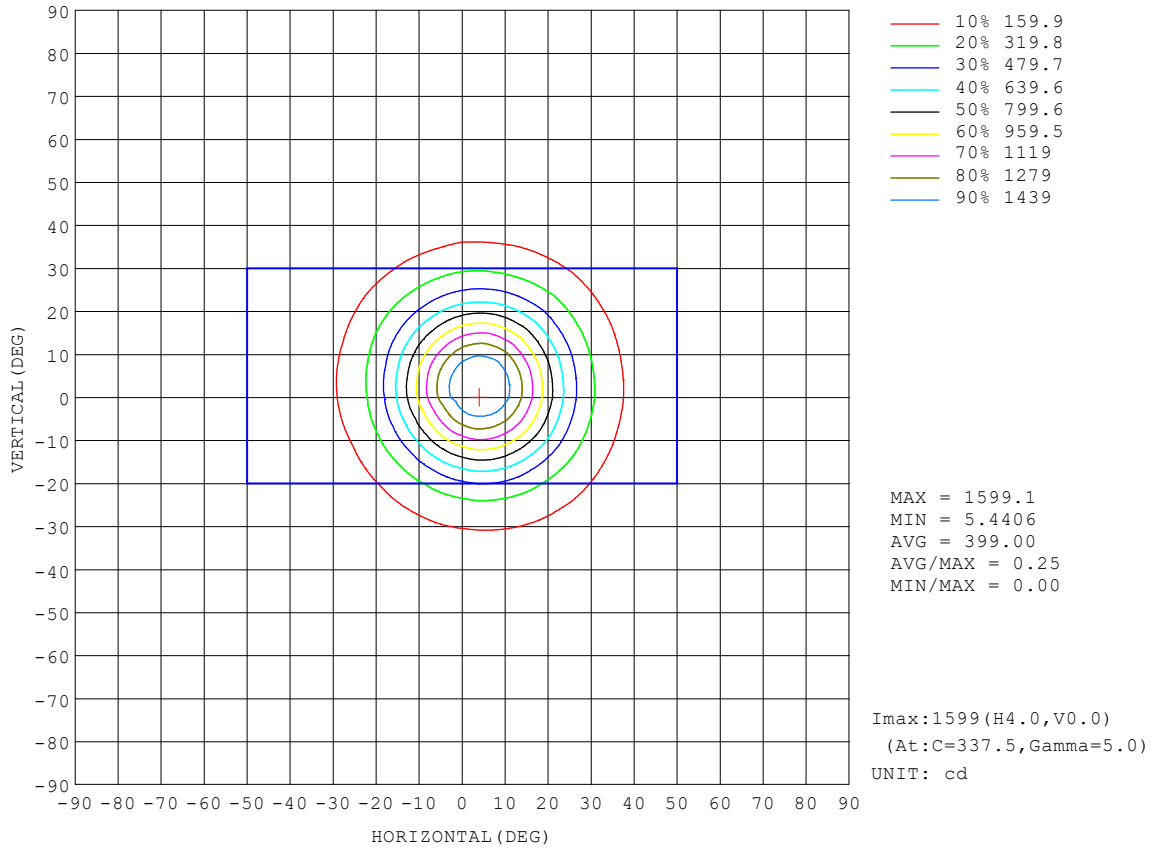


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.55V I:0.1369A P:11.025W PF:1.0389 Freq:59.98Hz Lamp Flux:680.898x1 lm		
NAME: AD-35-S12W-DTW-WH-REY	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

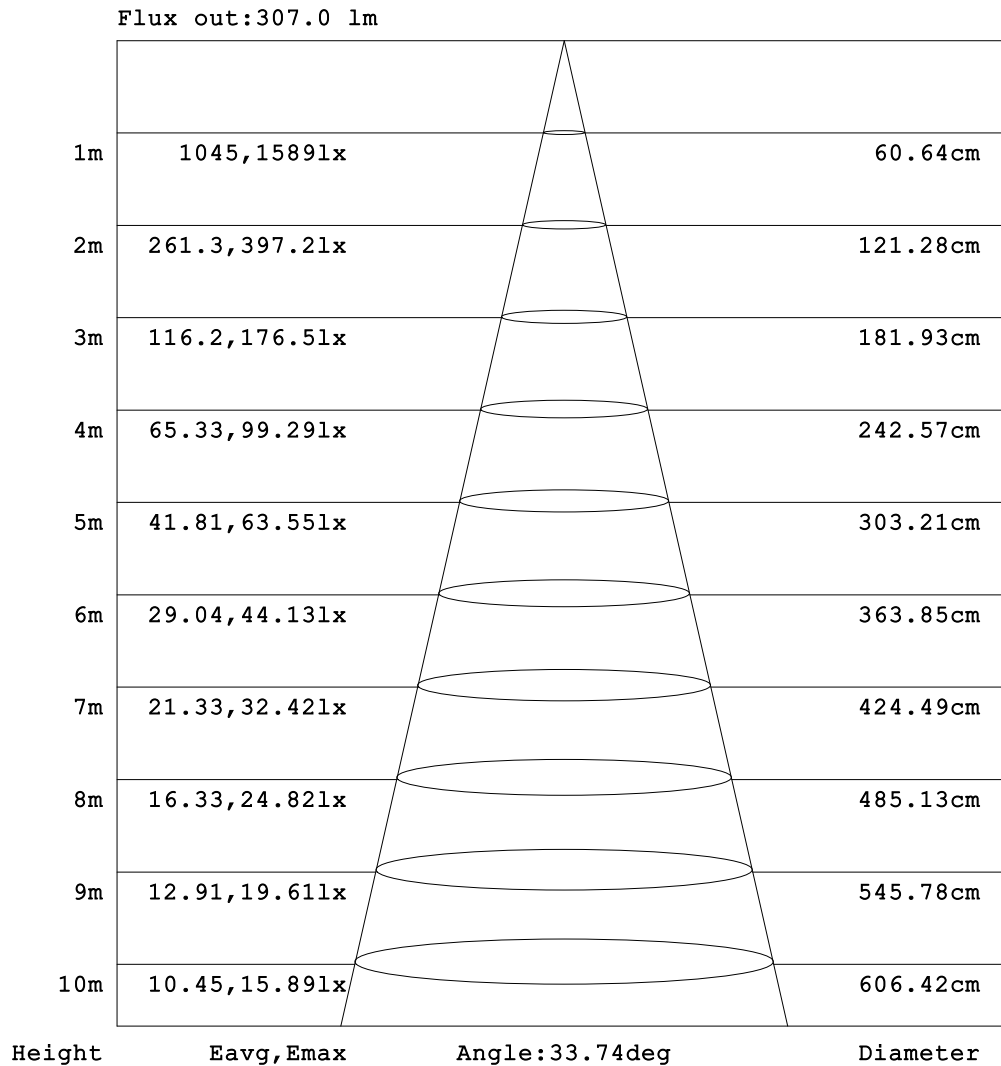


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.55V I:0.1369A P:11.025W PF:1.0389 Freq:59.98Hz Lamp Flux:680.898x1 lm		
NAME: AD-35-S12W-DTW-WH-REY	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

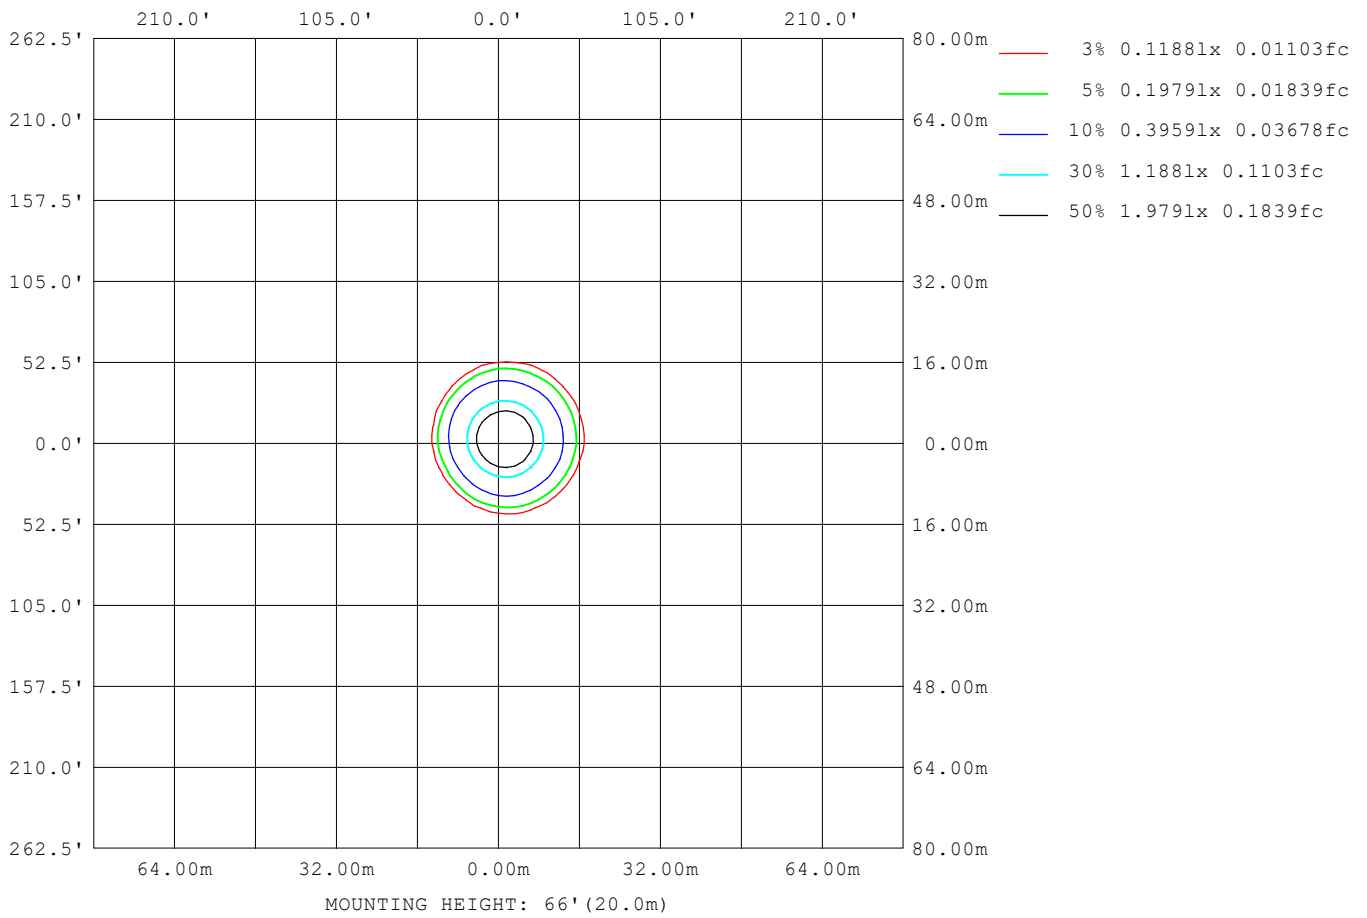

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.55V I:0.1369A P:11.025W PF:1.0389 Freq:59.98Hz Lamp Flux:680.898x1 lm		
NAME: AD-35-S12W-DTW-WH-REY	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	79
L_0~180 (75) av	50
L_0~180 (85) av	9
L_90~270 (65) av	74
L_90~270 (75) av	30
L_90~270 (85) av	4
L_45 (65) av	77
L_45 (75) av	42
L_45 (85) av	5

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

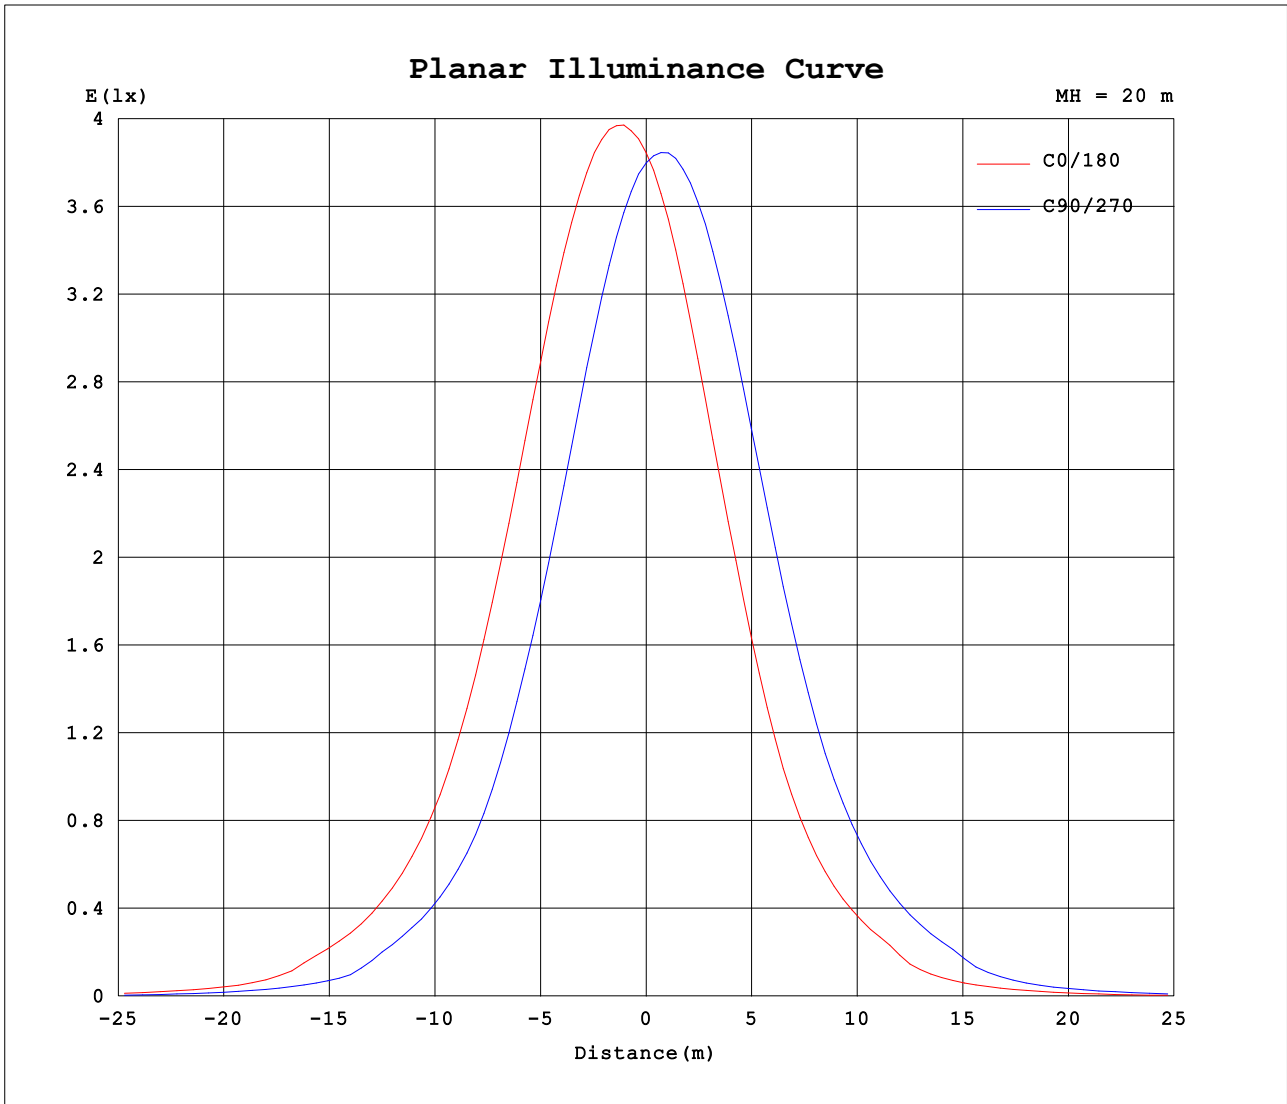

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-08-12

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.55V I:0.1369A P:11.025W PF:1.0389 Freq:59.98Hz Lamp Flux:680.898x1 lm		
NAME: AD-35-S12W-DTW-WH-REY	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1522	1522	1522	1522	1522	1522	1522	1522	1522	1522	1522	1522	1522	1522	1522	1522			
5	1582	1538	1472	1413	1350	1309	1277	1278	1300	1342	1401	1465	1528	1575	1604	1606			
10	1462	1375	1262	1156	1052	984	939	938	974	1039	1137	1245	1365	1465	1525	1525			
15	1194	1092	957	841	731	659	617	615	647	711	815	930	1071	1192	1267	1263			
20	857	769	650	548	455	393	367	370	389	443	530	627	741	851	921	920			
25	552	486	392	328	275	236	212	217	235	278	337	399	474	547	602	598			
30	342	295	237	201	169	144	122	119	142	165	207	247	297	331	374	370			
35	208	178	145	104	72.2	60.5	52.7	53.4	61.3	70.3	90.4	136	181	198	220	219			
40	102	73.8	57.5	46.3	39.2	33.5	30.1	30.1	33.4	38.4	45.2	58.2	80.1	97.8	115	120			
45	47.5	39.9	31.7	26.0	20.8	17.5	15.6	15.6	17.2	20.2	25.0	30.9	40.2	47.9	52.0	52.6			
50	25.7	21.9	17.0	13.5	10.7	8.95	8.13	8.07	8.68	10.1	12.6	16.0	20.8	24.0	26.8	27.4			
55	11.7	10.6	8.71	7.19	6.19	5.66	5.40	5.35	5.50	5.92	6.69	7.82	9.29	10.6	12.0	12.3			
60	6.24	5.97	5.44	4.96	4.55	4.28	4.11	4.05	4.10	4.23	4.51	4.81	5.18	5.52	6.15	6.31			
65	4.26	4.20	4.00	3.76	3.52	3.34	3.19	3.14	3.17	3.22	3.28	3.32	3.46	3.67	4.03	4.23			
70	3.13	3.11	2.95	2.75	2.48	2.35	2.12	2.09	2.23	2.36	2.30	2.31	2.35	2.53	2.81	3.07			
75	2.13	2.08	1.59	0.96	0.78	0.71	0.66	0.66	0.73	0.86	0.96	0.87	0.91	1.09	1.63	2.03			
80	0.59	0.56	0.28	0.22	0.24	0.26	0.29	0.29	0.27	0.24	0.20	0.15	0.16	0.19	0.32	0.55			
85	0.06	0.07	0.05	0.05	0.06	0.07	0.10	0.13	0.12	0.05	0.01	0.01	0.01	0.01	0.02	0.05			
90	0.01	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.01	0.00	0.00	0.00			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-08-12

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks: