
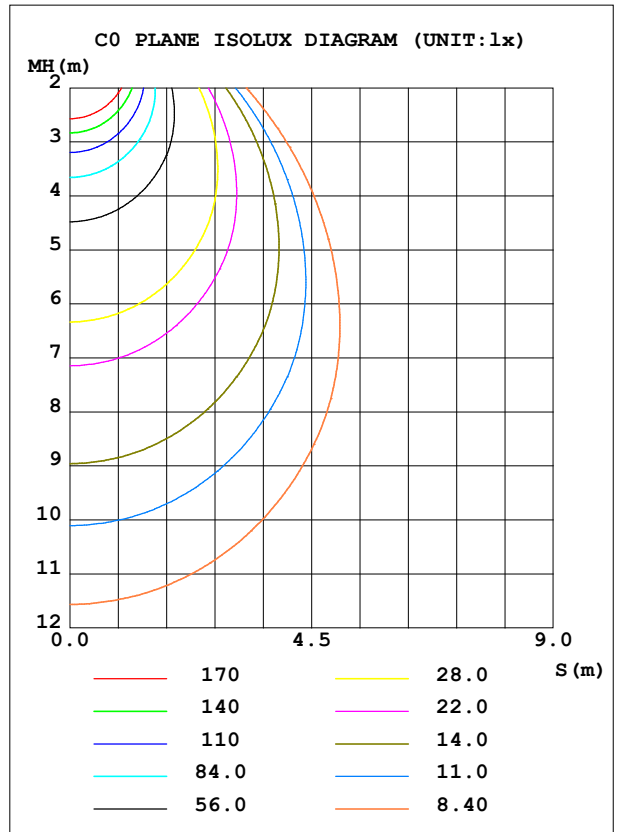


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.43V I:0.1761A P:20.607W PF:0.9801 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2237.04x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-10-40W-M-A5C5-HO	Imax (cd)	1124	S/MH (C0/180)	1.16
NOMINAL POWER (W)	22	LOR (%)	100.0	S/MH (C90/270)	1.15
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2237.0	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	2237.04	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.25

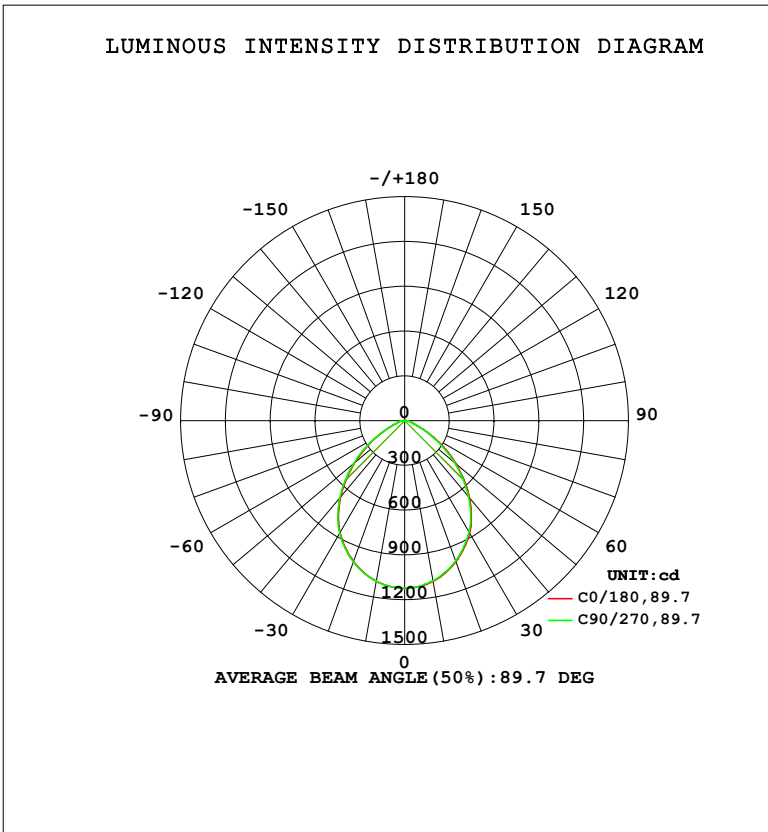

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, %lamp
10	1092	1093	1094	1094	1093	1093	1089	1087	0- 10	105.7	105.7	4.72,4.72
20	1004	1005	1008	1010	1005	1003	999.1	996.9	10- 20	296.9	402.6	18,18
30	866.0	867.5	873.0	875.9	871.0	867.6	863.2	860.2	20- 30	432.7	835.3	37.3,37.3
40	666.9	669.8	677.2	683.1	676.5	671.2	665.9	662.1	30- 40	484.0	1319	59,59
50	434.0	440.4	447.1	453.4	449.2	441.9	435.8	431.5	40- 50	429.4	1749	78.2,78.2
60	211.9	215.4	219.9	222.7	225.9	222.2	214.7	209.2	50- 60	291.6	2040	91.2,91.2
70	67.38	67.58	68.88	70.21	71.98	72.63	70.21	68.45	60- 70	131.3	2172	97.1,97.1
80	29.61	29.69	30.23	30.99	31.88	31.95	31.43	30.80	70- 80	50.43	2222	99.3,99.3
90	0.6227	0.6358	0.6096	0.6162	1.091	1.089	1.082	1.082	80- 90	15.02	2237	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1546.8 lm

%lum = 69.1%

%lamp = 69.1%

Conical surface Flux(130deg): 2123.2 lm

%lum = 94.9%


%lamp = 94.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.43V I:0.1761A P:20.607W PF:0.9801 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2237.04x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

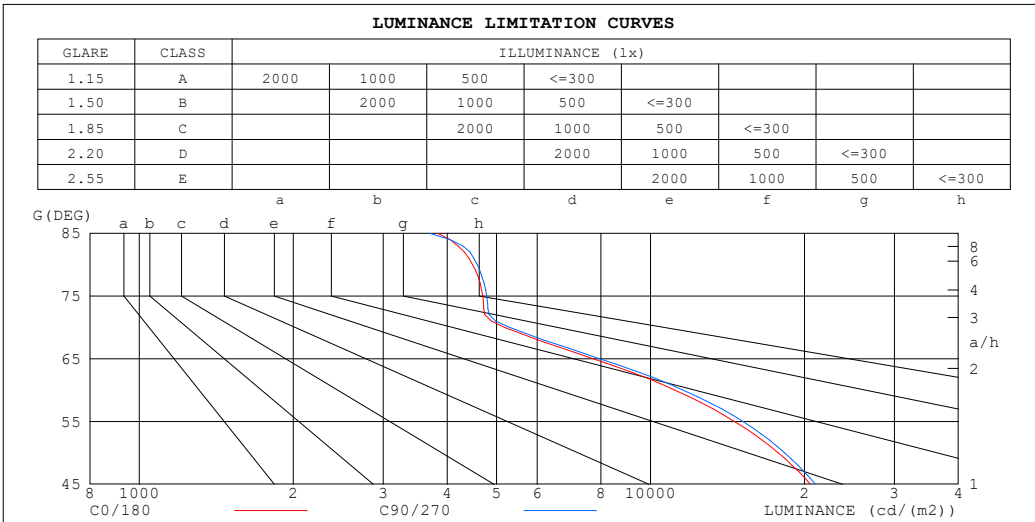

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3834	3696
80	4487	4582
75	4694	4781
70	5184	5300
65	7720	7955
60	11153	11575
55	14598	15161
50	17767	18304
45	20545	20998


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.43V I:0.1761A P:20.607W PF:0.9801 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2237.04x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.85	.94	.89	.84	.90	.86	.82	.87	.84	.81	.84	.81	.79	.77
3.0	.86	.79	.73	.84	.78	.73	.81	.76	.71	.79	.74	.70	.76	.72	.69	.67
4.0	.77	.70	.64	.76	.69	.63	.74	.68	.63	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.62	.56	.69	.61	.56	.67	.60	.55	.65	.59	.55	.63	.58	.54	.52
6.0	.64	.56	.50	.63	.55	.50	.61	.54	.49	.59	.53	.49	.58	.53	.49	.47
7.0	.58	.50	.45	.57	.50	.45	.56	.49	.44	.55	.49	.44	.53	.48	.44	.42
8.0	.54	.46	.40	.53	.45	.40	.52	.45	.40	.50	.44	.40	.49	.44	.40	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.46	.40	.36	.34
10.0	.46	.38	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.43	.37	.33	.31

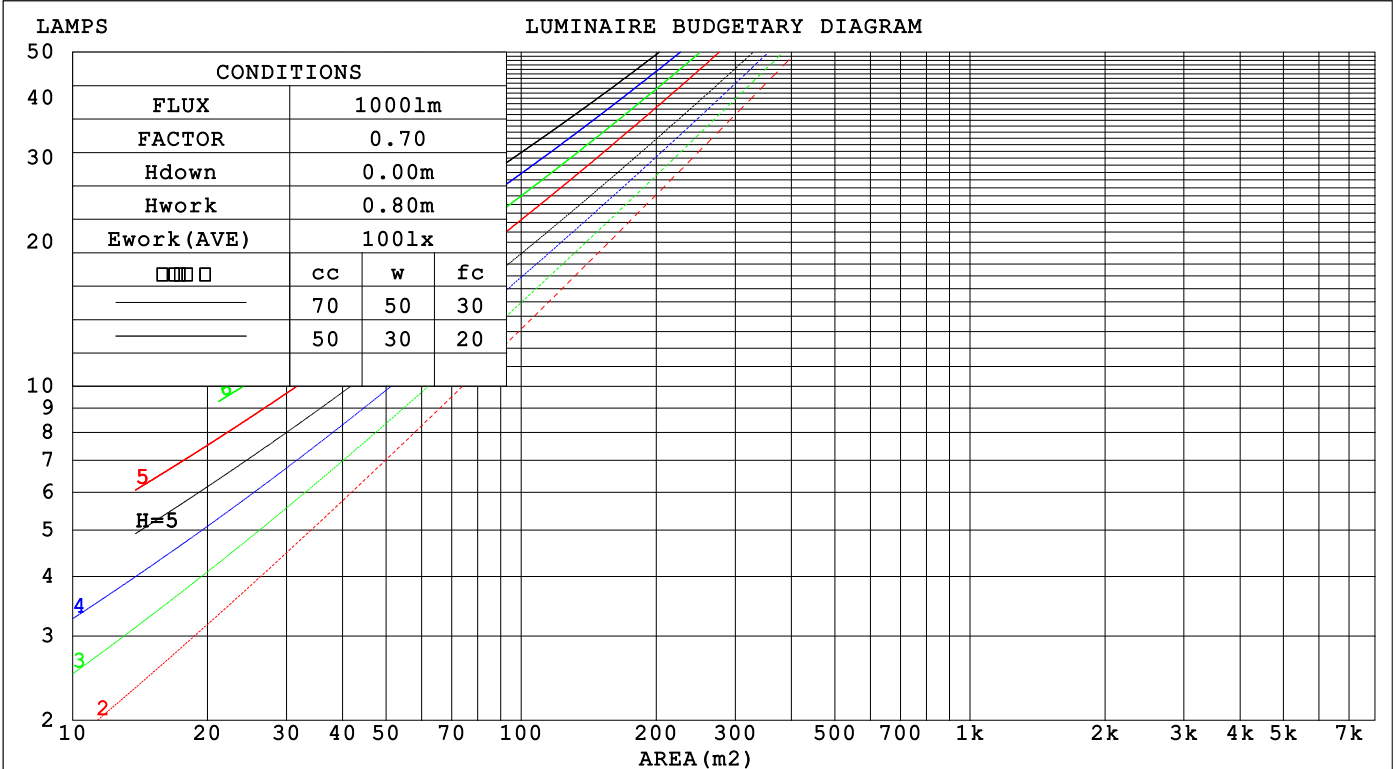

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-07-04

□ Range: 0 - 90DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.43V I:0.1761A P:20.607W PF:0.9801 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2237.04x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.249	.142	.045	.242	.138	.044	.229	.132	.042	.217	.125	.040	.206	.120	.039	
2.0	.241	.132	.041	.235	.129	.040	.224	.124	.039	.213	.120	.037	.204	.115	.036	
3.0	.228	.122	.036	.223	.119	.036	.213	.116	.035	.204	.112	.034	.196	.108	.034	
4.0	.215	.112	.033	.210	.110	.033	.202	.107	.032	.194	.104	.031	.186	.101	.031	
5.0	.202	.103	.030	.198	.102	.030	.191	.099	.029	.183	.097	.029	.177	.094	.028	
6.0	.190	.095	.027	.187	.094	.027	.180	.092	.027	.173	.090	.026	.167	.088	.026	
7.0	.179	.089	.025	.176	.088	.025	.170	.086	.025	.164	.084	.024	.159	.083	.024	
8.0	.169	.083	.023	.166	.082	.023	.161	.080	.023	.156	.079	.023	.151	.077	.023	
9.0	.160	.077	.022	.157	.077	.022	.152	.075	.021	.148	.074	.021	.143	.073	.021	
10.0	.151	.073	.020	.149	.072	.020	.145	.071	.020	.140	.070	.020	.136	.069	.020	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.176	.157	.139	.151	.134	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
3.0	.165	.132	.104	.142	.114	.090	.097	.079	.063	.056	.046	.037	.018	.015	.012	
4.0	.156	.114	.080	.134	.098	.070	.092	.068	.049	.053	.040	.029	.017	.013	.009	
5.0	.148	.100	.063	.127	.087	.055	.088	.060	.039	.051	.035	.023	.016	.012	.008	
6.0	.141	.089	.051	.121	.077	.045	.083	.054	.032	.048	.032	.019	.016	.010	.006	
7.0	.134	.081	.042	.115	.070	.037	.080	.049	.026	.046	.029	.016	.015	.009	.005	
8.0	.128	.074	.036	.110	.064	.031	.076	.045	.022	.044	.026	.013	.014	.009	.004	
9.0	.122	.068	.031	.105	.059	.027	.073	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.117	.063	.027	.100	.055	.023	.070	.038	.017	.041	.023	.010	.013	.007	.003	
10.0	.111	.059	.024	.096	.051	.021	.067	.036	.015	.039	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.43V I:0.1761A P:20.607W PF:0.9801 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2237.04x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.6	22.9	21.8	23.1	23.3	21.7	23.0	21.9	23.2	23.4
3H	21.8	23.0	22.1	23.2	23.5	21.9	23.1	22.2	23.3	23.6
4H	21.8	23.0	22.1	23.2	23.5	22.0	23.1	22.3	23.4	23.6
6H	21.9	23.0	22.2	23.2	23.5	22.0	23.1	22.3	23.4	23.6
8H	21.9	23.0	22.2	23.2	23.5	22.0	23.1	22.4	23.3	23.6
12H	21.9	22.9	22.2	23.2	23.5	22.0	23.0	22.4	23.3	23.6
4H 2H	21.7	22.9	22.0	23.1	23.3	21.8	23.0	22.1	23.2	23.4
3H	22.0	23.0	22.4	23.3	23.6	22.1	23.1	22.5	23.4	23.7
4H	22.1	23.0	22.5	23.4	23.7	22.2	23.1	22.6	23.5	23.8
6H	22.3	23.1	22.7	23.4	23.8	22.4	23.2	22.8	23.5	23.9
8H	22.3	23.1	22.7	23.4	23.8	22.4	23.2	22.8	23.5	23.9
12H	22.4	23.0	22.8	23.4	23.8	22.5	23.1	22.9	23.5	23.9
8H 4H	22.1	22.9	22.5	23.2	23.6	22.2	23.0	22.6	23.3	23.7
6H	22.4	23.0	22.8	23.4	23.8	22.4	23.1	22.9	23.5	23.9
8H	22.5	23.0	22.9	23.4	23.9	22.6	23.1	23.0	23.5	24.0
12H	22.5	23.0	23.0	23.4	23.9	22.6	23.1	23.1	23.5	24.0
12H 4H	22.1	22.8	22.5	23.2	23.6	22.2	22.9	22.6	23.3	23.7
6H	22.4	22.9	22.8	23.3	23.8	22.4	23.0	22.9	23.4	23.9
8H	22.5	22.9	22.9	23.4	23.9	22.6	23.0	23.0	23.5	23.9

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 0.8	+ 0.6 / - 0.8
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.4
2.0H	+ 1.3 / - 1.7	+ 1.3 / - 1.7

CIE Pub.117, 2237 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.8)
 Area: 0.038 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-04	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.43V I:0.1761A P:20.607W PF:0.9801 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2237.04x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	65	55	49	65	55	49	64	55	49	43
0.80	76	66	59	75	65	59	73	65	59	53
1.00	84	75	69	83	74	68	81	75	68	62
1.25	90	82	76	89	81	76	87	80	75	69
1.50	95	87	81	93	86	81	91	84	80	73
2.00	101	94	89	99	93	88	96	91	86	80
2.50	103	97	93	102	96	92	98	93	90	82
3.00	106	101	96	104	99	95	100	96	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	102	104	102	99	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.43V I:0.1761A P:20.607W PF:0.9801 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2237.04x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

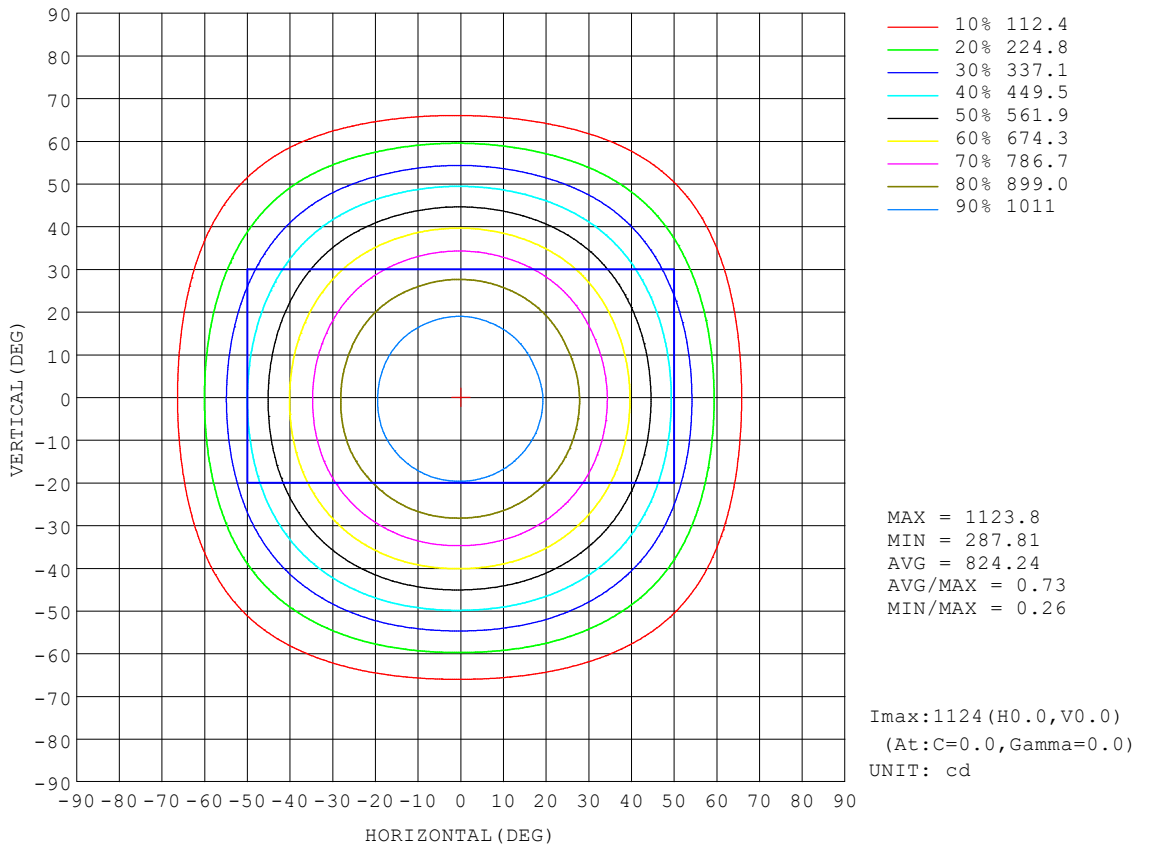


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.43V I:0.1761A P:20.607W PF:0.9801 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2237.04x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Flux out:1547 lm

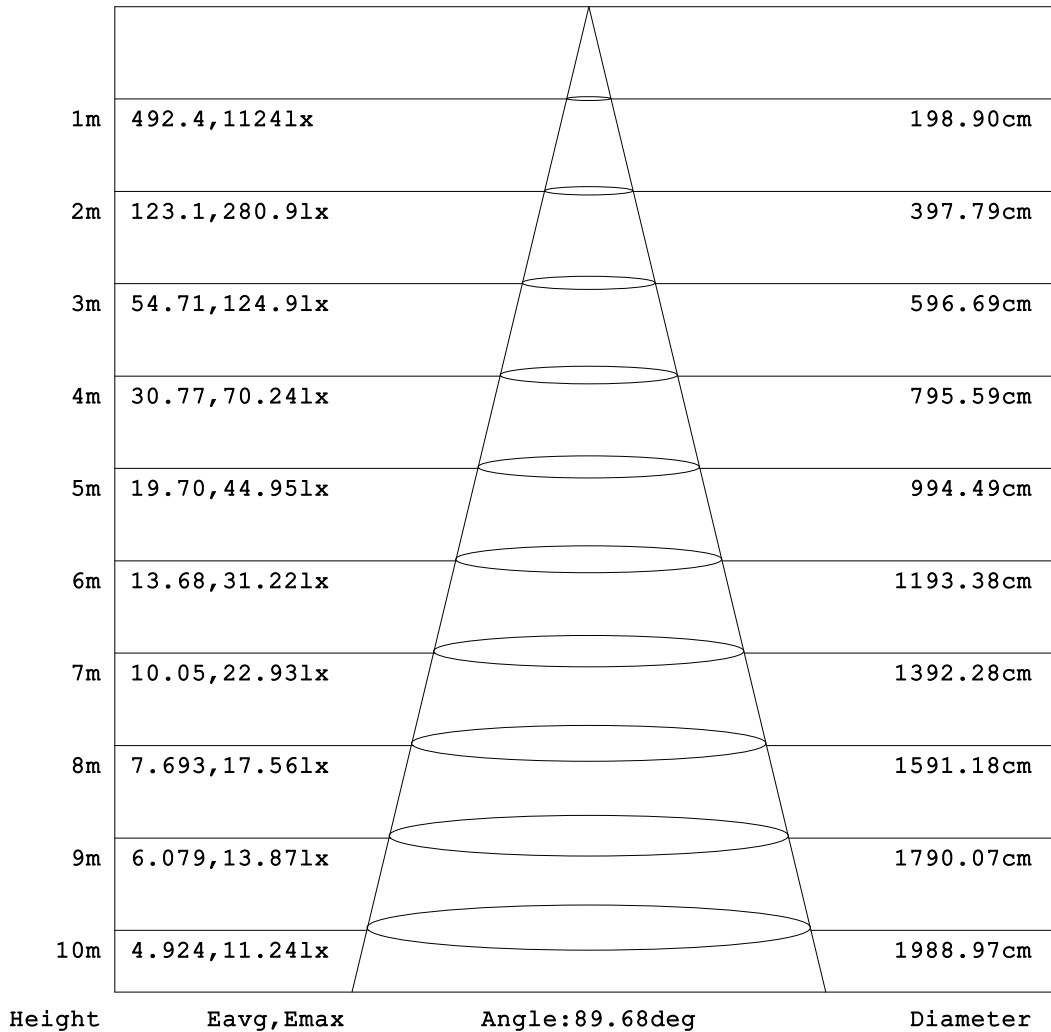


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.43V I:0.1761A P:20.607W PF:0.9801 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2237.04x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

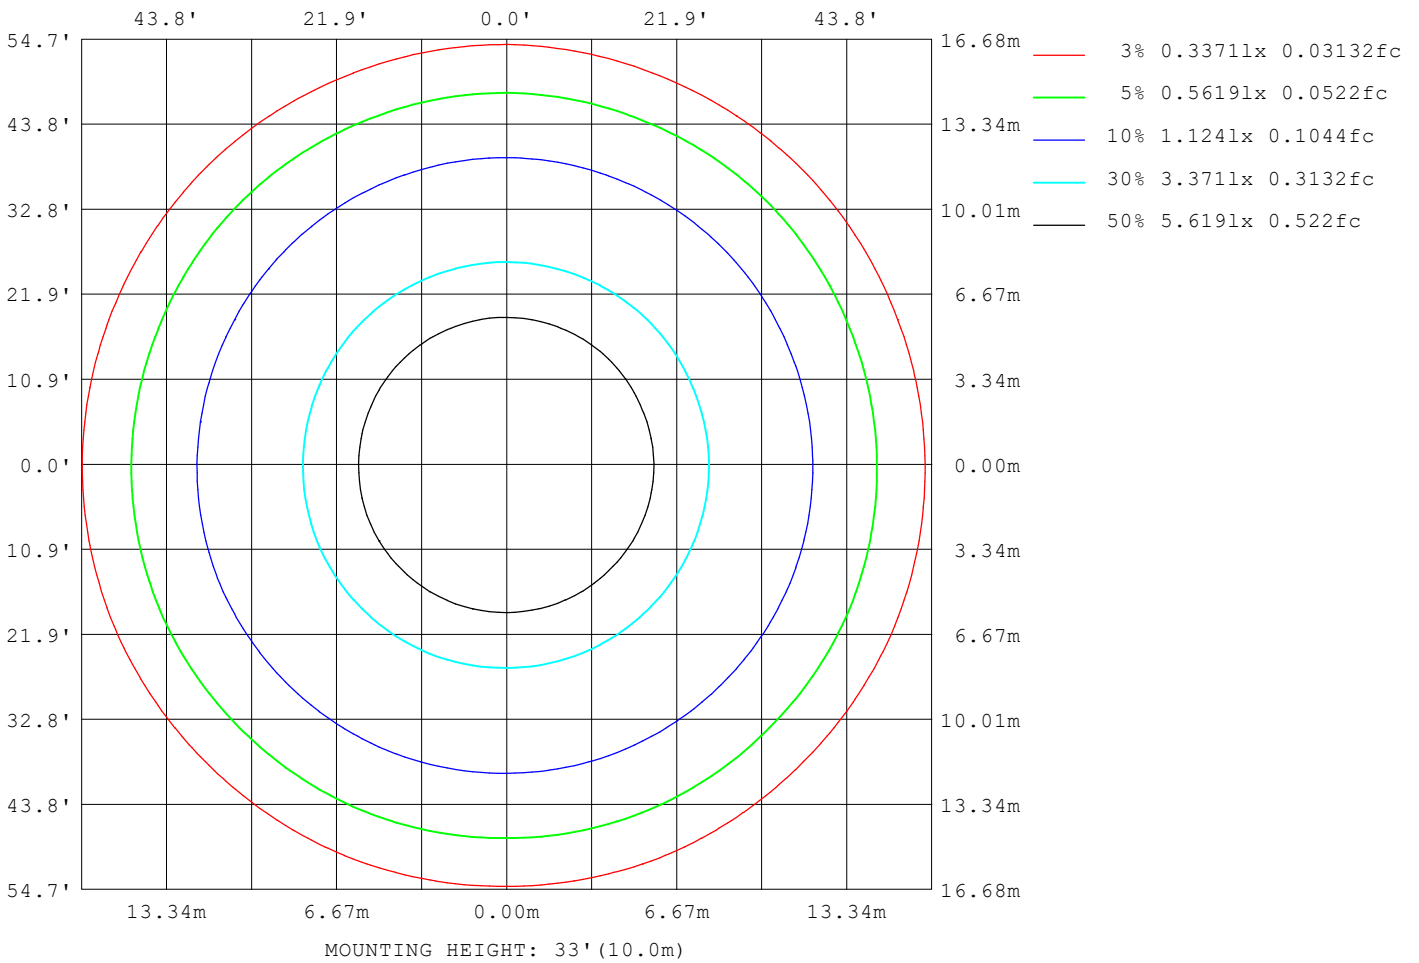

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.43V I:0.1761A P:20.607W PF:0.9801 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2237.04x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7984
L_0~180 (75) av	4814
L_0~180 (85) av	4159
L_90~270 (65) av	7911
L_90~270 (75) av	4820
L_90~270 (85) av	3838
L_45 (65) av	7949
L_45 (75) av	4818
L_45 (85) av	4087

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

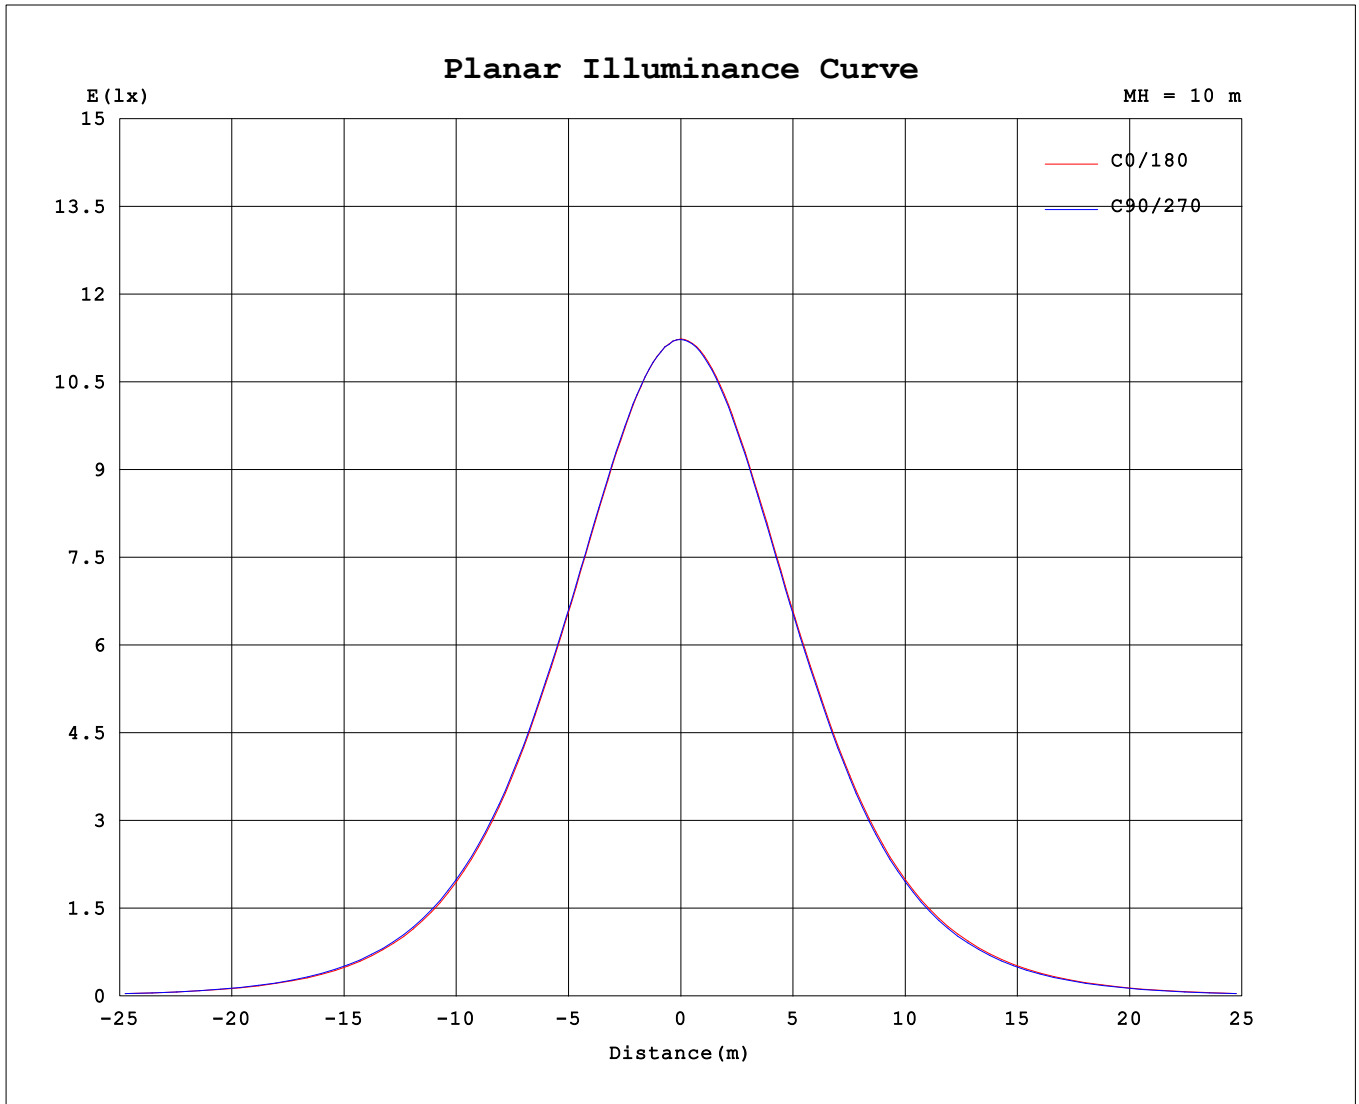

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.43V I:0.1761A P:20.607W PF:0.9801 Freq:60.01Hz UTHDI:0.00% ITHDI:0.00% KDisp:0 Lamp Flux:2237.04x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Table--1 UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1124	1124	1123	1123	1122	1122	1122	1121	1124	1124	1123	1123	1122	1122	1122	1121			
5	1115	1115	1115	1116	1115	1115	1115	1115	1116	1116	1115	1114	1114	1112	1112	1111			
10	1092	1093	1093	1093	1094	1094	1094	1094	1093	1092	1093	1091	1089	1088	1087	1086			
15	1054	1056	1056	1057	1058	1058	1059	1059	1056	1056	1054	1052	1051	1049	1049	1048			
20	1004	1005	1005	1007	1008	1009	1010	1009	1005	1004	1003	1000	999	998	997	996			
25	940	942	941	944	945	947	948	948	943	941	941	937	936	934	933	932			
30	866	868	868	871	873	875	876	876	871	868	868	865	863	860	860	859			
35	774	775	776	780	782	786	786	787	781	778	777	773	772	769	768	766			
40	667	669	670	675	677	682	683	683	677	673	671	667	666	662	662	660			
45	552	555	556	562	564	570	571	571	565	560	558	553	553	549	549	547			
50	434	439	440	445	447	452	453	455	449	443	442	437	436	432	431	429			
55	318	325	325	330	330	335	335	338	335	329	328	322	322	316	317	314			
60	212	216	215	220	220	223	223	226	226	223	222	216	215	210	209	209			
65	124	125	125	127	128	130	130	131	132	132	133	129	126	123	123	123			
70	67.4	68.0	67.6	68.7	68.9	70.1	70.2	71.1	72.0	72.0	72.6	71.2	70.2	68.7	68.5	67.7			
75	46.2	46.4	46.4	46.9	47.0	47.6	47.7	48.0	48.5	48.5	48.6	48.1	47.8	47.1	46.9	46.5			
80	29.6	29.8	29.7	30.1	30.2	30.8	31.0	31.3	31.9	32.0	31.9	31.6	31.4	30.9	30.8	30.2			
85	12.7	12.8	12.6	12.4	12.2	13.1	13.5	14.1	14.9	15.0	14.6	13.6	13.2	13.0	13.4	13.5			
90	0.62	0.62	0.64	0.60	0.61	0.58	0.62	0.62	1.09	1.14	1.09	1.09	1.08	1.11	1.08	1.08			

C Range: 0 - 360DEG	□ Range: 0 - 90DEG
C Interval: 22.5DEG	□ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-04	Remarks: