
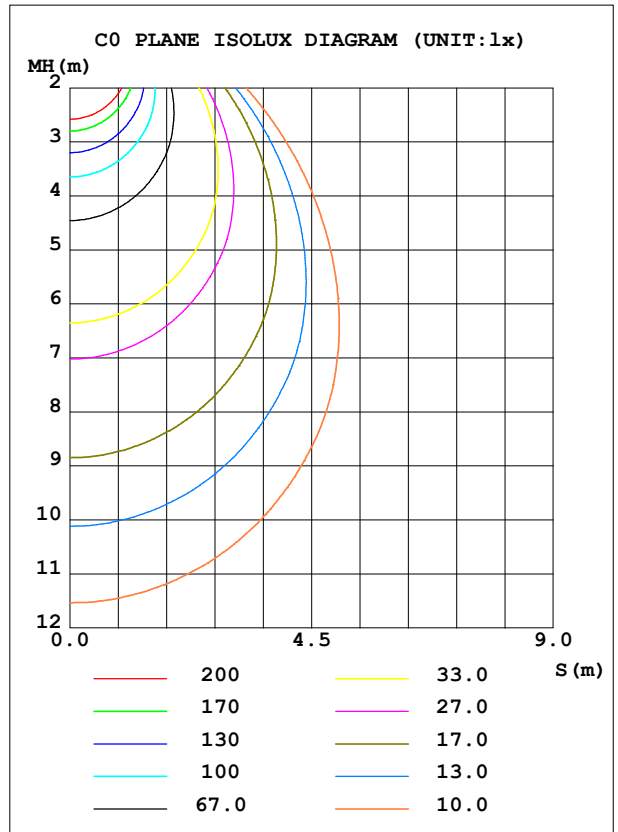


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.43V I:0.2090A P:24.618W PF:0.9864 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2651.67x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-10-40W-M-A5C5-HO	Imax (cd)	1332	S/MH (C0/180)	1.16
NOMINAL POWER (W)	26	LOR (%)	100.0	S/MH (C90/270)	1.15
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2651.7	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	2651.67	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.25

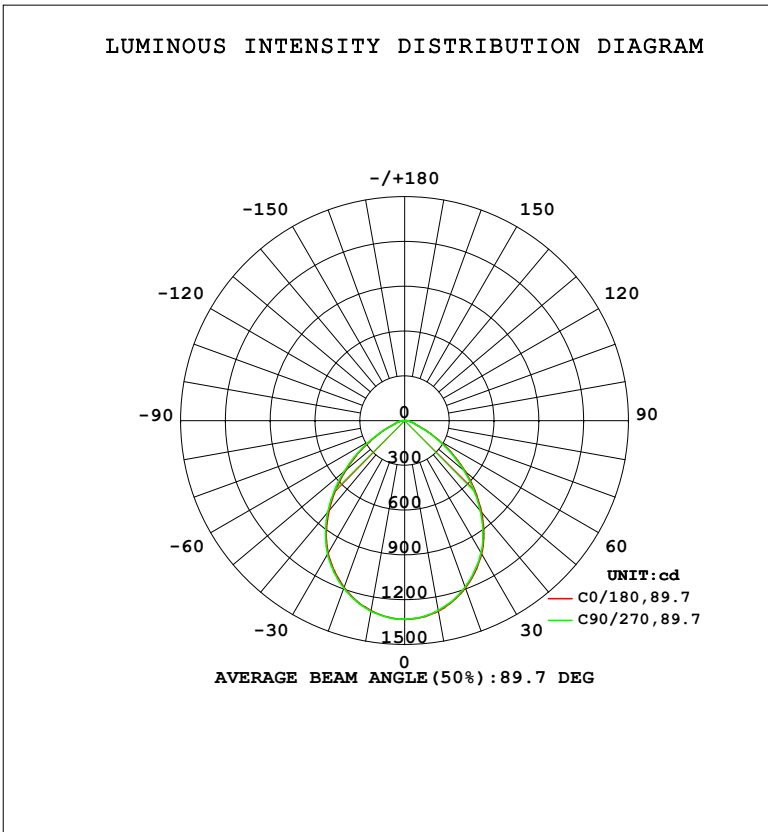

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1294	1295	1297	1298	1296	1294	1291	1289	0- 10	125.3	125.3	4.72,4.72
20	1188	1191	1194	1196	1191	1189	1185	1182	10- 20	351.9	477.2	18,18
30	1026	1029	1034	1039	1032	1027	1023	1019	20- 30	513.1	990.3	37.3,37.3
40	789.7	793.8	803.9	809.5	801.3	795.4	789.8	785.9	30- 40	573.8	1564	59,59
50	513.8	521.8	529.4	537.8	532.3	523.7	516.1	511.4	40- 50	508.9	2073	78.2,78.2
60	251.1	255.6	260.9	264.1	267.5	263.0	254.4	247.8	50- 60	345.6	2419	91.2,91.2
70	79.79	80.04	81.61	83.31	85.24	85.93	83.24	81.12	60- 70	155.5	2574	97.1,97.1
80	35.09	35.25	35.85	36.70	37.77	37.80	37.21	36.55	70- 80	59.76	2634	99.3,99.3
90	0.7342	0.7407	0.7145	0.7211	1.298	1.299	1.298	1.298	80- 90	17.81	2652	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1833.8 lm

%lum = 69.2%

%lamp = 69.2%

Conical surface Flux(130deg): 2516.7 lm

%lum = 94.9%


%lamp = 94.9%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:119.43V I:0.2090A P:24.618W PF:0.9864 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2651.67x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

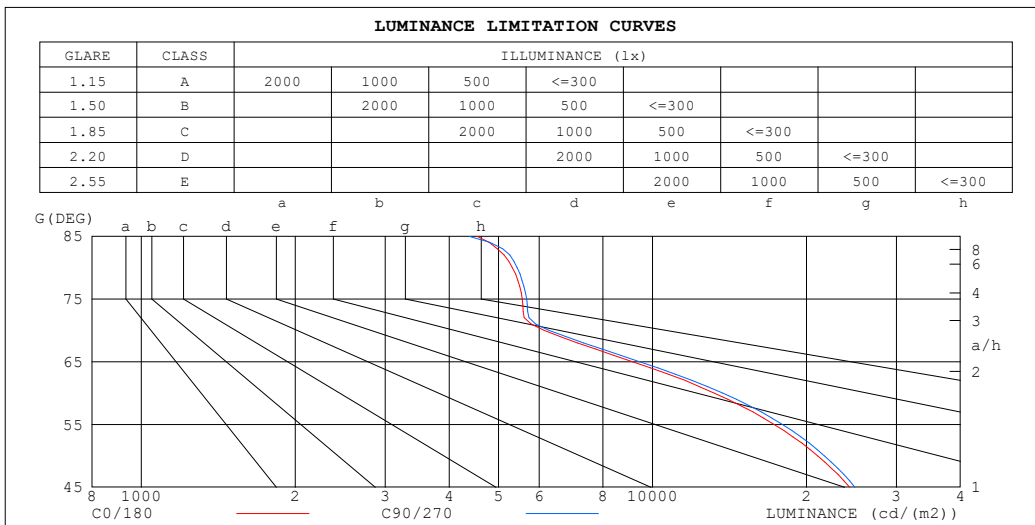

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4538	4374
80	5318	5432
75	5558	5671
70	6139	6279
65	9141	9432
60	13215	13732
55	17289	17960
50	21034	21675
45	24320	24885


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.43V I:0.2090A P:24.618W PF:0.9864 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:2651.67x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.85	.94	.89	.84	.90	.86	.82	.87	.84	.81	.84	.81	.79	.77
3.0	.86	.79	.73	.84	.78	.73	.82	.76	.71	.79	.74	.70	.76	.73	.69	.67
4.0	.77	.70	.64	.76	.69	.63	.74	.68	.63	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.62	.56	.69	.61	.56	.67	.60	.55	.65	.59	.55	.63	.58	.54	.52
6.0	.64	.56	.50	.63	.55	.50	.61	.54	.49	.59	.54	.49	.58	.53	.49	.47
7.0	.58	.50	.45	.57	.50	.45	.56	.49	.44	.55	.49	.44	.53	.48	.44	.42
8.0	.54	.46	.40	.53	.45	.40	.52	.45	.40	.50	.44	.40	.49	.44	.40	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.46	.40	.36	.34
10.0	.46	.38	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.43	.37	.33	.31

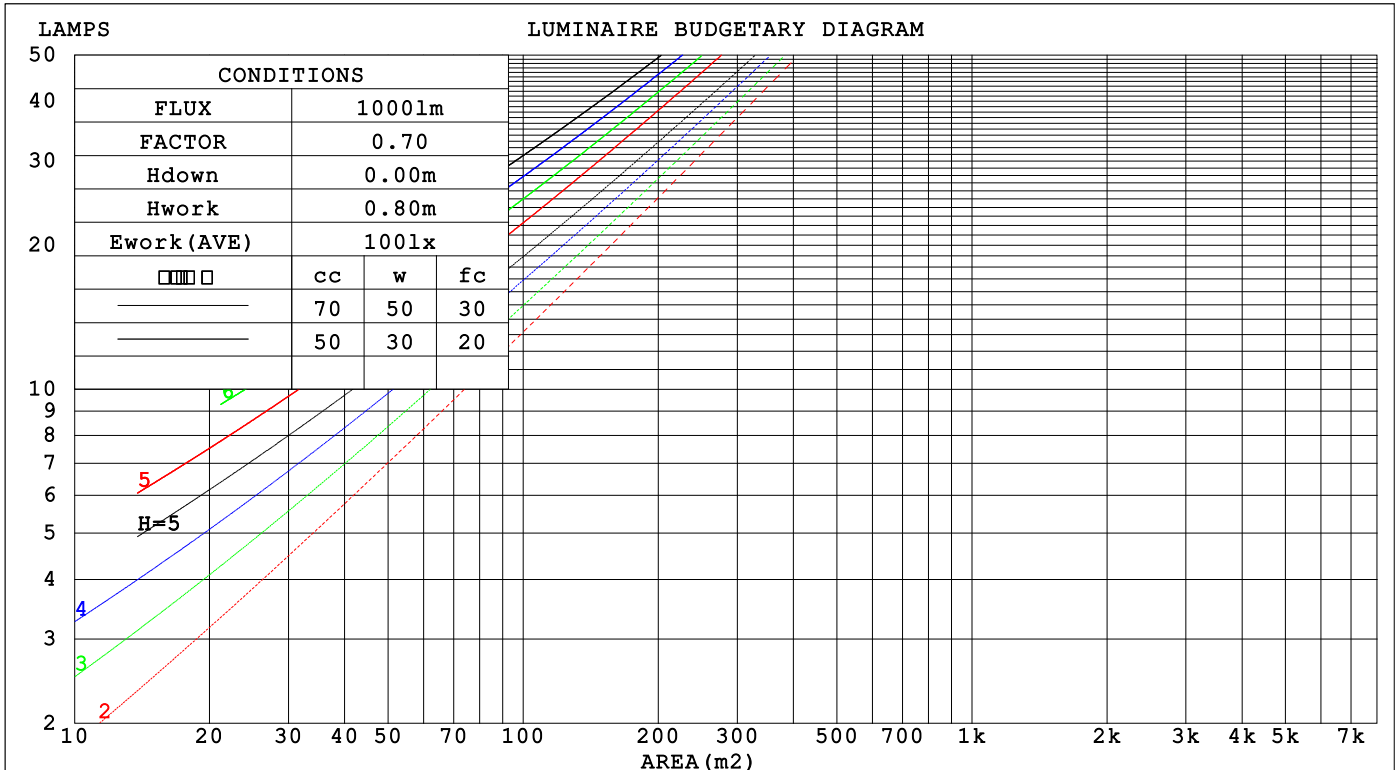

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:119.43V I:0.2090A P:24.618W PF:0.9864 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2651.67x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.249	.142	.045	.242	.138	.044	.229	.132	.042	.217	.125	.040	.206	.120	.039	
2.0	.241	.132	.041	.235	.129	.040	.224	.124	.039	.213	.120	.037	.204	.115	.036	
3.0	.228	.122	.036	.223	.119	.036	.213	.116	.035	.204	.112	.034	.196	.108	.034	
4.0	.215	.112	.033	.210	.110	.033	.202	.107	.032	.194	.104	.031	.186	.101	.031	
5.0	.202	.103	.030	.198	.102	.030	.191	.099	.029	.183	.097	.029	.177	.094	.028	
6.0	.190	.095	.027	.187	.094	.027	.180	.092	.027	.173	.090	.026	.167	.088	.026	
7.0	.179	.089	.025	.176	.088	.025	.170	.086	.025	.164	.084	.024	.159	.082	.024	
8.0	.169	.083	.023	.166	.082	.023	.161	.080	.023	.156	.079	.023	.151	.077	.023	
9.0	.160	.077	.022	.157	.077	.022	.152	.075	.021	.148	.074	.021	.143	.073	.021	
10.0	.151	.073	.020	.149	.072	.020	.145	.071	.020	.140	.070	.020	.136	.069	.020	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.176	.157	.139	.151	.134	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
3.0	.165	.132	.104	.142	.114	.090	.097	.079	.063	.056	.046	.037	.018	.015	.012	
4.0	.156	.114	.080	.134	.098	.070	.092	.068	.049	.053	.040	.029	.017	.013	.009	
5.0	.148	.100	.063	.127	.087	.055	.088	.060	.039	.051	.035	.023	.016	.012	.008	
6.0	.141	.089	.051	.121	.077	.045	.083	.054	.032	.048	.032	.019	.016	.010	.006	
7.0	.134	.081	.042	.115	.070	.037	.080	.049	.026	.046	.029	.016	.015	.009	.005	
8.0	.128	.074	.036	.110	.064	.031	.076	.045	.022	.044	.026	.013	.014	.009	.004	
9.0	.122	.068	.031	.105	.059	.027	.073	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.117	.063	.027	.100	.055	.023	.070	.038	.017	.041	.023	.010	.013	.007	.003	
10.0	.111	.059	.024	.096	.051	.021	.067	.036	.015	.039	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.43V I:0.2090A P:24.618W PF:0.9864 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2651.67x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.1	23.5	22.4	23.7	23.9	22.3	23.6	22.5	23.8	24.0
3H	22.4	23.6	22.7	23.8	24.0	22.5	23.7	22.8	23.9	24.2
4H	22.4	23.6	22.7	23.8	24.1	22.5	23.7	22.8	23.9	24.2
6H	22.5	23.6	22.8	23.8	24.1	22.6	23.7	22.9	23.9	24.2
8H	22.5	23.5	22.8	23.8	24.1	22.6	23.7	22.9	23.9	24.2
12H	22.5	23.5	22.8	23.8	24.1	22.6	23.6	23.0	23.9	24.2
4H 2H	22.3	23.4	22.6	23.7	23.9	22.4	23.5	22.7	23.8	24.0
3H	22.6	23.6	22.9	23.9	24.2	22.7	23.7	23.0	24.0	24.3
4H	22.7	23.6	23.1	23.9	24.3	22.8	23.7	23.2	24.0	24.4
6H	22.9	23.7	23.3	24.0	24.4	23.0	23.8	23.4	24.1	24.5
8H	22.9	23.7	23.3	24.0	24.4	23.0	23.8	23.4	24.1	24.5
12H	22.9	23.6	23.4	24.0	24.4	23.0	23.7	23.5	24.1	24.5
8H 4H	22.7	23.5	23.1	23.8	24.2	22.8	23.6	23.2	23.9	24.3
6H	22.9	23.5	23.4	23.9	24.4	23.0	23.6	23.5	24.0	24.5
8H	23.0	23.6	23.5	24.0	24.4	23.1	23.7	23.6	24.1	24.5
12H	23.1	23.6	23.6	24.0	24.5	23.2	23.7	23.7	24.1	24.6
12H 4H	22.7	23.4	23.1	23.8	24.2	22.8	23.5	23.2	23.9	24.2
6H	22.9	23.5	23.4	23.9	24.3	23.0	23.6	23.5	24.0	24.4
8H	23.1	23.5	23.5	24.0	24.4	23.2	23.6	23.6	24.1	24.5

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 0.8	+ 0.6 / - 0.8
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.4
2.0H	+ 1.3 / - 1.7	+ 1.3 / - 1.7

CIE Pub.117, 2652 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.4)  
 Area: 0.038 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-04	Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.43V I:0.2090A P:24.618W PF:0.9864 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2651.67x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	65	55	49	65	55	49	64	55	49	43
0.80	76	66	59	75	65	59	73	65	59	53
1.00	84	75	69	83	74	68	81	75	68	62
1.25	90	82	76	89	81	76	87	80	75	69
1.50	95	87	81	93	86	81	91	84	80	73
2.00	101	94	89	99	93	88	96	91	86	80
2.50	103	97	93	102	96	92	98	93	90	82
3.00	106	101	96	104	99	95	100	96	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	102	104	102	99	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.43V I:0.2090A P:24.618W PF:0.9864 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2651.67x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

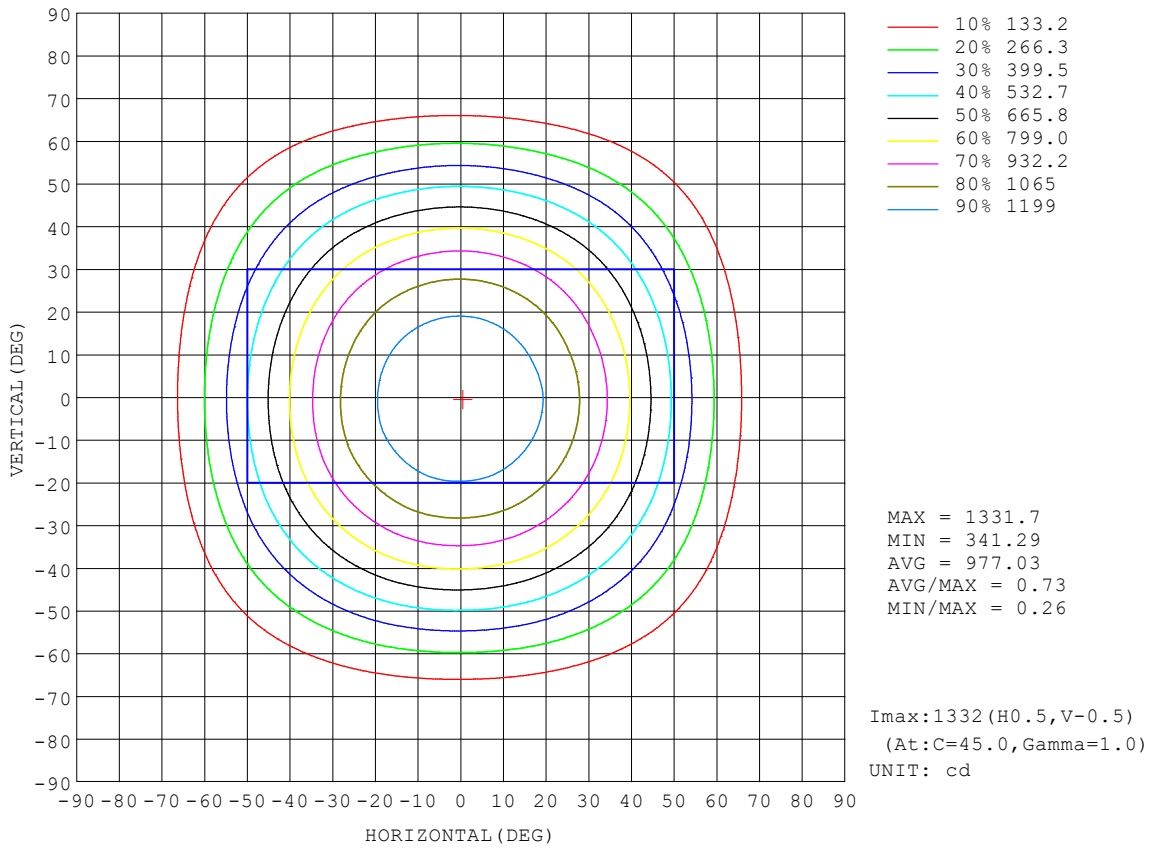

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04


Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.43V I:0.2090A P:24.618W PF:0.9864 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2651.67x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Flux out:1834 lm

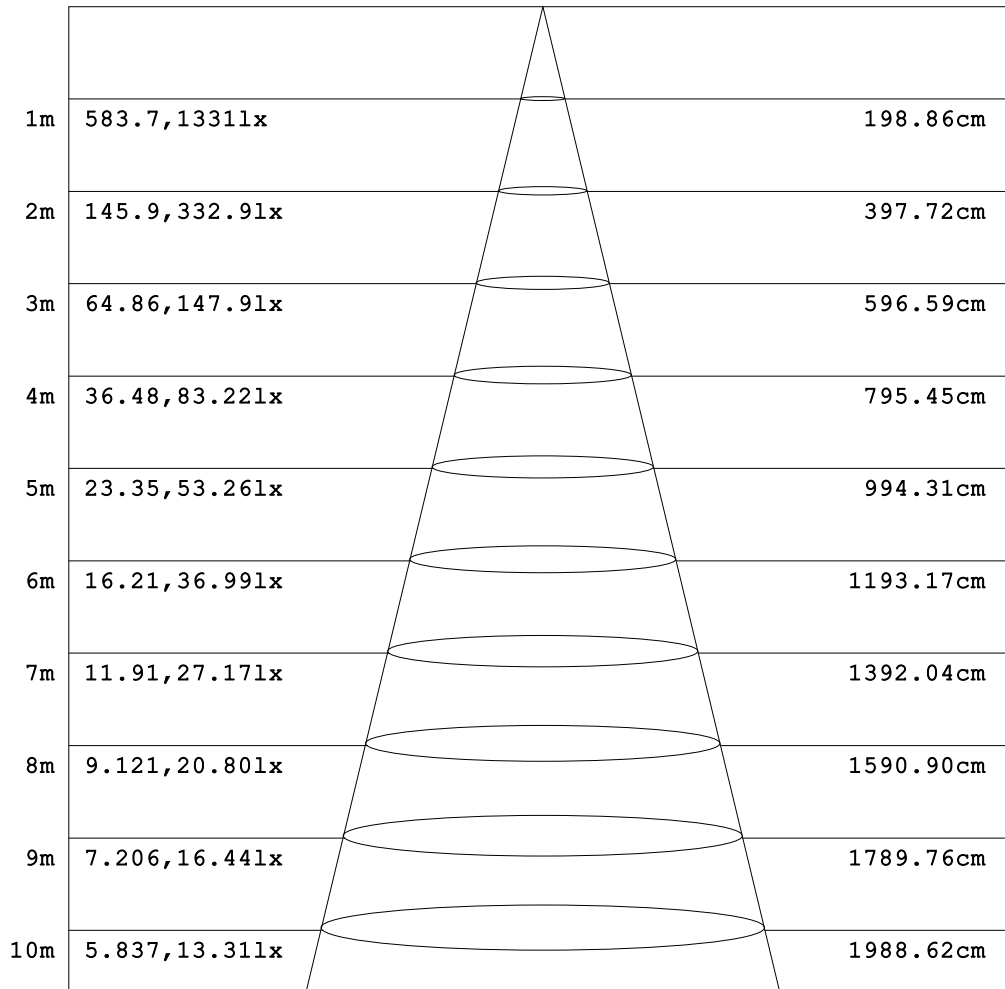

Angle:89.67deg

Height

Eavg, Emax

Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:DAMIN  
Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:9.680m [K=1.0000]  
Remarks:

**ISOLUX DIAGRAM**

Test:U:119.43V I:0.2090A P:24.618W PF:0.9864 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2651.67x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

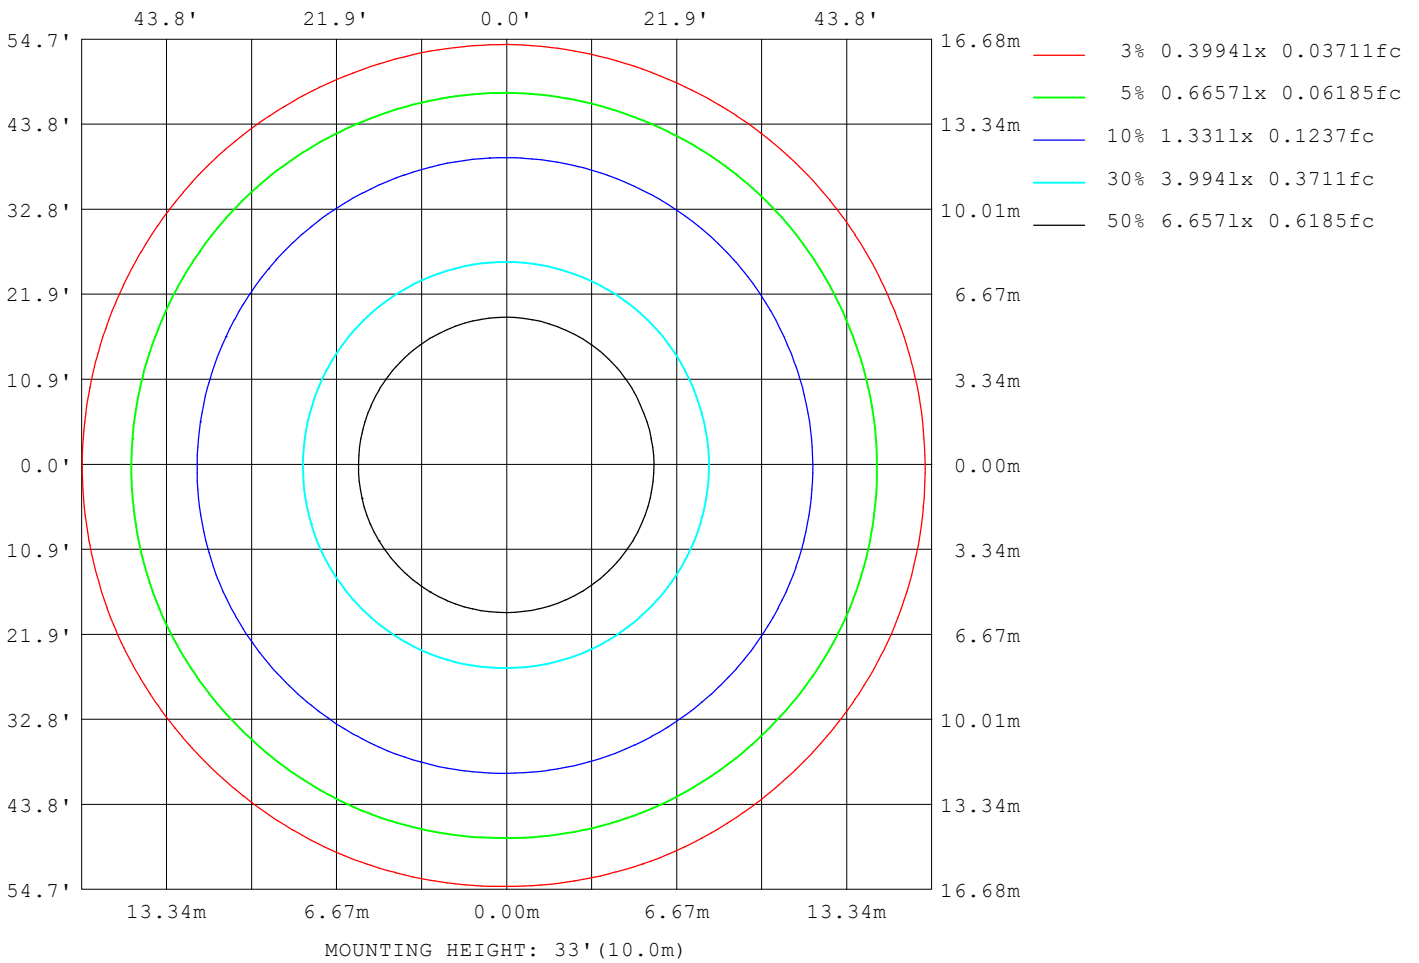

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.43V I:0.2090A P:24.618W PF:0.9864 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2651.67x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	9457
L_0~180 (75) av	5697
L_0~180 (85) av	4919
L_90~270 (65) av	9377
L_90~270 (75) av	5714
L_90~270 (85) av	4549
L_45 (65) av	9420
L_45 (75) av	5710
L_45 (85) av	4840

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

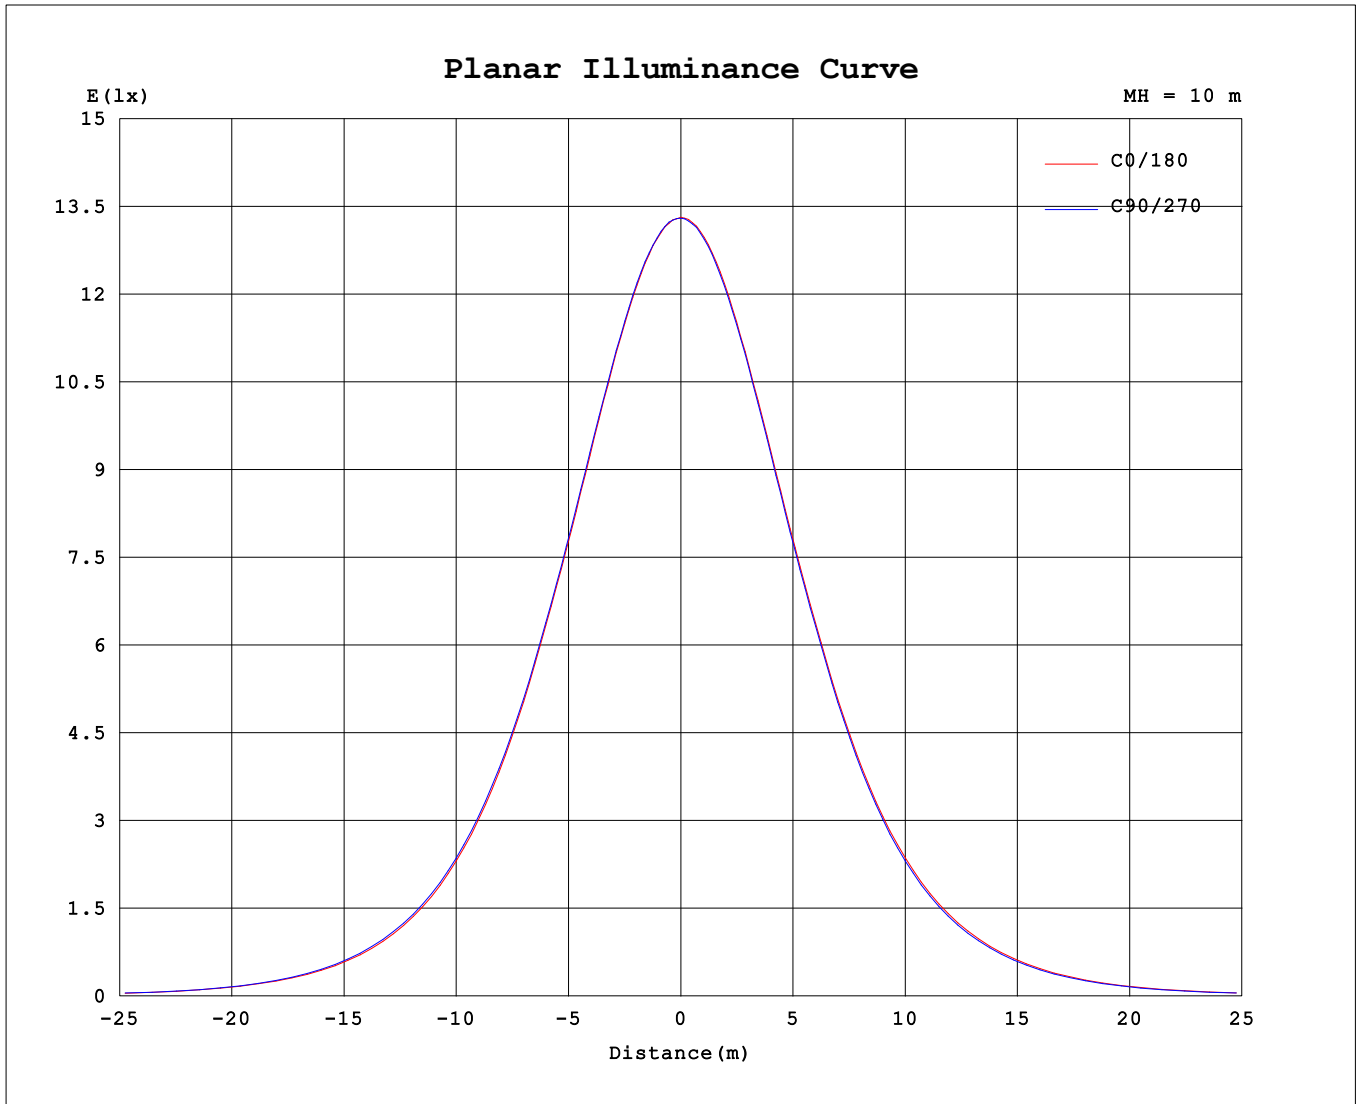

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

**LUMINOUS DISTRIBUTION INTENSITY DATA**

Test:U:119.43V I:0.2090A P:24.618W PF:0.9864 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2651.67x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1331	1331	1331	1331	1330	1331	1330	1330	1331	1331	1331	1331	1330	1331	1330	1330			
5	1321	1322	1322	1323	1323	1323	1322	1324	1322	1321	1322	1321	1319	1320	1319	1318			
10	1294	1296	1295	1296	1297	1298	1298	1298	1296	1295	1294	1293	1291	1291	1289	1288			
15	1249	1251	1251	1253	1253	1256	1255	1254	1251	1250	1250	1248	1247	1244	1244	1242			
20	1188	1190	1191	1194	1194	1198	1196	1196	1191	1189	1189	1187	1185	1184	1182	1181			
25	1113	1116	1116	1119	1121	1124	1123	1125	1118	1115	1115	1111	1110	1108	1106	1106			
30	1026	1028	1029	1032	1034	1039	1039	1040	1032	1029	1027	1025	1023	1020	1019	1018			
35	916	920	919	924	926	932	932	934	925	921	921	917	915	912	911	909			
40	790	794	794	800	804	810	809	809	801	797	795	791	790	786	786	784			
45	653	659	660	666	669	676	676	677	669	663	661	656	654	651	651	648			
50	514	520	522	528	529	537	538	539	532	525	524	517	516	513	511	509			
55	377	384	385	391	391	397	398	401	397	390	388	382	381	375	375	372			
60	251	256	256	261	261	265	264	268	268	264	263	257	254	248	248	247			
65	147	148	148	151	151	154	154	156	157	157	157	153	150	146	146	146			
70	79.8	80.5	80.0	81.3	81.6	83.1	83.3	84.2	85.2	85.3	85.9	84.4	83.2	81.4	81.1	80.3			
75	54.7	55.0	55.0	55.6	55.8	56.4	56.5	57.0	57.4	57.4	57.6	57.0	56.6	55.9	55.6	55.1			
80	35.1	35.3	35.2	35.7	35.8	36.6	36.7	37.1	37.8	37.9	37.8	37.5	37.2	36.6	36.6	35.9			
85	15.0	15.1	15.0	14.8	14.5	15.5	16.1	16.7	17.6	17.7	17.2	16.1	15.6	15.4	15.9	16.0			
90	0.73	0.72	0.74	0.71	0.71	0.69	0.72	0.72	1.30	1.35	1.30	1.32	1.30	1.32	1.30	1.27			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks: