
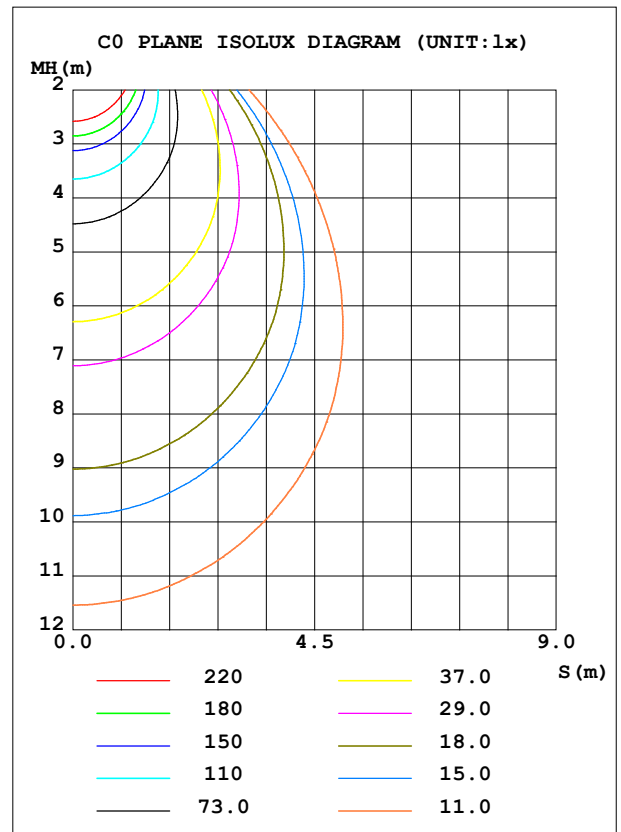


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.43V I:0.2094A P:24.674W PF:0.9865 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2926.1x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL DL254-10-40W-M-A5C5-HO		Imax (cd)	1466	S/MH (C0/180)	1.16
NOMINAL POWER (W)	26	LOR (%)	100.0	S/MH (C90/270)	1.16
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2926.1	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	2926.1	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.25

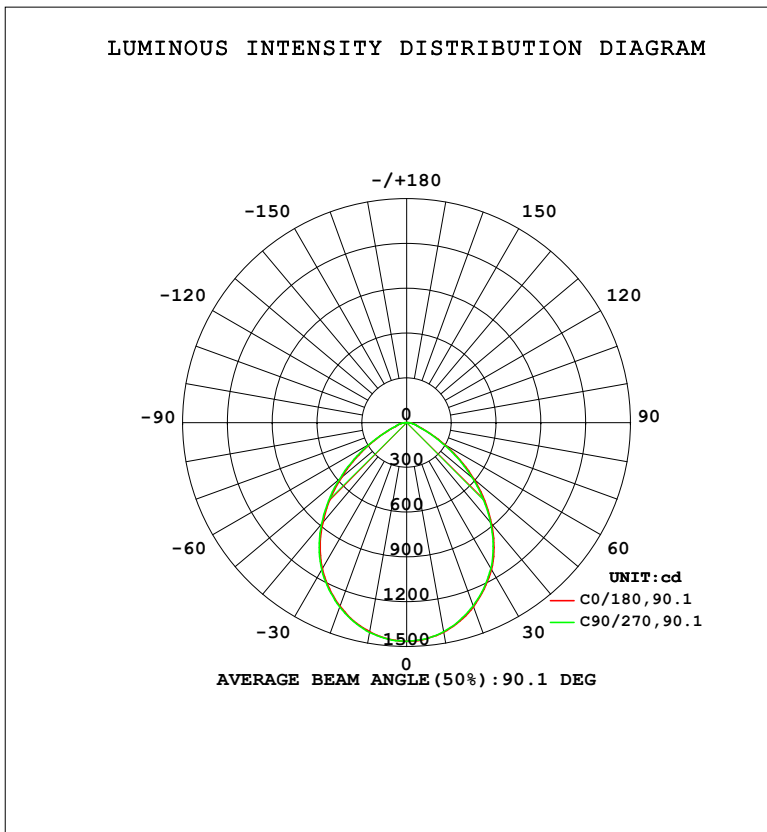

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1423	1425	1427	1427	1426	1425	1422	1420	0- 10	137.9	137.9	4.71,4.71
20	1308	1310	1314	1316	1312	1309	1305	1303	10- 20	387.4	525.2	18,18
30	1130	1132	1140	1143	1137	1133	1129	1125	20- 30	565.1	1090	37.3,37.3
40	873.4	878.3	887.0	895.0	886.4	880.6	874.6	869.4	30- 40	633.4	1724	58.9,58.9
50	570.4	578.2	587.0	596.0	589.9	581.8	574.5	567.8	40- 50	564.1	2288	78.2,78.2
60	275.1	279.6	285.5	290.0	293.2	288.8	279.6	272.5	50- 60	382.0	2670	91.2,91.2
70	88.19	88.39	90.21	92.10	94.08	94.87	91.88	89.57	60- 70	170.3	2840	97.1,97.1
80	38.95	39.07	39.79	40.76	41.89	41.96	41.31	40.48	70- 80	66.25	2906	99.3,99.3
90	0.8325	0.8456	0.8063	0.8325	1.438	1.443	1.442	1.442	80- 90	19.76	2926	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2022.5 lm

%lum = 69.1%

%lamp = 69.1%

Conical surface Flux(130deg): 2777.1 lm

%lum = 94.9%


%lamp = 94.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.43V I:0.2094A P:24.674W PF:0.9865 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2926.1x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

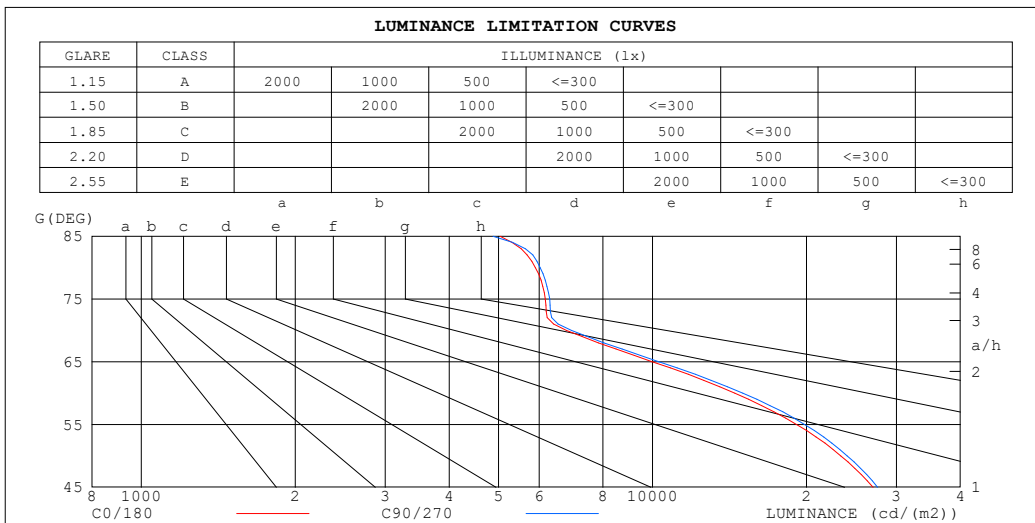

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5033	4877
80	5902	6031
75	6165	6292
70	6786	6941
65	9984	10289
60	14479	15026
55	19117	19845
50	23353	24030
45	27003	27558


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.43V I:0.2094A P:24.674W PF:0.9865 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:2926.1x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.85	.94	.89	.84	.90	.86	.82	.87	.84	.81	.84	.81	.79	.77
3.0	.86	.79	.73	.84	.78	.73	.81	.76	.71	.79	.74	.70	.76	.72	.69	.67
4.0	.77	.70	.64	.76	.69	.63	.74	.67	.63	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.62	.56	.69	.61	.56	.67	.60	.55	.65	.59	.55	.63	.58	.54	.52
6.0	.64	.56	.50	.63	.55	.50	.61	.54	.49	.59	.53	.49	.58	.53	.49	.47
7.0	.58	.50	.45	.57	.50	.45	.56	.49	.44	.55	.49	.44	.53	.48	.44	.42
8.0	.53	.46	.40	.53	.45	.40	.52	.45	.40	.50	.44	.40	.49	.44	.40	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.46	.40	.36	.34
10.0	.46	.38	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.43	.37	.33	.31

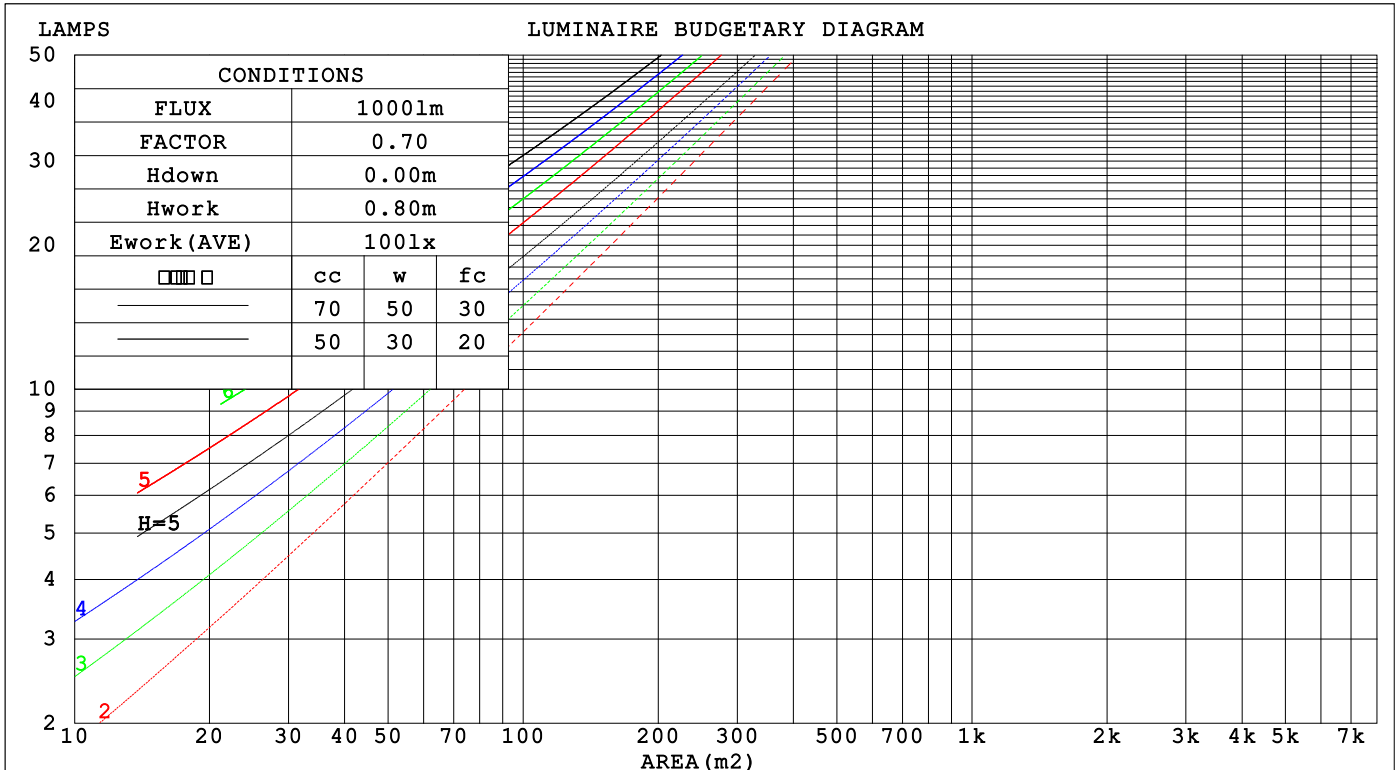

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.43V I:0.2094A P:24.674W PF:0.9865 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2926.1x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.249	.142	.045	.242	.138	.044	.229	.132	.042	.217	.125	.040	.207	.120	.039	
2.0	.241	.132	.041	.235	.129	.040	.224	.124	.039	.213	.120	.037	.204	.115	.036	
3.0	.228	.122	.036	.223	.120	.036	.213	.116	.035	.204	.112	.034	.196	.108	.034	
4.0	.215	.112	.033	.211	.110	.033	.202	.107	.032	.194	.104	.031	.186	.101	.031	
5.0	.202	.103	.030	.198	.102	.030	.191	.099	.029	.183	.097	.029	.177	.094	.028	
6.0	.190	.095	.027	.187	.094	.027	.180	.092	.027	.174	.090	.027	.168	.088	.026	
7.0	.179	.089	.025	.176	.088	.025	.170	.086	.025	.164	.084	.025	.159	.083	.024	
8.0	.169	.083	.023	.166	.082	.023	.161	.080	.023	.156	.079	.023	.151	.077	.023	
9.0	.160	.077	.022	.157	.077	.022	.152	.075	.021	.148	.074	.021	.143	.073	.021	
10.0	.152	.073	.020	.149	.072	.020	.145	.071	.020	.140	.070	.020	.137	.069	.020	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.176	.157	.139	.151	.134	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
3.0	.165	.132	.104	.142	.114	.090	.097	.079	.063	.056	.046	.037	.018	.015	.012	
4.0	.156	.114	.080	.134	.098	.070	.092	.068	.049	.053	.040	.029	.017	.013	.009	
5.0	.148	.100	.063	.127	.087	.055	.088	.060	.039	.051	.035	.023	.016	.012	.008	
6.0	.141	.089	.051	.121	.077	.045	.083	.054	.032	.048	.032	.019	.016	.010	.006	
7.0	.134	.081	.042	.115	.070	.037	.080	.049	.026	.046	.029	.016	.015	.009	.005	
8.0	.128	.074	.036	.110	.064	.031	.076	.045	.022	.044	.026	.013	.014	.009	.004	
9.0	.122	.068	.031	.105	.059	.027	.073	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.117	.063	.027	.100	.055	.023	.070	.038	.017	.041	.023	.010	.013	.007	.003	
10.0	.111	.059	.024	.096	.051	.021	.067	.036	.015	.039	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.43V I:0.2094A P:24.674W PF:0.9865 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2926.1x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.5	23.8	22.7	24.0	24.2	22.6	23.9	22.8	24.1	24.3
3H	22.7	23.9	23.0	24.1	24.4	22.8	24.0	23.1	24.3	24.5
4H	22.8	23.9	23.1	24.2	24.4	22.9	24.0	23.2	24.3	24.5
6H	22.8	23.9	23.1	24.2	24.4	22.9	24.0	23.3	24.3	24.5
8H	22.8	23.9	23.2	24.2	24.4	23.0	24.0	23.3	24.3	24.5
12H	22.8	23.8	23.2	24.1	24.4	22.9	23.9	23.3	24.2	24.5
4H 2H	22.6	23.8	22.9	24.0	24.3	22.7	23.9	23.0	24.1	24.4
3H	22.9	23.9	23.3	24.2	24.5	23.0	24.0	23.4	24.3	24.6
4H	23.1	24.0	23.4	24.3	24.6	23.2	24.1	23.5	24.4	24.7
6H	23.2	24.0	23.6	24.3	24.7	23.3	24.1	23.7	24.4	24.8
8H	23.3	24.0	23.7	24.4	24.7	23.4	24.1	23.8	24.5	24.8
12H	23.3	24.0	23.7	24.3	24.7	23.4	24.1	23.8	24.4	24.8
8H 4H	23.1	23.8	23.5	24.2	24.5	23.2	23.9	23.6	24.3	24.6
6H	23.3	23.9	23.7	24.3	24.7	23.4	24.0	23.8	24.4	24.8
8H	23.4	23.9	23.8	24.3	24.8	23.5	24.0	23.9	24.4	24.9
12H	23.5	23.9	23.9	24.4	24.8	23.5	24.0	24.0	24.4	24.9
12H 4H	23.0	23.7	23.5	24.1	24.5	23.1	23.8	23.5	24.2	24.6
6H	23.3	23.8	23.7	24.2	24.7	23.4	23.9	23.8	24.3	24.8
8H	23.4	23.9	23.9	24.3	24.8	23.5	24.0	24.0	24.4	24.9

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 0.8	+ 0.6 / - 0.8
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.4
2.0H	+ 1.3 / - 1.7	+ 1.3 / - 1.8

CIE Pub.117, 2926 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.7)
 Area: 0.038 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-04	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.43V I:0.2094A P:24.674W PF:0.9865 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2926.1x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	65	55	49	65	55	49	64	55	49	43
0.80	76	66	59	75	65	59	73	65	59	53
1.00	84	75	69	83	74	68	81	75	68	62
1.25	90	82	76	89	81	76	87	80	75	69
1.50	95	87	81	93	86	81	91	84	80	73
2.00	101	94	89	99	93	88	96	91	86	80
2.50	103	97	93	102	96	92	98	93	90	82
3.00	106	101	96	104	99	95	100	96	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	102	104	102	99	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.43V I:0.2094A P:24.674W PF:0.9865 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2926.1x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

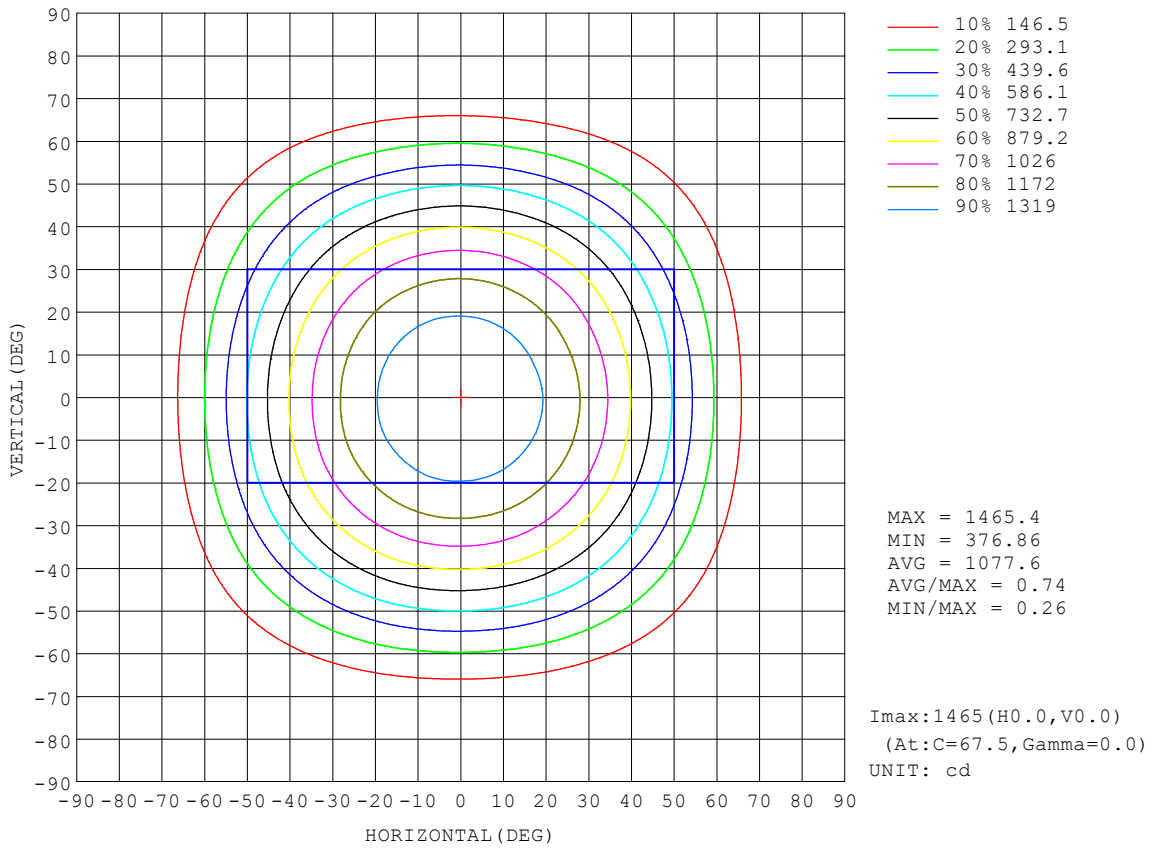


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.43V I:0.2094A P:24.674W PF:0.9865 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2926.1x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

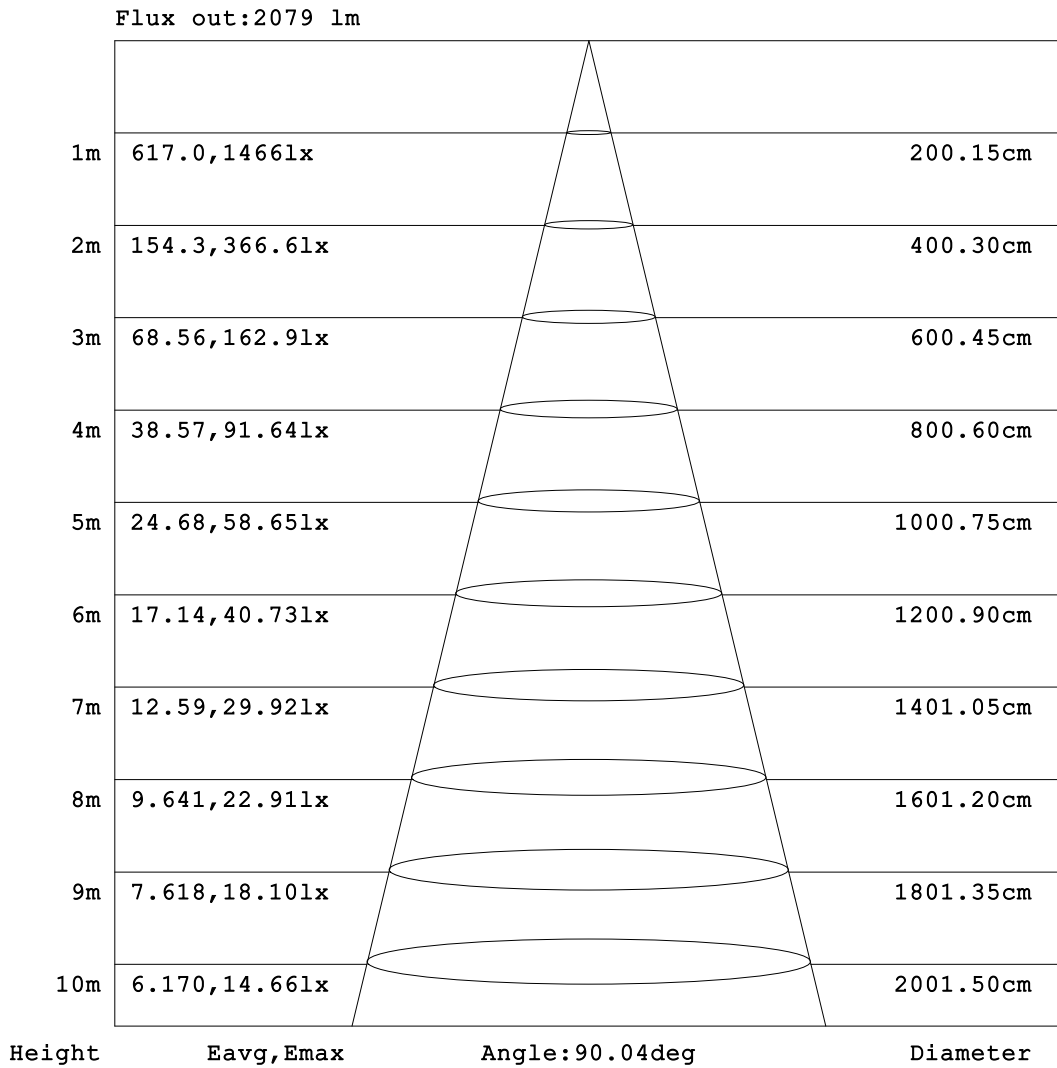


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.43V I:0.2094A P:24.674W PF:0.9865 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2926.1x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

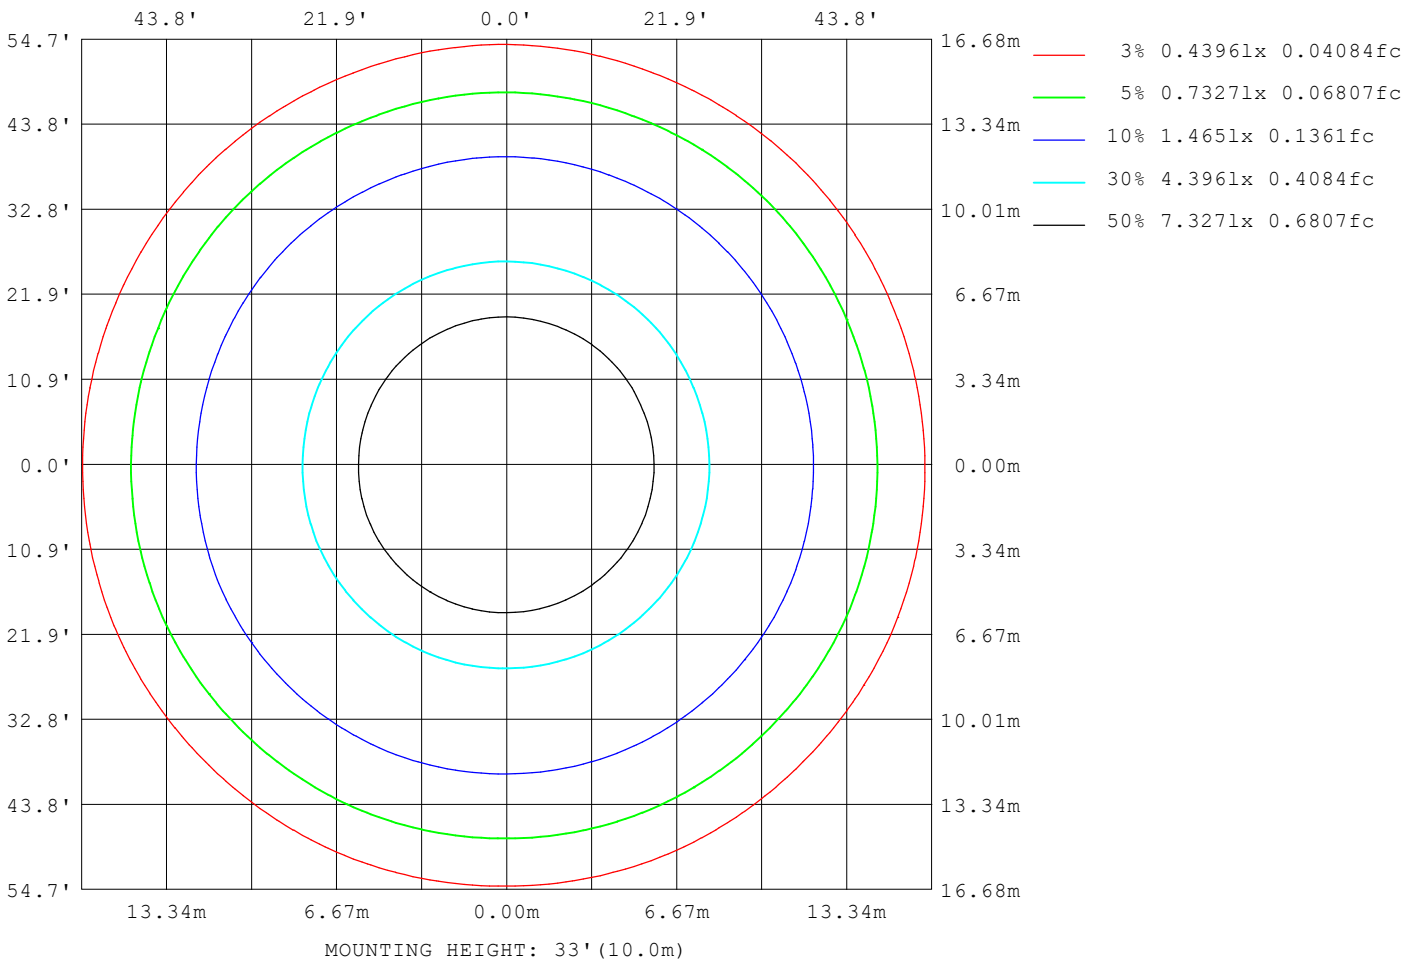

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.43V I:0.2094A P:24.674W PF:0.9865 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2926.1x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10328
L_0~180 (75) av	6321
L_0~180 (85) av	5455
L_90~270 (65) av	10241
L_90~270 (75) av	6339
L_90~270 (85) av	5061
L_45 (65) av	10297
L_45 (75) av	6331
L_45 (85) av	5371

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

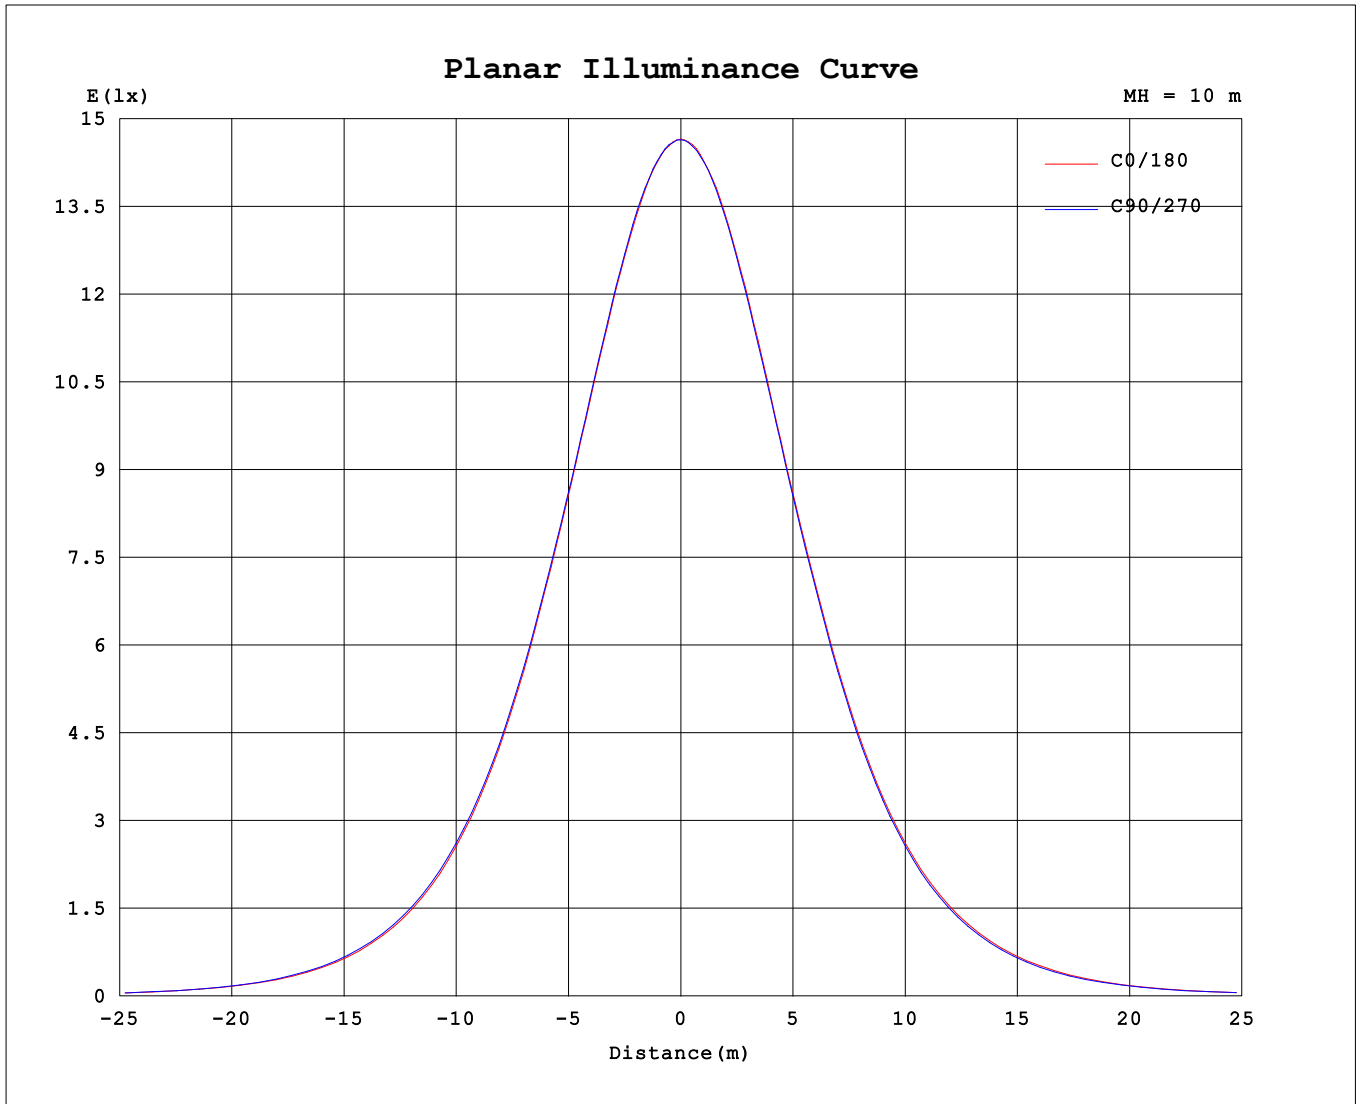

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.43V I:0.2094A P:24.674W PF:0.9865 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2926.1x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Table--1

UNIT: cd

C (DEG)\ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1465	1464	1464	1466	1464	1464	1463	1463	1465	1464	1464	1466	1464	1464	1463	1463			
5	1454	1455	1454	1455	1455	1457	1455	1457	1455	1455	1454	1455	1452	1451	1451	1451			
10	1423	1423	1425	1428	1427	1428	1427	1427	1426	1426	1425	1423	1422	1421	1420	1419			
15	1374	1376	1376	1379	1380	1382	1381	1381	1377	1376	1375	1373	1371	1371	1369	1369			
20	1308	1310	1310	1313	1314	1318	1316	1317	1312	1310	1309	1307	1305	1304	1303	1301			
25	1227	1228	1229	1232	1233	1236	1237	1238	1230	1228	1228	1226	1224	1221	1219	1218			
30	1130	1133	1132	1138	1140	1143	1143	1146	1137	1134	1133	1131	1129	1125	1125	1123			
35	1011	1014	1014	1021	1022	1028	1029	1030	1021	1017	1017	1013	1011	1006	1006	1003			
40	873	877	878	884	887	894	895	895	886	882	881	877	875	870	869	868			
45	726	729	731	737	740	748	749	750	741	736	734	728	727	723	722	719			
50	570	576	578	584	587	594	596	598	590	583	582	576	574	569	568	565			
55	417	424	425	431	433	438	440	442	438	432	429	423	421	416	415	412			
60	275	280	280	285	285	291	290	294	293	290	289	282	280	273	273	271			
65	160	162	162	164	165	168	168	170	171	171	172	167	164	160	160	160			
70	88.2	88.9	88.4	89.8	90.2	91.8	92.1	93.1	94.1	94.1	94.9	93.3	91.9	90.0	89.6	88.8			
75	60.6	61.0	60.9	61.6	61.9	62.6	62.7	63.2	63.7	63.6	63.8	63.2	62.8	62.0	61.6	61.2			
80	38.9	39.2	39.1	39.6	39.8	40.5	40.8	41.2	41.9	42.0	42.0	41.7	41.3	40.6	40.5	39.8			
85	16.7	16.8	16.6	16.4	16.2	17.2	17.8	18.5	19.5	19.6	19.1	17.9	17.4	17.1	17.7	17.7			
90	0.83	0.82	0.85	0.81	0.81	0.79	0.83	0.81	1.44	1.50	1.44	1.45	1.44	1.48	1.44	1.43			

C Range: 0 - 360DEG □ Range: 0 - 90DEG
 C Interval: 22.5DEG □ Interval: 1.0DEG
 Test Speed: HIGH Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Temperature:25.3°C Humidity:65.0%
 Operators:DAMIN Test Distance:9.680m [K=1.0000]
 Test Date:2023-07-04 Remarks: