
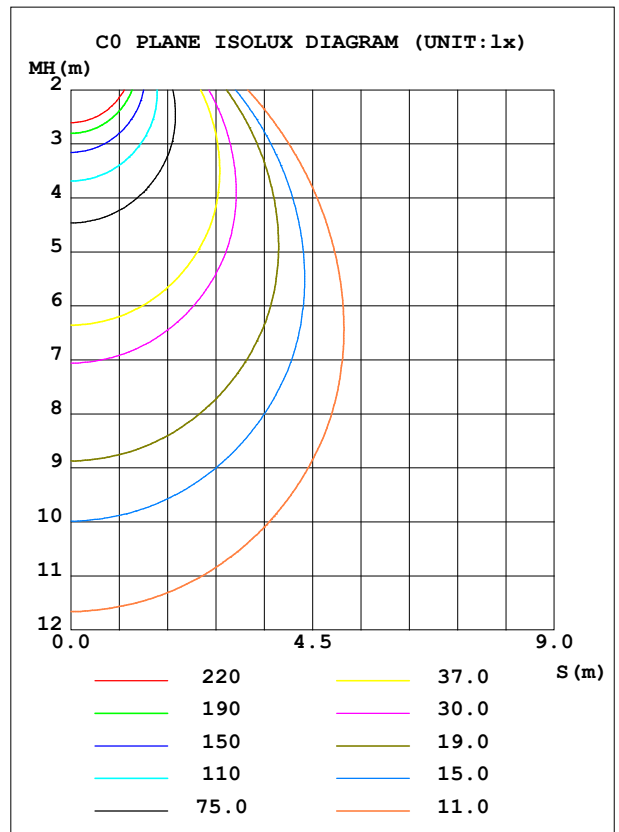


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.44V I:0.2098A P:24.717W PF:0.9865 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2994.1lx1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-10-40W-M-A5C5-HO	Imax (cd)	1498	S/MH (C0/180)	1.16
NOMINAL POWER (W)	26	LOR (%)	100.0	S/MH (C90/270)	1.16
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2994.1	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	2994.11	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.25

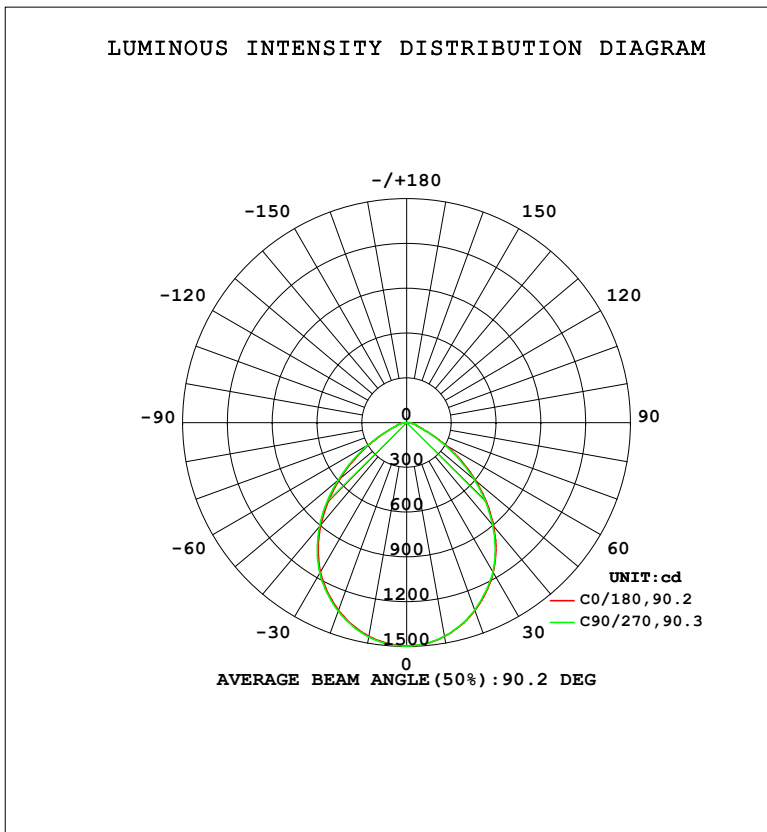

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1454	1455	1459	1460	1454	1456	1454	1452	0- 10	140.9	140.9	4.71,4.71
20	1337	1340	1343	1347	1340	1338	1335	1331	10- 20	396.0	536.9	17.9,17.9
30	1156	1160	1165	1171	1161	1159	1156	1150	20- 30	577.8	1115	37.2,37.2
40	894.0	898.0	909.0	915.5	907.7	902.3	897.0	891.5	30- 40	648.2	1763	58.9,58.9
50	584.2	592.3	601.2	610.9	604.0	596.4	589.1	583.1	40- 50	578.2	2341	78.2,78.2
60	280.5	285.2	291.5	295.8	299.6	294.8	285.9	278.6	50- 60	391.2	2732	91.3,91.3
70	90.27	90.64	92.34	94.23	96.21	97.05	94.14	91.88	60- 70	173.8	2906	97.1,97.1
80	39.85	40.07	40.85	41.87	42.96	42.97	42.41	41.57	70- 80	67.93	2974	99.3,99.3
90	0.8587	0.8653	0.8325	0.8653	1.479	1.475	1.475	1.475	80- 90	20.27	2994	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2069 lm

%lum = 69.1%

%lamp = 69.1%

Conical surface Flux(130deg): 2841.6 lm

%lum = 94.9%


%lamp = 94.9%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

<b>Test:U:119.44V I:0.2098A P:24.717W PF:0.9865 Freq:60.01Hz</b> <b>UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2994.11x1 lm</b>		
<b>NAME: DL254-10-40W-M-A5C5-HO</b>	<b>TYPE: 26W</b>	<b>WEIGHT:</b>
<b>SPEC.: 5000K</b>	<b>DIM.: 0.295</b>	<b>SERIAL No.: 1</b>
<b>MFR.: Lotus LED Lights</b>	<b>SUR.: 0.22</b>	<b>Shielding Angle:</b>

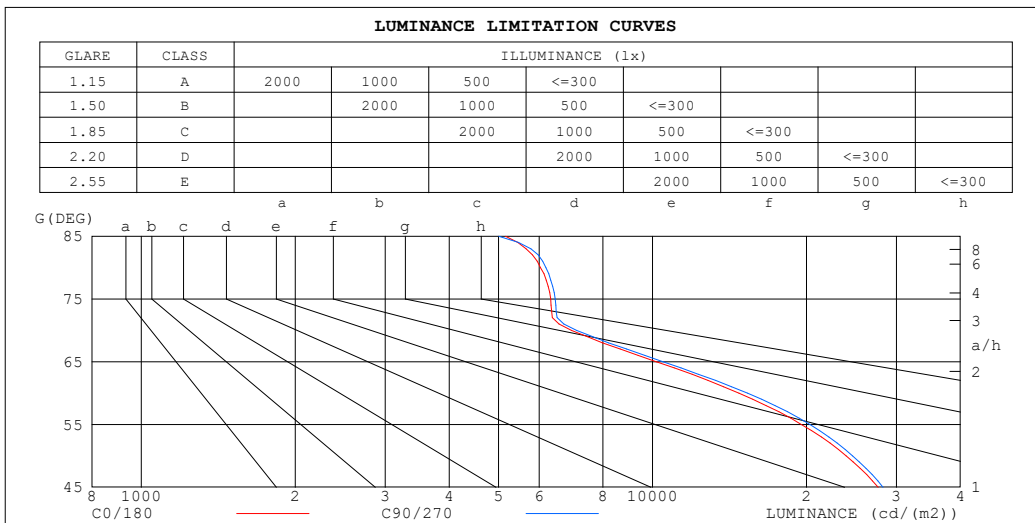

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5158	5004
80	6039	6190
75	6322	6451
70	6946	7105
65	10168	10493
60	14764	15341
55	19558	20320
50	23916	24614
45	27622	28251


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.44V I:0.2098A P:24.717W PF:0.9865 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:2994.11x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.85	.94	.89	.84	.90	.86	.82	.87	.84	.81	.84	.81	.79	.77
3.0	.86	.79	.73	.84	.78	.73	.81	.76	.71	.79	.74	.70	.76	.72	.69	.67
4.0	.77	.70	.64	.76	.69	.63	.74	.67	.63	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.62	.56	.69	.61	.56	.67	.60	.55	.65	.59	.55	.63	.58	.54	.52
6.0	.64	.56	.50	.63	.55	.50	.61	.54	.49	.59	.53	.49	.58	.53	.48	.47
7.0	.58	.50	.45	.57	.50	.45	.56	.49	.44	.55	.49	.44	.53	.48	.44	.42
8.0	.53	.46	.40	.53	.45	.40	.52	.45	.40	.50	.44	.40	.49	.44	.40	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.46	.40	.36	.34
10.0	.46	.38	.33	.45	.38	.33	.44	.38	.33	.43	.37	.33	.43	.37	.33	.31

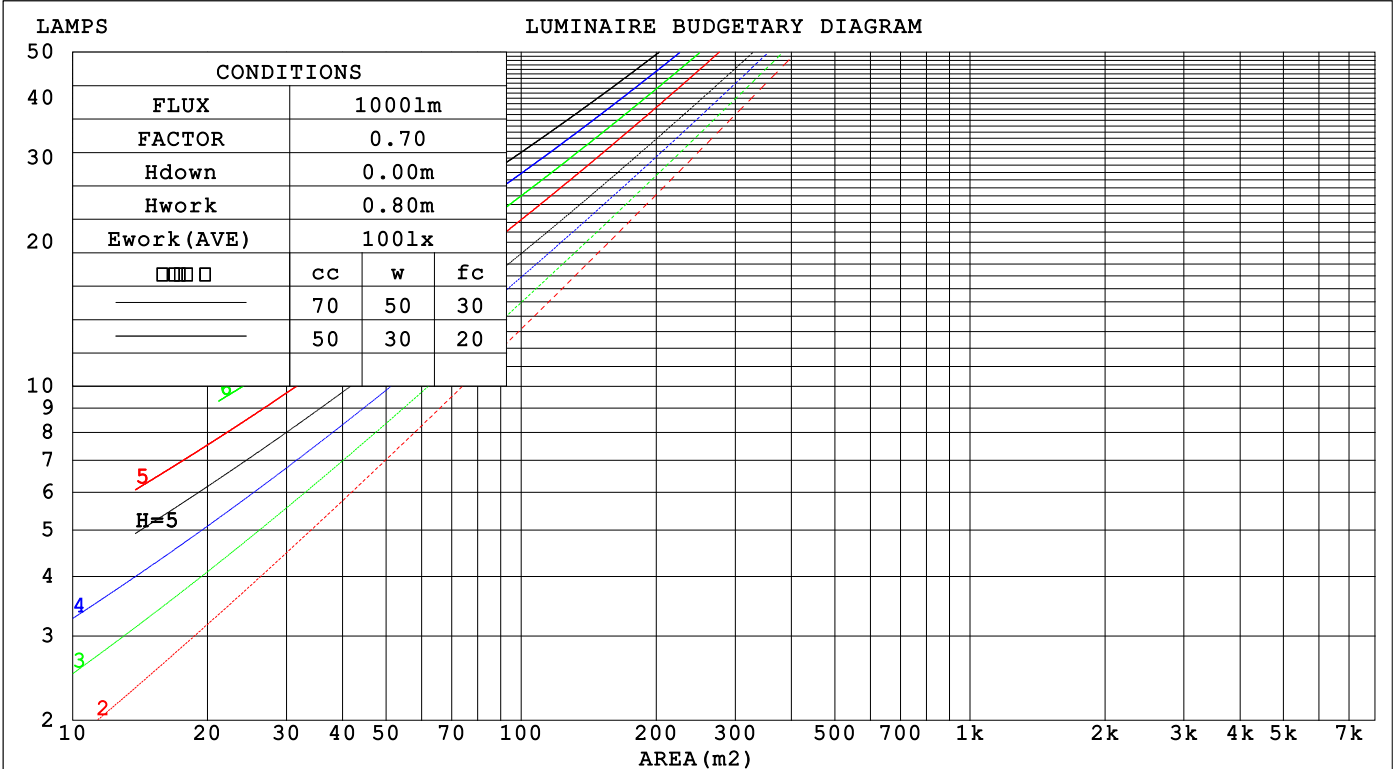

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:119.44V I:0.2098A P:24.717W PF:0.9865 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2994.11x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

<input type="checkbox"/> cc	80%		70%		50%		30%		10%		0				
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0		
<input type="checkbox"/> fc	20%		20%		20%		20%		20%		0				
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)								
0.0															
1.0	.249	.142	.045	.242	.138	.044	.229	.132	.042	.218	.125	.040	.207	.120	.039
2.0	.241	.132	.041	.235	.129	.040	.224	.124	.039	.213	.120	.037	.204	.115	.036
3.0	.228	.122	.036	.223	.120	.036	.213	.116	.035	.204	.112	.034	.196	.108	.034
4.0	.215	.112	.033	.211	.110	.033	.202	.107	.032	.194	.104	.031	.186	.101	.031
5.0	.202	.103	.030	.198	.102	.030	.191	.099	.029	.183	.097	.029	.177	.094	.028
6.0	.190	.095	.027	.187	.094	.027	.180	.092	.027	.174	.090	.027	.168	.088	.026
7.0	.179	.089	.025	.176	.088	.025	.170	.086	.025	.164	.084	.025	.159	.083	.024
8.0	.169	.083	.023	.166	.082	.023	.161	.080	.023	.156	.079	.023	.151	.077	.023
9.0	.160	.077	.022	.157	.077	.022	.152	.075	.021	.148	.074	.021	.143	.073	.021
10.0	.152	.073	.020	.149	.072	.020	.145	.071	.020	.141	.070	.020	.137	.069	.020

<input type="checkbox"/> cc	80%		70%		50%		30%		10%		0				
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0		
<input type="checkbox"/> fc	20%		20%		20%		20%		20%		0				
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)								
0.0															
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020
2.0	.176	.157	.139	.151	.134	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016
3.0	.165	.132	.104	.142	.114	.090	.097	.079	.063	.056	.046	.037	.018	.015	.012
4.0	.156	.114	.080	.134	.098	.070	.092	.068	.049	.053	.040	.029	.017	.013	.009
5.0	.148	.100	.063	.127	.087	.055	.088	.060	.039	.051	.035	.023	.016	.012	.008
6.0	.141	.089	.051	.121	.077	.045	.084	.054	.032	.048	.032	.019	.016	.010	.006
7.0	.134	.081	.042	.116	.070	.037	.080	.049	.026	.046	.029	.016	.015	.009	.005
8.0	.128	.074	.036	.110	.064	.031	.076	.045	.022	.044	.026	.013	.014	.009	.004
9.0	.122	.068	.031	.105	.059	.027	.073	.041	.019	.042	.024	.011	.014	.008	.004
10.0	.117	.063	.027	.100	.055	.023	.070	.038	.017	.041	.023	.010	.013	.007	.003

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.44V I:0.2098A P:24.717W PF:0.9865 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2994.11x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.6	23.9	22.8	24.1	24.3	22.7	24.0	22.9	24.2	24.4
3H	22.8	24.0	23.1	24.2	24.4	22.9	24.1	23.2	24.3	24.6
4H	22.8	24.0	23.1	24.2	24.5	23.0	24.1	23.3	24.4	24.6
6H	22.9	24.0	23.2	24.2	24.5	23.0	24.1	23.3	24.4	24.6
8H	22.9	24.0	23.2	24.2	24.5	23.0	24.1	23.4	24.3	24.6
12H	22.9	23.9	23.2	24.2	24.5	23.0	24.0	23.4	24.3	24.6
4H 2H	22.7	23.8	23.0	24.1	24.3	22.8	23.9	23.1	24.2	24.4
3H	23.0	24.0	23.3	24.3	24.6	23.1	24.1	23.4	24.4	24.7
4H	23.1	24.0	23.5	24.4	24.7	23.2	24.1	23.6	24.5	24.8
6H	23.3	24.1	23.7	24.4	24.8	23.4	24.2	23.8	24.5	24.9
8H	23.3	24.1	23.7	24.4	24.8	23.4	24.2	23.8	24.5	24.9
12H	23.4	24.0	23.8	24.4	24.8	23.5	24.1	23.9	24.5	24.9
8H 4H	23.1	23.9	23.5	24.2	24.6	23.2	24.0	23.6	24.3	24.7
6H	23.4	24.0	23.8	24.4	24.8	23.5	24.1	23.9	24.5	24.9
8H	23.5	24.0	23.9	24.4	24.9	23.6	24.1	24.0	24.5	25.0
12H	23.5	24.0	24.0	24.4	24.9	23.6	24.1	24.1	24.5	25.0
12H 4H	23.1	23.8	23.5	24.2	24.6	23.2	23.9	23.6	24.3	24.7
6H	23.4	23.9	23.8	24.3	24.8	23.5	24.0	23.9	24.4	24.9
8H	23.5	23.9	24.0	24.4	24.9	23.6	24.0	24.1	24.5	25.0

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 0.8	+ 0.6 / - 0.8
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.4
2.0H	+ 1.3 / - 1.7	+ 1.3 / - 1.8

CIE Pub.117, 2994 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.8)  
 Area: 0.038 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-04	Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.44V I:0.2098A P:24.717W PF:0.9865 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2994.11x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	65	55	49	65	55	49	64	54	49	43
0.80	76	66	59	75	65	59	73	65	59	53
1.00	84	75	69	83	74	68	81	75	68	62
1.25	90	82	76	89	81	76	87	80	75	69
1.50	95	87	81	93	86	81	91	84	80	73
2.00	101	94	89	99	93	88	96	90	86	80
2.50	103	97	93	102	96	92	98	93	90	82
3.00	106	101	96	104	99	95	100	96	93	85
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	102	104	102	99	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.44V I:0.2098A P:24.717W PF:0.9865 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2994.11x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

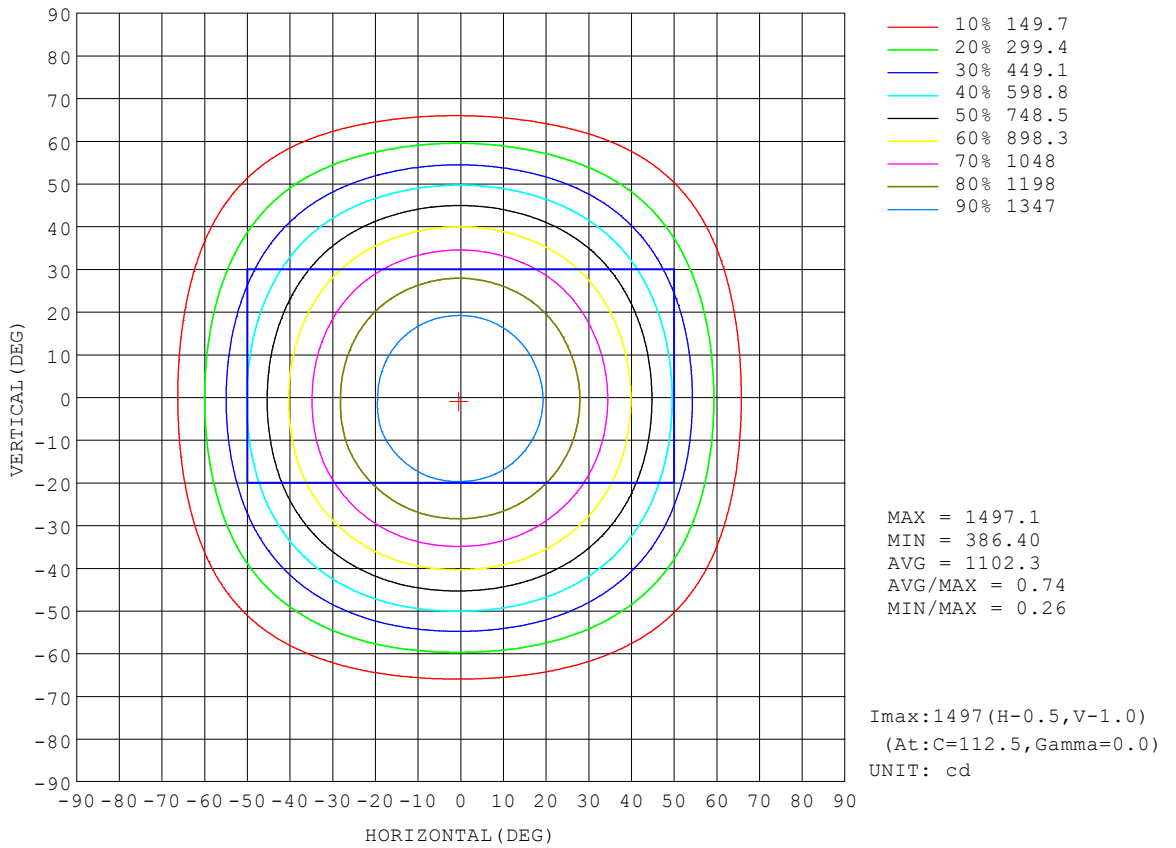

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04


Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.44V I:0.2098A P:24.717W PF:0.9865 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2994.11x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Flux out:2127 lm

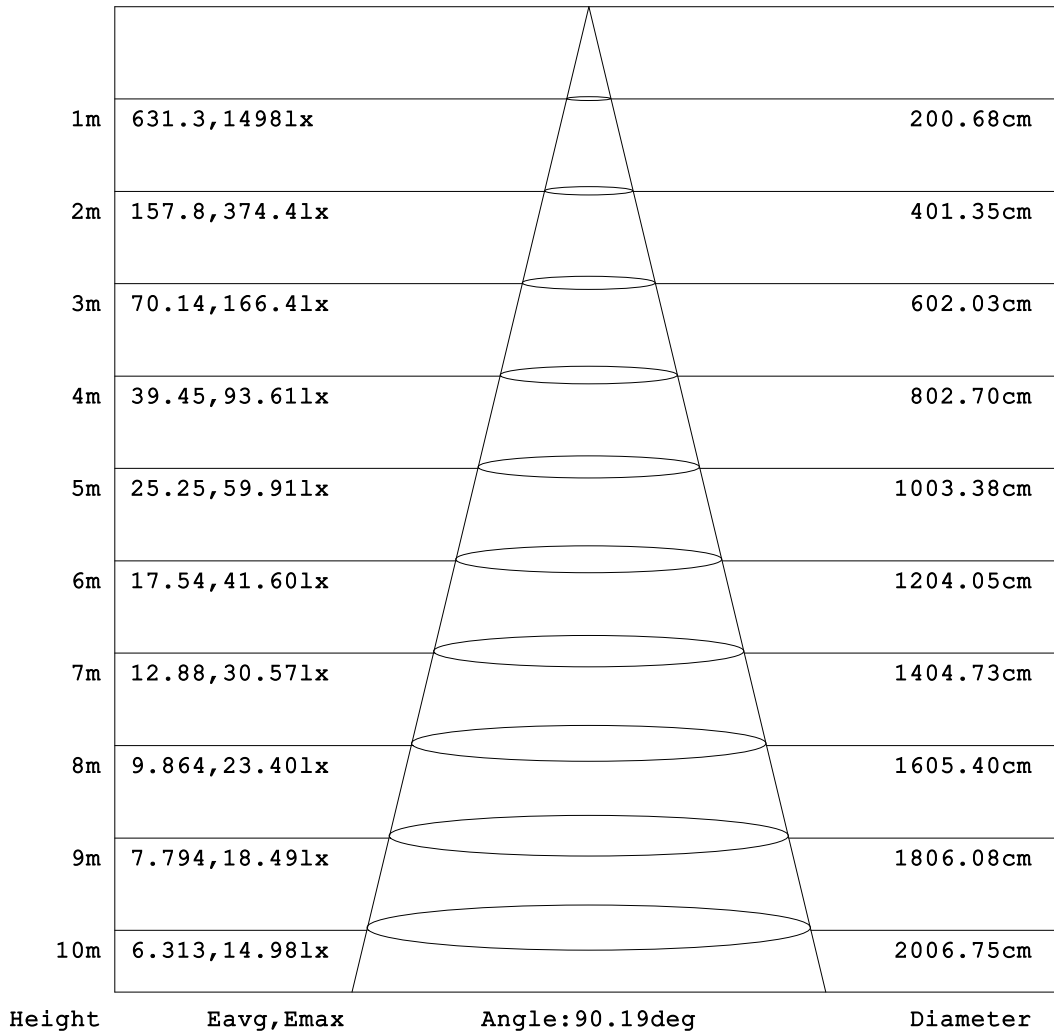


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.44V I:0.2098A P:24.717W PF:0.9865 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2994.11x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

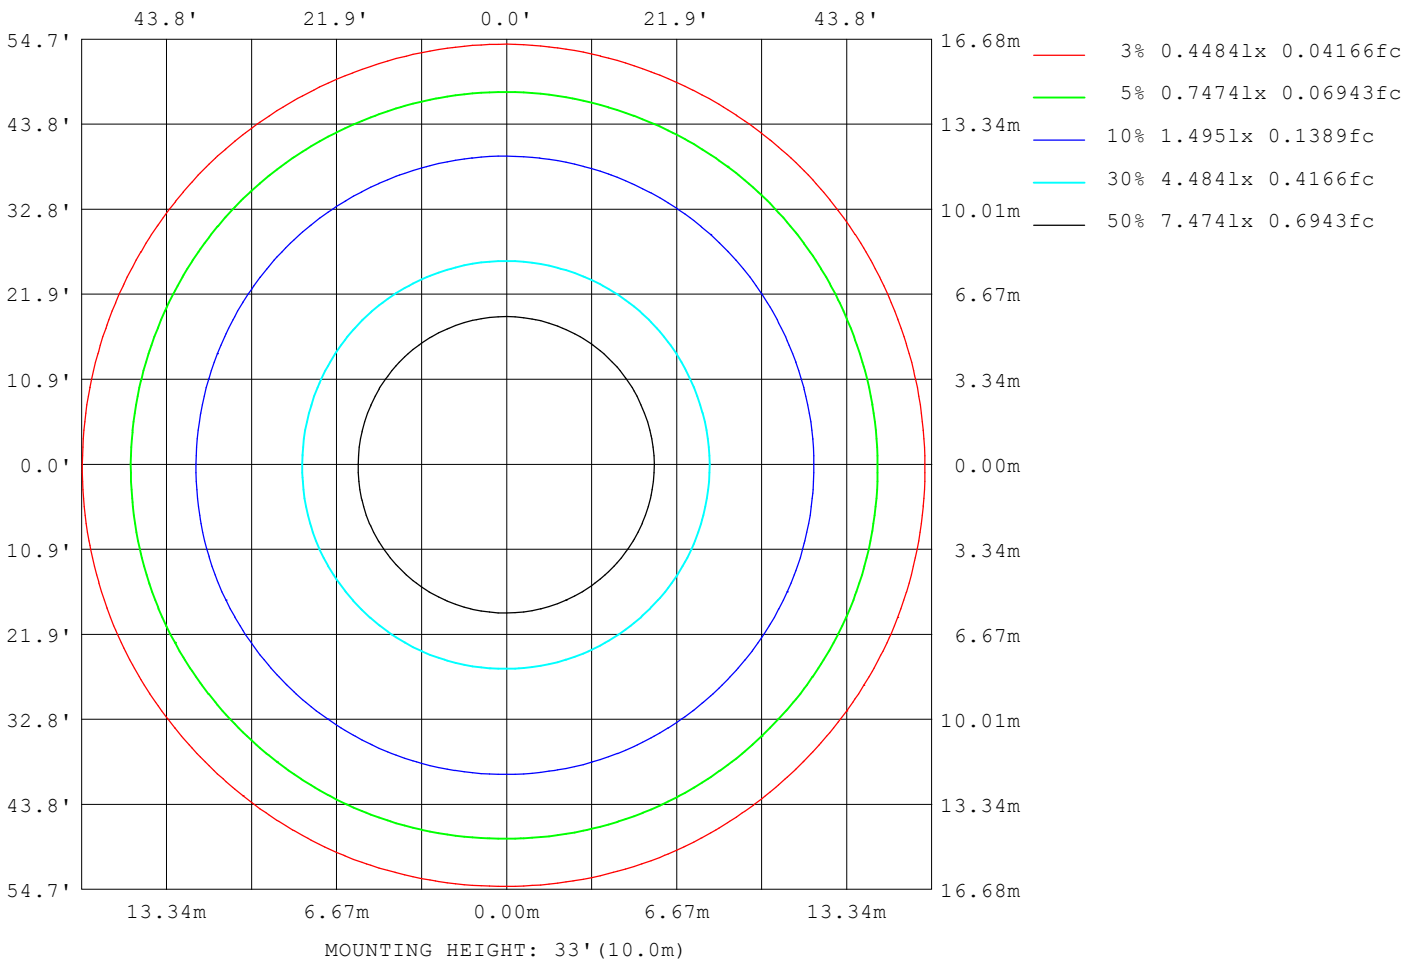

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.44V I:0.2098A P:24.717W PF:0.9865 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2994.11x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10521
L_0~180 (75) av	6478
L_0~180 (85) av	5591
L_90~270 (65) av	10453
L_90~270 (75) av	6501
L_90~270 (85) av	5193
L_45 (65) av	10493
L_45 (75) av	6494
L_45 (85) av	5510

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

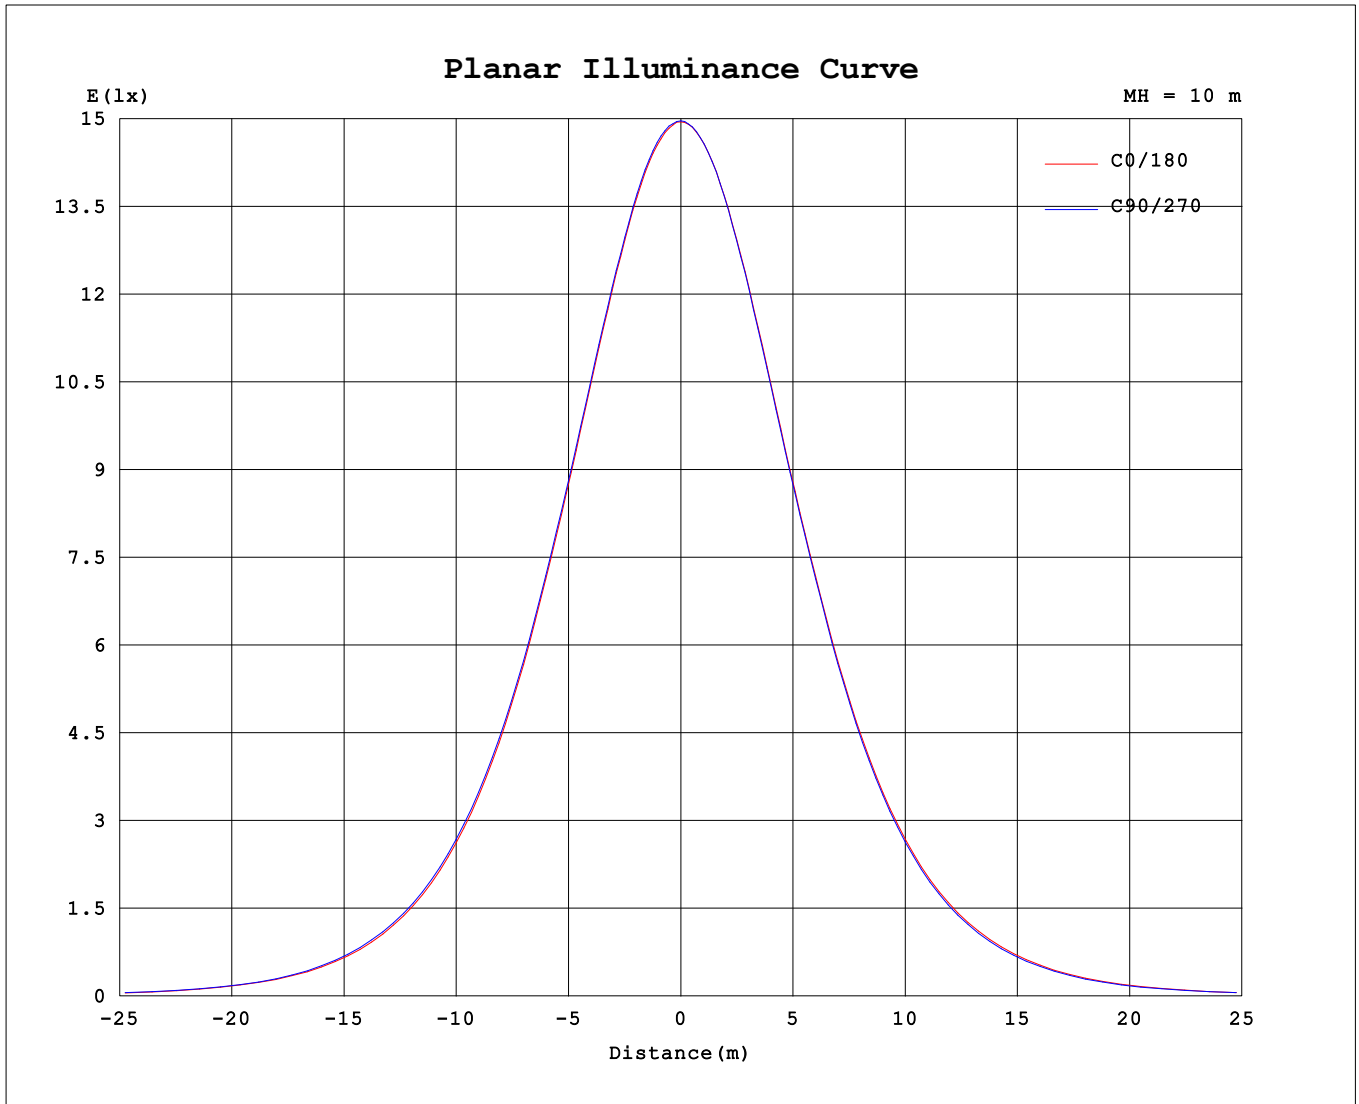

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.44V I:0.2098A P:24.717W PF:0.9865 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2994.11x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1495	1496	1496	1496	1496	1498	1497	1497	1495	1496	1496	1496	1496	1498	1497	1497			
5	1483	1485	1486	1487	1488	1491	1488	1490	1485	1486	1486	1486	1484	1486	1484	1484			
10	1454	1455	1455	1459	1459	1462	1460	1461	1454	1455	1456	1454	1454	1453	1452	1451			
15	1403	1406	1407	1408	1409	1413	1412	1413	1406	1406	1406	1405	1403	1402	1401	1399			
20	1337	1339	1340	1343	1343	1347	1347	1349	1340	1339	1338	1337	1335	1333	1331	1331			
25	1253	1254	1256	1260	1262	1265	1265	1266	1256	1255	1255	1253	1251	1249	1248	1246			
30	1156	1158	1160	1163	1165	1170	1171	1172	1161	1160	1159	1157	1156	1151	1150	1149			
35	1033	1038	1037	1043	1045	1052	1052	1054	1043	1041	1041	1037	1035	1032	1030	1028			
40	894	898	898	905	909	917	915	918	908	903	902	897	897	893	891	889			
45	742	747	749	756	759	767	768	769	759	754	753	748	746	742	740	738			
50	584	590	592	600	601	609	611	613	604	598	596	590	589	585	583	580			
55	426	433	435	441	443	449	450	453	448	442	440	434	432	426	425	422			
60	281	286	285	291	291	297	296	300	300	296	295	288	286	279	279	277			
65	163	165	165	168	169	172	172	174	175	174	175	171	167	163	163	163			
70	90.3	90.9	90.6	91.9	92.3	94.0	94.2	95.4	96.2	96.3	97.0	95.3	94.1	92.2	91.9	90.9			
75	62.2	62.5	62.5	63.2	63.4	64.2	64.3	64.8	65.3	65.3	65.4	64.8	64.4	63.6	63.2	62.7			
80	39.8	40.2	40.1	40.6	40.8	41.6	41.9	42.3	43.0	43.1	43.0	42.7	42.4	41.7	41.6	40.8			
85	17.1	17.2	17.0	16.8	16.6	17.7	18.3	19.0	20.0	20.1	19.6	18.3	17.8	17.5	18.1	18.1			
90	0.86	0.85	0.87	0.84	0.83	0.82	0.87	0.85	1.48	1.54	1.47	1.49	1.47	1.51	1.48	1.46			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:DAMIN  
 Test Date:2023-07-04

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks: