
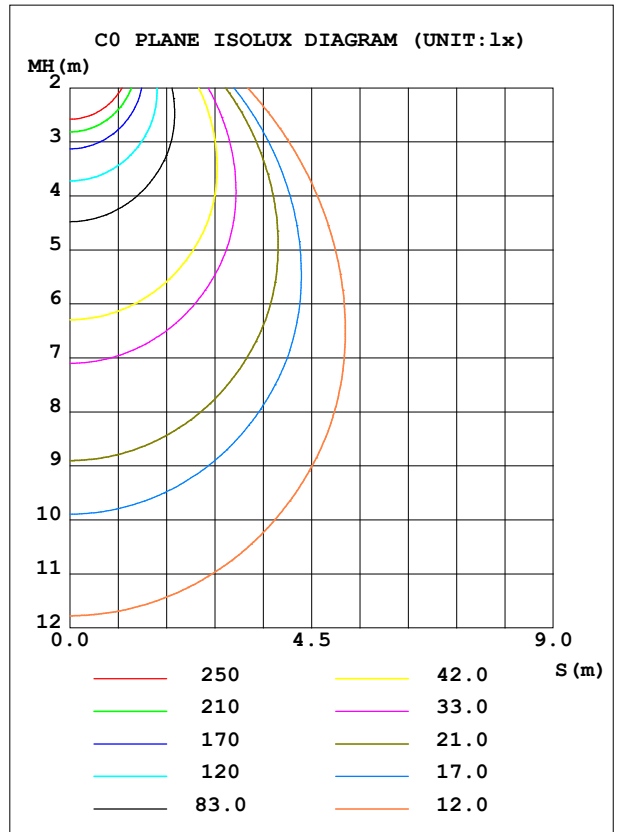


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.44V I:0.2392A P:28.255W PF:0.9891 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3325.15x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-10-40W-M-A5C5-HO	Imax (cd)	1666	S/MH (C0/180)	1.16
NOMINAL POWER (W)	30	LOR (%)	100.0	S/MH (C90/270)	1.16
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3325.1	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	3325.15	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.25

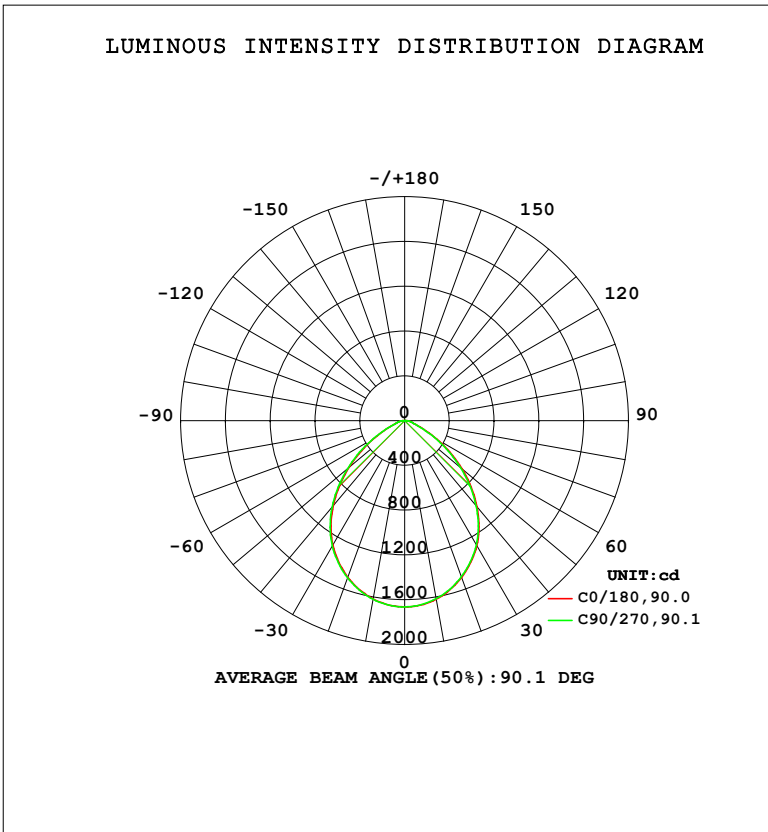

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1618	1620	1621	1623	1621	1620	1616	1613	0- 10	156.7	156.7	4.71,4.71
20	1487	1489	1494	1495	1490	1487	1484	1479	10- 20	440.2	596.9	18,18
30	1285	1288	1294	1299	1291	1287	1283	1277	20- 30	642.2	1239	37.3,37.3
40	992.5	997.6	1008	1017	1007	1001	994.4	988.4	30- 40	719.7	1959	58.9,58.9
50	648.2	657.8	667.2	676.4	670.6	660.7	652.3	645.3	40- 50	641.0	2600	78.2,78.2
60	312.8	317.6	324.5	329.3	333.6	328.0	317.6	309.6	50- 60	434.0	3034	91.2,91.2
70	100.2	100.5	102.4	104.5	106.9	107.7	104.5	101.9	60- 70	193.5	3227	97.1,97.1
80	44.21	44.41	45.22	46.28	47.62	47.71	46.94	46.09	70- 80	75.28	3303	99.3,99.3
90	0.9505	0.9571	0.9177	0.9439	1.676	1.653	1.645	1.652	80- 90	22.46	3325	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2298.4 lm

%lum = 69.1%

%lamp = 69.1%

Conical surface Flux(130deg): 3155.9 lm

%lum = 94.9%


%lamp = 94.9%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:119.44V I:0.2392A P:28.255W PF:0.9891 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3325.15x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

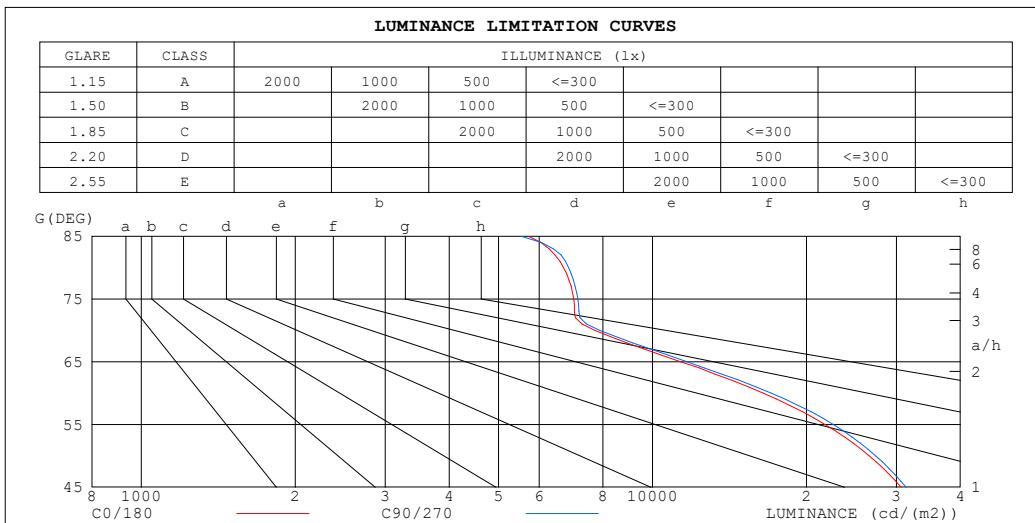

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5724	5533
80	6700	6853
75	7009	7145
70	7711	7880
65	11344	11687
60	16462	17079
55	21759	22582
50	26536	27315
45	30670	31316


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.44V I:0.2392A P:28.255W PF:0.9891 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3325.15x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.85	.94	.89	.84	.90	.86	.82	.87	.84	.81	.84	.81	.79	.77
3.0	.86	.79	.73	.84	.78	.73	.81	.76	.71	.79	.74	.70	.76	.72	.69	.67
4.0	.77	.70	.64	.76	.69	.63	.74	.67	.63	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.62	.56	.69	.61	.56	.67	.60	.55	.65	.59	.55	.63	.58	.54	.52
6.0	.64	.56	.50	.63	.55	.50	.61	.54	.49	.59	.53	.49	.58	.53	.49	.47
7.0	.58	.50	.45	.57	.50	.45	.56	.49	.44	.55	.49	.44	.53	.48	.44	.42
8.0	.54	.46	.40	.53	.45	.40	.52	.45	.40	.50	.44	.40	.49	.44	.40	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.46	.40	.36	.34
10.0	.46	.38	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.43	.37	.33	.31

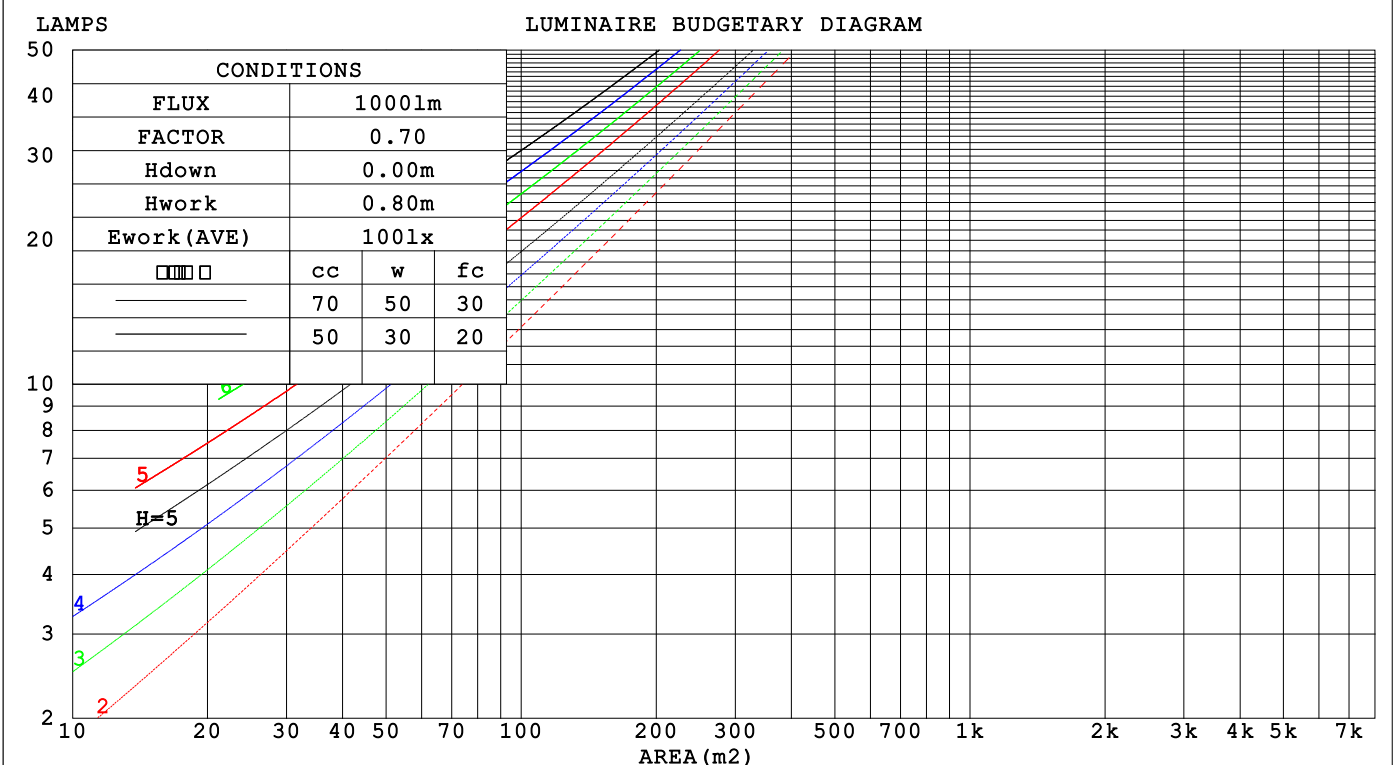

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:119.44V I:0.2392A P:28.255W PF:0.9891 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3325.15x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients(WEC)			
0.0						
1.0	.249 .142 .045	.242 .138 .044	.229 .132 .042	.217 .125 .040	.206 .120 .039	
2.0	.241 .132 .041	.235 .129 .040	.224 .124 .039	.213 .120 .037	.204 .115 .036	
3.0	.228 .122 .036	.223 .120 .036	.213 .116 .035	.204 .112 .034	.196 .108 .034	
4.0	.215 .112 .033	.211 .110 .033	.202 .107 .032	.194 .104 .031	.186 .101 .031	
5.0	.202 .103 .030	.198 .102 .030	.191 .099 .029	.183 .097 .029	.177 .094 .028	
6.0	.190 .095 .027	.187 .094 .027	.180 .092 .027	.174 .090 .027	.168 .088 .026	
7.0	.179 .089 .025	.176 .088 .025	.170 .086 .025	.164 .084 .025	.159 .083 .024	
8.0	.169 .083 .023	.166 .082 .023	.161 .080 .023	.156 .079 .023	.151 .077 .023	
9.0	.160 .077 .022	.157 .077 .022	.152 .075 .021	.148 .074 .021	.143 .073 .021	
10.0	.152 .073 .020	.149 .072 .020	.145 .071 .020	.140 .070 .020	.137 .069 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients(CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.176 .157 .139	.151 .134 .120	.103 .093 .083	.059 .054 .048	.019 .017 .016	
2.0	.165 .132 .104	.142 .114 .090	.097 .079 .063	.056 .046 .037	.018 .015 .012	
3.0	.156 .114 .080	.134 .098 .070	.092 .068 .049	.053 .040 .029	.017 .013 .009	
4.0	.148 .100 .063	.127 .087 .055	.088 .060 .039	.051 .035 .023	.016 .012 .008	
5.0	.141 .089 .051	.121 .077 .045	.083 .054 .032	.048 .032 .019	.016 .010 .006	
6.0	.134 .081 .042	.115 .070 .037	.080 .049 .026	.046 .029 .016	.015 .009 .005	
7.0	.128 .074 .036	.110 .064 .031	.076 .045 .022	.044 .026 .013	.014 .009 .004	
8.0	.122 .068 .031	.105 .059 .027	.073 .041 .019	.042 .024 .011	.014 .008 .004	
9.0	.117 .063 .027	.100 .055 .023	.070 .038 .017	.041 .023 .010	.013 .007 .003	
10.0	.111 .059 .024	.096 .051 .021	.067 .036 .015	.039 .021 .009	.013 .007 .003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.44V I:0.2392A P:28.255W PF:0.9891 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3325.15x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.9	24.3	23.2	24.4	24.6	23.0	24.4	23.3	24.6	24.8
3H	23.1	24.4	23.4	24.6	24.8	23.3	24.5	23.5	24.7	24.9
4H	23.2	24.4	23.5	24.6	24.9	23.3	24.5	23.6	24.7	25.0
6H	23.3	24.4	23.6	24.6	24.9	23.4	24.5	23.7	24.7	25.0
8H	23.3	24.3	23.6	24.6	24.9	23.4	24.4	23.7	24.7	25.0
12H	23.3	24.3	23.6	24.6	24.9	23.4	24.4	23.7	24.7	25.0
4H 2H	23.1	24.2	23.4	24.5	24.7	23.2	24.3	23.5	24.6	24.8
3H	23.4	24.4	23.7	24.7	25.0	23.5	24.5	23.8	24.8	25.0
4H	23.5	24.4	23.9	24.7	25.0	23.6	24.5	24.0	24.8	25.1
6H	23.6	24.4	24.0	24.8	25.1	23.7	24.5	24.1	24.9	25.2
8H	23.7	24.4	24.1	24.8	25.2	23.8	24.5	24.2	24.9	25.3
12H	23.7	24.4	24.1	24.8	25.2	23.8	24.5	24.2	24.9	25.3
8H 4H	23.5	24.2	23.9	24.6	25.0	23.6	24.3	24.0	24.7	25.1
6H	23.7	24.3	24.2	24.7	25.2	23.8	24.4	24.3	24.8	25.2
8H	23.8	24.4	24.3	24.8	25.2	23.9	24.5	24.4	24.9	25.3
12H	23.9	24.4	24.4	24.8	25.3	24.0	24.4	24.5	24.9	25.4
12H 4H	23.5	24.2	23.9	24.5	24.9	23.6	24.2	24.0	24.6	25.0
6H	23.7	24.3	24.2	24.7	25.1	23.8	24.4	24.3	24.8	25.2
8H	23.8	24.3	24.3	24.8	25.2	23.9	24.4	24.4	24.8	25.3

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 0.8	+ 0.6 / - 0.8
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.4
2.0H	+ 1.3 / - 1.7	+ 1.3 / - 1.8

CIE Pub.117, 3325 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.2)  
 Area: 0.038 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-04	Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.44V I:0.2392A P:28.255W PF:0.9891 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3325.15x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	65	55	49	65	55	49	64	55	49	43
0.80	76	66	59	75	65	59	73	65	59	53
1.00	84	75	69	83	74	68	81	75	68	62
1.25	90	82	76	89	81	76	87	80	75	69
1.50	95	87	81	93	86	81	91	84	80	73
2.00	101	94	89	99	93	88	96	91	86	80
2.50	103	97	93	102	96	92	98	93	90	82
3.00	106	101	96	104	99	95	100	96	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	102	104	102	99	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.44V I:0.2392A P:28.255W PF:0.9891 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3325.15x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

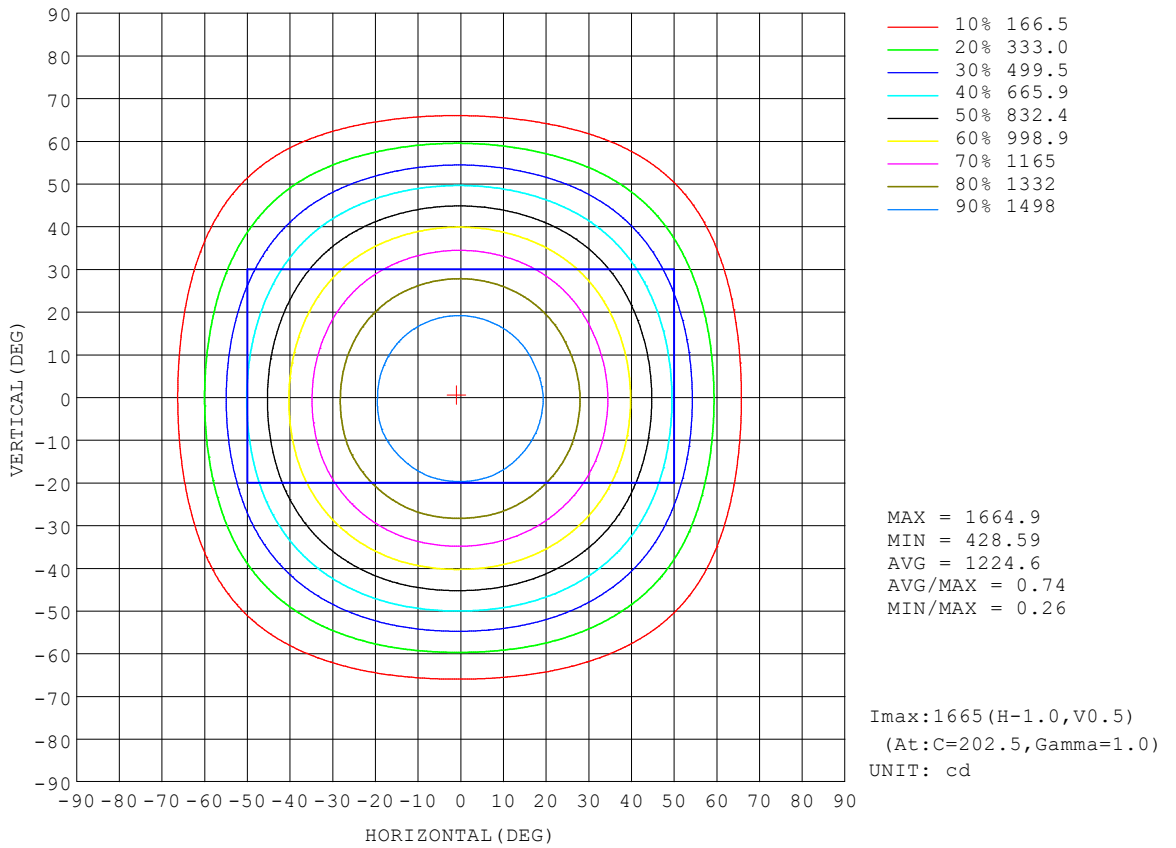

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04


Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.44V I:0.2392A P:28.255W PF:0.9891 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3325.15x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Flux out:2362 lm

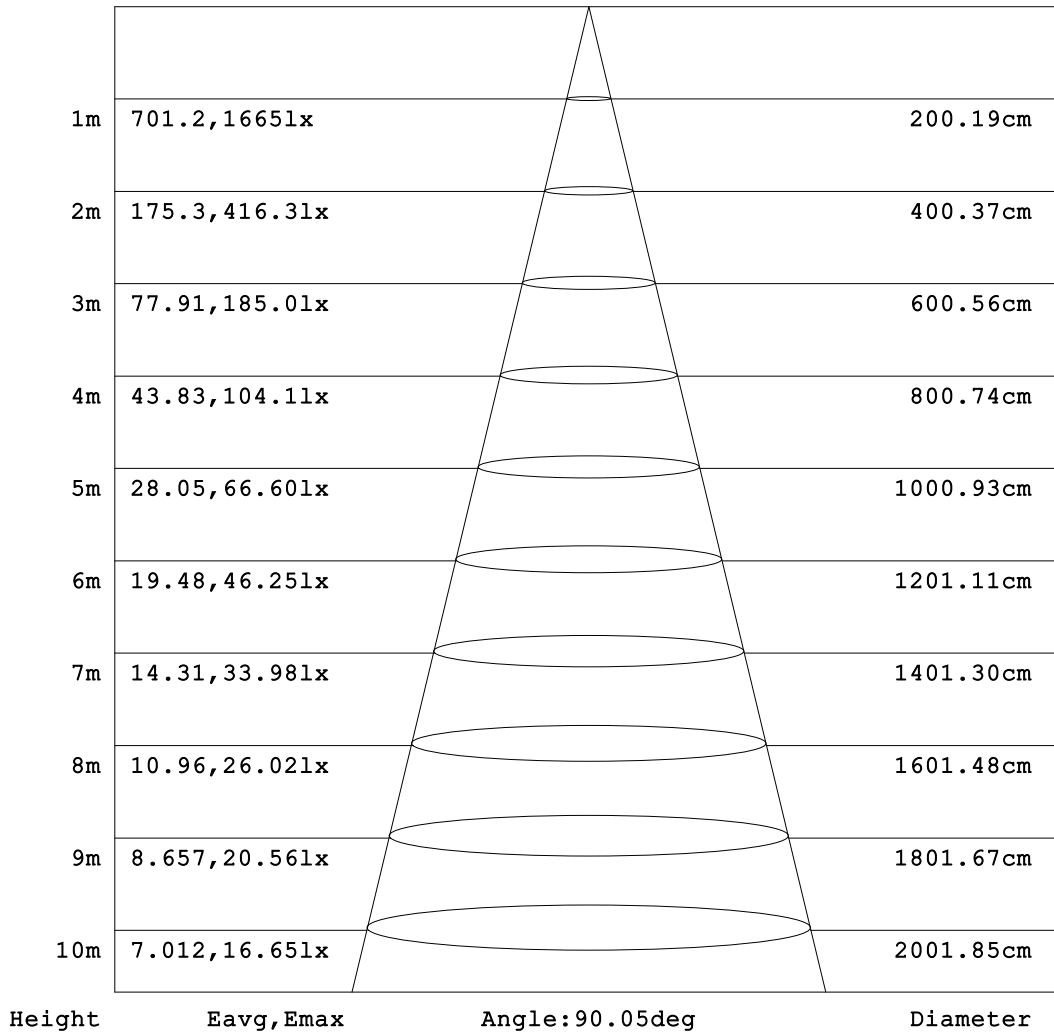


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.44V I:0.2392A P:28.255W PF:0.9891 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3325.15x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

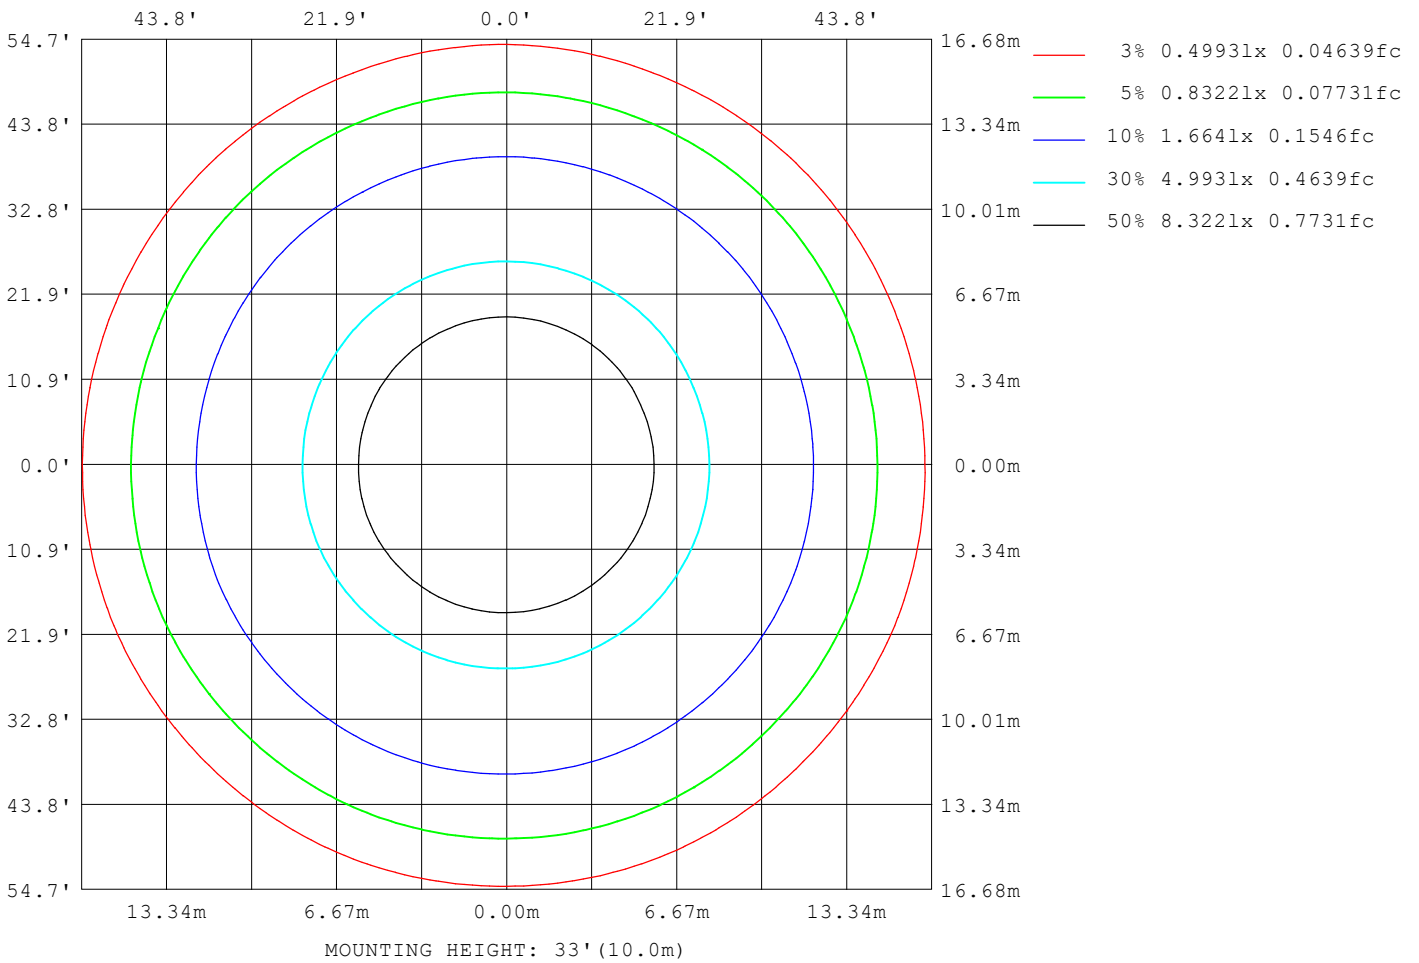

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.44V I:0.2392A P:28.255W PF:0.9891 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3325.15x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	11736
L_0~180 (75) av	7182
L_0~180 (85) av	6214
L_90~270 (65) av	11640
L_90~270 (75) av	7202
L_90~270 (85) av	5741
L_45 (65) av	11708
L_45 (75) av	7199
L_45 (85) av	6111

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

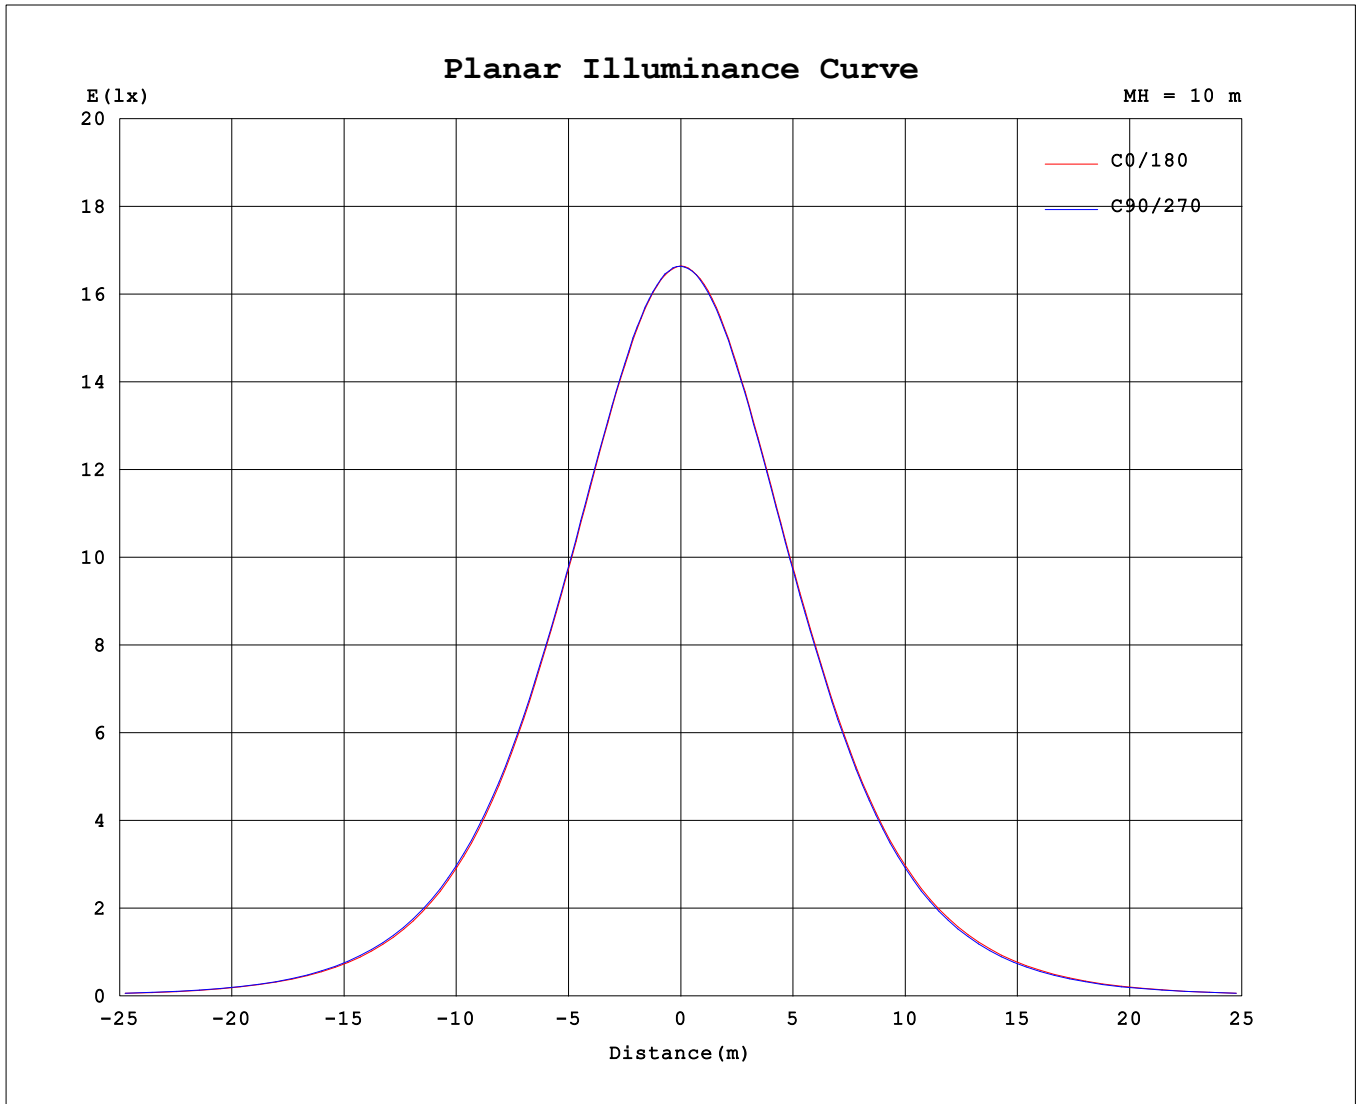

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.44V I:0.2392A P:28.255W PF:0.9891 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3325.15x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1664	1665	1663	1665	1664	1664	1663	1663	1664	1665	1663	1665	1664	1664	1663	1663			
5	1652	1653	1653	1654	1654	1656	1655	1654	1653	1653	1653	1653	1650	1652	1650	1648			
10	1618	1619	1620	1621	1621	1623	1623	1623	1621	1619	1620	1618	1616	1614	1613	1612			
15	1563	1564	1563	1568	1568	1570	1569	1571	1564	1563	1563	1562	1560	1557	1556	1555			
20	1487	1489	1489	1494	1494	1497	1495	1497	1490	1489	1487	1486	1484	1482	1479	1477			
25	1393	1396	1396	1401	1401	1407	1406	1408	1398	1396	1395	1392	1391	1387	1386	1384			
30	1285	1287	1288	1293	1294	1300	1299	1301	1291	1288	1287	1285	1283	1279	1277	1275			
35	1150	1153	1152	1158	1162	1168	1168	1170	1161	1157	1155	1151	1148	1145	1144	1140			
40	992	996	998	1005	1008	1016	1017	1018	1007	1002	1001	995	994	989	988	986			
45	824	828	831	838	841	851	852	852	842	836	834	829	826	821	820	817			
50	648	655	658	665	667	675	676	679	671	663	661	654	652	647	645	642			
55	474	481	483	490	492	498	499	503	498	490	488	481	479	472	471	468			
60	313	318	318	324	324	330	329	334	334	329	328	320	318	310	310	308			
65	182	184	184	187	188	191	192	193	195	195	195	190	186	182	181	181			
70	100	101	101	102	102	104	105	106	107	107	108	106	105	102	102	101			
75	68.9	69.3	69.3	70.0	70.3	71.1	71.3	71.8	72.3	72.3	72.6	71.9	71.4	70.4	70.1	69.4			
80	44.2	44.6	44.4	45.0	45.2	46.1	46.3	46.8	47.6	47.8	47.7	47.4	46.9	46.2	46.1	45.3			
85	19.0	19.1	18.9	18.7	18.3	19.5	20.2	21.1	22.2	22.3	21.7	20.3	19.7	19.4	20.1	20.1			
90	0.95	0.94	0.96	0.92	0.92	0.90	0.94	0.93	1.68	1.72	1.65	1.65	1.65	1.68	1.65	1.63			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks: