
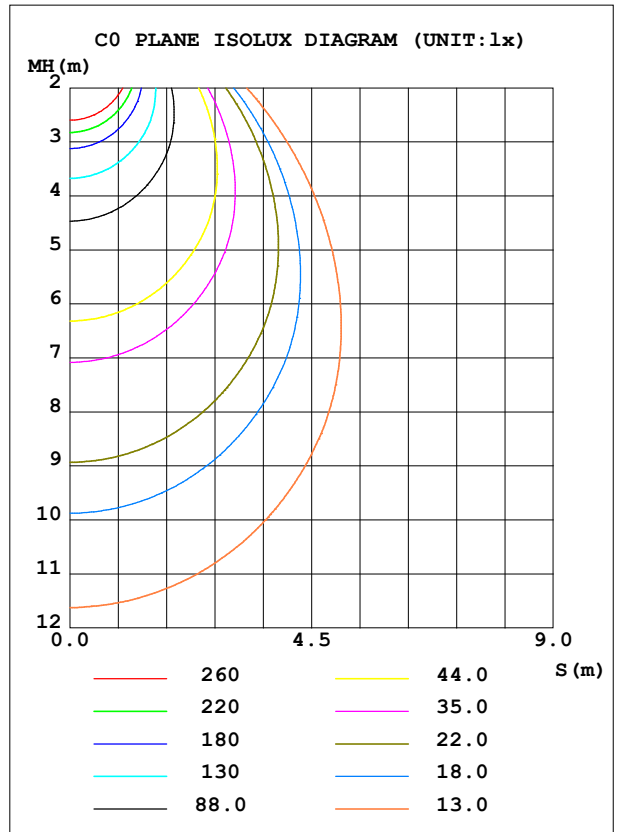


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.45V I:0.2826A P:33.468W PF:0.9916 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3497.77x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-10-40W-M-A5C5-HO	Imax (cd)	1756	S/MH (C0/180)	1.16
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	1.15
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3497.8	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	3497.77	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.25

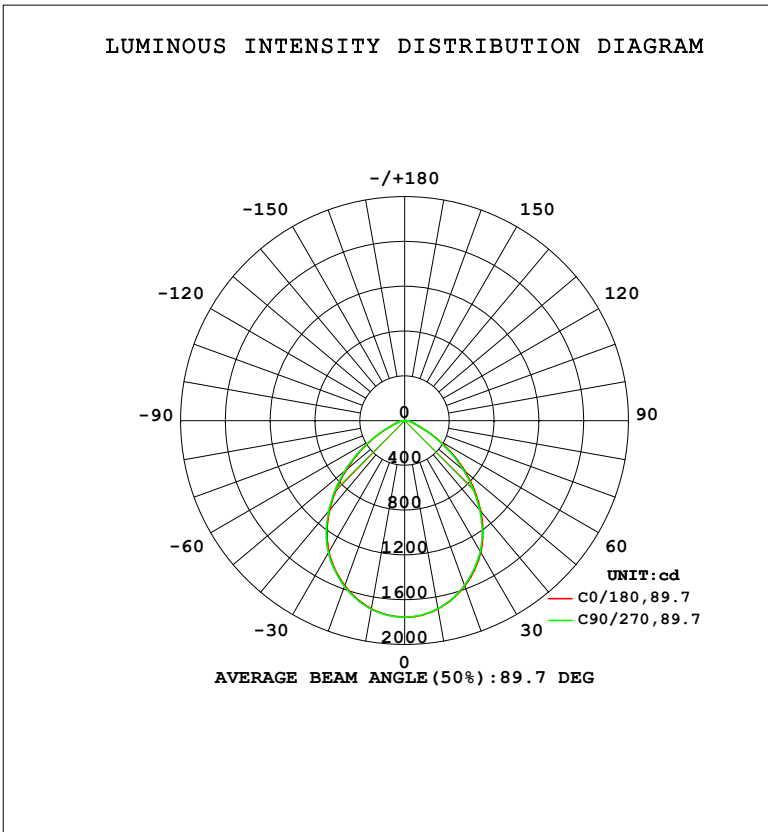

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1706	1708	1711	1711	1708	1707	1705	1701	0- 10	165.3	165.3	4.72,4.72
20	1568	1570	1576	1578	1572	1568	1564	1560	10- 20	464.3	629.5	18,18
30	1354	1357	1364	1371	1361	1356	1351	1345	20- 30	676.8	1306	37.3,37.3
40	1043	1047	1060	1069	1058	1050	1042	1035	30- 40	756.9	2063	59,59
50	678.4	688.6	699.4	709.2	702.0	690.3	681.1	674.2	40- 50	671.5	2735	78.2,78.2
60	330.9	336.8	344.0	348.8	352.7	346.5	335.5	327.0	50- 60	455.7	3190	91.2,91.2
70	105.4	105.7	107.7	109.8	112.4	113.4	109.9	107.0	60- 70	205.0	3395	97.1,97.1
80	46.30	46.52	47.38	48.53	49.84	49.94	49.17	48.25	70- 80	78.87	3474	99.3,99.3
90	1.023	1.023	0.9767	1.003	1.768	1.745	1.737	1.738	80- 90	23.54	3498	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2419.2 lm

%lum = 69.2%

%lamp = 69.2%

Conical surface Flux(130deg): 3319.7 lm

%lum = 94.9%


%lamp = 94.9%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:119.45V I:0.2826A P:33.468W PF:0.9916 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3497.77x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

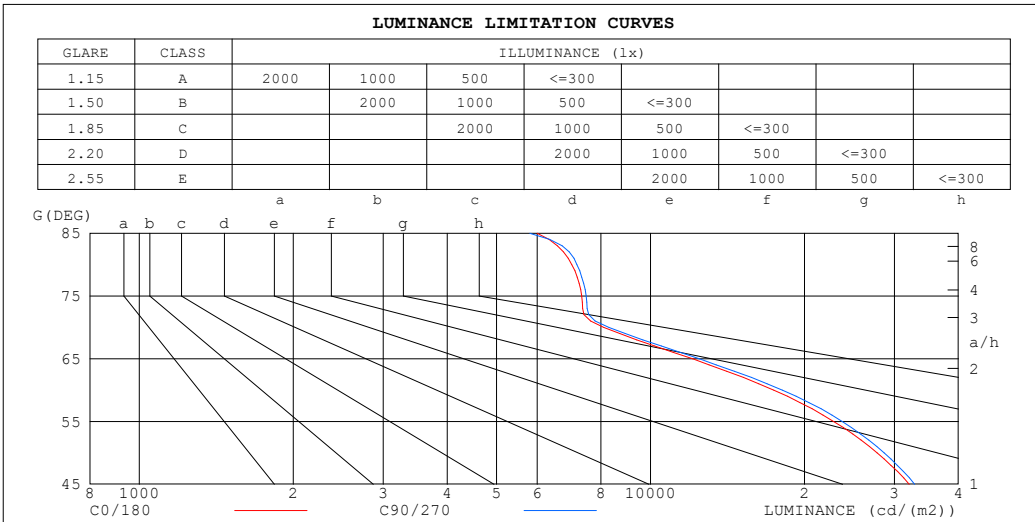

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6003	5804
80	7017	7181
75	7337	7484
70	8106	8290
65	12087	12470
60	17416	18103
55	22827	23718
50	27772	28633
45	32076	32845


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.45V I:0.2826A P:33.468W PF:0.9916 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3497.77x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.85	.94	.89	.84	.90	.86	.82	.87	.84	.81	.84	.81	.79	.77
3.0	.86	.79	.73	.84	.78	.73	.82	.76	.71	.79	.74	.70	.76	.73	.69	.67
4.0	.77	.70	.64	.76	.69	.63	.74	.68	.63	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.62	.56	.69	.61	.56	.67	.60	.55	.65	.59	.55	.63	.58	.54	.52
6.0	.64	.56	.50	.63	.55	.50	.61	.54	.49	.59	.54	.49	.58	.53	.49	.47
7.0	.58	.50	.45	.57	.50	.45	.56	.49	.44	.55	.49	.44	.53	.48	.44	.42
8.0	.54	.46	.40	.53	.45	.40	.52	.45	.40	.50	.44	.40	.49	.44	.40	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.46	.40	.36	.34
10.0	.46	.38	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.43	.37	.33	.31

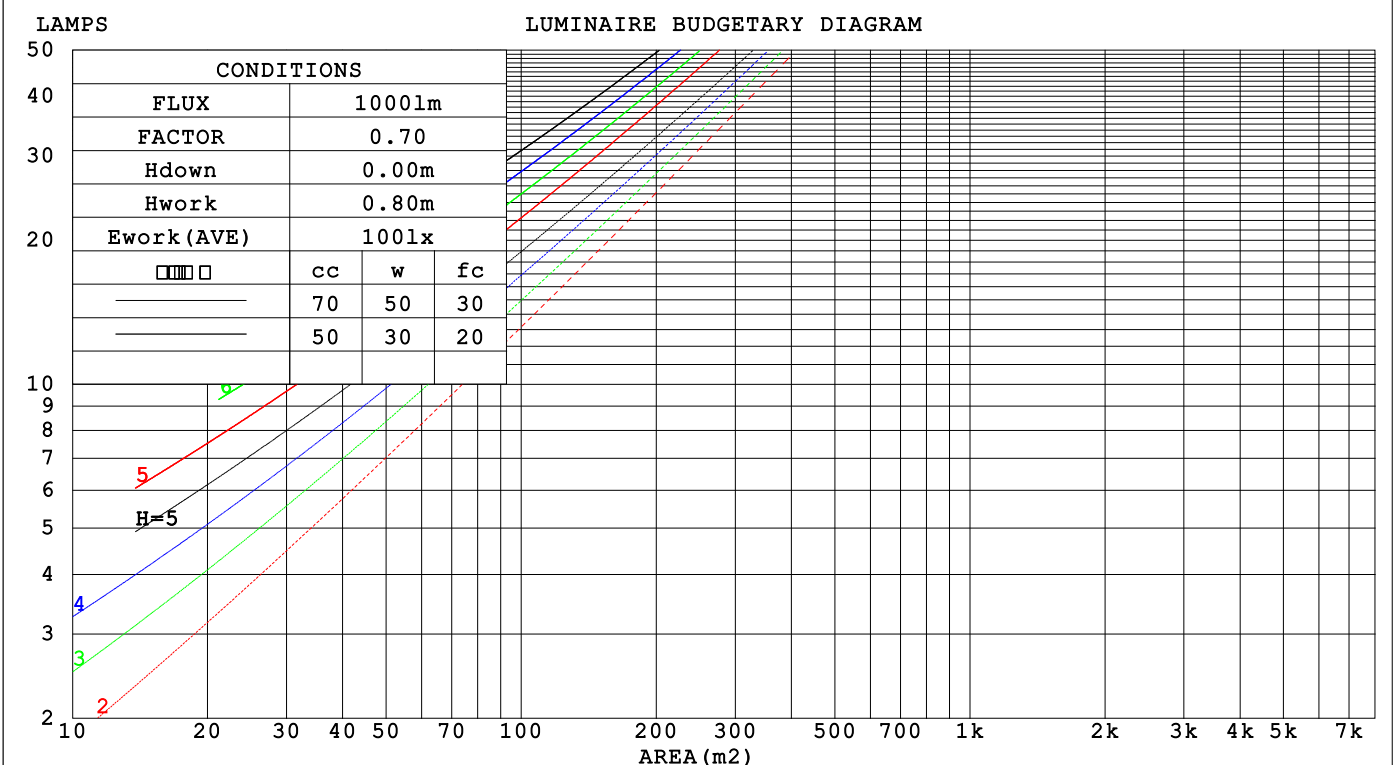

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:119.45V I:0.2826A P:33.468W PF:0.9916 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3497.77x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.249	.142	.045	.242	.138	.044	.229	.132	.042	.217	.125	.040	.206	.120	.039	
2.0	.241	.132	.040	.235	.129	.040	.224	.124	.039	.213	.120	.037	.204	.115	.036	
3.0	.228	.122	.036	.223	.119	.036	.213	.116	.035	.204	.112	.034	.196	.108	.034	
4.0	.215	.112	.033	.210	.110	.033	.202	.107	.032	.194	.104	.031	.186	.101	.031	
5.0	.202	.103	.030	.198	.102	.030	.191	.099	.029	.183	.097	.029	.177	.094	.028	
6.0	.190	.095	.027	.187	.094	.027	.180	.092	.027	.173	.090	.026	.167	.088	.026	
7.0	.179	.089	.025	.176	.088	.025	.170	.086	.025	.164	.084	.024	.159	.082	.024	
8.0	.169	.083	.023	.166	.082	.023	.161	.080	.023	.156	.079	.023	.151	.077	.023	
9.0	.160	.077	.022	.157	.077	.022	.152	.075	.021	.148	.074	.021	.143	.073	.021	
10.0	.151	.073	.020	.149	.072	.020	.145	.071	.020	.140	.070	.020	.136	.069	.020	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.176	.157	.139	.151	.134	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
2.0	.165	.132	.104	.142	.114	.090	.097	.079	.063	.056	.046	.037	.018	.015	.012	
3.0	.156	.114	.080	.134	.098	.070	.092	.068	.049	.053	.040	.029	.017	.013	.009	
4.0	.148	.100	.063	.127	.087	.055	.088	.060	.039	.051	.035	.023	.016	.012	.008	
5.0	.141	.089	.051	.121	.077	.045	.083	.054	.032	.048	.032	.019	.016	.010	.006	
6.0	.134	.081	.042	.115	.070	.037	.080	.049	.026	.046	.029	.016	.015	.009	.005	
7.0	.128	.074	.036	.110	.064	.031	.076	.045	.022	.044	.026	.013	.014	.009	.004	
8.0	.122	.068	.031	.105	.059	.027	.073	.041	.019	.042	.024	.011	.014	.008	.004	
9.0	.117	.063	.027	.100	.055	.023	.070	.038	.017	.041	.023	.010	.013	.007	.003	
10.0	.111	.059	.024	.096	.051	.021	.067	.036	.015	.039	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.45V I:0.2826A P:33.468W PF:0.9916 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3497.77x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.1	24.4	23.4	24.6	24.8	23.2	24.5	23.5	24.7	24.9
3H	23.3	24.5	23.6	24.8	25.0	23.4	24.7	23.7	24.9	25.1
4H	23.4	24.5	23.7	24.8	25.0	23.5	24.7	23.8	24.9	25.1
6H	23.4	24.5	23.8	24.8	25.1	23.6	24.6	23.9	24.9	25.2
8H	23.5	24.5	23.8	24.8	25.1	23.6	24.6	23.9	24.9	25.2
12H	23.5	24.5	23.8	24.7	25.0	23.6	24.6	23.9	24.9	25.1
4H 2H	23.2	24.4	23.5	24.6	24.9	23.3	24.5	23.6	24.7	25.0
3H	23.6	24.6	23.9	24.8	25.1	23.7	24.7	24.0	24.9	25.2
4H	23.7	24.6	24.1	24.9	25.2	23.8	24.7	24.2	25.0	25.3
6H	23.8	24.6	24.2	25.0	25.3	23.9	24.7	24.3	25.1	25.4
8H	23.9	24.6	24.3	25.0	25.4	24.0	24.7	24.4	25.1	25.5
12H	23.9	24.6	24.3	25.0	25.4	24.0	24.7	24.4	25.1	25.5
8H 4H	23.7	24.4	24.1	24.8	25.2	23.8	24.5	24.2	24.9	25.3
6H	23.9	24.5	24.3	24.9	25.3	24.0	24.6	24.4	25.0	25.4
8H	24.0	24.5	24.5	25.0	25.4	24.1	24.6	24.6	25.1	25.5
12H	24.1	24.5	24.5	25.0	25.4	24.2	24.6	24.6	25.1	25.5
12H 4H	23.7	24.3	24.1	24.7	25.1	23.8	24.4	24.2	24.8	25.2
6H	23.9	24.4	24.4	24.9	25.3	24.0	24.5	24.5	25.0	25.4
8H	24.0	24.5	24.5	24.9	25.4	24.1	24.6	24.6	25.0	25.5

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 0.8	+ 0.6 / - 0.8
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.5
2.0H	+ 1.3 / - 1.7	+ 1.3 / - 1.7

CIE Pub.117, 3498 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.4)  
Area: 0.038 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-04	Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.45V I:0.2826A P:33.468W PF:0.9916 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3497.77x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	65	55	49	65	55	49	64	55	49	43
0.80	76	66	59	75	65	59	73	65	59	53
1.00	84	75	69	83	74	68	81	75	68	62
1.25	90	82	76	89	81	76	87	80	75	69
1.50	95	87	81	93	86	81	91	84	80	73
2.00	101	94	89	99	93	88	96	91	86	80
2.50	103	97	93	102	96	92	98	93	90	82
3.00	106	101	96	104	99	95	100	96	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	102	104	102	99	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.45V I:0.2826A P:33.468W PF:0.9916 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3497.77x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

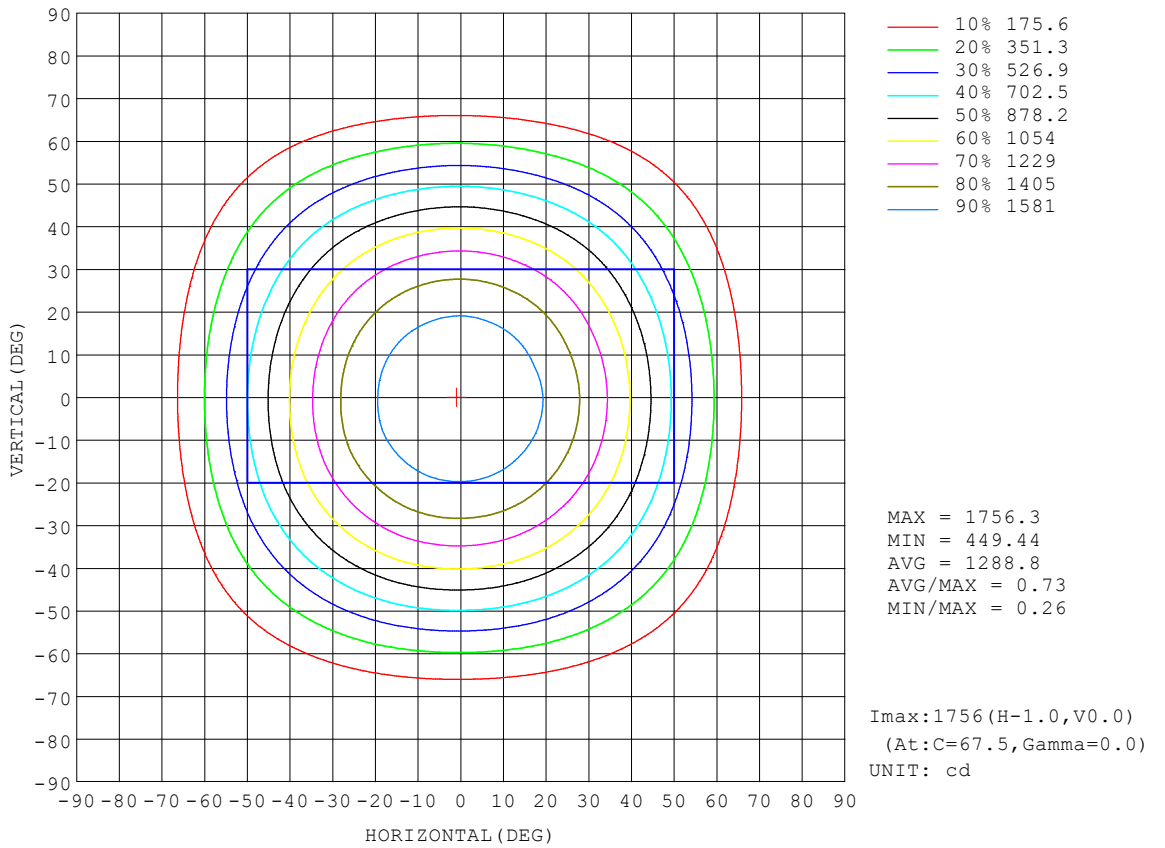


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.45V I:0.2826A P:33.468W PF:0.9916 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3497.77x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

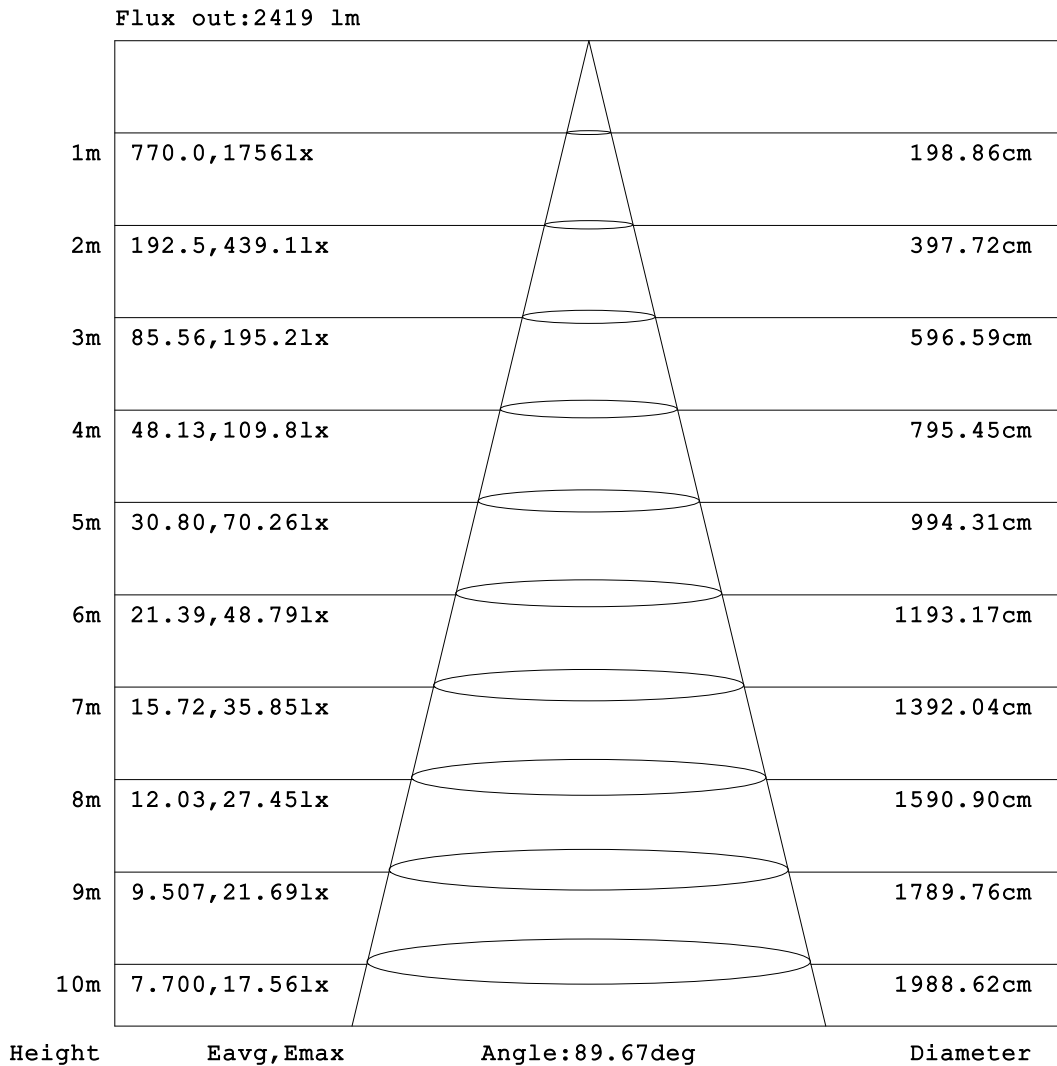


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.45V I:0.2826A P:33.468W PF:0.9916 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3497.77x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

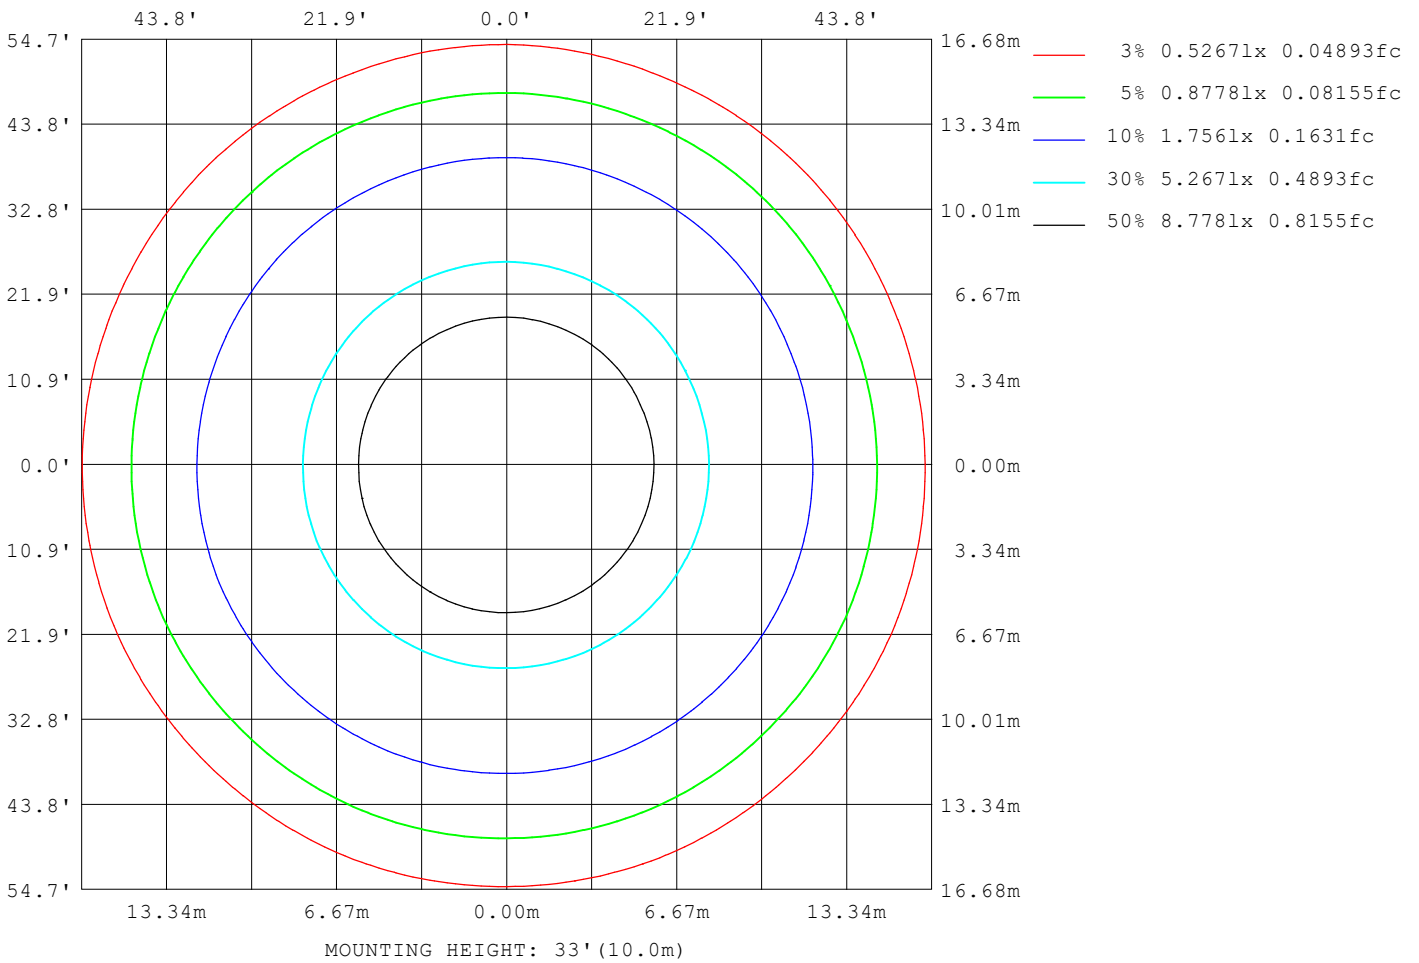

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.45V I:0.2826A P:33.468W PF:0.9916 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3497.77x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	12490
L_0~180 (75) av	7523
L_0~180 (85) av	6511
L_90~270 (65) av	12386
L_90~270 (75) av	7544
L_90~270 (85) av	6017
L_45 (65) av	12439
L_45 (75) av	7535
L_45 (85) av	6396

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

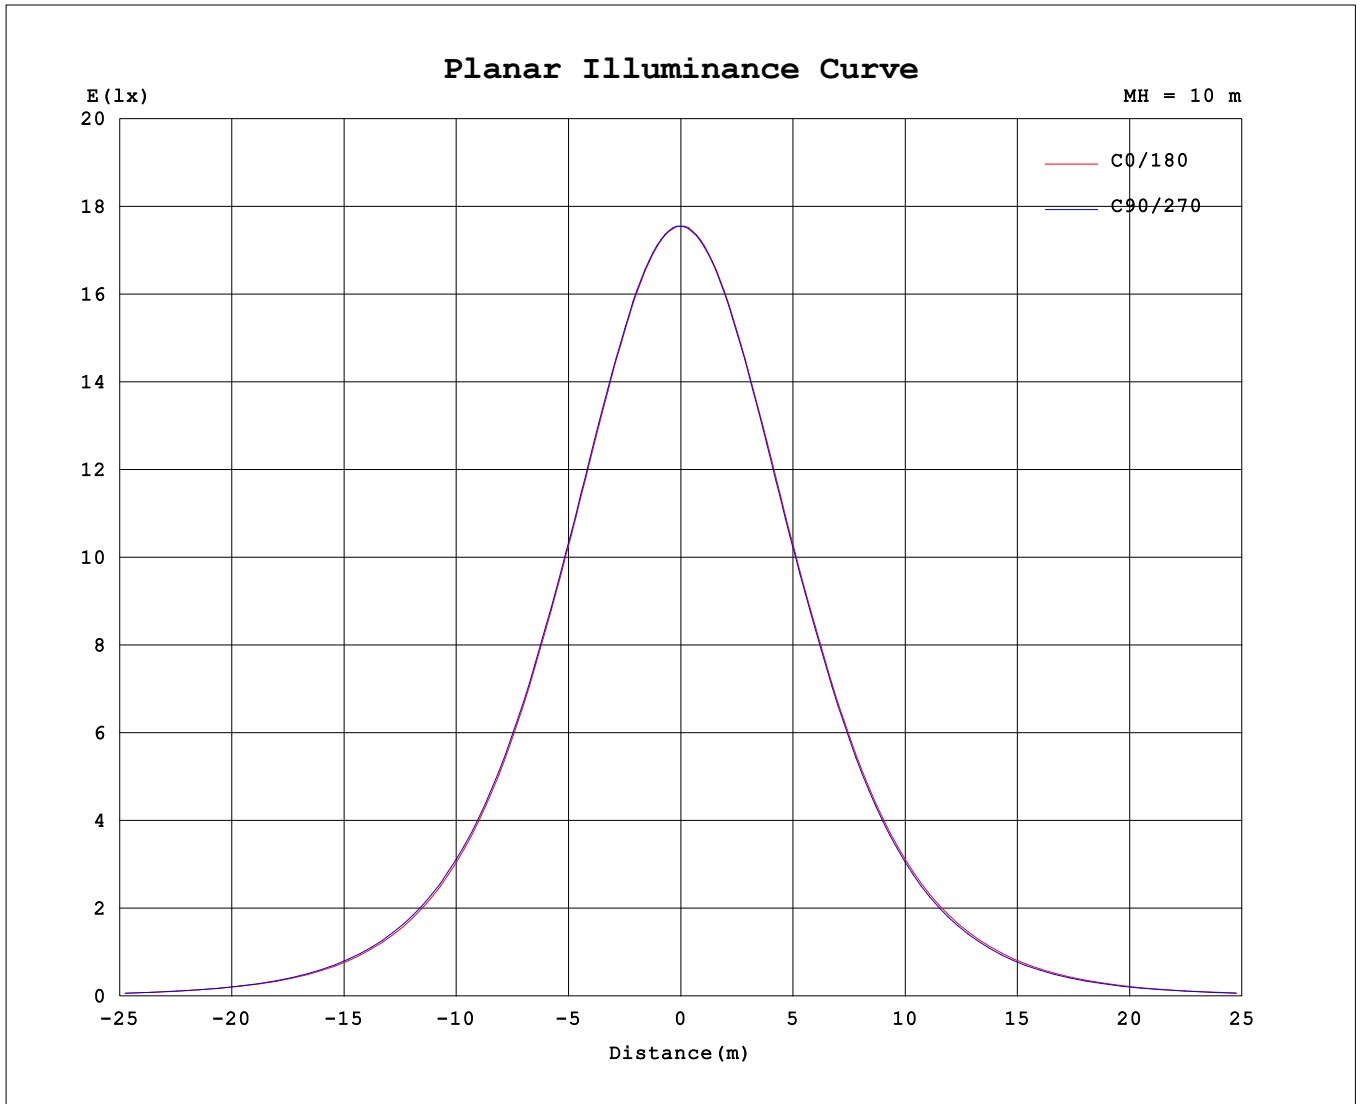

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

**LUMINOUS DISTRIBUTION INTENSITY DATA**

Test:U:119.45V I:0.2826A P:33.468W PF:0.9916 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3497.77x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1756	1756	1756	1756	1755	1756	1754	1754	1756	1756	1756	1756	1755	1756	1754	1754			
5	1743	1742	1743	1746	1744	1746	1745	1745	1745	1744	1744	1743	1741	1742	1740	1738			
10	1706	1707	1708	1711	1711	1713	1711	1712	1708	1707	1707	1706	1705	1702	1701	1699			
15	1647	1650	1650	1654	1653	1657	1656	1657	1650	1649	1648	1646	1645	1642	1641	1639			
20	1568	1569	1570	1574	1576	1579	1578	1579	1572	1569	1568	1565	1564	1560	1560	1558			
25	1470	1472	1472	1476	1478	1482	1482	1482	1474	1470	1470	1467	1464	1461	1460	1458			
30	1354	1356	1357	1362	1364	1370	1371	1371	1361	1358	1356	1351	1351	1346	1345	1343			
35	1210	1212	1214	1219	1223	1230	1230	1231	1220	1215	1215	1210	1208	1202	1202	1198			
40	1043	1046	1047	1055	1060	1068	1069	1069	1058	1052	1050	1044	1042	1037	1035	1033			
45	862	868	871	879	883	892	892	894	882	876	873	866	864	858	858	855			
50	678	685	689	696	699	708	709	712	702	694	690	683	681	676	674	670			
55	498	506	508	515	517	524	524	528	523	515	511	504	502	495	494	490			
60	331	337	337	344	344	350	349	353	353	348	347	339	335	327	327	325			
65	194	195	196	199	200	204	203	206	207	207	208	202	198	193	192	193			
70	105	106	106	107	108	110	110	111	112	112	113	111	110	107	107	106			
75	72.2	72.6	72.5	73.3	73.6	74.5	74.6	75.2	75.8	75.8	76.0	75.2	74.8	73.7	73.3	72.7			
80	46.3	46.7	46.5	47.1	47.4	48.3	48.5	49.0	49.8	50.1	49.9	49.6	49.2	48.3	48.3	47.2			
85	19.9	20.0	19.8	19.5	19.2	20.4	21.2	22.1	23.2	23.4	22.7	21.3	20.6	20.3	21.1	21.0			
90	1.02	1.00	1.02	0.98	0.98	0.96	1.00	1.00	1.77	1.80	1.74	1.75	1.74	1.78	1.74	1.72			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks: