
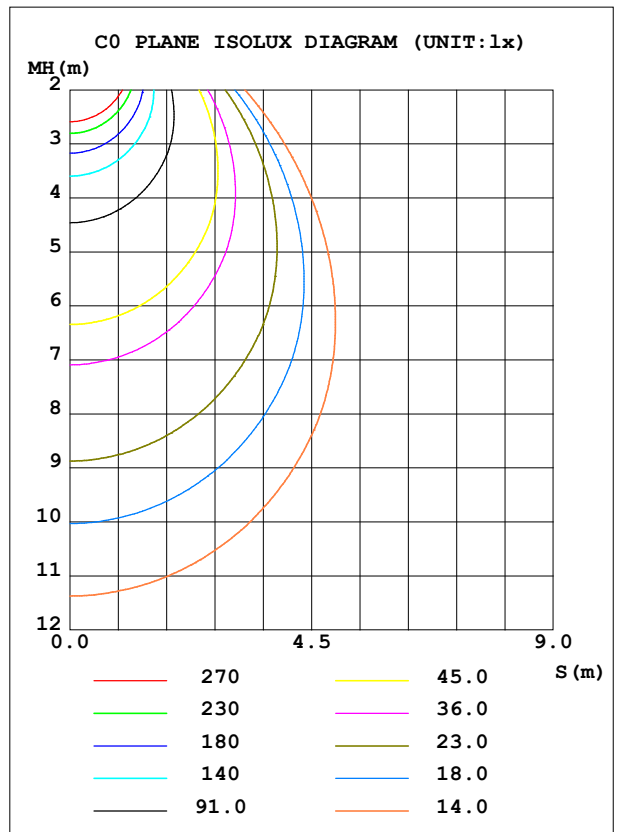


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.45V I:0.2839A P:33.626W PF:0.9917 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3606.69x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-10-40W-M-A5C5-HO	Imax (cd)	1811	S/MH (C0/180)	1.16
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	1.15
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3606.7	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	3606.69	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.25

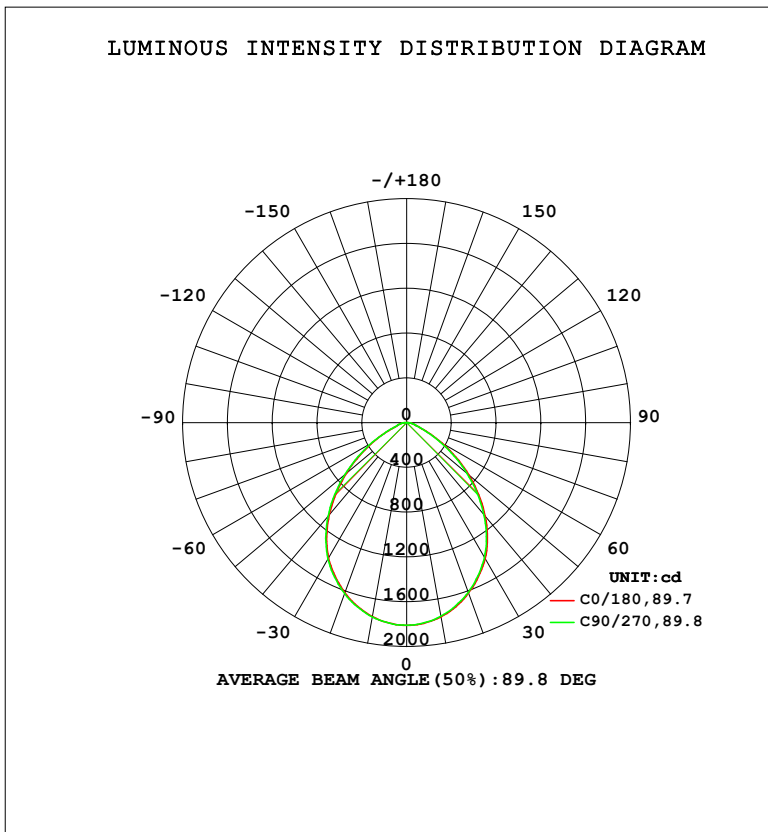

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1759	1761	1762	1764	1762	1760	1756	1753	0- 10	170.3	170.3	4.72,4.72
20	1616	1619	1624	1626	1620	1617	1613	1607	10- 20	478.5	648.8	18,18
30	1396	1399	1406	1412	1404	1398	1391	1386	20- 30	697.5	1346	37.3,37.3
40	1076	1080	1093	1101	1092	1083	1076	1070	30- 40	780.5	2127	59,59
50	700.1	711.2	721.0	732.3	724.9	713.0	703.6	695.9	40- 50	693.1	2820	78.2,78.2
60	341.1	346.8	354.2	358.9	363.3	357.1	345.8	336.7	50- 60	470.1	3290	91.2,91.2
70	108.7	108.9	111.0	113.2	116.0	116.9	113.3	110.3	60- 70	211.0	3501	97.1,97.1
80	47.85	47.96	48.85	50.04	51.48	51.51	50.79	49.77	70- 80	81.40	3582	99.3,99.3
90	1.029	1.042	0.9964	1.016	1.821	1.790	1.796	1.784	80- 90	24.29	3607	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2494.2 lm

%lum = 69.2%

%lamp = 69.2%

Conical surface Flux(130deg): 3423.1 lm

%lum = 94.9%


%lamp = 94.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.45V I:0.2839A P:33.626W PF:0.9917 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3606.69x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

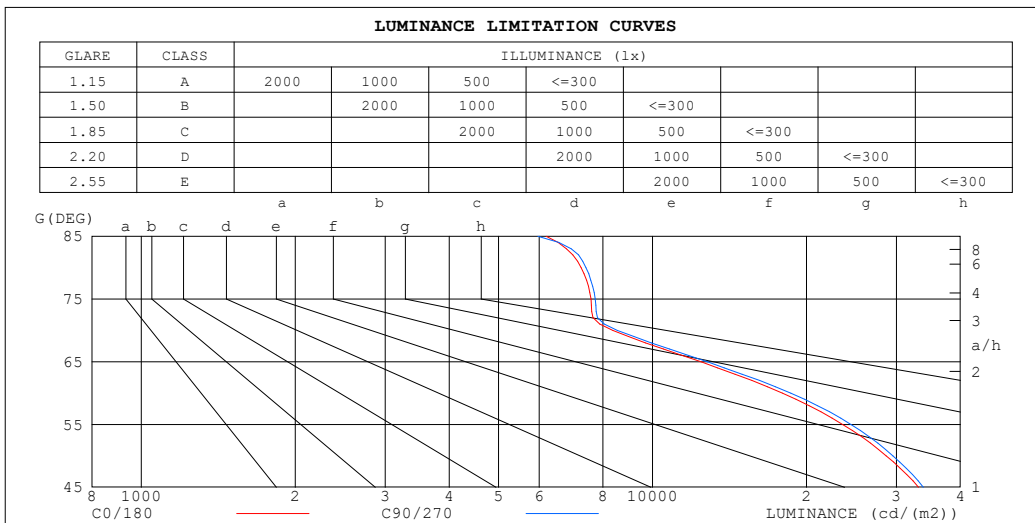

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6199	5966
80	7252	7403
75	7580	7725
70	8360	8538
65	12442	12822
60	17953	18640
55	23551	24451
50	28663	29519
45	33145	33860


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.45V I:0.2839A P:33.626W PF:0.9917 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3606.69x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.85	.94	.89	.84	.90	.86	.82	.87	.84	.81	.84	.81	.79	.77
3.0	.86	.79	.73	.84	.78	.73	.82	.76	.71	.79	.74	.70	.76	.73	.69	.67
4.0	.77	.70	.64	.76	.69	.63	.74	.68	.63	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.62	.56	.69	.61	.56	.67	.60	.55	.65	.59	.55	.63	.58	.54	.52
6.0	.64	.56	.50	.63	.55	.50	.61	.54	.49	.59	.53	.49	.58	.53	.49	.47
7.0	.58	.50	.45	.57	.50	.45	.56	.49	.44	.55	.49	.44	.53	.48	.44	.42
8.0	.54	.46	.40	.53	.45	.40	.52	.45	.40	.50	.44	.40	.49	.44	.40	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.46	.40	.36	.34
10.0	.46	.38	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.43	.37	.33	.31

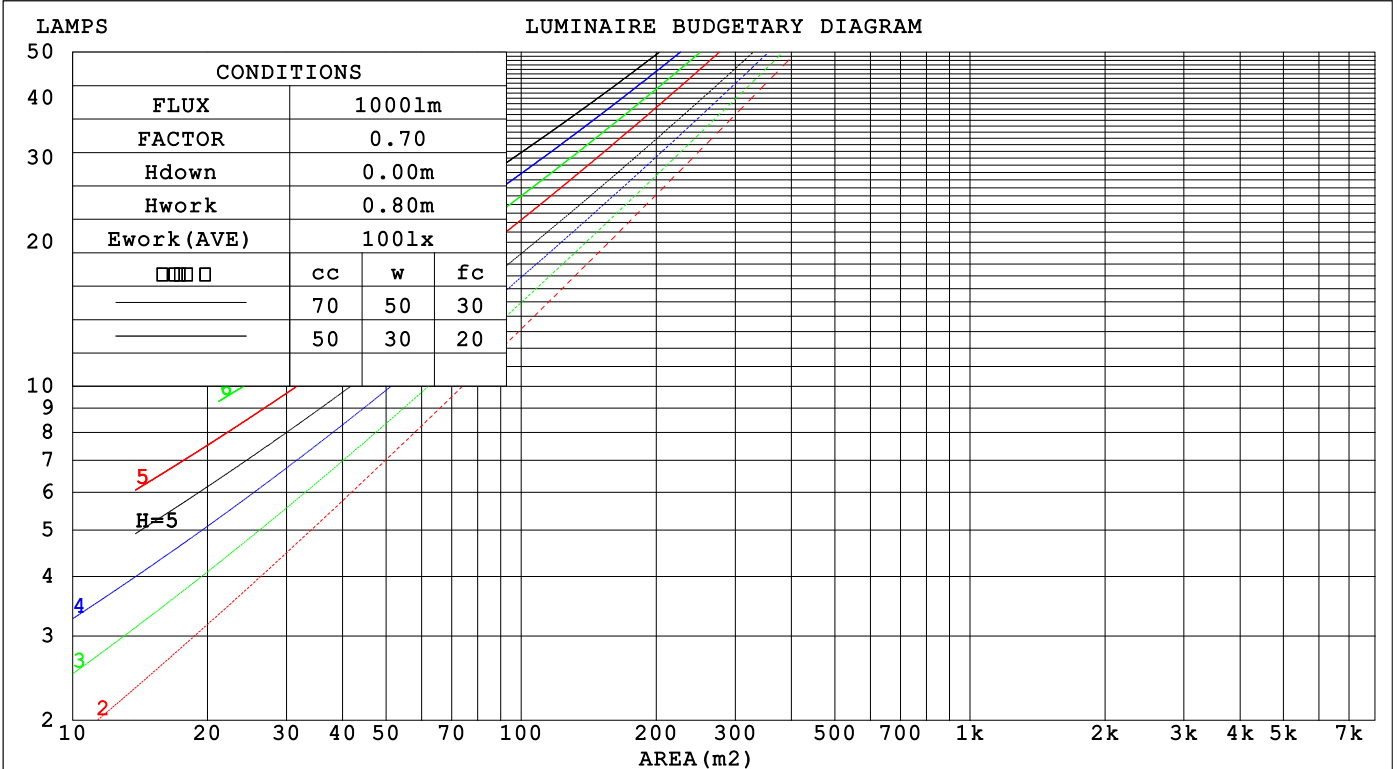

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.45V I:0.2839A P:33.626W PF:0.9917 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3606.69x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.249	.142	.045	.242	.138	.044	.229	.132	.042	.217	.125	.040	.206	.120	.039	
2.0	.241	.132	.041	.235	.129	.040	.224	.124	.039	.213	.120	.037	.204	.115	.036	
3.0	.228	.122	.036	.223	.119	.036	.213	.116	.035	.204	.112	.034	.196	.108	.034	
4.0	.215	.112	.033	.210	.110	.033	.202	.107	.032	.194	.104	.031	.186	.101	.031	
5.0	.202	.103	.030	.198	.102	.030	.191	.099	.029	.183	.097	.029	.177	.094	.028	
6.0	.190	.095	.027	.187	.094	.027	.180	.092	.027	.173	.090	.026	.167	.088	.026	
7.0	.179	.089	.025	.176	.088	.025	.170	.086	.025	.164	.084	.024	.159	.083	.024	
8.0	.169	.083	.023	.166	.082	.023	.161	.080	.023	.156	.079	.023	.151	.077	.023	
9.0	.160	.077	.022	.157	.077	.022	.152	.075	.021	.148	.074	.021	.143	.073	.021	
10.0	.151	.073	.020	.149	.072	.020	.145	.071	.020	.140	.070	.020	.136	.069	.020	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.176	.157	.139	.151	.134	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
3.0	.165	.132	.104	.142	.114	.090	.097	.079	.063	.056	.046	.037	.018	.015	.012	
4.0	.156	.114	.080	.134	.098	.070	.092	.068	.049	.053	.040	.029	.017	.013	.009	
5.0	.148	.100	.063	.127	.087	.055	.088	.060	.039	.051	.035	.023	.016	.012	.008	
6.0	.141	.089	.051	.121	.077	.045	.083	.054	.032	.048	.032	.019	.016	.010	.006	
7.0	.134	.081	.042	.115	.070	.037	.080	.049	.026	.046	.029	.016	.015	.009	.005	
8.0	.128	.074	.036	.110	.064	.031	.076	.045	.022	.044	.026	.013	.014	.009	.004	
9.0	.122	.068	.031	.105	.059	.027	.073	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.117	.063	.027	.100	.055	.023	.070	.038	.017	.041	.023	.010	.013	.007	.003	
10.0	.111	.059	.024	.096	.051	.021	.067	.036	.015	.039	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.45V I:0.2839A P:33.626W PF:0.9917 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3606.69x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.2	24.5	23.5	24.7	24.9	23.3	24.7	23.6	24.8	25.0
3H	23.4	24.7	23.7	24.9	25.1	23.5	24.8	23.8	25.0	25.2
4H	23.5	24.7	23.8	24.9	25.1	23.6	24.8	23.9	25.0	25.3
6H	23.5	24.6	23.9	24.9	25.2	23.7	24.7	24.0	25.0	25.3
8H	23.6	24.6	23.9	24.9	25.2	23.7	24.7	24.0	25.0	25.3
12H	23.6	24.6	23.9	24.8	25.1	23.7	24.7	24.0	25.0	25.3
4H 2H	23.3	24.5	23.6	24.7	25.0	23.4	24.6	23.7	24.8	25.1
3H	23.7	24.7	24.0	24.9	25.2	23.8	24.8	24.1	25.0	25.3
4H	23.8	24.7	24.2	25.0	25.3	23.9	24.8	24.3	25.1	25.4
6H	23.9	24.7	24.3	25.1	25.4	24.0	24.8	24.4	25.2	25.5
8H	24.0	24.7	24.4	25.1	25.5	24.1	24.8	24.5	25.2	25.6
12H	24.0	24.7	24.4	25.1	25.5	24.1	24.8	24.5	25.2	25.6
8H 4H	23.8	24.5	24.2	24.9	25.3	23.9	24.6	24.3	25.0	25.4
6H	24.0	24.6	24.4	25.0	25.4	24.1	24.7	24.5	25.1	25.5
8H	24.1	24.6	24.6	25.1	25.5	24.2	24.7	24.7	25.2	25.6
12H	24.2	24.6	24.7	25.1	25.6	24.3	24.7	24.7	25.2	25.6
12H 4H	23.8	24.4	24.2	24.8	25.2	23.9	24.5	24.3	24.9	25.3
6H	24.0	24.5	24.5	25.0	25.4	24.1	24.6	24.6	25.1	25.5
8H	24.1	24.6	24.6	25.0	25.5	24.2	24.7	24.7	25.1	25.6

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 0.8	+ 0.6 / - 0.8
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.4
2.0H	+ 1.3 / - 1.7	+ 1.3 / - 1.7

CIE Pub.117, 3607 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.5)
 Area: 0.038 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-04	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.45V I:0.2839A P:33.626W PF:0.9917 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3606.69x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	65	55	49	65	55	49	64	55	49	43
0.80	76	66	59	75	65	59	73	65	59	53
1.00	84	75	69	83	74	68	81	75	68	62
1.25	90	82	76	89	81	76	87	80	75	69
1.50	95	87	81	93	86	81	91	84	80	73
2.00	101	94	89	99	93	88	96	91	86	80
2.50	103	97	93	102	96	92	98	93	90	82
3.00	106	101	96	104	99	95	100	96	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	102	104	102	99	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.45V I:0.2839A P:33.626W PF:0.9917 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3606.69x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

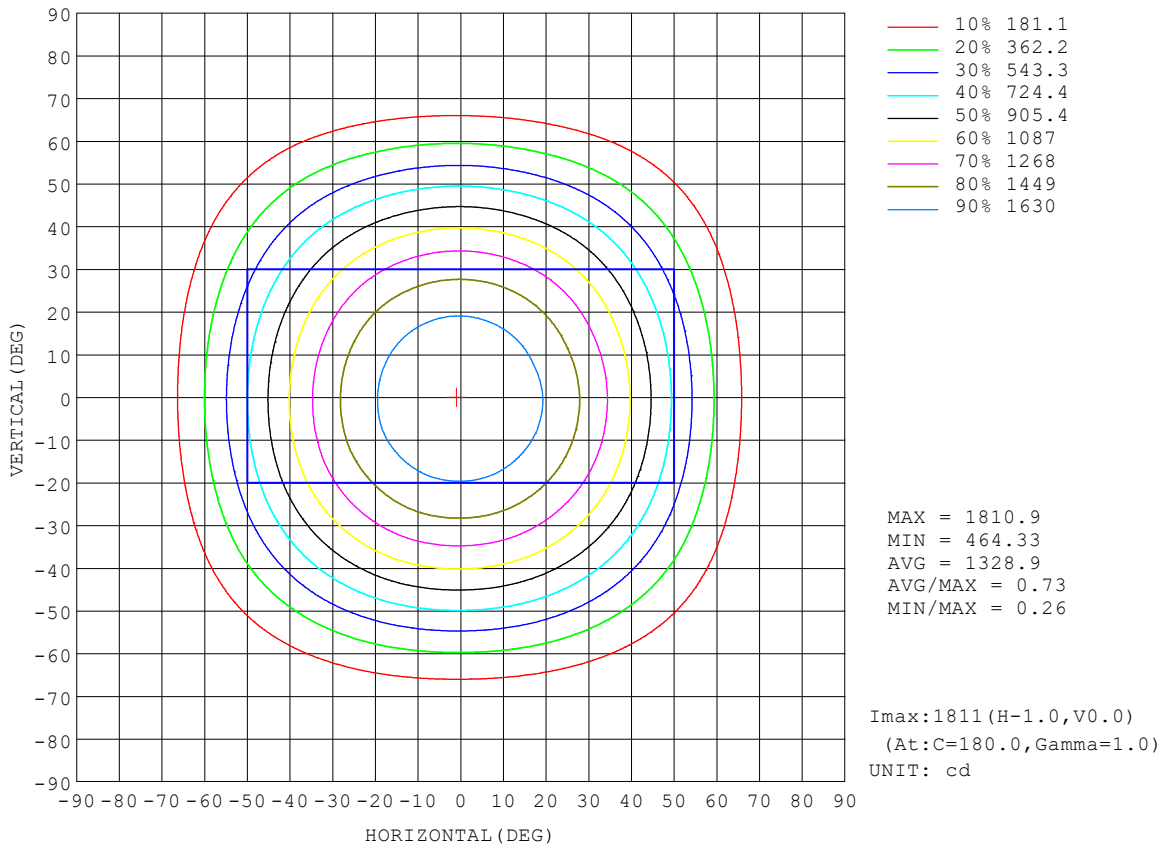


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.45V I:0.2839A P:33.626W PF:0.9917 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3606.69x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Flux out:2494 lm

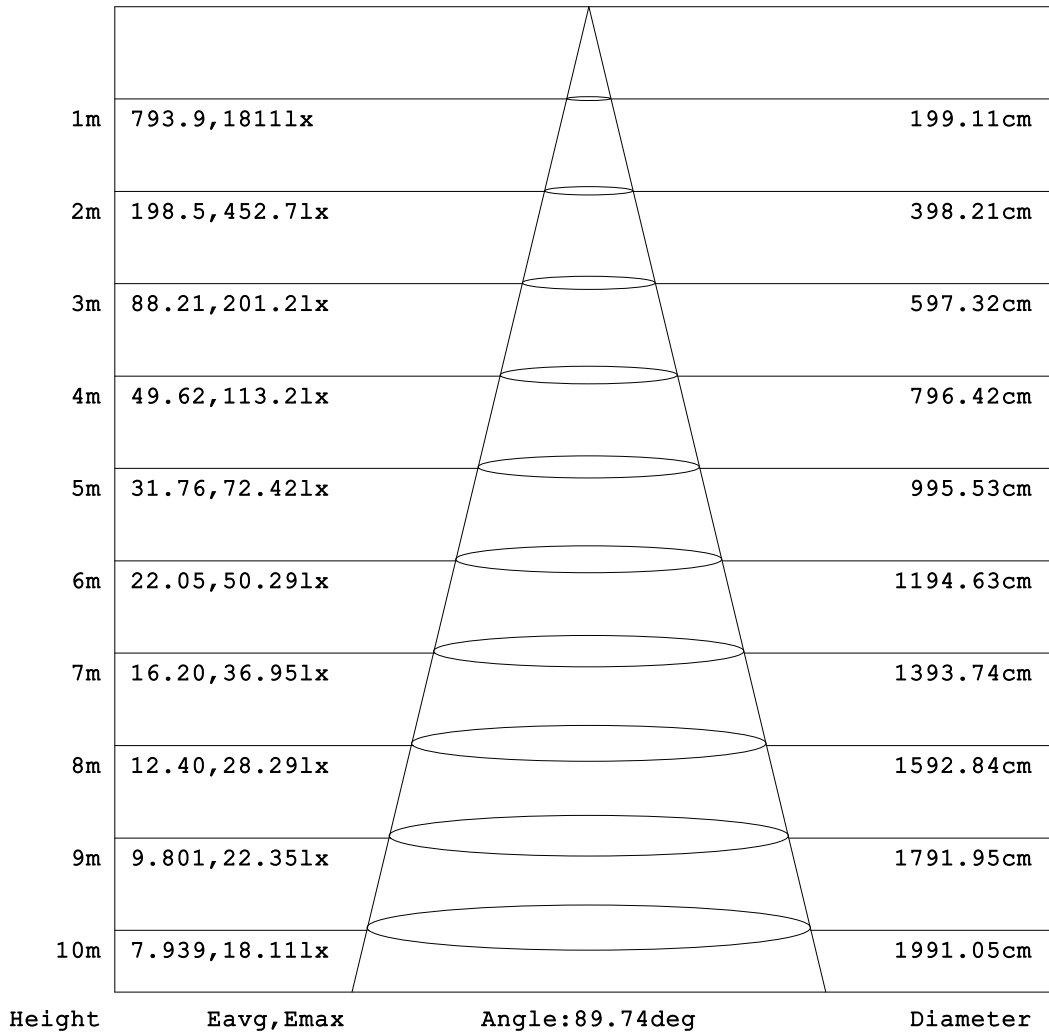


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.45V I:0.2839A P:33.626W PF:0.9917 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3606.69x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

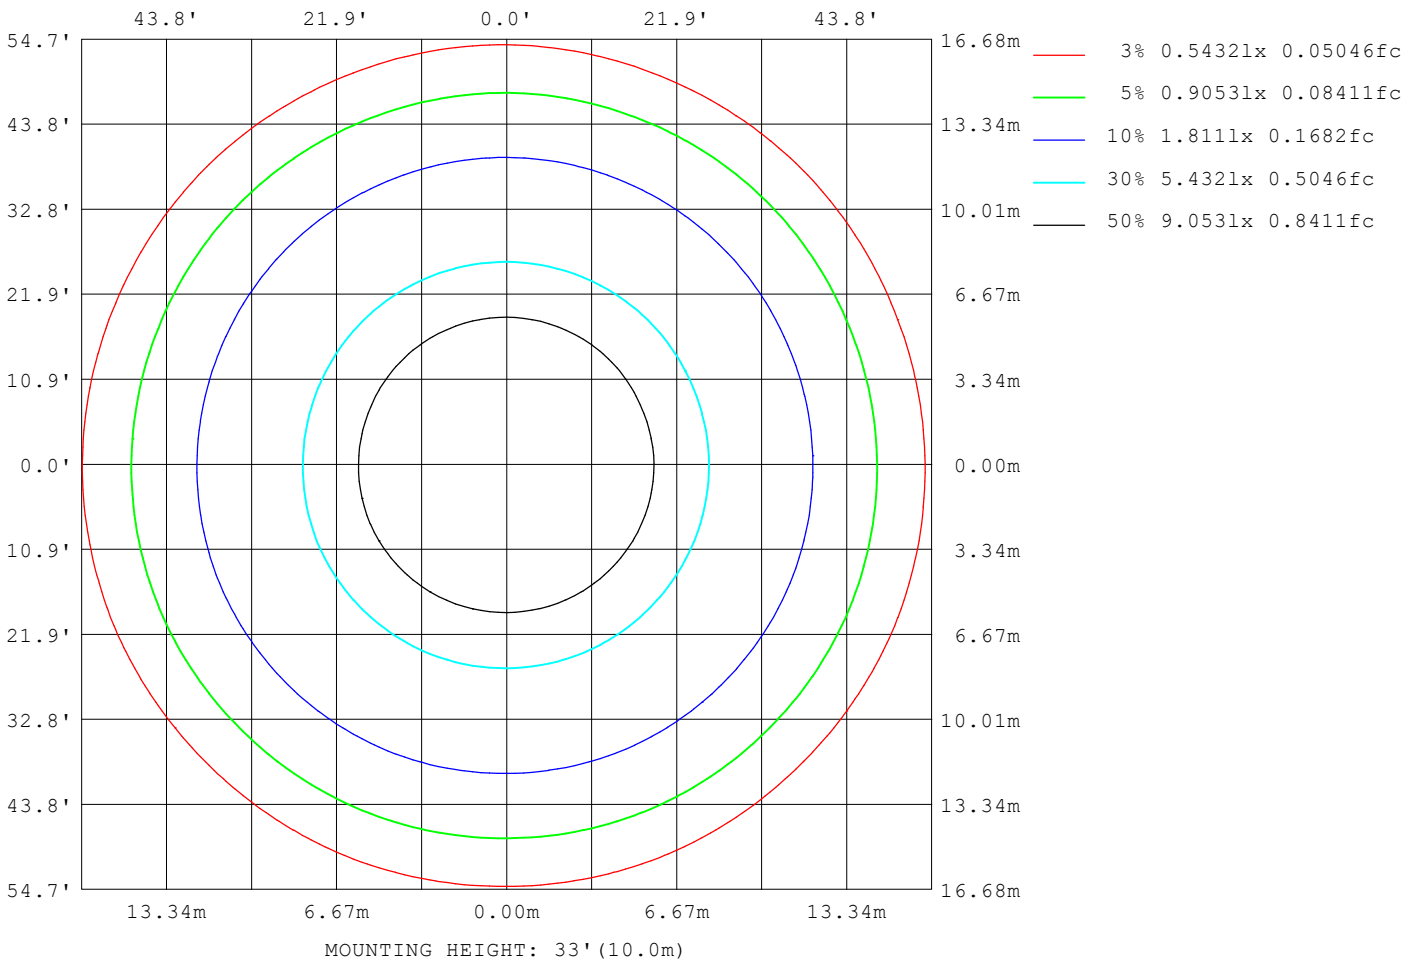

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.45V I:0.2839A P:33.626W PF:0.9917 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3606.69x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	12851
L_0~180 (75) av	7773
L_0~180 (85) av	6725
L_90~270 (65) av	12734
L_90~270 (75) av	7787
L_90~270 (85) av	6204
L_45 (65) av	12795
L_45 (75) av	7778
L_45 (85) av	6590

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

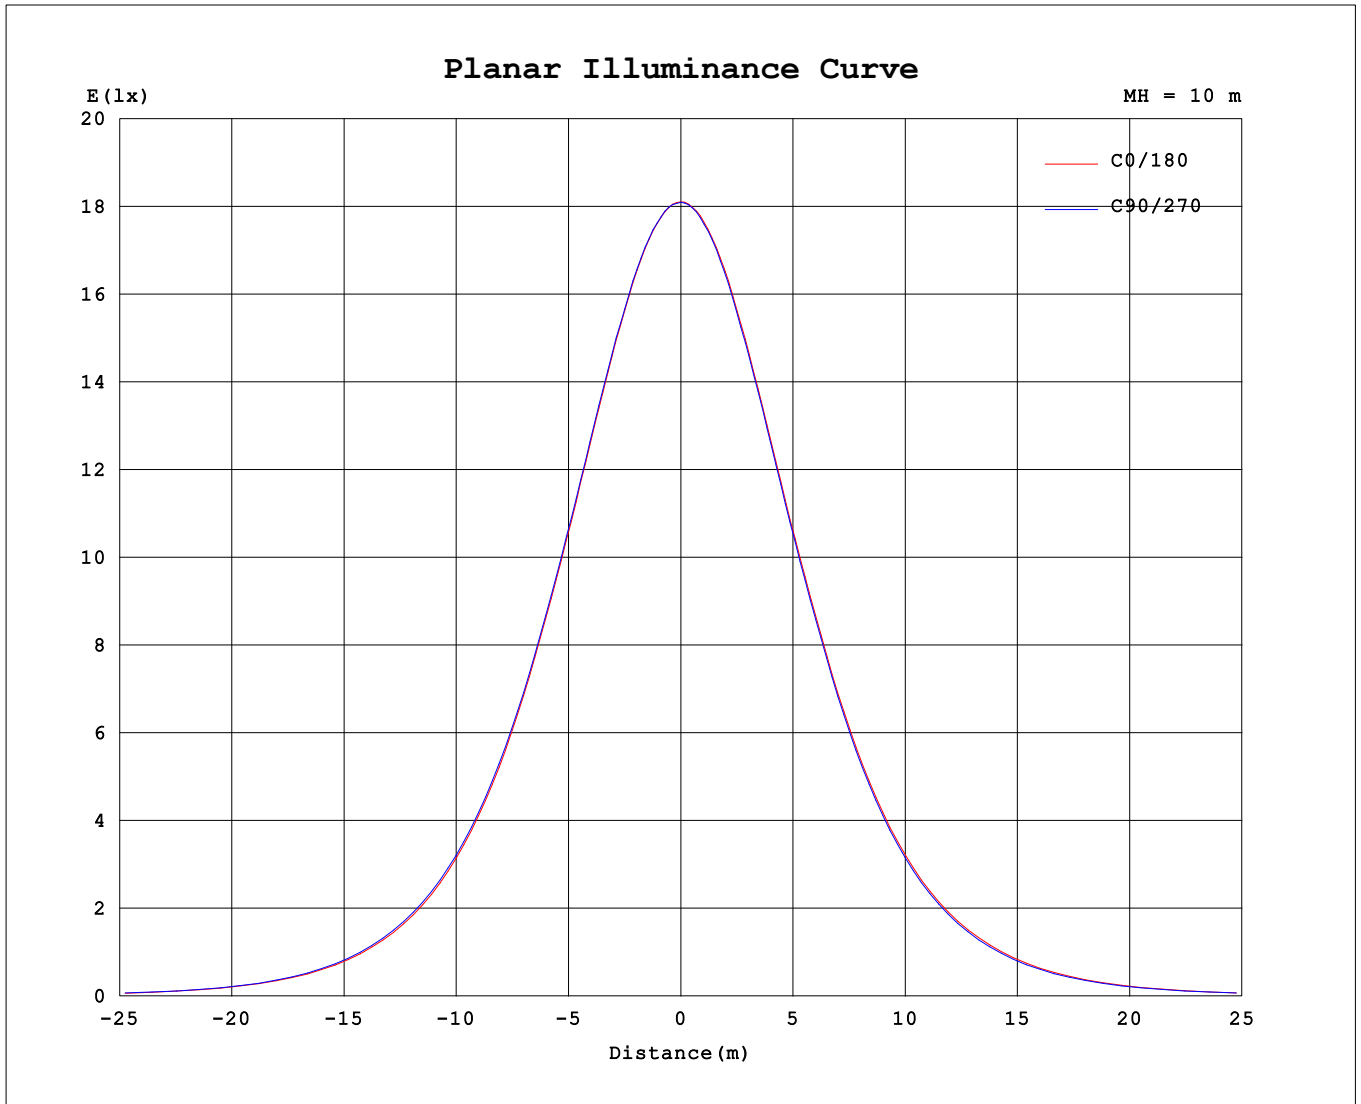

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.45V I:0.2839A P:33.626W PF:0.9917 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3606.69x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1811	1810	1809	1809	1810	1808	1807	1807	1811	1810	1809	1809	1810	1808	1807	1807			
5	1796	1797	1798	1800	1797	1799	1797	1797	1799	1798	1796	1796	1795	1793	1791	1791			
10	1759	1761	1761	1763	1762	1765	1764	1764	1762	1761	1760	1759	1756	1755	1753	1753			
15	1698	1701	1700	1703	1703	1706	1705	1707	1702	1699	1699	1697	1692	1693	1691	1689			
20	1616	1619	1619	1622	1624	1627	1626	1627	1620	1618	1617	1614	1613	1608	1607	1605			
25	1514	1517	1518	1522	1523	1527	1528	1527	1519	1517	1515	1511	1509	1506	1505	1503			
30	1396	1399	1399	1404	1406	1411	1412	1413	1404	1399	1398	1394	1391	1389	1386	1384			
35	1248	1252	1250	1257	1261	1268	1267	1269	1258	1252	1253	1246	1245	1240	1239	1236			
40	1076	1080	1080	1089	1093	1101	1101	1102	1092	1086	1083	1077	1076	1071	1070	1066			
45	891	896	898	907	910	920	921	922	911	903	900	894	893	887	885	883			
50	700	708	711	719	721	730	732	734	725	716	713	706	704	698	696	693			
55	513	522	524	531	533	539	541	544	540	531	528	521	518	511	509	506			
60	341	347	347	353	354	360	359	363	363	359	357	349	346	337	337	335			
65	200	201	202	204	206	209	209	211	213	212	214	208	203	199	198	198			
70	109	110	109	111	111	113	113	115	116	116	117	115	113	111	110	109			
75	74.6	74.9	74.9	75.7	76.0	76.9	77.0	77.5	78.4	78.3	78.4	77.7	77.2	76.1	75.7	75.0			
80	47.9	48.1	48.0	48.6	48.8	49.7	50.0	50.5	51.5	51.7	51.5	51.2	50.8	49.9	49.8	48.8			
85	20.5	20.6	20.4	20.1	19.8	21.1	21.9	22.8	24.0	24.2	23.4	21.9	21.3	20.9	21.7	21.8			
90	1.03	1.02	1.04	1.00	1.00	0.97	1.02	1.01	1.82	1.87	1.79	1.81	1.80	1.84	1.78	1.77			

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-04	Remarks: