
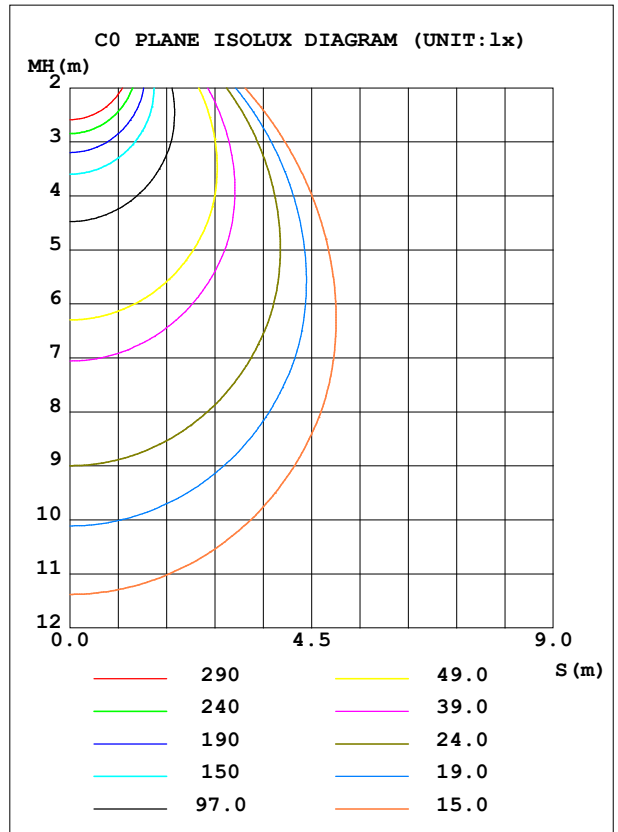


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.45V I:0.2822A P:33.422W PF:0.9916 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3880.62x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-10-40W-M-A5C5-HO	Imax (cd)	1944	S/MH (C0/180)	1.16
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	1.16
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3880.6	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	3880.62	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.25

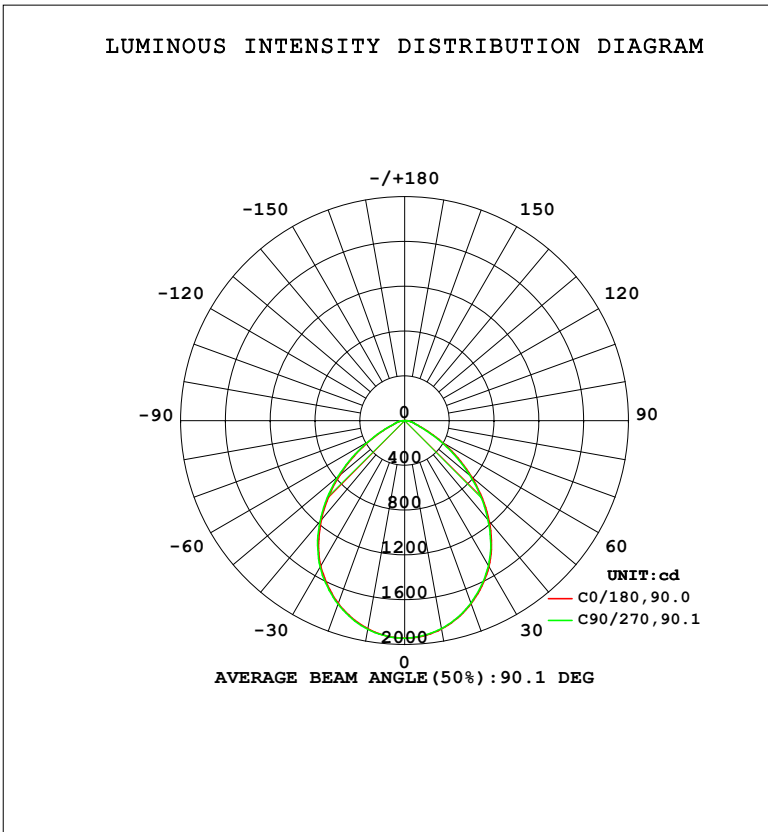

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1886	1889	1893	1892	1890	1890	1886	1882	0- 10	182.9	182.9	4.71,4.71
20	1736	1739	1743	1746	1738	1737	1733	1728	10- 20	513.9	696.7	18,18
30	1500	1505	1511	1518	1507	1504	1497	1491	20- 30	749.5	1446	37.3,37.3
40	1159	1164	1178	1187	1175	1168	1159	1154	30- 40	840.0	2286	58.9,58.9
50	756.8	766.9	777.8	789.5	782.1	770.8	760.9	753.0	40- 50	748.0	3034	78.2,78.2
60	365.4	371.4	379.0	384.8	389.0	382.9	370.8	361.3	50- 60	506.5	3541	91.2,91.2
70	117.0	117.4	119.6	122.1	124.7	125.8	122.0	118.7	60- 70	225.8	3767	97.1,97.1
80	51.62	51.88	52.77	54.08	55.58	55.68	54.81	53.73	70- 80	87.87	3854	99.3,99.3
90	1.108	1.121	1.082	1.095	1.965	1.934	1.934	1.934	80- 90	26.23	3881	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2682.5 lm

%lum = 69.1%

%lamp = 69.1%

Conical surface Flux(130deg): 3683 lm

%lum = 94.9%


%lamp = 94.9%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:119.45V I:0.2822A P:33.422W PF:0.9916 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3880.62x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

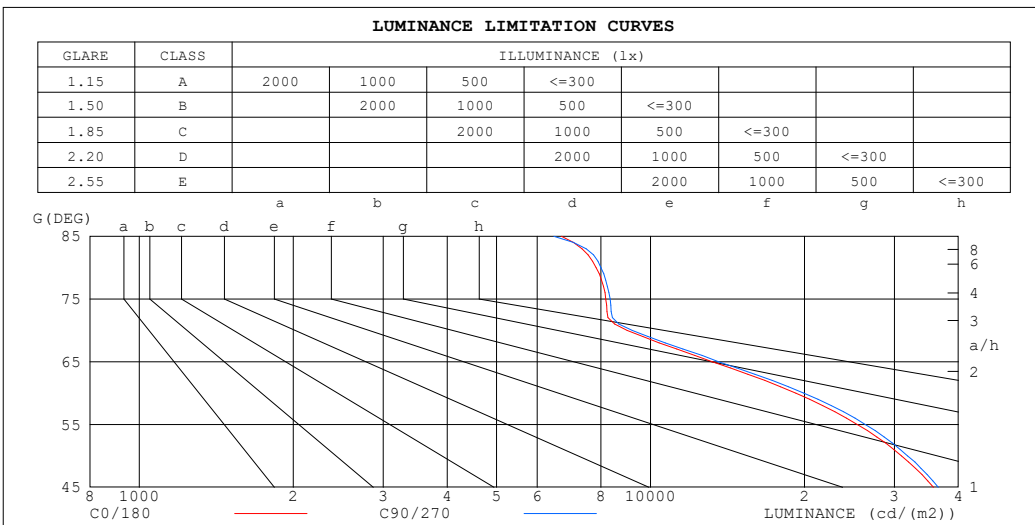

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6697	6470
80	7823	7998
75	8175	8337
70	9005	9205
65	13202	13593
60	19230	19950
55	25384	26328
50	30985	31842
45	35776	36543


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.45V I:0.2822A P:33.422W PF:0.9916 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3880.62x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.85	.94	.89	.84	.90	.86	.82	.87	.84	.81	.84	.81	.79	.77
3.0	.86	.79	.73	.84	.78	.73	.81	.76	.71	.79	.74	.70	.76	.72	.69	.67
4.0	.77	.70	.64	.76	.69	.63	.74	.67	.63	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.62	.56	.69	.61	.56	.67	.60	.55	.65	.59	.55	.63	.58	.54	.52
6.0	.64	.56	.50	.63	.55	.50	.61	.54	.49	.59	.53	.49	.58	.53	.49	.47
7.0	.58	.50	.45	.57	.50	.45	.56	.49	.44	.55	.49	.44	.53	.48	.44	.42
8.0	.54	.46	.40	.53	.45	.40	.52	.45	.40	.50	.44	.40	.49	.44	.40	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.46	.40	.36	.34
10.0	.46	.38	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.43	.37	.33	.31

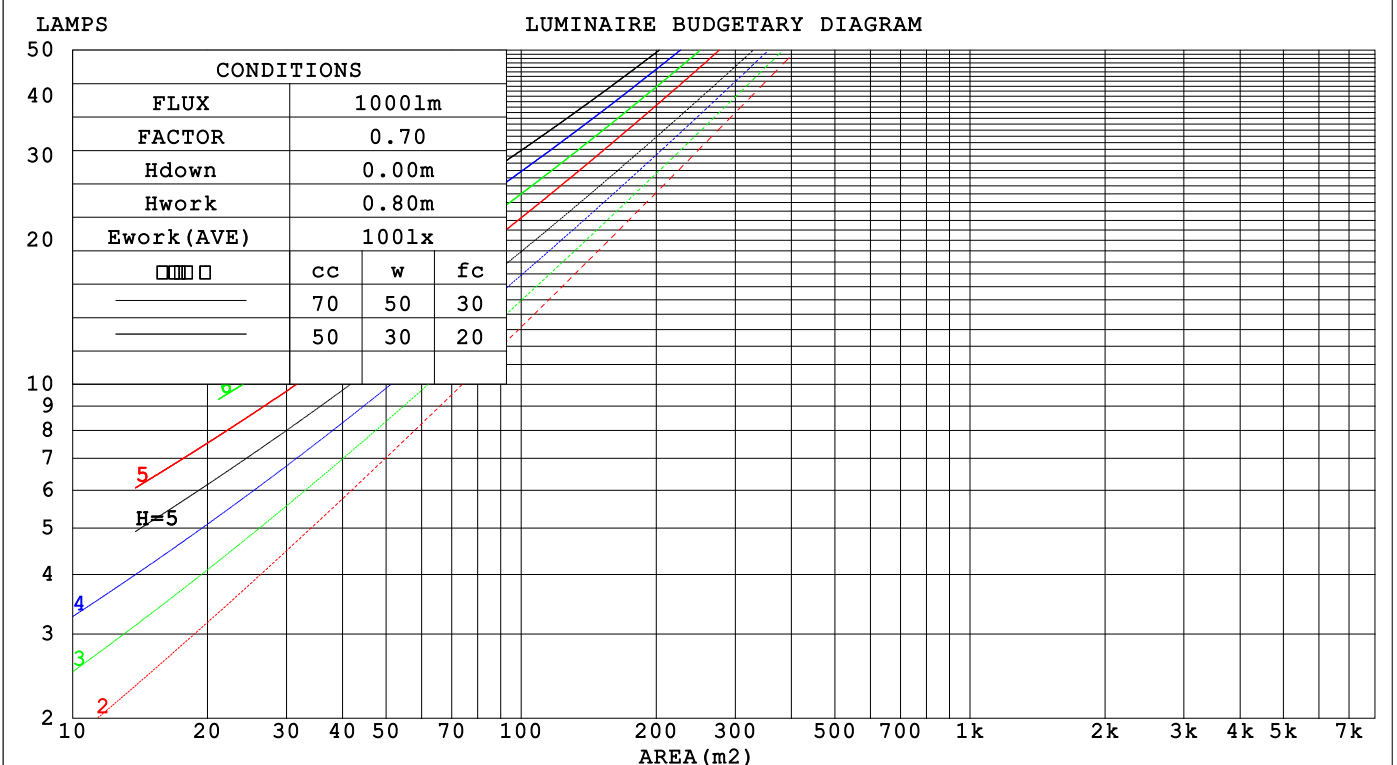

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:119.45V I:0.2822A P:33.422W PF:0.9916 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3880.62x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.249	.142	.045	.242	.138	.044	.229	.132	.042	.217	.125	.040	.206	.120	.039	
2.0	.241	.132	.041	.235	.129	.040	.224	.124	.039	.213	.120	.037	.204	.115	.036	
3.0	.228	.122	.036	.223	.120	.036	.213	.116	.035	.204	.112	.034	.196	.108	.034	
4.0	.215	.112	.033	.211	.110	.033	.202	.107	.032	.194	.104	.031	.186	.101	.031	
5.0	.202	.103	.030	.198	.102	.030	.191	.099	.029	.183	.097	.029	.177	.094	.028	
6.0	.190	.095	.027	.187	.094	.027	.180	.092	.027	.173	.090	.027	.168	.088	.026	
7.0	.179	.089	.025	.176	.088	.025	.170	.086	.025	.164	.084	.025	.159	.083	.024	
8.0	.169	.083	.023	.166	.082	.023	.161	.080	.023	.156	.079	.023	.151	.077	.023	
9.0	.160	.077	.022	.157	.077	.022	.152	.075	.021	.148	.074	.021	.143	.073	.021	
10.0	.152	.073	.020	.149	.072	.020	.145	.071	.020	.140	.070	.020	.136	.069	.020	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.176	.157	.139	.151	.134	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
3.0	.165	.132	.104	.142	.114	.090	.097	.079	.063	.056	.046	.037	.018	.015	.012	
4.0	.156	.114	.080	.134	.098	.070	.092	.068	.049	.053	.040	.029	.017	.013	.009	
5.0	.148	.100	.063	.127	.087	.055	.088	.060	.039	.051	.035	.023	.016	.012	.008	
6.0	.141	.089	.051	.121	.077	.045	.083	.054	.032	.048	.032	.019	.016	.010	.006	
7.0	.134	.081	.042	.115	.070	.037	.080	.049	.026	.046	.029	.016	.015	.009	.005	
8.0	.128	.074	.036	.110	.064	.031	.076	.045	.022	.044	.026	.013	.014	.009	.004	
9.0	.122	.068	.031	.105	.059	.027	.073	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.117	.063	.027	.100	.055	.023	.070	.038	.017	.041	.023	.010	.013	.007	.003	
10.0	.111	.059	.024	.096	.051	.021	.067	.036	.015	.039	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.45V I:0.2822A P:33.422W PF:0.9916 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3880.62x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.5	24.8	23.7	25.0	25.2	23.6	24.9	23.8	25.1	25.3
3H	23.7	24.9	24.0	25.1	25.4	23.8	25.0	24.1	25.2	25.5
4H	23.7	24.9	24.0	25.1	25.4	23.9	25.0	24.2	25.3	25.5
6H	23.8	24.9	24.1	25.1	25.4	23.9	25.0	24.2	25.3	25.5
8H	23.8	24.9	24.1	25.1	25.4	23.9	25.0	24.3	25.2	25.5
12H	23.8	24.8	24.2	25.1	25.4	23.9	24.9	24.3	25.2	25.5
4H 2H	23.6	24.8	23.9	25.0	25.2	23.7	24.9	24.0	25.1	25.3
3H	23.9	24.9	24.3	25.2	25.5	24.0	25.0	24.4	25.3	25.6
4H	24.0	25.0	24.4	25.3	25.6	24.1	25.0	24.5	25.4	25.7
6H	24.2	25.0	24.6	25.3	25.7	24.3	25.1	24.7	25.4	25.8
8H	24.2	25.0	24.6	25.3	25.7	24.3	25.1	24.7	25.4	25.8
12H	24.3	24.9	24.7	25.3	25.7	24.4	25.0	24.8	25.4	25.8
8H 4H	24.0	24.8	24.4	25.1	25.5	24.1	24.9	24.5	25.2	25.6
6H	24.3	24.9	24.7	25.3	25.7	24.4	25.0	24.8	25.4	25.8
8H	24.4	24.9	24.8	25.3	25.8	24.5	25.0	24.9	25.4	25.9
12H	24.4	24.9	24.9	25.3	25.8	24.5	25.0	25.0	25.4	25.9
12H 4H	24.0	24.7	24.4	25.1	25.5	24.1	24.8	24.5	25.2	25.6
6H	24.3	24.8	24.7	25.2	25.7	24.4	24.9	24.8	25.3	25.8
8H	24.4	24.8	24.9	25.3	25.8	24.5	24.9	25.0	25.4	25.9

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 0.8	+ 0.6 / - 0.8
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.4
2.0H	+ 1.3 / - 1.7	+ 1.3 / - 1.8

CIE Pub.117, 3881 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.7)  
 Area: 0.038 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-04	Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.45V I:0.2822A P:33.422W PF:0.9916 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3880.62x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	65	55	49	65	55	49	64	55	49	43
0.80	76	66	59	75	65	59	73	65	59	53
1.00	84	75	69	83	74	68	81	75	68	62
1.25	90	82	76	89	81	76	87	80	75	69
1.50	95	87	81	93	86	81	91	84	80	73
2.00	101	94	89	99	93	88	96	91	86	80
2.50	103	97	93	102	96	92	98	93	90	82
3.00	106	101	96	104	99	95	100	96	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	102	104	102	99	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.45V I:0.2822A P:33.422W PF:0.9916 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3880.62x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

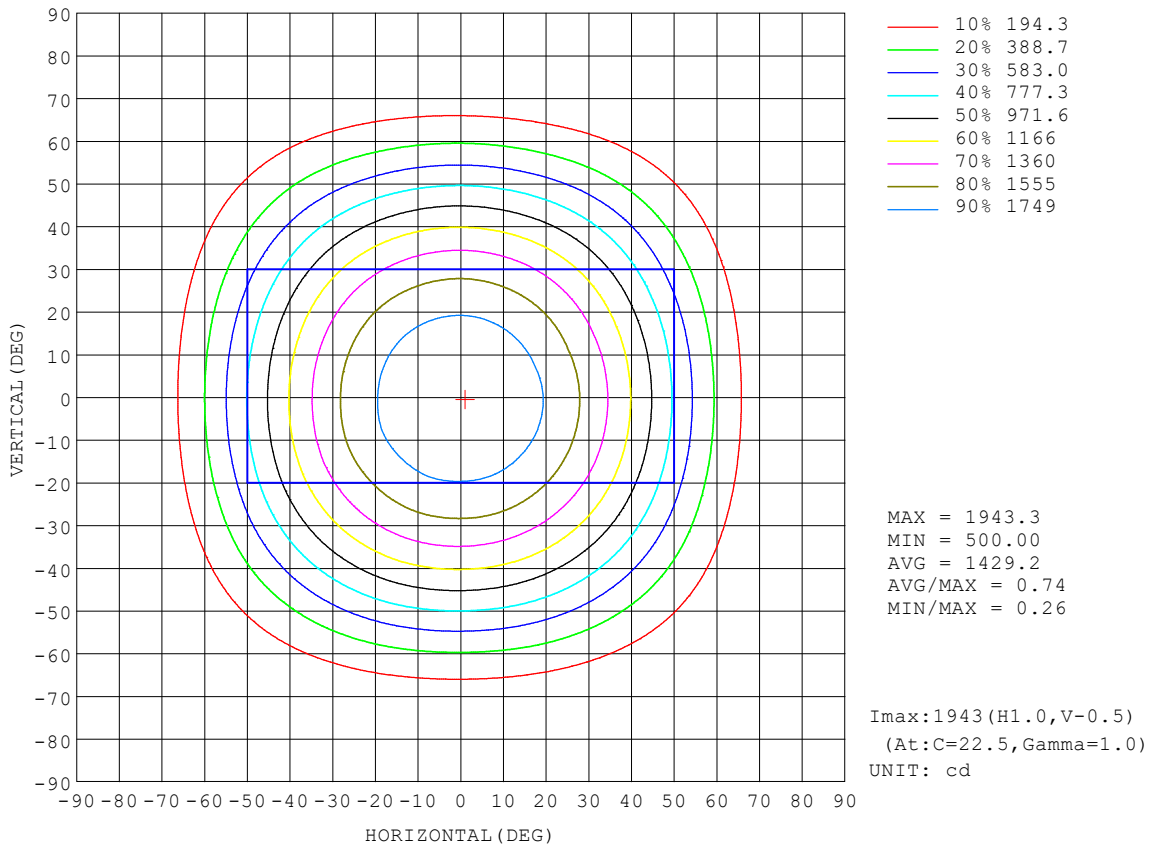


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.45V I:0.2822A P:33.422W PF:0.9916 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3880.62x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

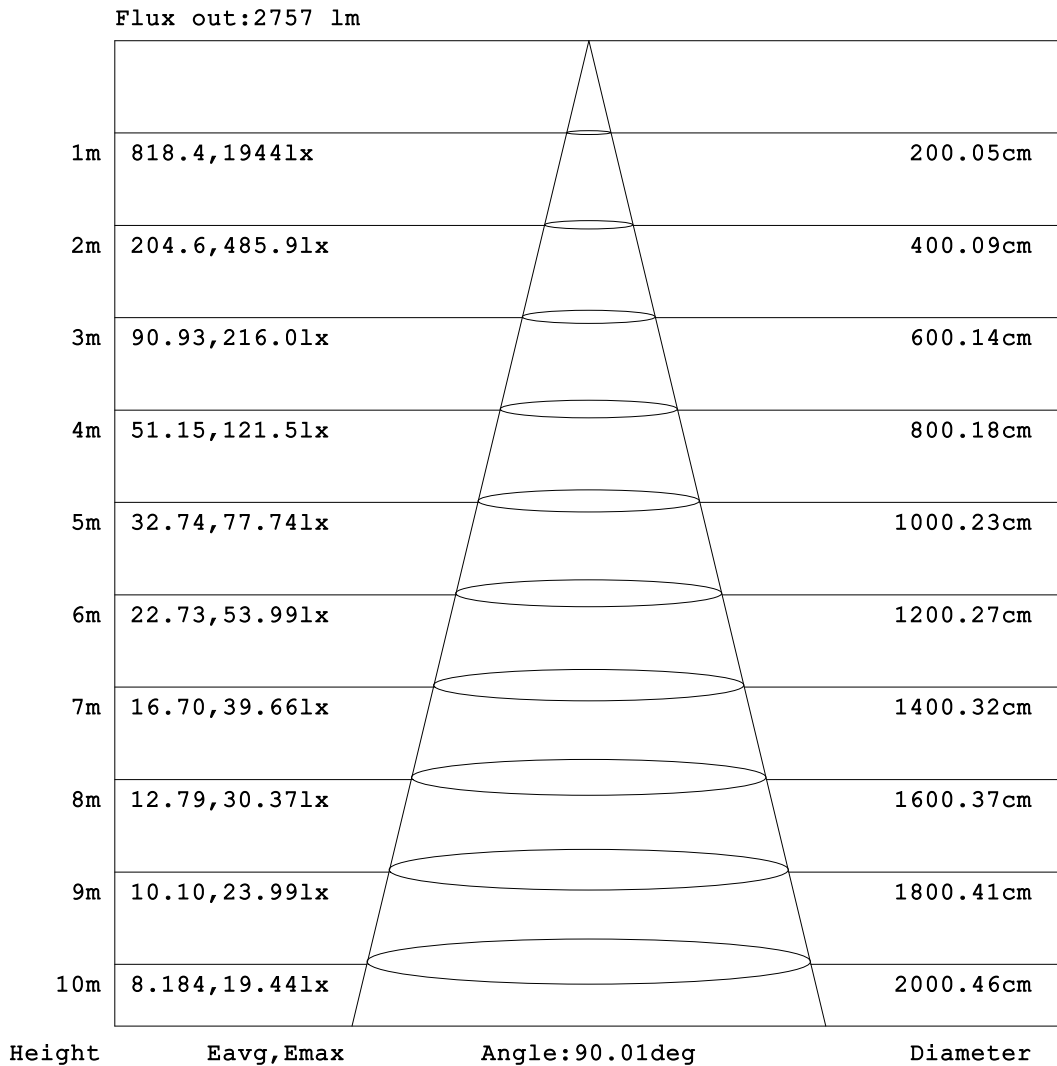


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.45V I:0.2822A P:33.422W PF:0.9916 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3880.62x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

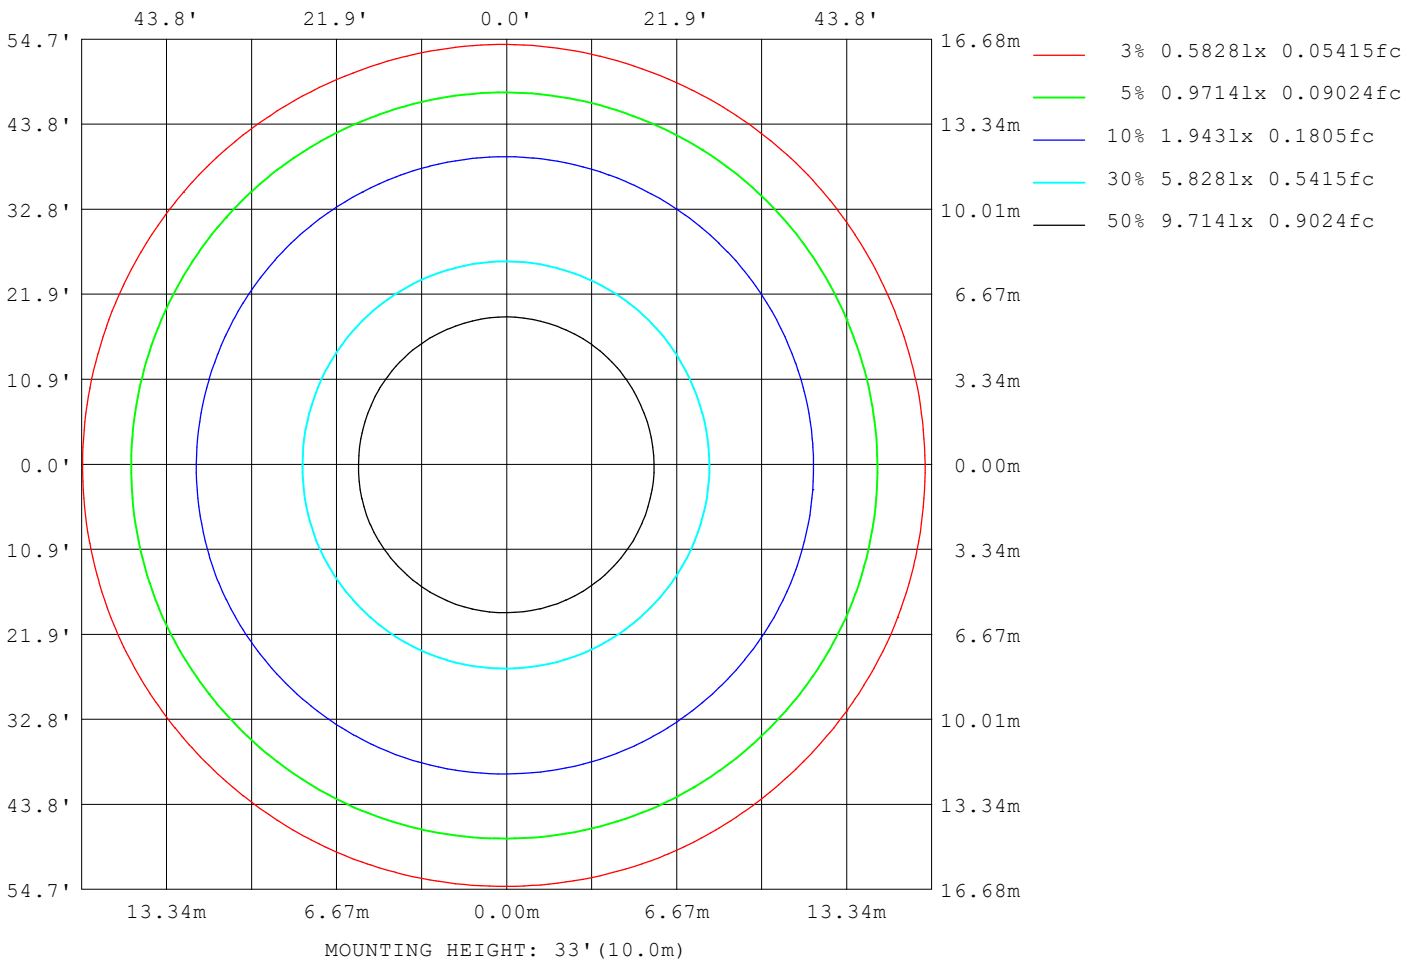

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.45V I:0.2822A P:33.422W PF:0.9916 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3880.62x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	13668
L_0~180 (75) av	8381
L_0~180 (85) av	7246
L_90~270 (65) av	13551
L_90~270 (75) av	8405
L_90~270 (85) av	6717
L_45 (65) av	13620
L_45 (75) av	8400
L_45 (85) av	7126

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:DAMIN  
 Test Date:2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

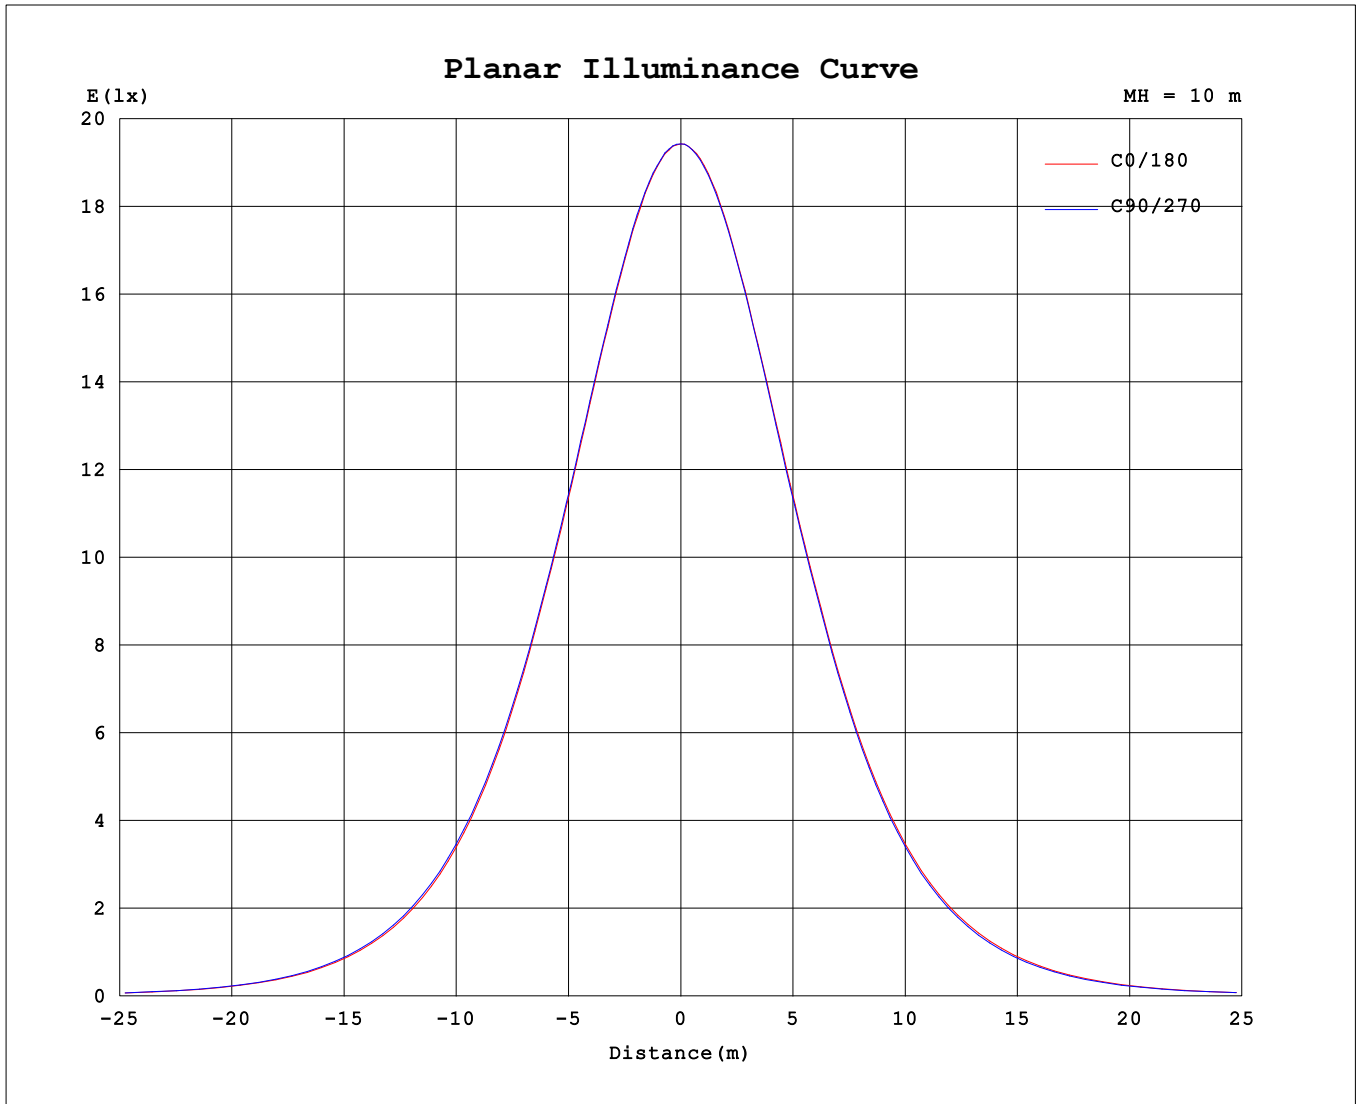

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-04

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.45V I:0.2822A P:33.422W PF:0.9916 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3880.62x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1943	1944	1943	1943	1943	1943	1940	1941	1943	1944	1943	1943	1943	1943	1940	1941			
5	1928	1928	1930	1931	1930	1932	1930	1931	1931	1930	1930	1929	1927	1927	1926	1925			
10	1886	1889	1889	1893	1893	1895	1892	1895	1890	1891	1890	1888	1886	1883	1882	1881			
15	1823	1825	1826	1830	1829	1833	1832	1833	1825	1823	1825	1824	1822	1820	1816	1815			
20	1736	1738	1739	1742	1743	1749	1746	1749	1738	1737	1737	1735	1733	1729	1728	1725			
25	1627	1629	1629	1635	1636	1642	1640	1643	1633	1629	1629	1625	1623	1618	1617	1615			
30	1500	1502	1505	1509	1511	1517	1518	1519	1507	1504	1504	1498	1497	1492	1491	1488			
35	1342	1346	1346	1351	1357	1364	1364	1366	1354	1349	1348	1343	1341	1337	1334	1331			
40	1159	1163	1164	1172	1178	1186	1187	1188	1175	1170	1168	1162	1159	1155	1154	1150			
45	961	967	969	979	982	992	992	994	982	975	972	967	965	959	957	954			
50	757	764	767	775	778	788	789	793	782	773	771	764	761	754	753	749			
55	553	562	564	572	574	582	583	587	581	573	569	562	559	551	550	546			
60	365	372	371	379	379	386	385	390	389	384	383	374	371	362	361	360			
65	212	215	213	218	218	223	222	226	227	226	228	221	217	211	212	211			
70	117	118	117	119	120	122	122	124	125	125	126	124	122	119	119	118			
75	80.4	80.9	80.9	81.7	82.0	83.0	83.2	83.8	84.4	84.5	84.7	83.9	83.3	82.2	81.7	81.1			
80	51.6	52.0	51.9	52.5	52.8	53.7	54.1	54.6	55.6	55.9	55.7	55.3	54.8	53.9	53.7	52.8			
85	22.2	22.2	22.0	21.7	21.4	22.8	23.6	24.6	25.8	26.1	25.3	23.7	23.1	22.6	23.4	23.5			
90	1.11	1.09	1.12	1.08	1.08	1.05	1.09	1.09	1.97	2.01	1.93	1.95	1.93	1.98	1.93	1.91			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:DAMIN  
 Test Date:2023-07-04

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks: