
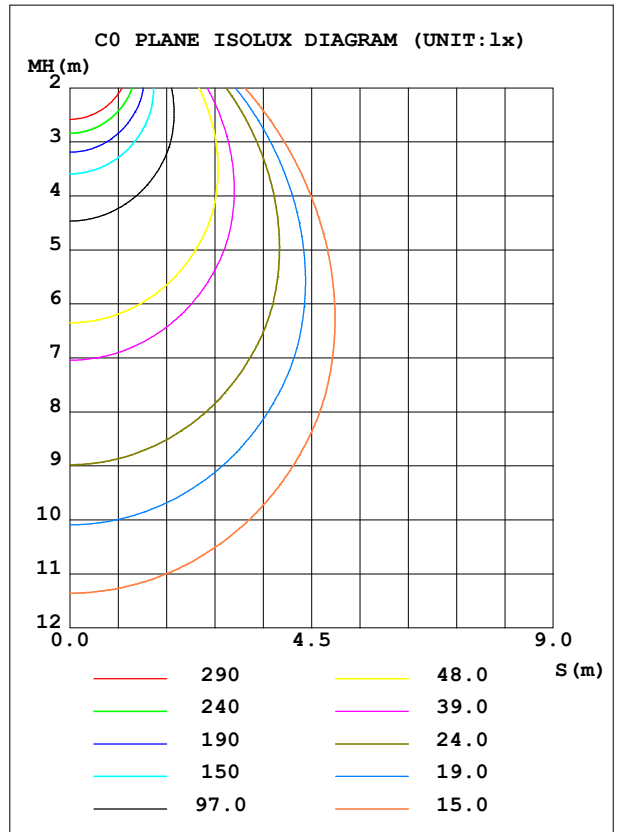


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.44V I:0.3160A P:37.472W PF:0.9929 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3851.63x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-10-40W-M-A5C5-HO	Imax (cd)	1935	S/MH (C0/180)	1.16
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	1.15
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3851.6	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	3851.63	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.25

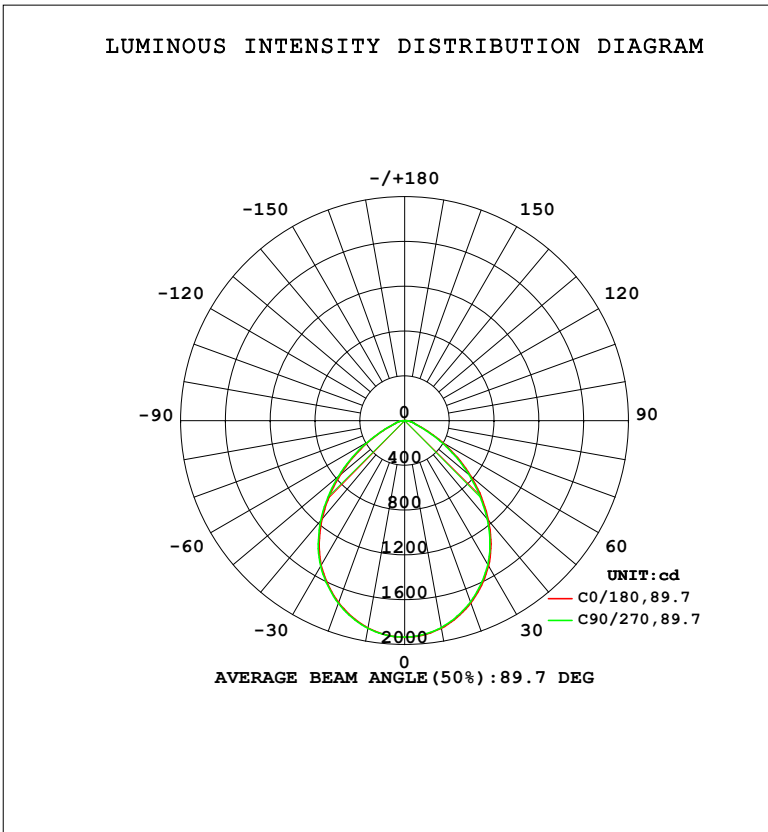

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1880	1880	1883	1883	1884	1881	1877	1873	0- 10	182.0	182.0	4.72,4.72
20	1728	1732	1735	1738	1732	1728	1721	1717	10- 20	511.3	693.2	18,18
30	1492	1496	1502	1508	1498	1493	1486	1480	20- 30	745.2	1438	37.3,37.3
40	1149	1154	1167	1176	1165	1156	1147	1141	30- 40	833.5	2272	59,59
50	746.9	758.9	770.3	780.7	773.8	760.3	750.3	742.5	40- 50	739.4	3011	78.2,78.2
60	365.0	371.2	379.0	384.2	388.4	382.3	369.3	359.6	50- 60	501.8	3513	91.2,91.2
70	116.0	116.3	118.5	121.1	123.9	124.9	121.0	117.7	60- 70	225.7	3739	97.1,97.1
80	51.03	51.24	52.17	53.49	54.96	54.98	54.17	53.07	70- 80	86.87	3826	99.3,99.3
90	1.121	1.127	1.088	1.108	1.947	1.921	1.921	1.921	80- 90	25.92	3852	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2663.9 lm

%lum = 69.2%

%lamp = 69.2%

Conical surface Flux(130deg): 3655.5 lm

%lum = 94.9%


%lamp = 94.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.44V I:0.3160A P:37.472W PF:0.9929 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3851.63x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

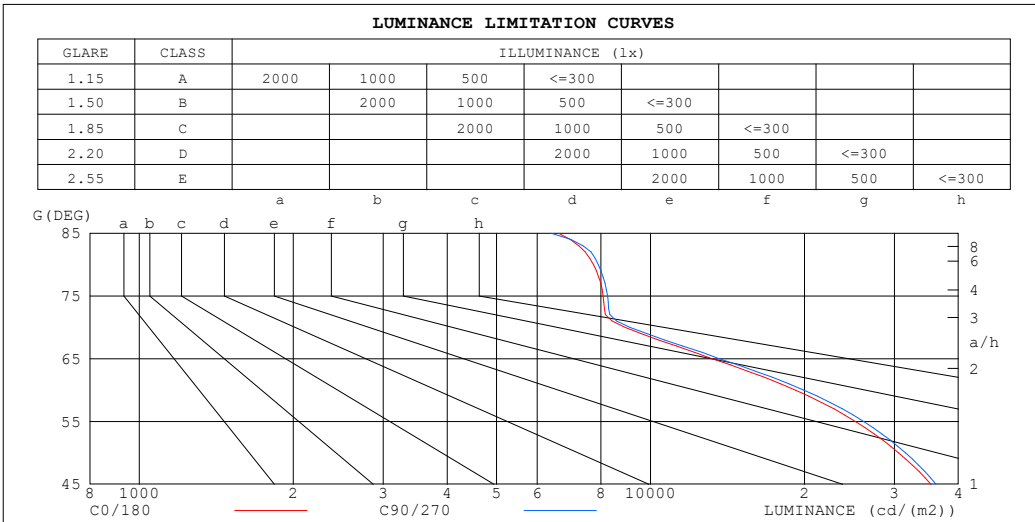

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6609	6390
80	7733	7906
75	8077	8244
70	8924	9121
65	13216	13629
60	19209	19948
55	25163	26129
50	30579	31534
45	35372	36170


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.44V I:0.3160A P:37.472W PF:0.9929 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:3851.63x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.85	.94	.89	.84	.90	.86	.82	.87	.84	.81	.84	.81	.79	.77
3.0	.86	.79	.73	.84	.78	.73	.82	.76	.71	.79	.74	.70	.76	.73	.69	.67
4.0	.77	.70	.64	.76	.69	.63	.74	.68	.63	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.62	.56	.69	.61	.56	.67	.60	.55	.65	.59	.55	.63	.58	.54	.52
6.0	.64	.56	.50	.63	.55	.50	.61	.54	.49	.59	.54	.49	.58	.53	.49	.47
7.0	.58	.50	.45	.57	.50	.45	.56	.49	.44	.55	.49	.44	.53	.48	.44	.42
8.0	.54	.46	.40	.53	.45	.40	.52	.45	.40	.50	.44	.40	.49	.44	.40	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.46	.40	.36	.34
10.0	.46	.38	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.43	.37	.33	.31

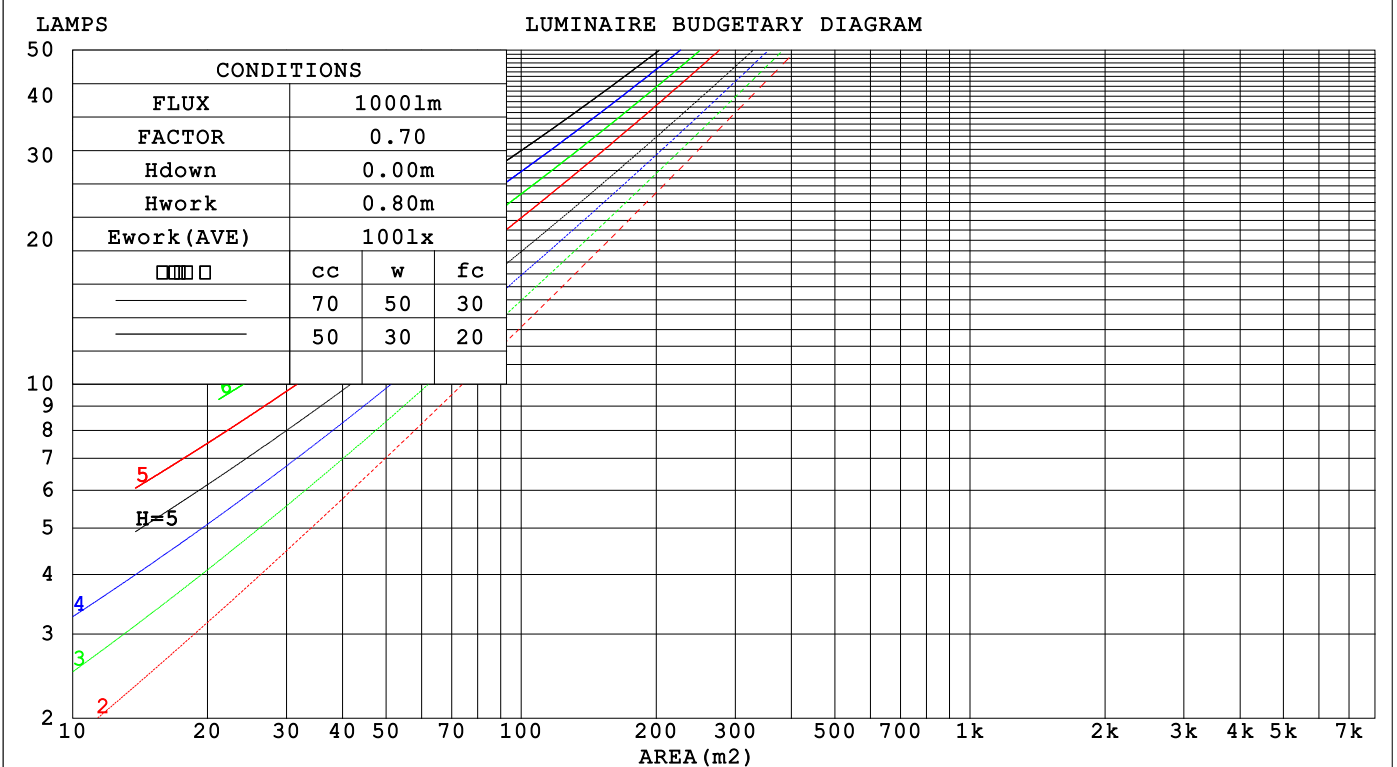

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.44V I:0.3160A P:37.472W PF:0.9929 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3851.63x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.249	.142	.045	.242	.138	.044	.229	.132	.042	.217	.125	.040	.206	.120	.039	
2.0	.241	.132	.040	.235	.129	.040	.224	.124	.039	.213	.120	.037	.204	.115	.036	
3.0	.228	.122	.036	.223	.119	.036	.213	.116	.035	.204	.112	.034	.196	.108	.034	
4.0	.215	.112	.033	.210	.110	.033	.202	.107	.032	.194	.104	.031	.186	.101	.031	
5.0	.202	.103	.030	.198	.102	.030	.191	.099	.029	.183	.097	.029	.177	.094	.028	
6.0	.190	.095	.027	.187	.094	.027	.180	.092	.027	.173	.090	.026	.167	.088	.026	
7.0	.179	.089	.025	.176	.088	.025	.170	.086	.025	.164	.084	.024	.159	.082	.024	
8.0	.169	.083	.023	.166	.082	.023	.161	.080	.023	.156	.079	.023	.151	.077	.023	
9.0	.160	.077	.022	.157	.077	.022	.152	.075	.021	.148	.074	.021	.143	.073	.021	
10.0	.151	.073	.020	.149	.072	.020	.145	.071	.020	.140	.070	.020	.136	.069	.020	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.176	.157	.139	.151	.134	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
3.0	.165	.132	.104	.142	.114	.090	.097	.079	.063	.056	.046	.037	.018	.015	.012	
4.0	.156	.114	.080	.134	.098	.070	.092	.068	.049	.053	.040	.029	.017	.013	.009	
5.0	.148	.100	.063	.127	.087	.055	.088	.060	.039	.051	.035	.023	.016	.012	.008	
6.0	.141	.089	.051	.121	.077	.045	.083	.054	.032	.048	.032	.019	.016	.010	.006	
7.0	.134	.081	.042	.115	.070	.037	.080	.049	.026	.046	.029	.016	.015	.009	.005	
8.0	.128	.074	.036	.110	.064	.031	.076	.045	.022	.044	.026	.013	.014	.009	.004	
9.0	.122	.068	.031	.105	.059	.027	.073	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.117	.063	.027	.100	.055	.023	.070	.038	.017	.041	.023	.010	.013	.007	.003	
10.0	.111	.059	.024	.096	.051	.021	.067	.036	.015	.039	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.44V I:0.3160A P:37.472W PF:0.9929 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3851.63x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.4	24.8	23.7	25.0	25.2	23.5	24.9	23.8	25.1	25.3
3H	23.7	24.9	23.9	25.1	25.3	23.8	25.0	24.1	25.2	25.5
4H	23.7	24.9	24.0	25.1	25.4	23.8	25.0	24.1	25.2	25.5
6H	23.8	24.9	24.1	25.1	25.4	23.9	25.0	24.2	25.2	25.5
8H	23.8	24.8	24.1	25.1	25.4	23.9	25.0	24.2	25.2	25.5
12H	23.8	24.8	24.1	25.1	25.4	23.9	24.9	24.2	25.2	25.5
4H 2H	23.6	24.7	23.9	25.0	25.2	23.7	24.8	24.0	25.1	25.3
3H	23.9	24.9	24.2	25.2	25.5	24.0	25.0	24.3	25.3	25.6
4H	24.0	24.9	24.4	25.2	25.6	24.1	25.0	24.5	25.3	25.7
6H	24.2	25.0	24.6	25.3	25.7	24.3	25.1	24.7	25.4	25.8
8H	24.2	25.0	24.6	25.3	25.7	24.3	25.1	24.7	25.4	25.8
12H	24.2	24.9	24.7	25.3	25.7	24.3	25.0	24.8	25.4	25.8
8H 4H	24.0	24.8	24.4	25.1	25.5	24.1	24.9	24.5	25.2	25.6
6H	24.2	24.8	24.7	25.2	25.7	24.3	24.9	24.8	25.3	25.8
8H	24.3	24.9	24.8	25.3	25.7	24.4	25.0	24.9	25.4	25.8
12H	24.4	24.9	24.9	25.3	25.8	24.5	25.0	25.0	25.4	25.9
12H 4H	24.0	24.7	24.4	25.0	25.4	24.1	24.8	24.5	25.1	25.5
6H	24.2	24.8	24.7	25.2	25.6	24.3	24.9	24.8	25.3	25.7
8H	24.4	24.8	24.8	25.3	25.7	24.5	24.9	24.9	25.4	25.8

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 0.8	+ 0.6 / - 0.8
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.4
2.0H	+ 1.3 / - 1.7	+ 1.3 / - 1.7

CIE Pub.117, 3852 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.7)
Area: 0.038 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-04	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.44V I:0.3160A P:37.472W PF:0.9929 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3851.63x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	65	55	49	65	55	49	64	55	49	43
0.80	76	66	59	75	65	59	73	65	59	53
1.00	84	75	69	83	74	68	81	75	68	62
1.25	90	82	76	89	81	76	87	80	75	69
1.50	95	87	81	93	86	81	91	84	80	73
2.00	101	94	89	99	93	88	96	91	86	80
2.50	103	97	93	102	96	92	98	93	90	82
3.00	106	101	96	104	99	95	100	96	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	102	104	102	99	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.44V I:0.3160A P:37.472W PF:0.9929 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3851.63x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

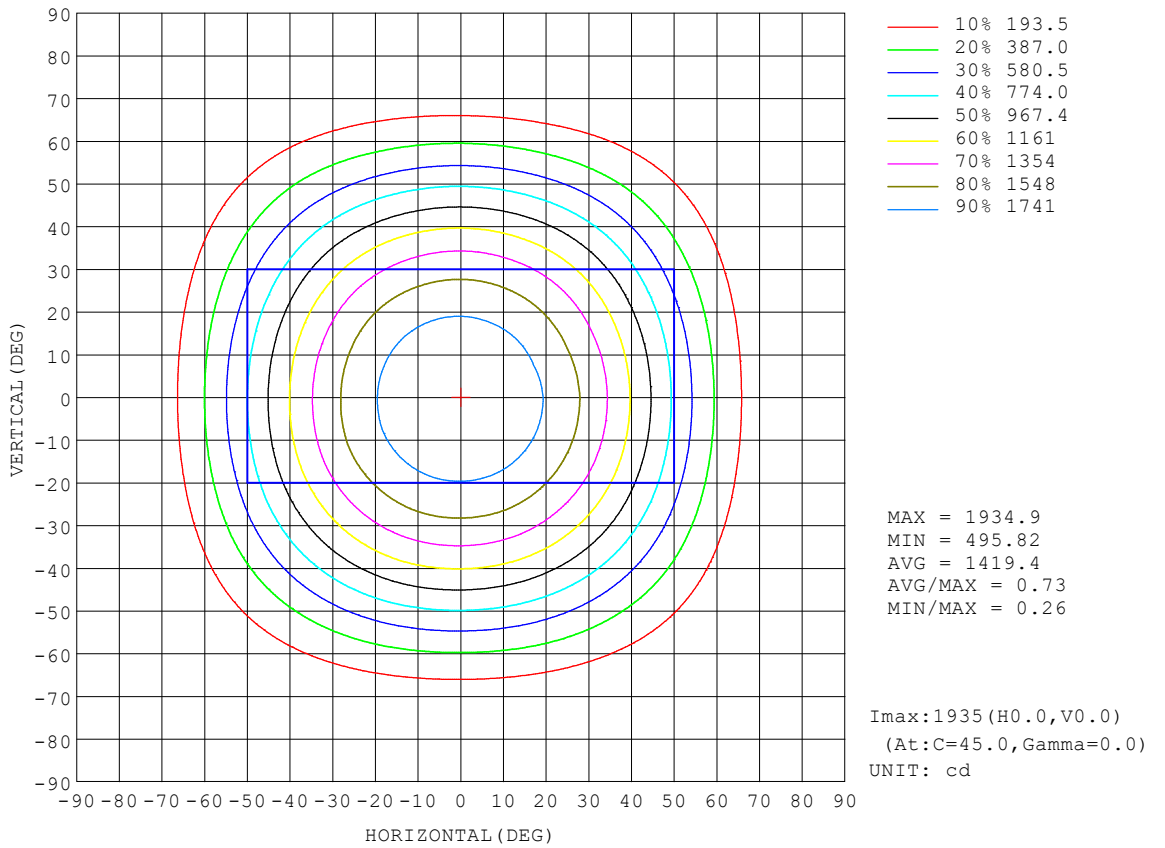


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.44V I:0.3160A P:37.472W PF:0.9929 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3851.63x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Flux out:2664 lm

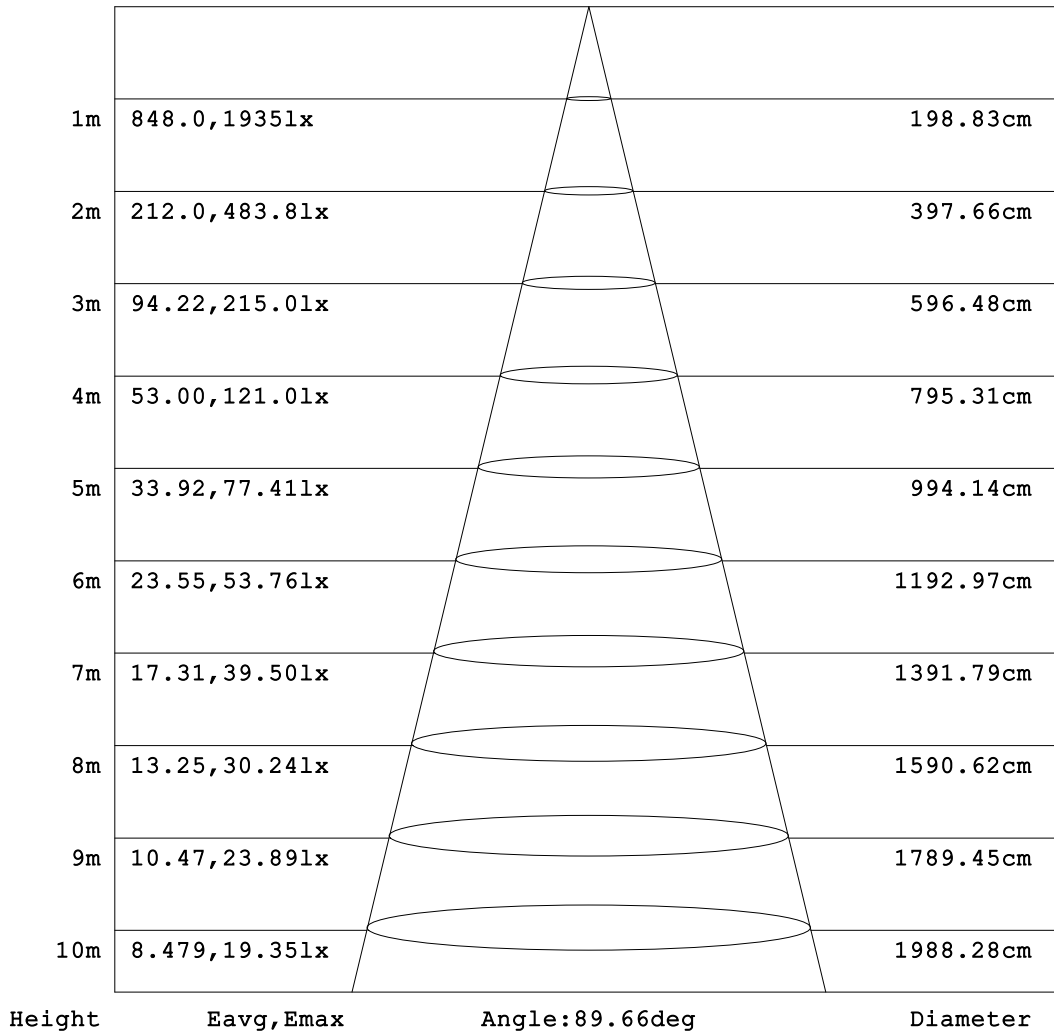


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.44V I:0.3160A P:37.472W PF:0.9929 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3851.63x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

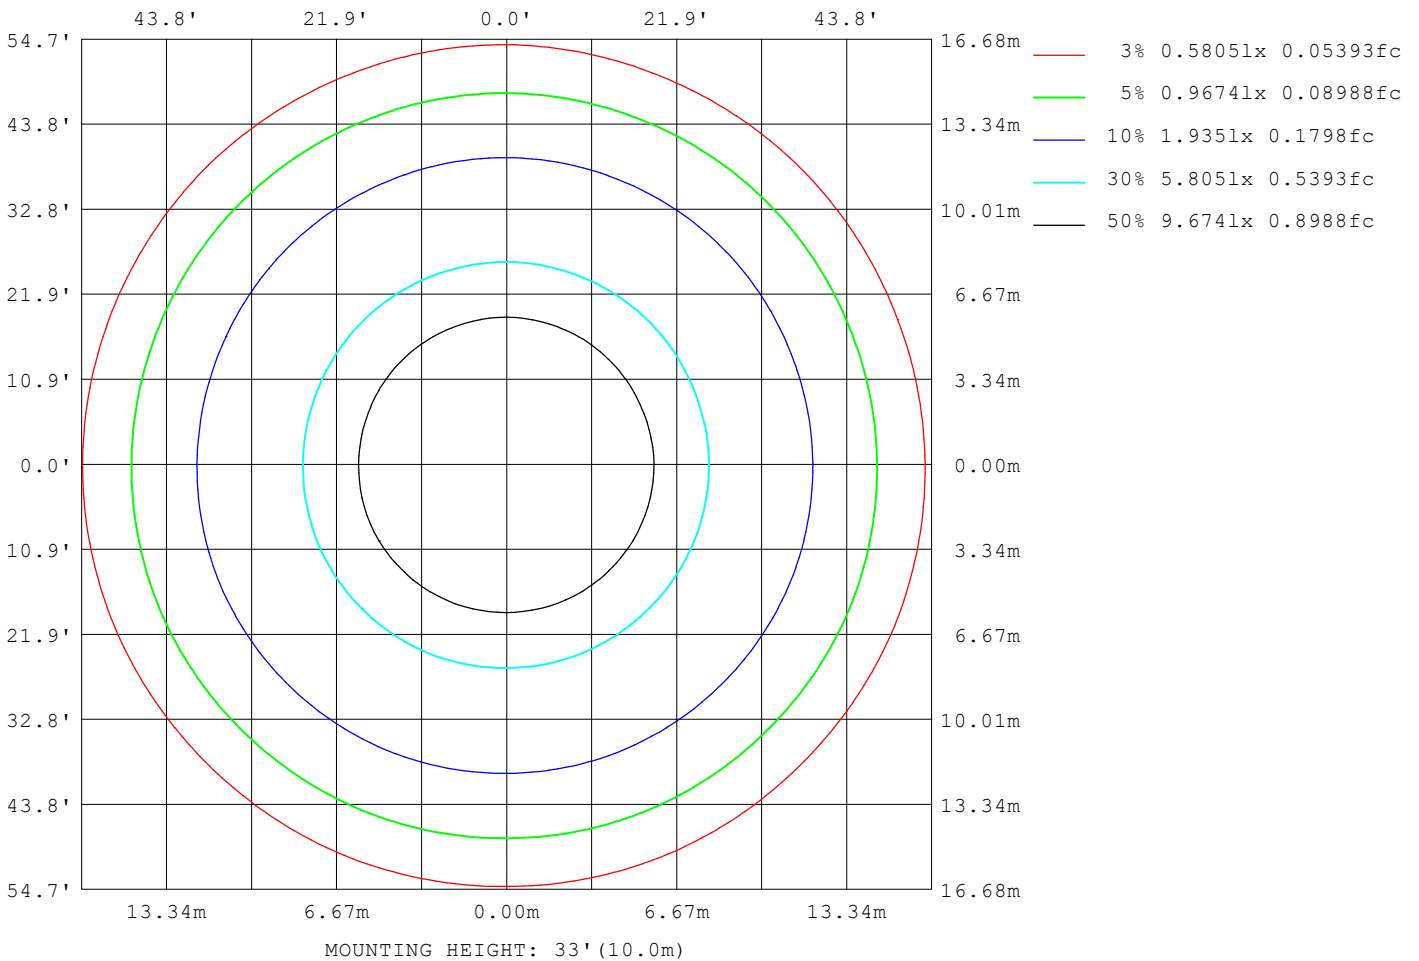

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.44V I:0.3160A P:37.472W PF:0.9929 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3851.63x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	13703
L_0~180 (75) av	8287
L_0~180 (85) av	7162
L_90~270 (65) av	13577
L_90~270 (75) av	8308
L_90~270 (85) av	6633
L_45 (65) av	13640
L_45 (75) av	8296
L_45 (85) av	7039

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

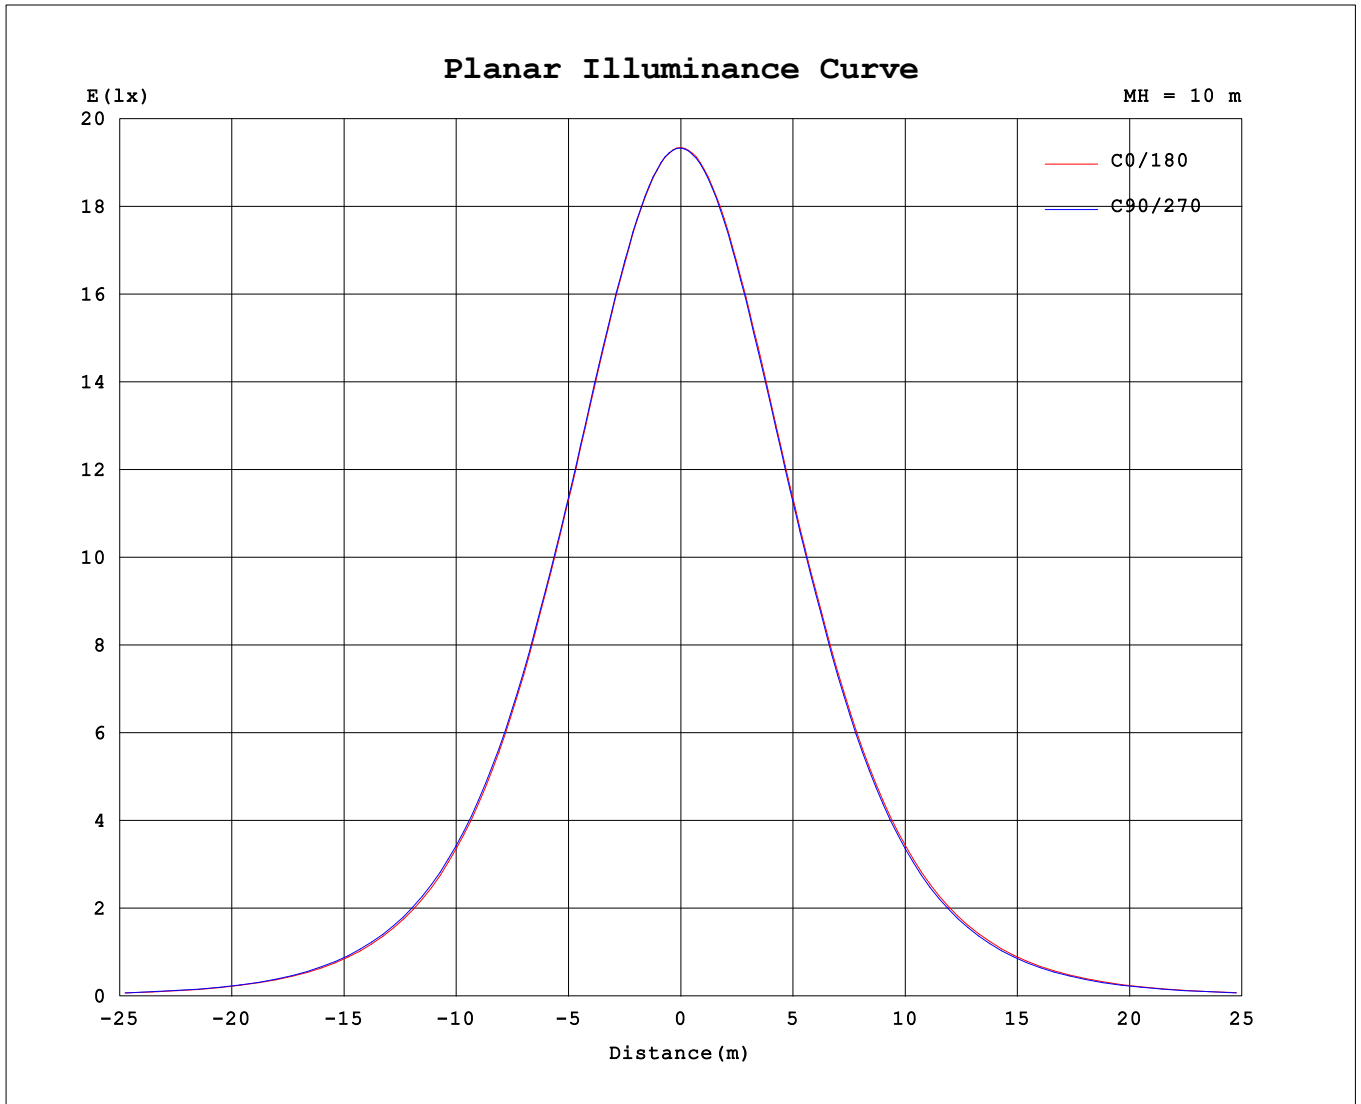

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 9.680m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.44V I:0.3160A P:37.472W PF:0.9929 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3851.63x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1935	1934	1935	1934	1933	1932	1931	1931	1935	1934	1935	1934	1933	1932	1931	1931			
5	1920	1920	1922	1921	1922	1921	1921	1922	1922	1921	1920	1918	1918	1916	1916	1915			
10	1880	1882	1880	1883	1883	1885	1883	1885	1884	1881	1881	1878	1877	1873	1873	1872			
15	1816	1817	1816	1820	1820	1823	1824	1822	1818	1816	1816	1813	1810	1808	1805	1804			
20	1728	1730	1732	1734	1735	1738	1738	1738	1732	1729	1728	1725	1721	1717	1717	1716			
25	1618	1622	1621	1627	1626	1631	1632	1633	1624	1620	1620	1614	1613	1608	1607	1605			
30	1492	1494	1496	1501	1502	1508	1508	1509	1498	1495	1493	1488	1486	1482	1480	1479			
35	1332	1335	1335	1343	1346	1353	1354	1356	1346	1339	1338	1331	1330	1324	1324	1320			
40	1149	1152	1154	1162	1167	1176	1176	1177	1165	1158	1156	1150	1147	1141	1141	1138			
45	950	956	959	967	972	981	983	983	973	964	961	953	950	946	945	941			
50	747	755	759	766	770	779	781	783	774	764	760	753	750	744	743	738			
55	548	558	560	567	570	576	578	582	576	568	564	555	552	545	543	541			
60	365	371	371	379	379	385	384	389	388	384	382	373	369	360	360	359			
65	212	215	214	219	219	224	222	226	228	227	229	221	217	210	212	211			
70	116	117	116	118	119	121	121	122	124	124	125	123	121	118	118	117			
75	79.4	79.9	79.9	80.7	81.1	81.9	82.2	82.7	83.6	83.5	83.7	82.8	82.3	81.2	80.6	80.0			
80	51.0	51.3	51.2	51.8	52.2	53.2	53.5	53.9	55.0	55.1	55.0	54.6	54.2	53.2	53.1	52.1			
85	21.9	22.0	21.8	21.4	21.2	22.5	23.4	24.3	25.6	25.7	25.0	23.5	22.8	22.3	23.1	23.1			
90	1.12	1.10	1.13	1.09	1.09	1.06	1.11	1.09	1.95	1.99	1.92	1.94	1.92	1.96	1.92	1.90			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks: