
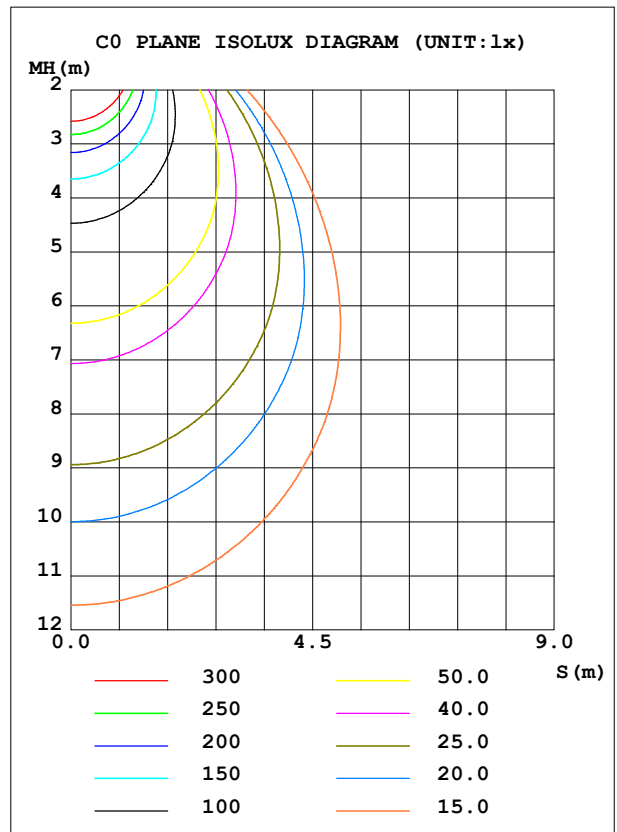


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.42V I:0.3174A P:37.635W PF:0.9930 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3979.05x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-10-40W-M-A5C5-HO	Imax (cd)	1999	S/MH (C0/180)	1.16
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	1.15
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3979.0	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	3979.05	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.25

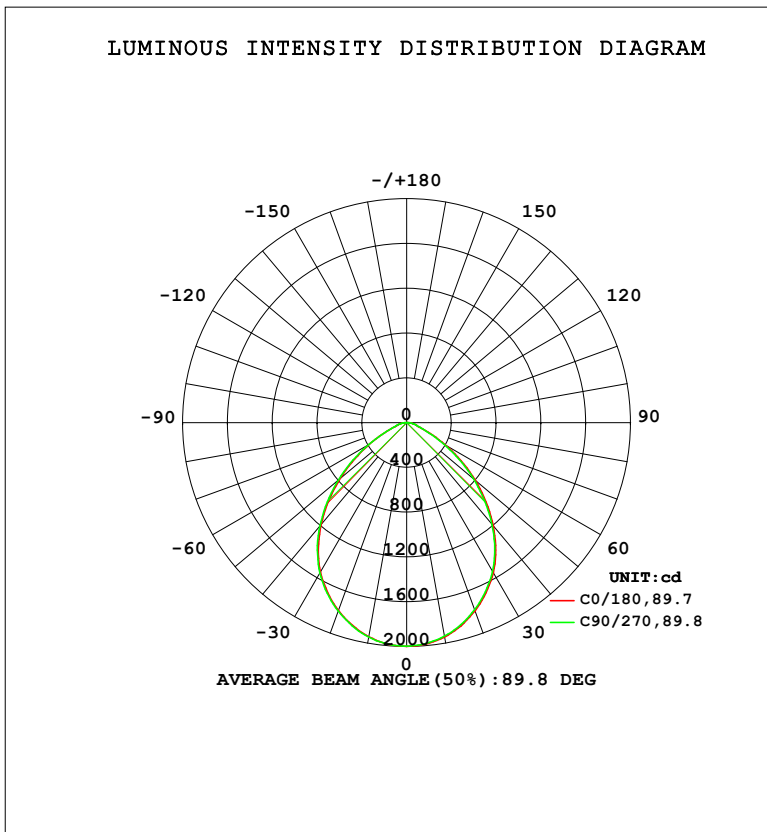

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1943	1942	1945	1945	1945	1942	1937	1934	0- 10	187.9	187.9	4.72,4.72
20	1783	1786	1790	1794	1789	1784	1778	1772	10- 20	527.8	715.7	18,18
30	1542	1544	1551	1558	1549	1543	1535	1530	20- 30	769.6	1485	37.3,37.3
40	1187	1193	1206	1215	1205	1196	1185	1179	30- 40	861.1	2346	59,59
50	773.2	784.3	796.3	807.3	800.0	787.3	776.2	769.2	40- 50	764.6	3111	78.2,78.2
60	376.2	382.3	390.5	395.7	401.3	394.0	381.6	371.4	50- 60	518.6	3630	91.2,91.2
70	119.8	120.3	122.6	125.0	128.1	129.2	124.9	121.7	60- 70	232.7	3862	97.1,97.1
80	52.76	52.98	53.90	55.21	56.90	56.89	56.03	54.86	70- 80	89.82	3952	99.3,99.3
90	1.154	1.160	1.114	1.141	2.025	1.988	1.986	1.980	80- 90	26.81	3979	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2751.7 lm

%lum = 69.2%

%lamp = 69.2%

Conical surface Flux(130deg): 3776.4 lm

%lum = 94.9%


%lamp = 94.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.42V I:0.3174A P:37.635W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3979.05x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

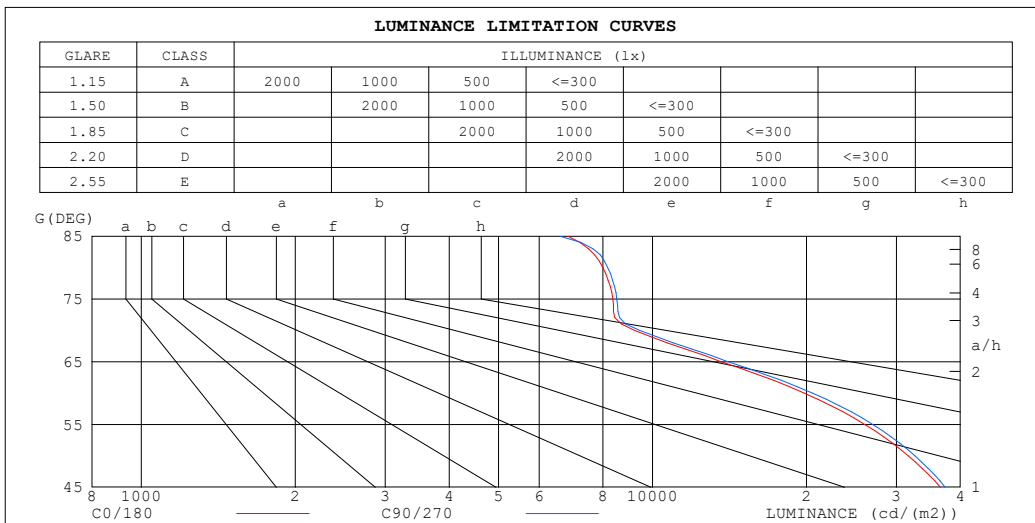

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6830	6605
80	7996	8168
75	8357	8512
70	9220	9432
65	13606	14057
60	19800	20552
55	25999	26965
50	31656	32601
45	36577	37364


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.42V I:0.3174A P:37.635W PF:0.9930 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:3979.05x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.85	.94	.89	.84	.90	.86	.82	.87	.84	.81	.84	.81	.79	.77
3.0	.86	.79	.73	.84	.78	.73	.82	.76	.71	.79	.74	.70	.76	.73	.69	.67
4.0	.77	.70	.64	.76	.69	.63	.74	.68	.63	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.62	.56	.69	.61	.56	.67	.60	.55	.65	.59	.55	.63	.58	.54	.52
6.0	.64	.56	.50	.63	.55	.50	.61	.54	.49	.59	.53	.49	.58	.53	.49	.47
7.0	.58	.50	.45	.57	.50	.45	.56	.49	.44	.55	.49	.44	.53	.48	.44	.42
8.0	.54	.46	.40	.53	.45	.40	.52	.45	.40	.50	.44	.40	.49	.44	.40	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.46	.40	.36	.34
10.0	.46	.38	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.43	.37	.33	.31

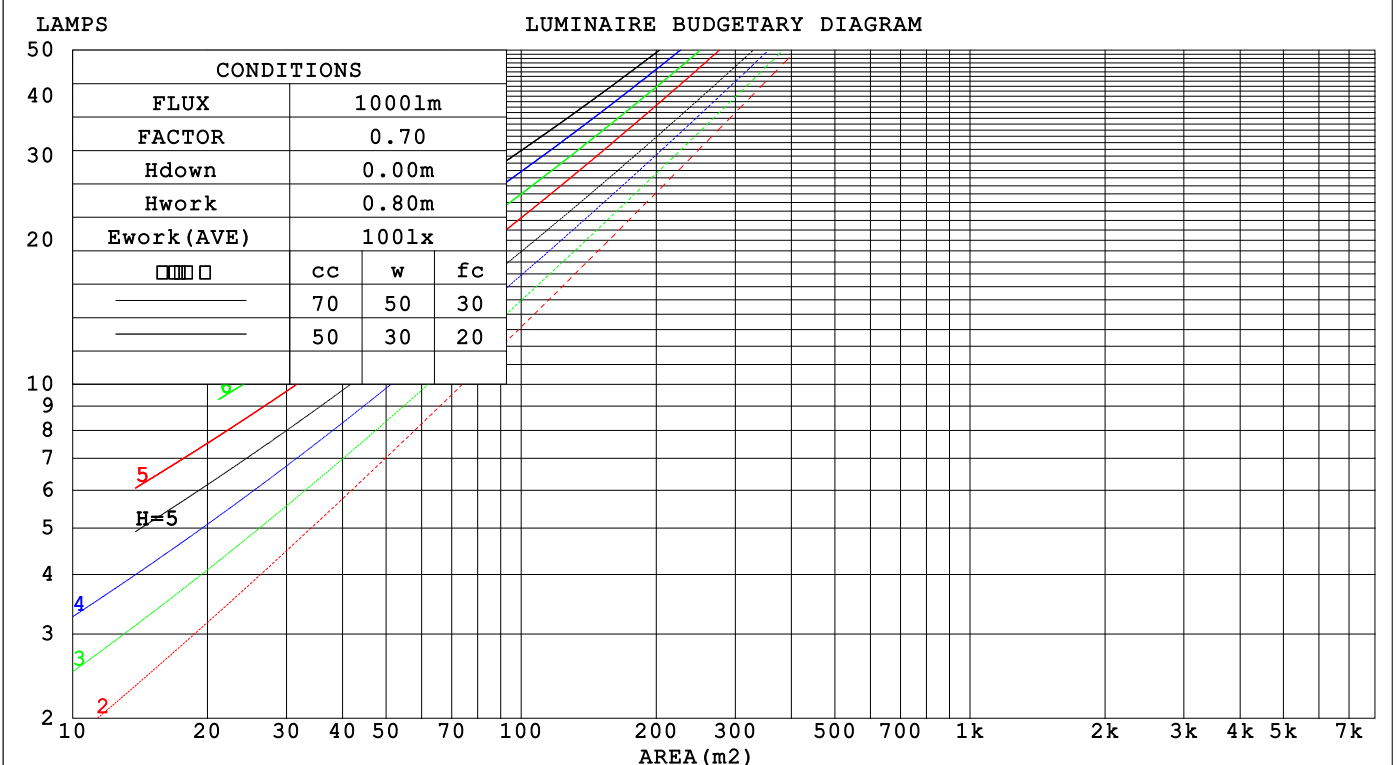

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.42V I:0.3174A P:37.635W PF:0.9930 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3979.05x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients(WEC)			
0.0						
1.0	.249 .142 .045	.242 .138 .044	.229 .132 .042	.217 .125 .040	.206 .120 .039	
2.0	.241 .132 .041	.235 .129 .040	.224 .124 .039	.213 .120 .037	.204 .115 .036	
3.0	.228 .122 .036	.223 .119 .036	.213 .116 .035	.204 .112 .034	.196 .108 .034	
4.0	.215 .112 .033	.210 .110 .033	.202 .107 .032	.194 .104 .031	.186 .101 .031	
5.0	.202 .103 .030	.198 .102 .030	.191 .099 .029	.183 .097 .029	.177 .094 .028	
6.0	.190 .095 .027	.187 .094 .027	.180 .092 .027	.173 .090 .026	.167 .088 .026	
7.0	.179 .089 .025	.176 .088 .025	.170 .086 .025	.164 .084 .024	.159 .083 .024	
8.0	.169 .083 .023	.166 .082 .023	.161 .080 .023	.156 .079 .023	.151 .077 .023	
9.0	.160 .077 .022	.157 .077 .022	.152 .075 .021	.148 .074 .021	.143 .073 .021	
10.0	.151 .073 .020	.149 .072 .020	.145 .071 .020	.140 .070 .020	.136 .069 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients(CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.176 .157 .139	.151 .134 .120	.103 .093 .083	.059 .054 .048	.019 .017 .016	
2.0	.165 .132 .104	.142 .114 .090	.097 .079 .063	.056 .046 .037	.018 .015 .012	
3.0	.156 .114 .080	.134 .098 .070	.092 .068 .049	.053 .040 .029	.017 .013 .009	
4.0	.148 .100 .063	.127 .087 .055	.088 .060 .039	.051 .035 .023	.016 .012 .008	
5.0	.141 .089 .051	.121 .077 .045	.083 .054 .032	.048 .032 .019	.016 .010 .006	
6.0	.134 .081 .042	.115 .070 .037	.080 .049 .026	.046 .029 .016	.015 .009 .005	
7.0	.128 .074 .036	.110 .064 .031	.076 .045 .022	.044 .026 .013	.014 .009 .004	
8.0	.122 .068 .031	.105 .059 .027	.073 .041 .019	.042 .024 .011	.014 .008 .004	
9.0	.117 .063 .027	.100 .055 .023	.070 .038 .017	.041 .023 .010	.013 .007 .003	
10.0	.111 .059 .024	.096 .051 .021	.067 .036 .015	.039 .021 .009	.013 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.42V I:0.3174A P:37.635W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3979.05x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.5	24.9	23.8	25.1	25.3	23.7	25.0	23.9	25.2	25.4
3H	23.8	25.0	24.1	25.2	25.4	23.9	25.1	24.2	25.3	25.6
4H	23.8	25.0	24.1	25.2	25.5	23.9	25.1	24.3	25.3	25.6
6H	23.9	25.0	24.2	25.2	25.5	24.0	25.1	24.3	25.3	25.6
8H	23.9	24.9	24.2	25.2	25.5	24.0	25.1	24.4	25.3	25.6
12H	23.9	24.9	24.2	25.2	25.5	24.0	25.0	24.4	25.3	25.6
4H 2H	23.7	24.8	24.0	25.1	25.3	23.8	24.9	24.1	25.2	25.4
3H	24.0	25.0	24.3	25.3	25.6	24.1	25.1	24.4	25.4	25.7
4H	24.1	25.0	24.5	25.4	25.7	24.2	25.1	24.6	25.5	25.8
6H	24.3	25.1	24.7	25.4	25.8	24.4	25.2	24.8	25.5	25.9
8H	24.3	25.1	24.7	25.4	25.8	24.4	25.2	24.8	25.5	25.9
12H	24.4	25.0	24.8	25.4	25.8	24.4	25.1	24.9	25.5	25.9
8H 4H	24.1	24.9	24.5	25.2	25.6	24.2	25.0	24.6	25.3	25.7
6H	24.4	25.0	24.8	25.4	25.8	24.4	25.1	24.9	25.5	25.9
8H	24.5	25.0	24.9	25.4	25.9	24.5	25.1	25.0	25.5	25.9
12H	24.5	25.0	25.0	25.4	25.9	24.6	25.1	25.1	25.5	26.0
12H 4H	24.1	24.8	24.5	25.2	25.6	24.2	24.9	24.6	25.3	25.7
6H	24.4	24.9	24.8	25.3	25.8	24.4	25.0	24.9	25.4	25.8
8H	24.5	24.9	24.9	25.4	25.8	24.6	25.0	25.0	25.5	25.9

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 0.8	+ 0.6 / - 0.8
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.4
2.0H	+ 1.3 / - 1.7	+ 1.3 / - 1.7

CIE Pub.117, 3979 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.8)
 Area: 0.038 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-04	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.42V I:0.3174A P:37.635W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3979.05x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	65	55	49	65	55	49	64	55	49	43
0.80	76	66	59	75	65	59	73	65	59	53
1.00	84	75	69	83	74	68	81	75	68	62
1.25	90	82	76	89	81	76	87	80	75	69
1.50	95	87	81	93	86	81	91	84	80	73
2.00	101	94	89	99	93	88	96	91	86	80
2.50	103	97	93	102	96	92	98	93	90	82
3.00	106	101	96	104	99	95	100	96	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	102	104	102	99	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.42V I:0.3174A P:37.635W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3979.05x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

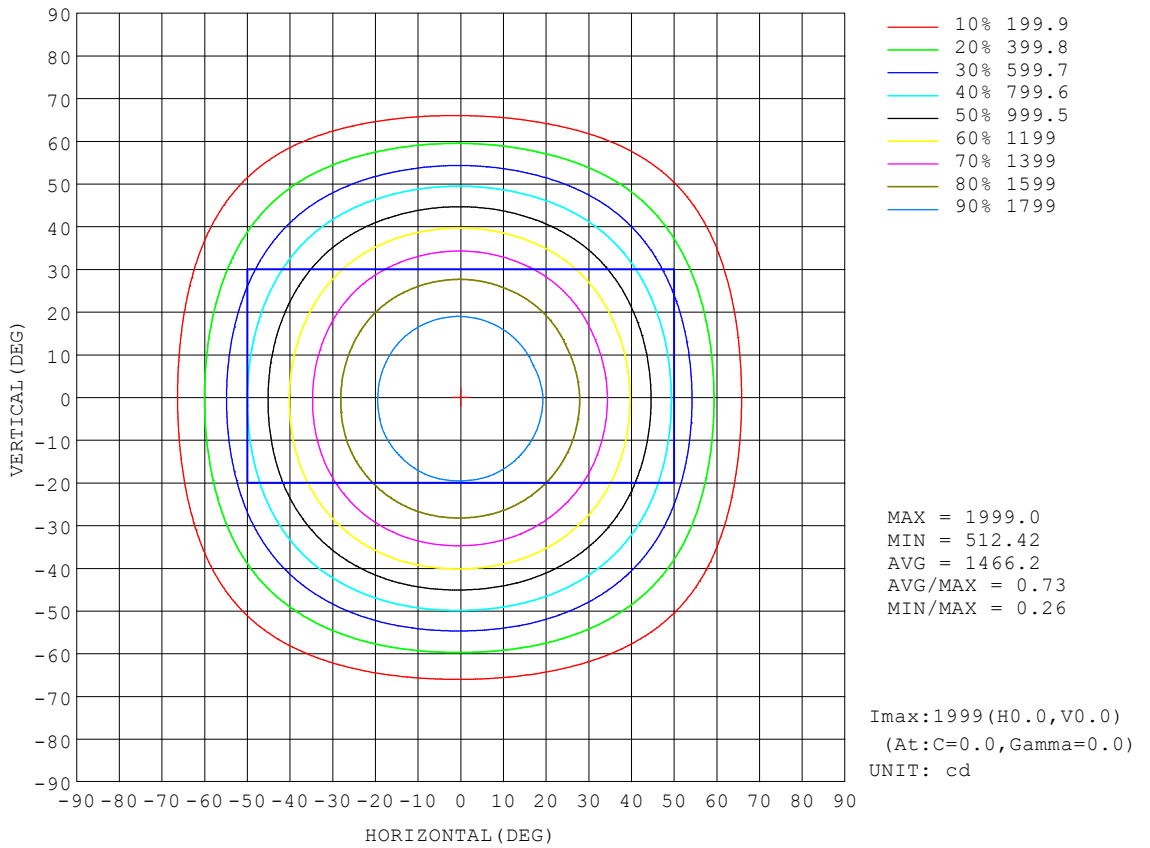


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.42V I:0.3174A P:37.635W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3979.05x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

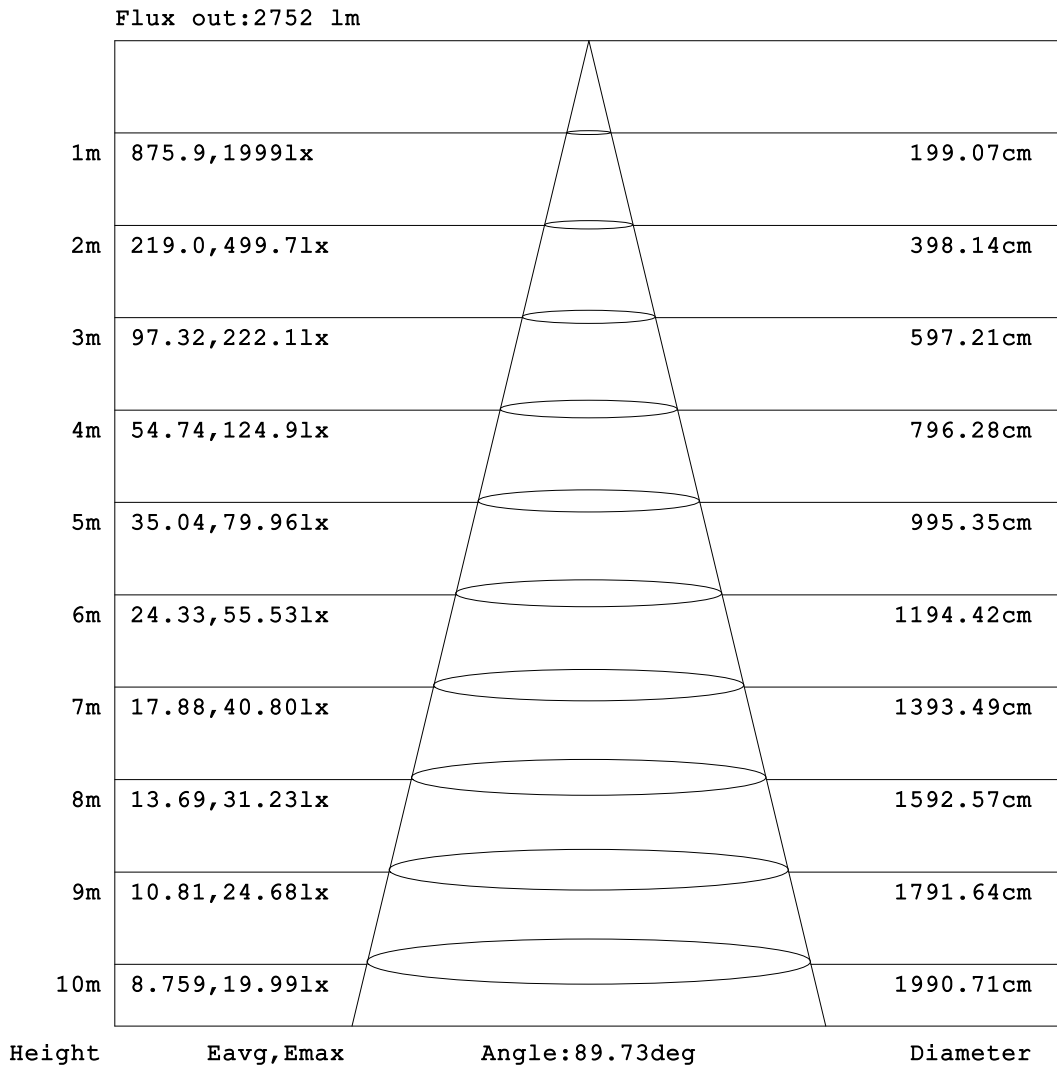


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.42V I:0.3174A P:37.635W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3979.05x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

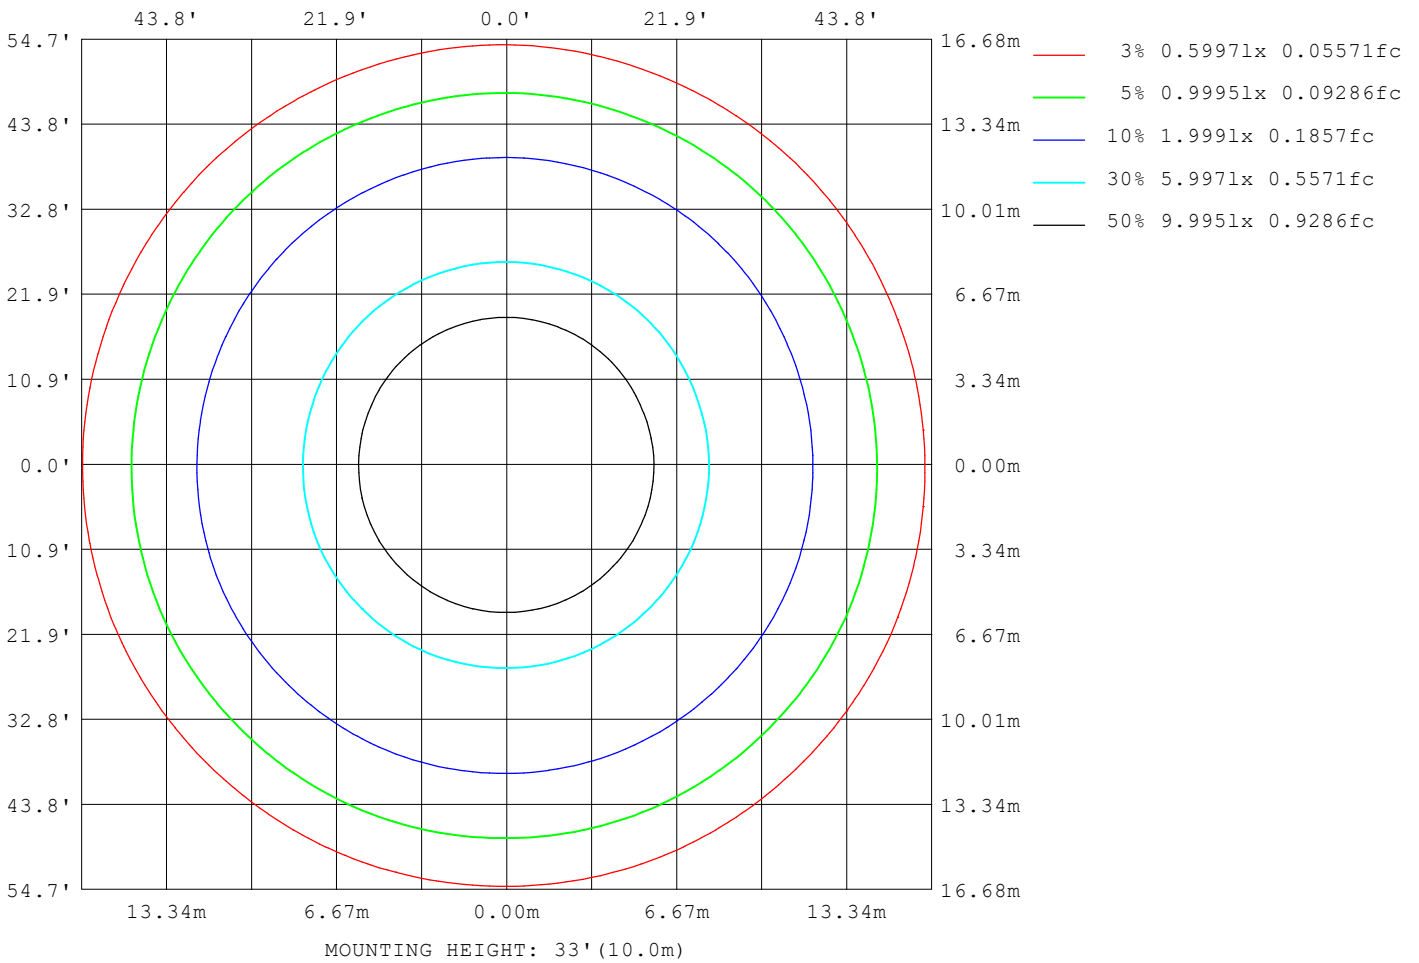

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.42V I:0.3174A P:37.635W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3979.05x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	14114
L_0~180 (75) av	8575
L_0~180 (85) av	7409
L_90~270 (65) av	13997
L_90~270 (75) av	8584
L_90~270 (85) av	6853
L_45 (65) av	14062
L_45 (75) av	8579
L_45 (85) av	7283

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

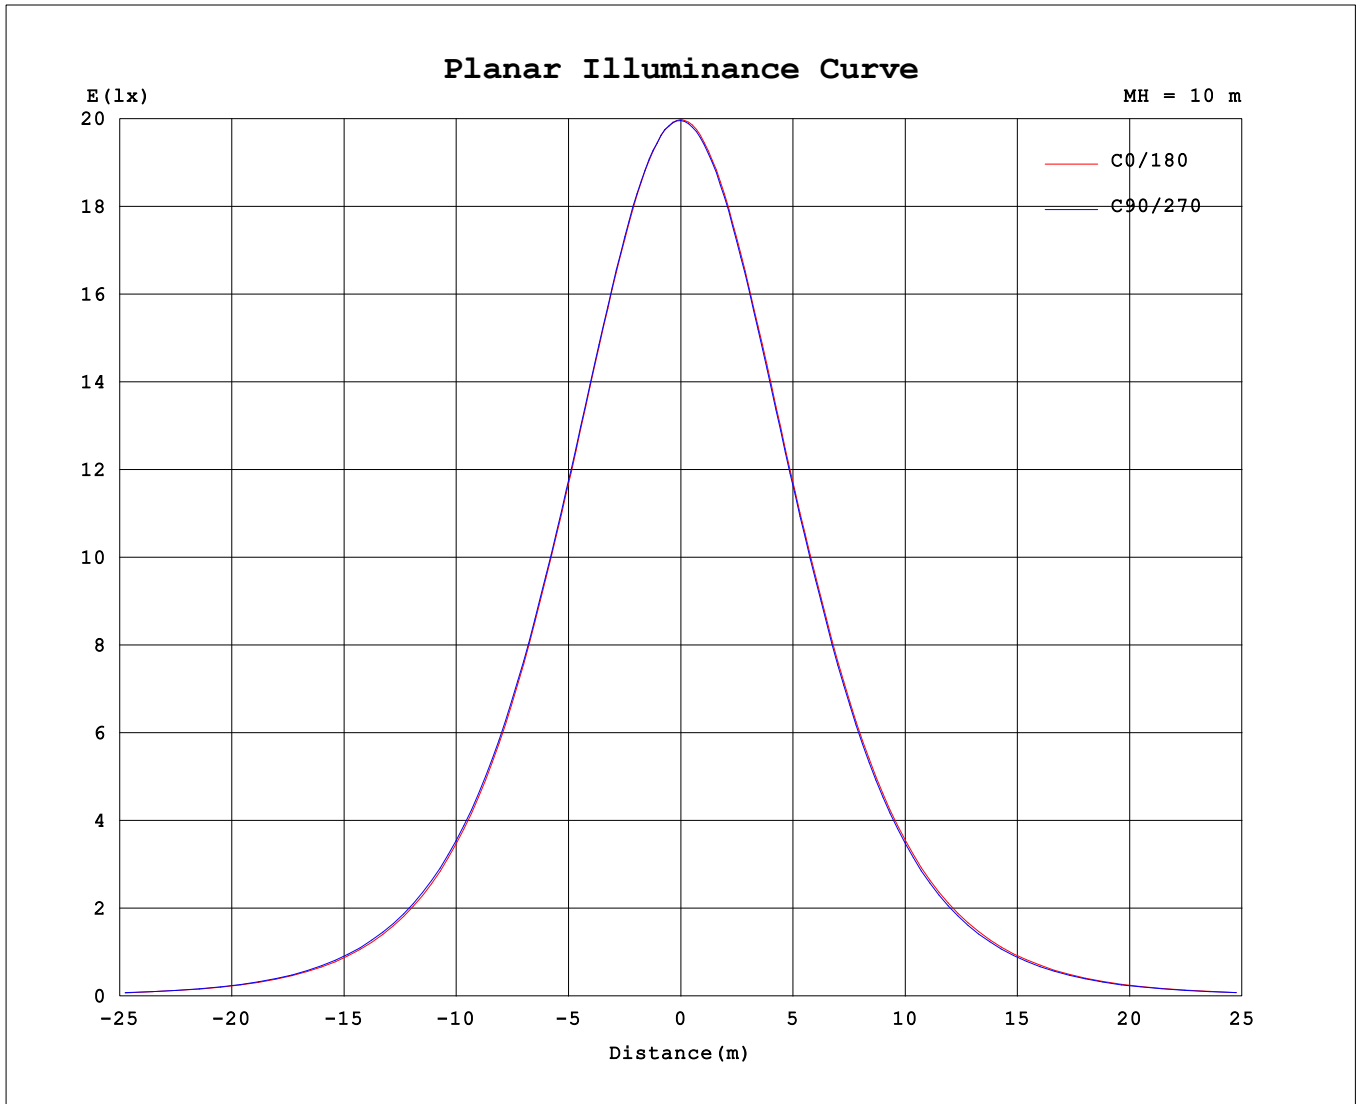

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

