
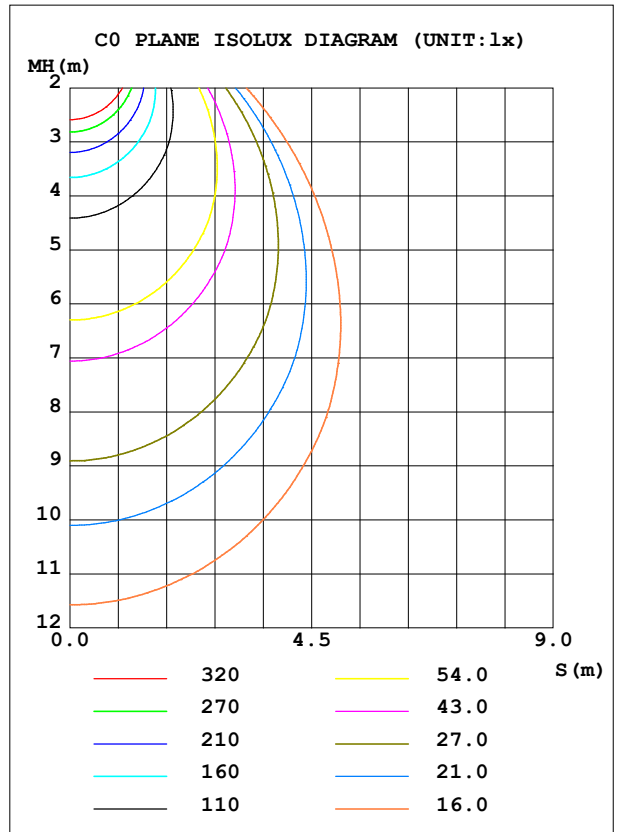


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.40V I:0.3155A P:37.406W PF:0.9930 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4280.27x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-10-40W-M-A5C5-HO	Imax (cd)	2145	S/MH (C0/180)	1.16
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	1.16
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	4280.3	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	4280.27	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.25

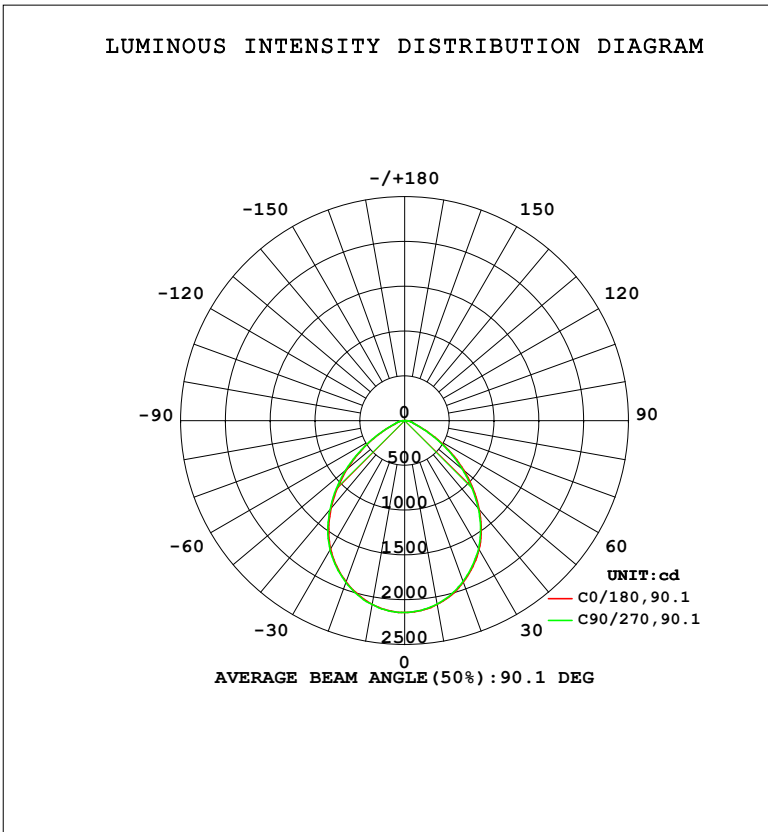

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	2083	2085	2085	2090	2085	2085	2081	2076	0- 10	201.7	201.7	4.71,4.71
20	1915	1917	1923	1926	1920	1916	1910	1905	10- 20	566.8	768.5	18,18
30	1657	1658	1667	1674	1663	1659	1651	1644	20- 30	826.7	1595	37.3,37.3
40	1279	1285	1299	1308	1296	1288	1280	1271	30- 40	926.6	2522	58.9,58.9
50	834.6	846.0	858.5	871.9	863.0	850.1	839.7	829.5	40- 50	825.0	3347	78.2,78.2
60	402.9	408.8	418.5	424.7	428.5	421.6	409.2	398.9	50- 60	558.6	3905	91.2,91.2
70	129.2	129.5	131.9	134.7	137.7	138.8	134.5	131.0	60- 70	249.0	4154	97.1,97.1
80	57.01	57.14	58.24	59.67	61.37	61.40	60.51	59.33	70- 80	96.93	4251	99.3,99.3
90	1.252	1.265	1.219	1.245	2.170	2.144	2.144	2.144	80- 90	28.95	4280	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2958.8 lm

%lum = 69.1%

%lamp = 69.1%

Conical surface Flux(130deg): 4062.3 lm

%lum = 94.9%


%lamp = 94.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.40V I:0.3155A P:37.406W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4280.27x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

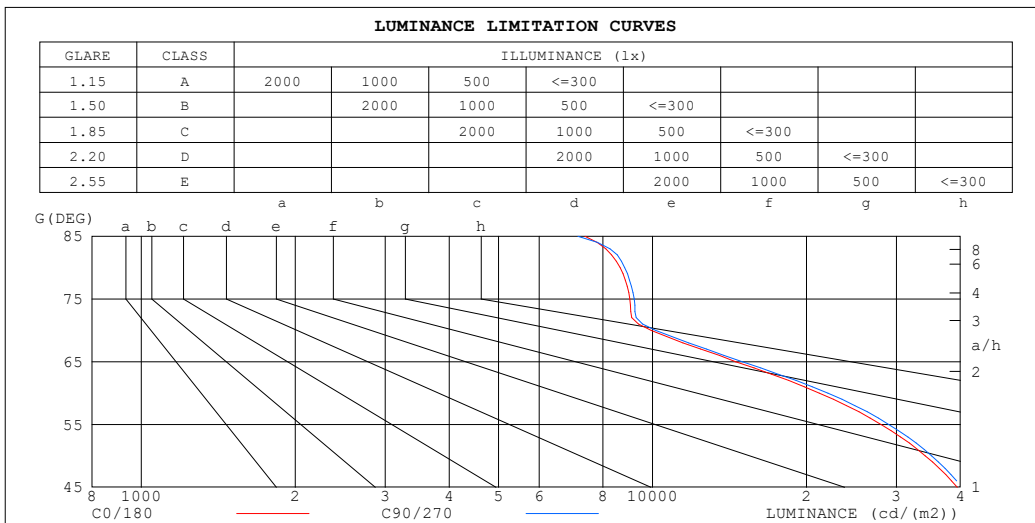

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7374	7144
80	8639	8825
75	9023	9204
70	9939	10149
65	14554	15002
60	21203	22025
55	28004	28998
50	34168	35146
45	39470	40304


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.40V I:0.3155A P:37.406W PF:0.9930 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4280.27x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.85	.94	.89	.84	.90	.86	.82	.87	.84	.81	.84	.81	.79	.77
3.0	.86	.79	.73	.84	.78	.73	.81	.76	.71	.79	.74	.70	.76	.72	.69	.67
4.0	.77	.70	.64	.76	.69	.63	.74	.67	.63	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.62	.56	.69	.61	.56	.67	.60	.55	.65	.59	.55	.63	.58	.54	.52
6.0	.64	.56	.50	.63	.55	.50	.61	.54	.49	.59	.53	.49	.58	.53	.49	.47
7.0	.58	.50	.45	.57	.50	.45	.56	.49	.44	.55	.49	.44	.53	.48	.44	.42
8.0	.54	.46	.40	.53	.45	.40	.52	.45	.40	.50	.44	.40	.49	.44	.40	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.46	.40	.36	.34
10.0	.46	.38	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.43	.37	.33	.31

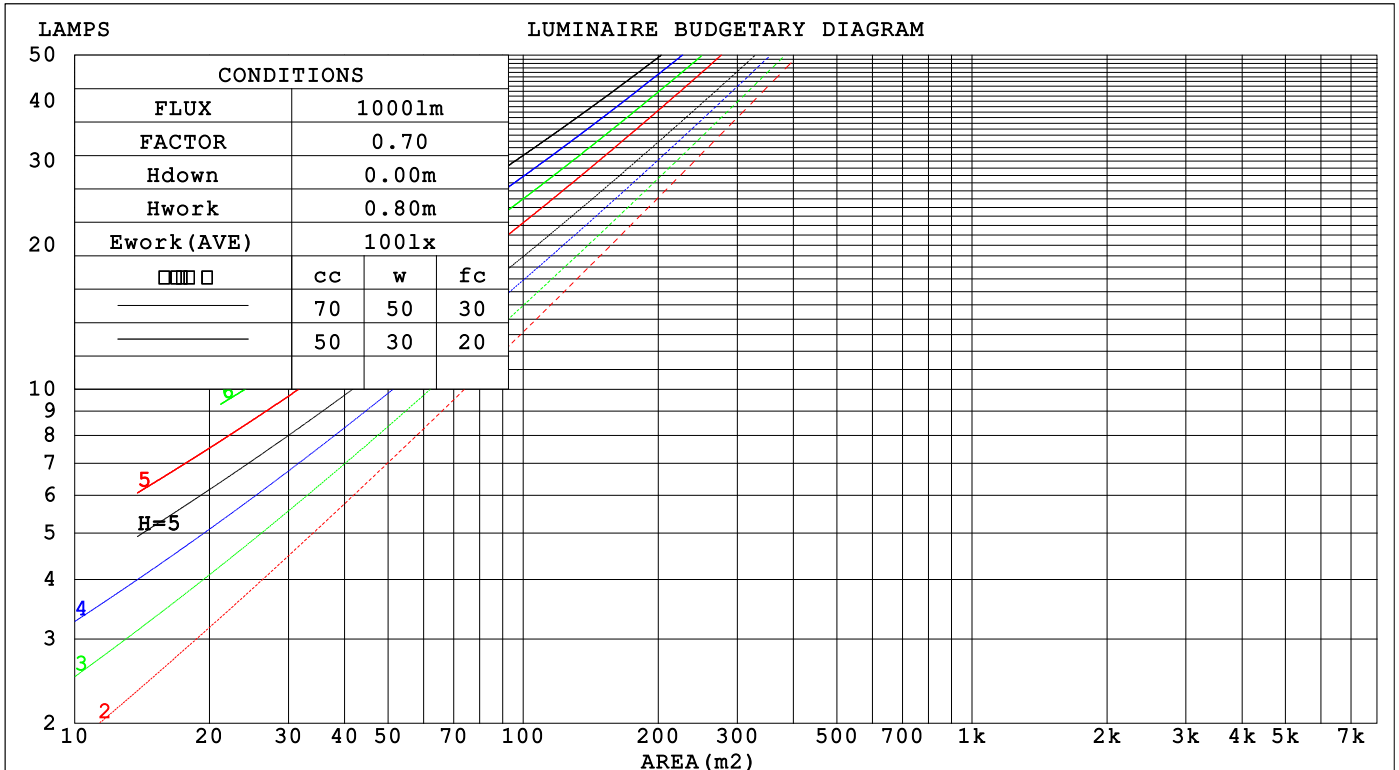

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.40V I:0.3155A P:37.406W PF:0.9930 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4280.27x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients(WEC)			
0.0						
1.0	.249 .142 .045	.242 .138 .044	.229 .132 .042	.217 .125 .040	.207 .120 .039	
2.0	.241 .132 .041	.235 .129 .040	.224 .124 .039	.213 .120 .037	.204 .115 .036	
3.0	.228 .122 .036	.223 .120 .036	.213 .116 .035	.204 .112 .034	.196 .108 .034	
4.0	.215 .112 .033	.211 .110 .033	.202 .107 .032	.194 .104 .031	.186 .101 .031	
5.0	.202 .103 .030	.198 .102 .030	.191 .099 .029	.183 .097 .029	.177 .094 .028	
6.0	.190 .095 .027	.187 .094 .027	.180 .092 .027	.173 .090 .027	.168 .088 .026	
7.0	.179 .089 .025	.176 .088 .025	.170 .086 .025	.164 .084 .025	.159 .083 .024	
8.0	.169 .083 .023	.166 .082 .023	.161 .080 .023	.156 .079 .023	.151 .077 .023	
9.0	.160 .077 .022	.157 .077 .022	.152 .075 .021	.148 .074 .021	.143 .073 .021	
10.0	.151 .073 .020	.149 .072 .020	.145 .071 .020	.140 .070 .020	.136 .069 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients(CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.176 .157 .139	.151 .134 .120	.103 .093 .083	.059 .054 .048	.019 .017 .016	
2.0	.165 .132 .104	.142 .114 .090	.097 .079 .063	.056 .046 .037	.018 .015 .012	
3.0	.156 .114 .080	.134 .098 .070	.092 .068 .049	.053 .040 .029	.017 .013 .009	
4.0	.148 .100 .063	.127 .087 .055	.088 .060 .039	.051 .035 .023	.016 .012 .008	
5.0	.141 .089 .051	.121 .077 .045	.083 .054 .032	.048 .032 .019	.016 .010 .006	
6.0	.134 .081 .042	.115 .070 .037	.080 .049 .026	.046 .029 .016	.015 .009 .005	
7.0	.128 .074 .036	.110 .064 .031	.076 .045 .022	.044 .026 .013	.014 .009 .004	
8.0	.122 .068 .031	.105 .059 .027	.073 .041 .019	.042 .024 .011	.014 .008 .004	
9.0	.117 .063 .027	.100 .055 .023	.070 .038 .017	.041 .023 .010	.013 .007 .003	
10.0	.111 .059 .024	.096 .051 .021	.067 .036 .015	.039 .021 .009	.013 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.40V I:0.3155A P:37.406W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4280.27x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.8	25.1	24.1	25.3	25.5	23.9	25.2	24.2	25.4	25.6
3H	24.0	25.3	24.3	25.5	25.7	24.1	25.4	24.4	25.6	25.8
4H	24.1	25.2	24.4	25.5	25.7	24.2	25.4	24.5	25.6	25.8
6H	24.1	25.2	24.5	25.5	25.8	24.3	25.3	24.6	25.6	25.9
8H	24.2	25.2	24.5	25.5	25.8	24.3	25.3	24.6	25.6	25.9
12H	24.2	25.2	24.5	25.4	25.7	24.3	25.3	24.6	25.6	25.8
4H 2H	23.9	25.1	24.2	25.3	25.6	24.0	25.2	24.3	25.4	25.7
3H	24.3	25.3	24.6	25.5	25.8	24.3	25.3	24.7	25.6	25.9
4H	24.4	25.3	24.7	25.6	25.9	24.5	25.4	24.8	25.7	26.0
6H	24.5	25.3	24.9	25.7	26.0	24.6	25.4	25.0	25.8	26.1
8H	24.6	25.3	25.0	25.7	26.1	24.7	25.4	25.1	25.8	26.2
12H	24.6	25.3	25.0	25.7	26.1	24.7	25.4	25.1	25.8	26.2
8H 4H	24.4	25.1	24.8	25.5	25.9	24.5	25.2	24.9	25.6	26.0
6H	24.6	25.2	25.0	25.6	26.0	24.7	25.3	25.1	25.7	26.1
8H	24.7	25.2	25.2	25.7	26.1	24.8	25.3	25.3	25.8	26.2
12H	24.8	25.2	25.3	25.7	26.2	24.9	25.3	25.3	25.8	26.2
12H 4H	24.4	25.0	24.8	25.4	25.8	24.4	25.1	24.9	25.5	25.9
6H	24.6	25.1	25.1	25.6	26.0	24.7	25.2	25.2	25.7	26.1
8H	24.7	25.2	25.2	25.6	26.1	24.8	25.3	25.3	25.7	26.2

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 0.8	+ 0.6 / - 0.8
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.4
2.0H	+ 1.3 / - 1.7	+ 1.3 / - 1.8

CIE Pub.117, 4280 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.1)
 Area: 0.038 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-04	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.40V I:0.3155A P:37.406W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4280.27x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	65	55	49	65	55	49	64	55	49	43
0.80	76	66	59	75	65	59	73	65	59	53
1.00	84	75	69	83	74	68	81	75	68	62
1.25	90	82	76	89	81	76	87	80	75	69
1.50	95	87	81	93	86	81	91	84	80	73
2.00	101	94	89	99	93	88	96	91	86	80
2.50	103	97	93	102	96	92	98	93	90	82
3.00	106	101	96	104	99	95	100	96	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	102	104	102	99	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.40V I:0.3155A P:37.406W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4280.27x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

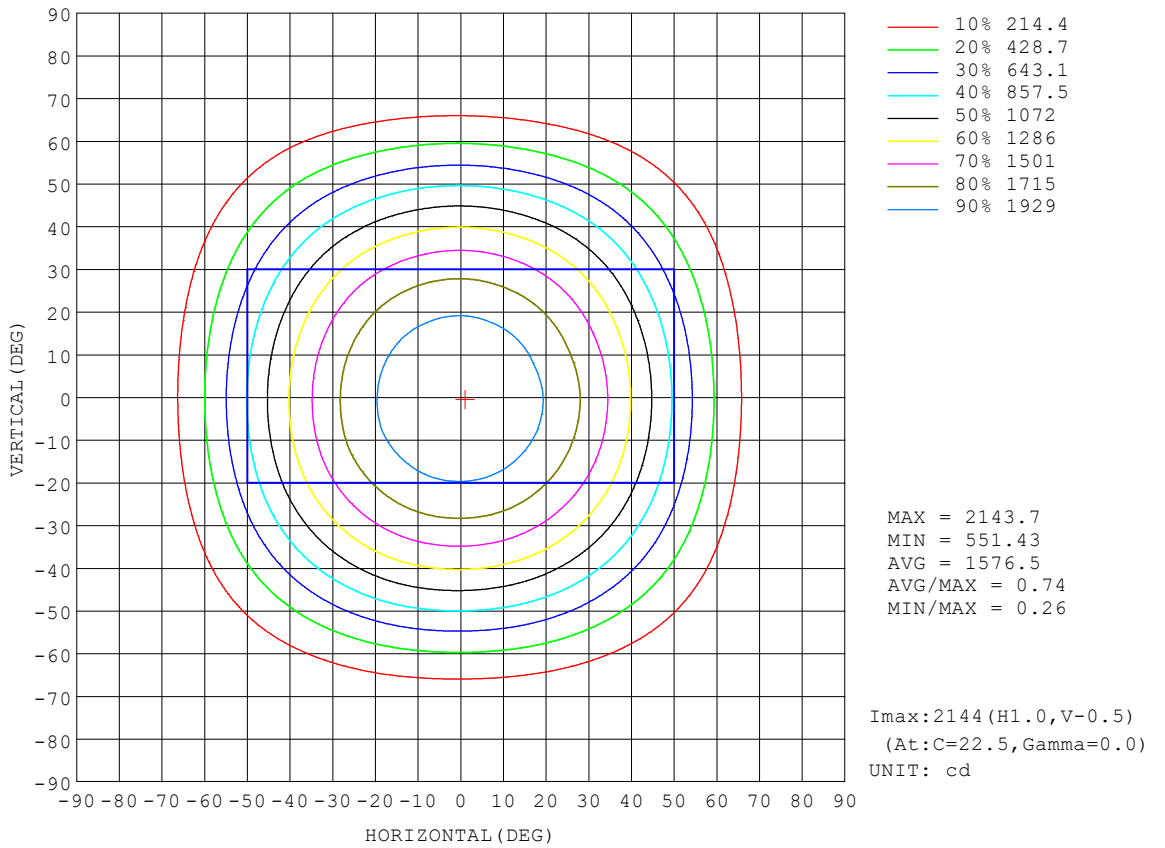


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.40V I:0.3155A P:37.406W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4280.27x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Flux out:3041 lm

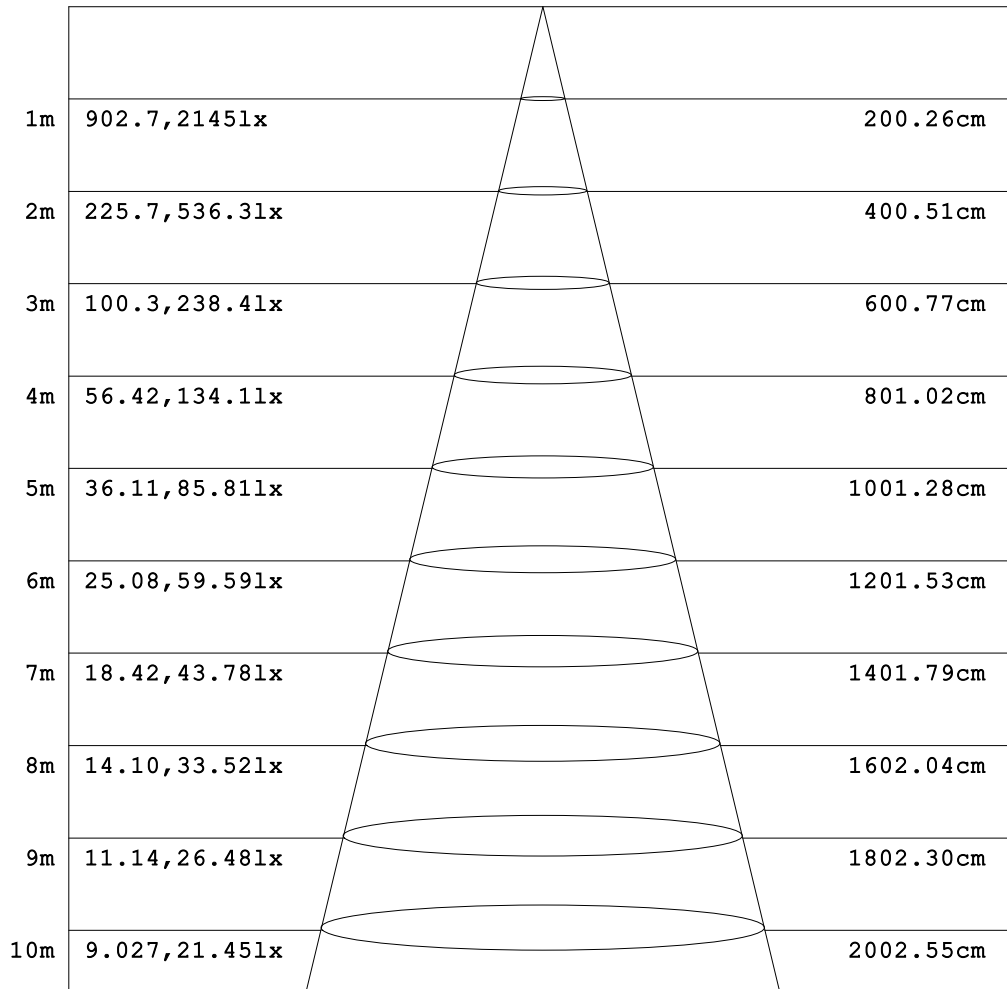

Angle:90.07deg

Height

Eavg, Emax

Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.40V I:0.3155A P:37.406W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4280.27x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

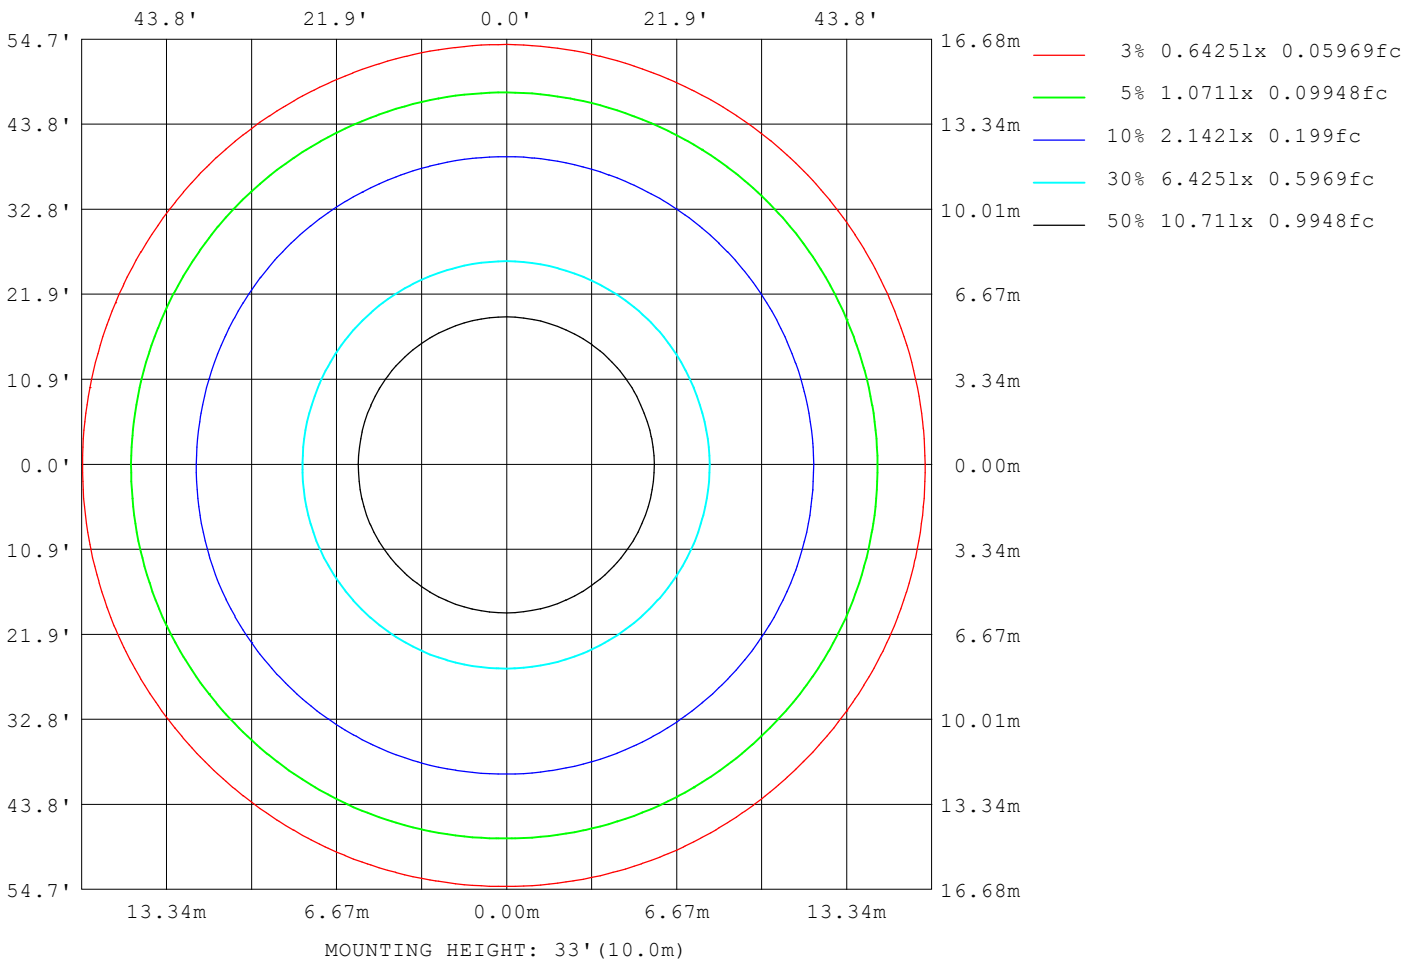

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.40V I:0.3155A P:37.406W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4280.27x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	15073
L_0~180 (75) av	9251
L_0~180 (85) av	7998
L_90~270 (65) av	14961
L_90~270 (75) av	9275
L_90~270 (85) av	7409
L_45 (65) av	15032
L_45 (75) av	9268
L_45 (85) av	7871

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

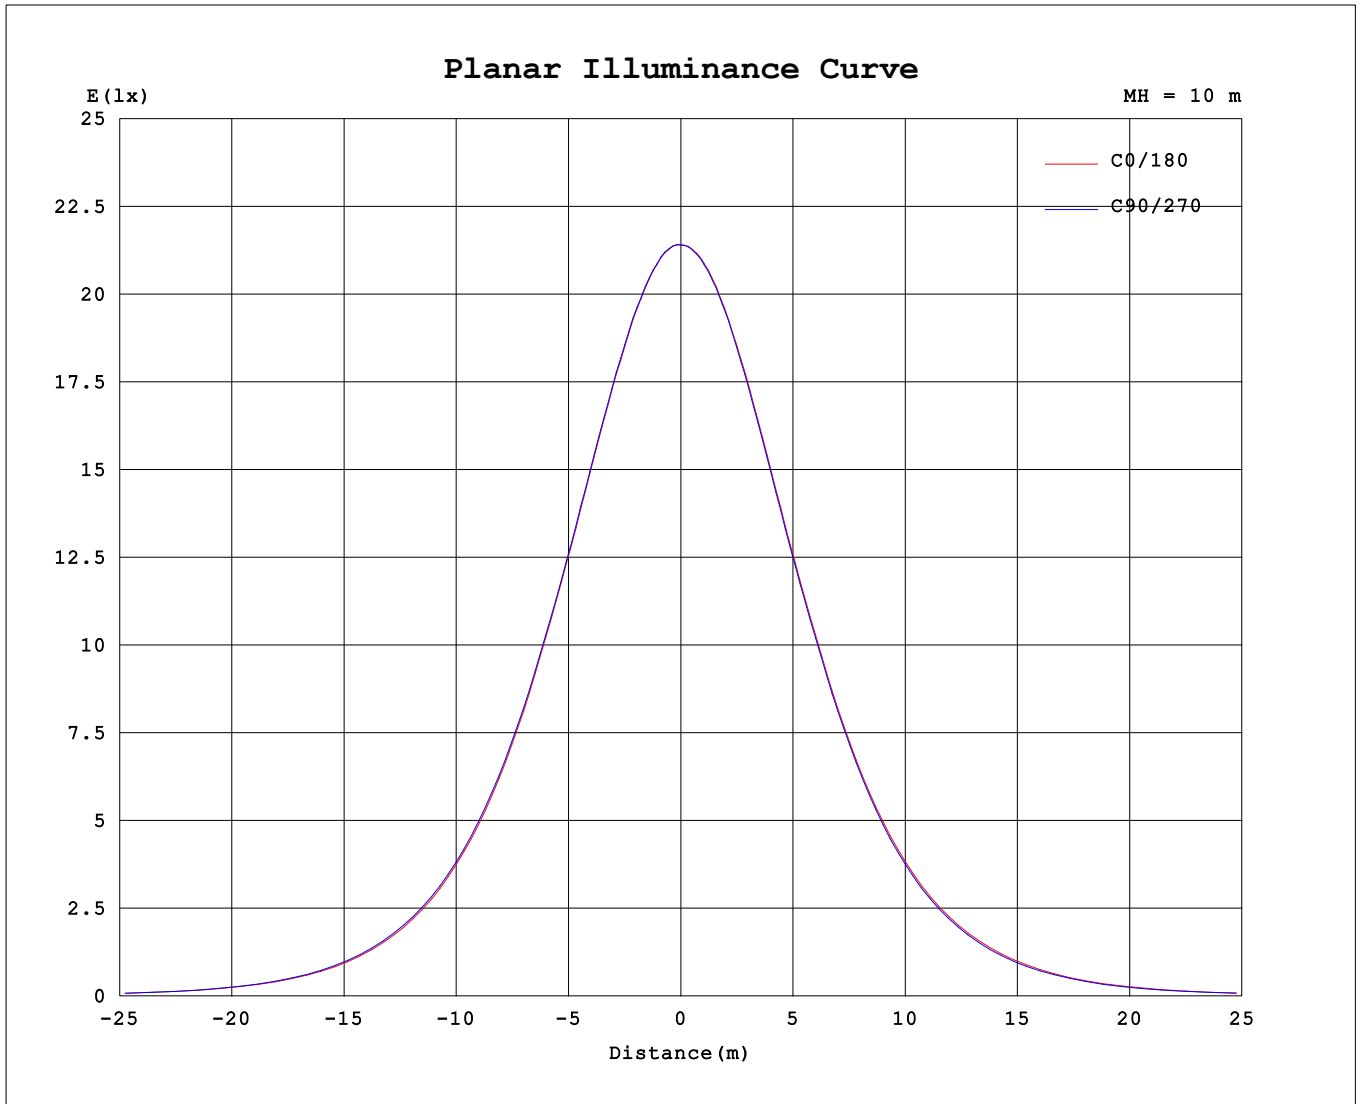

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.40V I:0.3155A P:37.406W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4280.27x1 lm		
NAME: DL254-10-40W-M-A5C5-HO	TYPE: 40W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.22	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2142	2145	2144	2143	2141	2142	2140	2142	2142	2145	2144	2143	2141	2142	2140	2142			
5	2129	2128	2129	2129	2130	2131	2129	2128	2129	2130	2128	2126	2126	2125	2122	2123			
10	2083	2086	2085	2087	2085	2088	2090	2088	2085	2084	2085	2081	2081	2077	2076	2075			
15	2011	2014	2013	2016	2017	2021	2020	2020	2016	2013	2013	2010	2009	2004	2001	2002			
20	1915	1918	1917	1921	1923	1926	1926	1929	1920	1916	1916	1910	1910	1904	1905	1902			
25	1795	1796	1798	1803	1805	1808	1810	1811	1800	1798	1796	1791	1790	1786	1784	1781			
30	1657	1658	1658	1665	1667	1673	1674	1676	1663	1660	1659	1654	1651	1646	1644	1642			
35	1479	1484	1484	1492	1496	1504	1504	1505	1493	1488	1488	1480	1479	1473	1472	1468			
40	1279	1284	1285	1293	1299	1308	1308	1310	1296	1290	1288	1281	1280	1272	1271	1268			
45	1061	1067	1070	1079	1083	1095	1096	1097	1085	1076	1074	1066	1064	1056	1056	1052			
50	835	842	846	854	858	869	872	874	863	853	850	842	840	832	829	826			
55	610	619	622	630	632	641	643	648	640	631	627	619	616	608	606	602			
60	403	410	409	418	418	424	425	429	428	425	422	412	409	398	399	397			
65	234	237	236	240	241	246	245	249	250	250	251	244	240	232	233	232			
70	129	130	130	131	132	134	135	136	138	138	139	136	134	132	131	130			
75	88.7	89.2	89.3	90.2	90.5	91.5	91.8	92.5	93.2	93.2	93.5	92.6	91.9	90.6	90.1	89.4			
80	57.0	57.4	57.1	57.9	58.2	59.4	59.7	60.2	61.4	61.6	61.4	61.0	60.5	59.4	59.3	58.2			
85	24.4	24.5	24.4	24.0	23.7	25.2	26.2	27.1	28.6	28.8	27.9	26.1	25.4	24.9	25.8	25.9			
90	1.25	1.24	1.27	1.22	1.22	1.19	1.25	1.23	2.17	2.22	2.14	2.16	2.14	2.20	2.14	2.11			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-04

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks: