
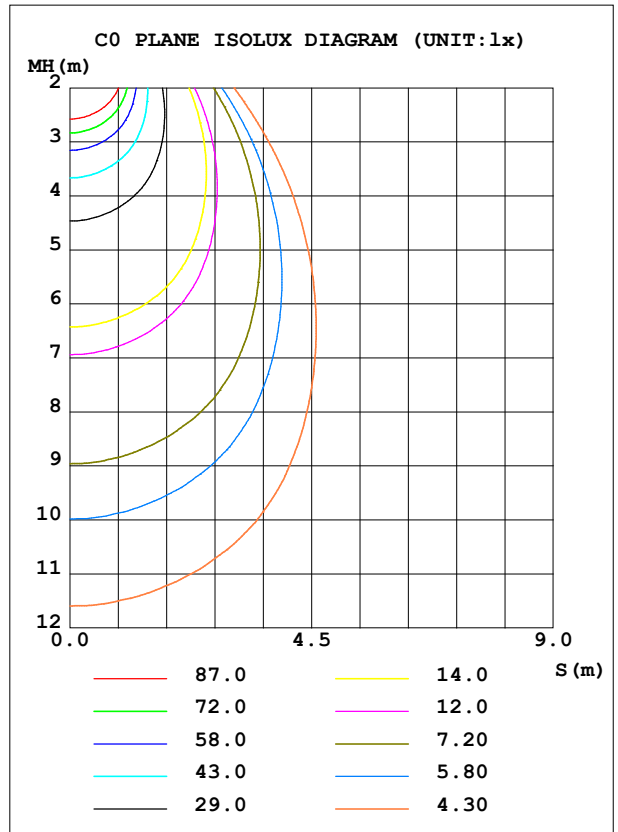


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.48V I:0.0911A P:9.8299W PF:0.9027 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1010.97x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 10W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-4-16W-M-A5C5	Imax (cd)	578.4	S/MH (C0/180)	1.07
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	1.05
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1011.0	<input type="checkbox"/> UP, DN (C0-180)	0.0, 51.2
NOMINAL FLUX (lm)	1010.97	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 48.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

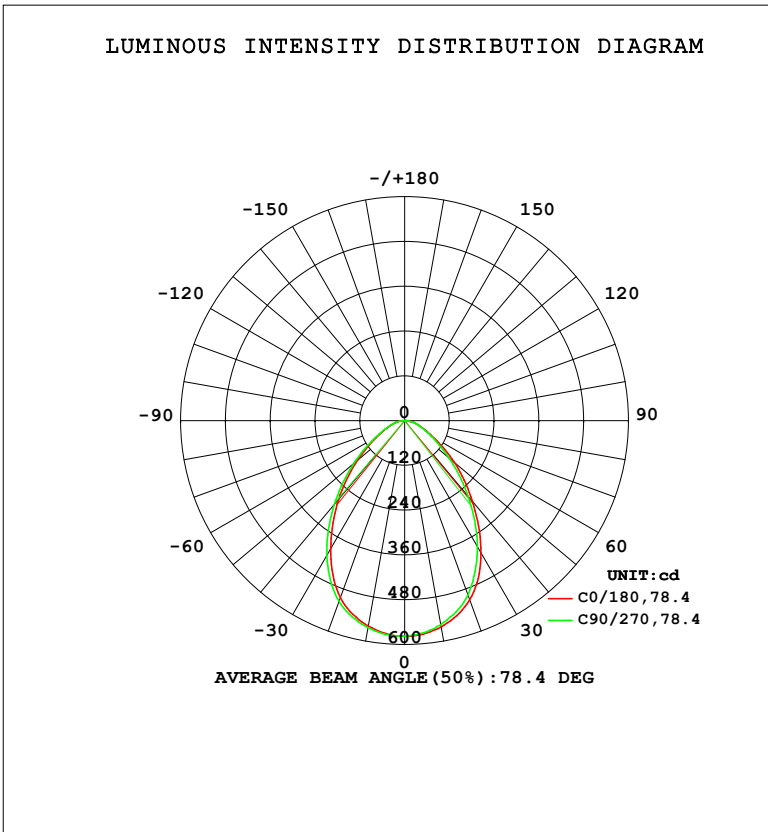

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	559.5	561.9	564.0	564.0	561.4	557.9	555.5	553.6	0- 10	54.25	54.25	5.37,5.37
20	504.1	508.2	514.9	515.3	510.2	503.3	496.3	496.2	10- 20	151.2	205.5	20.3,20.3
30	396.7	410.8	418.0	423.8	409.5	400.4	389.9	389.6	20- 30	210.8	416.3	41.2,41.2
40	275.9	288.1	293.7	295.6	283.1	272.7	265.0	256.7	30- 40	213.2	629.5	62.3,62.3
50	165.2	174.3	178.0	172.9	173.7	164.7	155.2	151.3	40- 50	169.7	799.2	79.1,79.1
60	84.18	88.84	90.48	87.92	87.75	88.45	80.72	82.30	50- 60	109.9	909.1	89.9,89.9
70	43.51	44.03	44.55	44.48	43.74	43.46	43.09	42.81	60- 70	61.62	970.8	96,96
80	18.32	18.72	18.38	19.29	19.23	18.59	16.79	18.04	70- 80	32.70	1003	99.3,99.3
90	0.2950	0.2819	0.2360	0.2425	0.5047	0.4589	0.4786	0.4589	80- 90	7.519	1011	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 721.41 lm

%lum = 71.4%

%lamp = 71.4%

Conical surface Flux(130deg): 944.6 lm

%lum = 93.4%


%lamp = 93.4%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.48V I:0.0911A P:9.8299W PF:0.9027 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1010.97x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 10W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

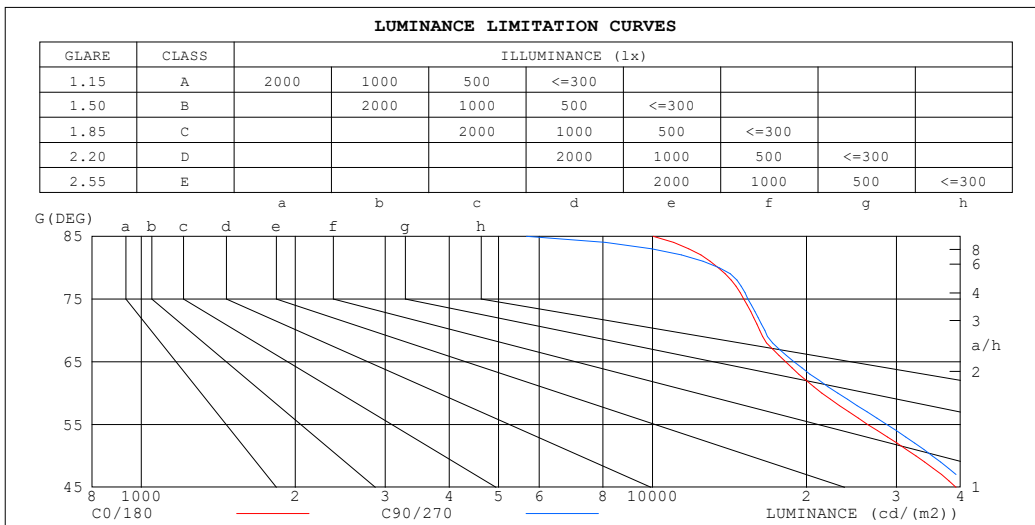

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	10023	5668
80	13436	13486
75	15088	15372
70	16207	16592
65	18206	18898
60	21448	23052
55	26356	28710
50	32738	35280
45	39255	41945


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.48V I:0.0911A P:9.8299W PF:0.9027 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:1010.97x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 10W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.86	.94	.89	.85	.91	.86	.83	.88	.84	.81	.85	.82	.79	.77
3.0	.86	.79	.74	.85	.78	.73	.82	.77	.72	.79	.75	.71	.77	.73	.70	.68
4.0	.78	.71	.65	.77	.70	.64	.74	.68	.64	.72	.67	.63	.70	.66	.62	.60
5.0	.71	.63	.57	.70	.63	.57	.68	.62	.57	.66	.60	.56	.64	.59	.55	.54
6.0	.65	.57	.51	.64	.57	.51	.62	.56	.51	.61	.55	.50	.59	.54	.50	.48
7.0	.60	.52	.46	.59	.51	.46	.57	.51	.46	.56	.50	.46	.55	.49	.45	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.35	.33

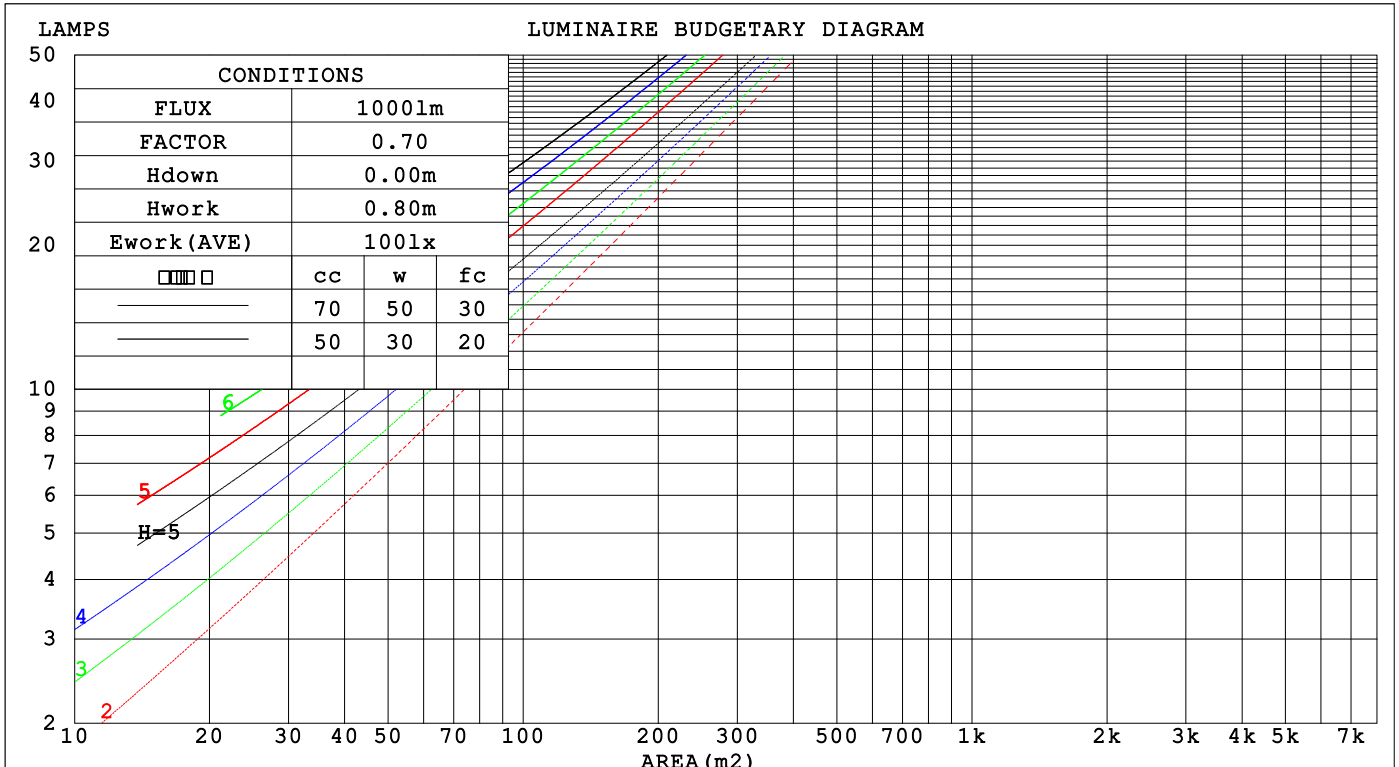

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.48V I:0.0911A P:9.8299W PF:0.9027 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1010.97x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 10W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients(WEC)			
0.0						
1.0	.250 .142 .045	.243 .138 .044	.230 .132 .042	.218 .126 .040	.207 .120 .039	
2.0	.239 .131 .040	.233 .129 .040	.222 .123 .038	.212 .119 .037	.202 .114 .036	
3.0	.225 .120 .036	.220 .118 .036	.210 .114 .035	.201 .110 .034	.193 .107 .033	
4.0	.212 .110 .032	.207 .108 .032	.198 .105 .031	.190 .102 .031	.183 .099 .030	
5.0	.198 .101 .029	.194 .100 .029	.187 .097 .029	.180 .095 .028	.173 .092 .028	
6.0	.186 .093 .027	.183 .092 .027	.176 .090 .026	.170 .088 .026	.164 .086 .026	
7.0	.175 .087 .025	.172 .086 .024	.166 .084 .024	.161 .082 .024	.155 .081 .024	
8.0	.166 .081 .023	.163 .080 .023	.157 .079 .022	.152 .077 .022	.147 .076 .022	
9.0	.156 .076 .021	.154 .075 .021	.149 .074 .021	.144 .072 .021	.140 .071 .021	
10.0	.148 .071 .020	.146 .071 .020	.142 .069 .020	.137 .068 .019	.133 .067 .019	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients(CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.176 .157 .139	.151 .134 .120	.103 .093 .083	.059 .054 .048	.019 .017 .016	
2.0	.165 .132 .104	.142 .114 .090	.097 .079 .063	.056 .046 .037	.018 .015 .012	
3.0	.156 .114 .081	.134 .098 .070	.092 .068 .049	.053 .040 .029	.017 .013 .009	
4.0	.148 .100 .064	.127 .087 .056	.087 .060 .039	.050 .035 .023	.016 .012 .008	
5.0	.140 .089 .052	.120 .077 .045	.083 .054 .032	.048 .032 .019	.015 .010 .006	
6.0	.133 .081 .043	.114 .070 .037	.079 .049 .027	.046 .029 .016	.015 .009 .005	
7.0	.127 .074 .036	.109 .064 .032	.075 .045 .022	.044 .026 .013	.014 .009 .004	
8.0	.121 .068 .031	.104 .059 .027	.072 .041 .019	.042 .024 .012	.014 .008 .004	
9.0	.115 .063 .027	.099 .054 .024	.069 .038 .017	.040 .023 .010	.013 .007 .003	
10.0	.110 .058 .024	.095 .051 .021	.066 .036 .015	.038 .021 .009	.012 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.48V I:0.0911A P:9.8299W PF:0.9027 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1010.97x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 10W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.5	24.8	23.7	25.0	25.2	23.8	25.1	24.0	25.3	25.5
3H	24.1	25.3	24.4	25.5	25.8	24.4	25.6	24.7	25.8	26.0
4H	24.4	25.5	24.7	25.8	26.0	24.6	25.8	24.9	26.0	26.3
6H	24.6	25.7	24.9	25.9	26.2	24.9	25.9	25.2	26.2	26.4
8H	24.7	25.7	25.0	26.0	26.3	24.9	25.9	25.2	26.2	26.5
12H	24.7	25.7	25.0	26.0	26.3	24.9	25.9	25.2	26.1	26.4
4H 2H	23.7	24.9	24.0	25.1	25.4	24.0	25.1	24.3	25.4	25.6
3H	24.5	25.5	24.9	25.8	26.1	24.8	25.7	25.1	26.0	26.3
4H	25.0	25.9	25.3	26.2	26.5	25.2	26.0	25.5	26.4	26.7
6H	25.3	26.1	25.7	26.4	26.8	25.5	26.3	25.9	26.6	27.0
8H	25.4	26.1	25.8	26.5	26.9	25.6	26.3	26.0	26.7	27.0
12H	25.5	26.1	25.9	26.5	26.9	25.6	26.2	26.0	26.6	27.0
8H 4H	25.1	25.8	25.5	26.2	26.6	25.3	26.0	25.7	26.4	26.7
6H	25.6	26.2	26.0	26.6	27.0	25.7	26.3	26.1	26.7	27.1
8H	25.7	26.3	26.2	26.7	27.1	25.8	26.4	26.3	26.8	27.2
12H	25.8	26.3	26.3	26.8	27.2	25.9	26.3	26.4	26.8	27.3
12H 4H	25.1	25.7	25.5	26.1	26.5	25.3	25.9	25.7	26.3	26.7
6H	25.6	26.1	26.0	26.5	27.0	25.7	26.3	26.2	26.7	27.1
8H	25.8	26.2	26.3	26.7	27.2	25.9	26.3	26.4	26.8	27.3

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.5 / - 0.6	+ 0.5 / - 0.6
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.3
2.0H	+ 1.1 / - 0.9	+ 1.2 / - 1.0

CIE Pub.117, 1011 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.0)
 Area: 0.00785 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.48V I:0.0911A P:9.8299W PF:0.9027 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1010.97x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 10W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	47
0.80	78	68	62	77	68	62	75	67	61	56
1.00	85	76	70	84	76	70	82	76	69	64
1.25	91	83	77	90	82	77	88	81	76	70
1.50	95	88	82	94	87	82	91	85	81	74
2.00	101	94	89	99	93	88	96	91	87	80
2.50	104	98	93	102	96	92	98	94	90	83
3.00	106	101	97	104	99	96	101	97	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	106	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.48V I:0.0911A P:9.8299W PF:0.9027 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1010.97x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 10W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

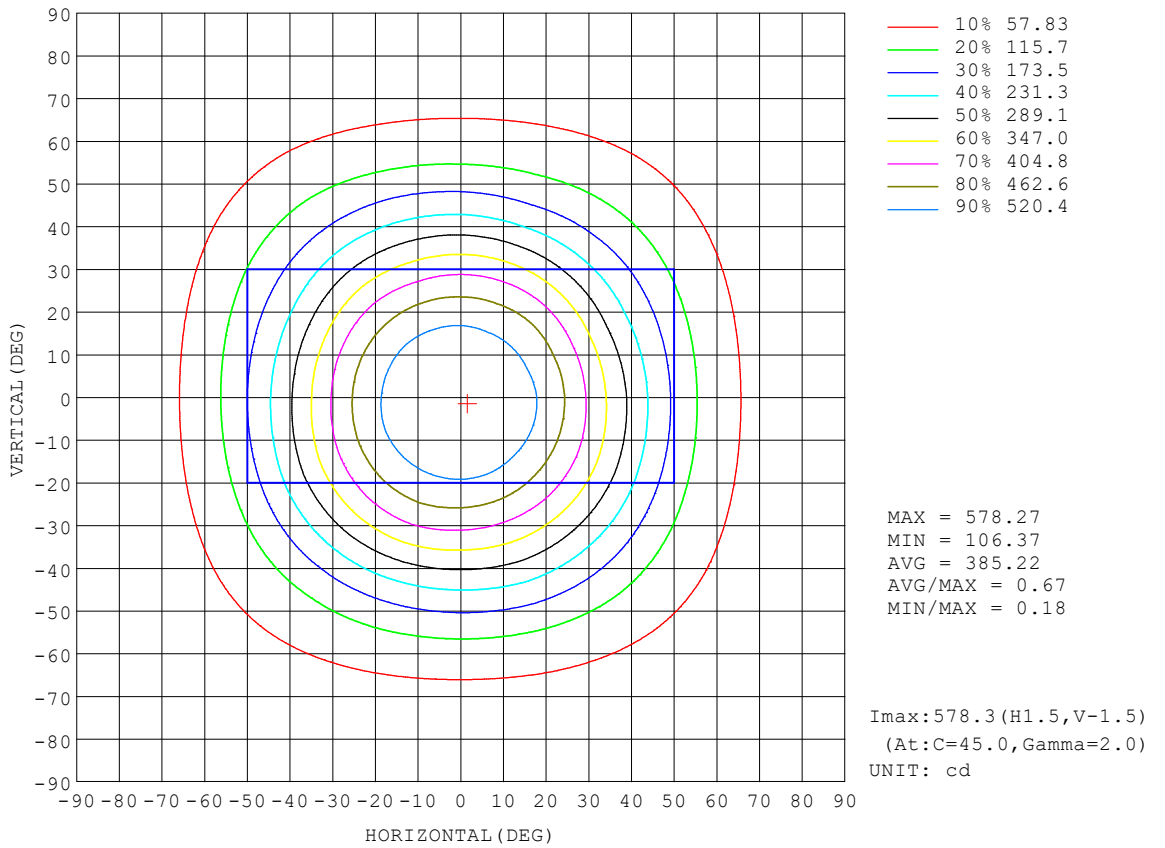


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.48V I:0.0911A P:9.8299W PF:0.9027 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1010.97x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 10W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

Flux out:629.5 lm

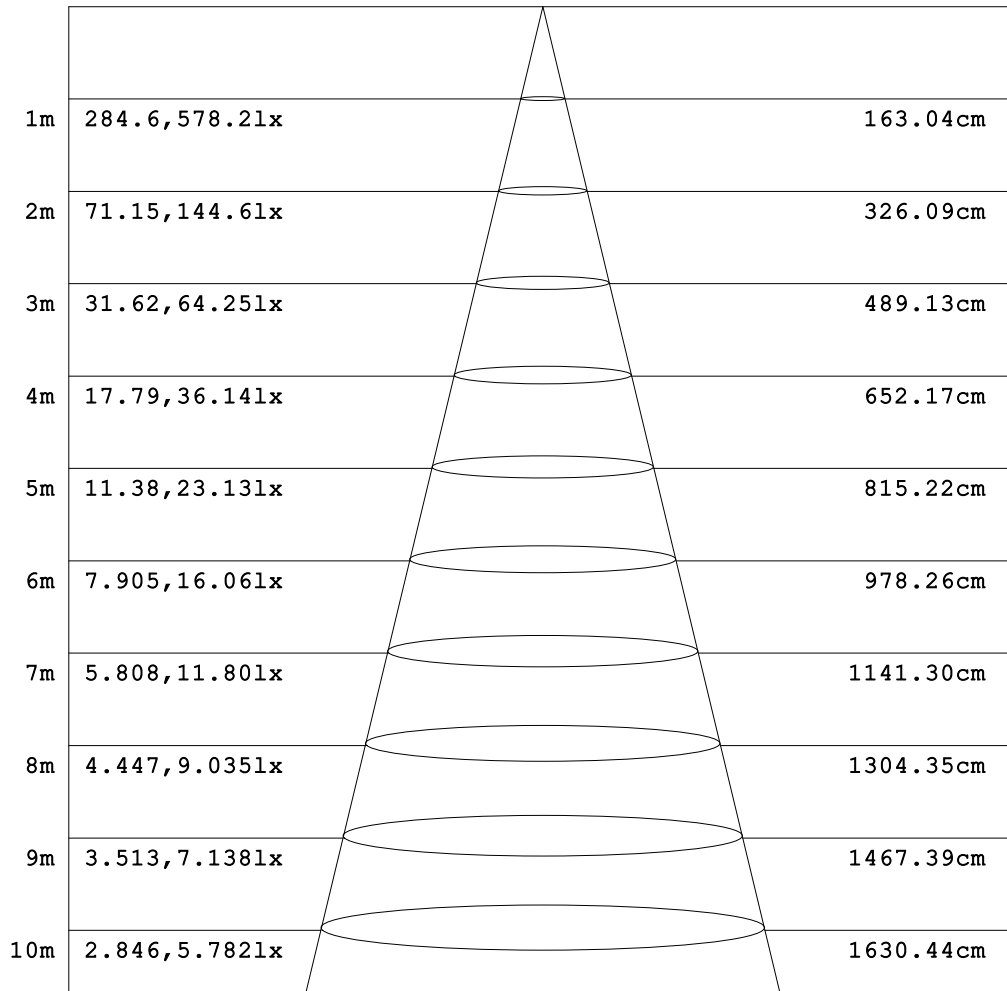

Angle:78.38deg

Height

Eavg, Emax

Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.48V I:0.0911A P:9.8299W PF:0.9027 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1010.97x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 10W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

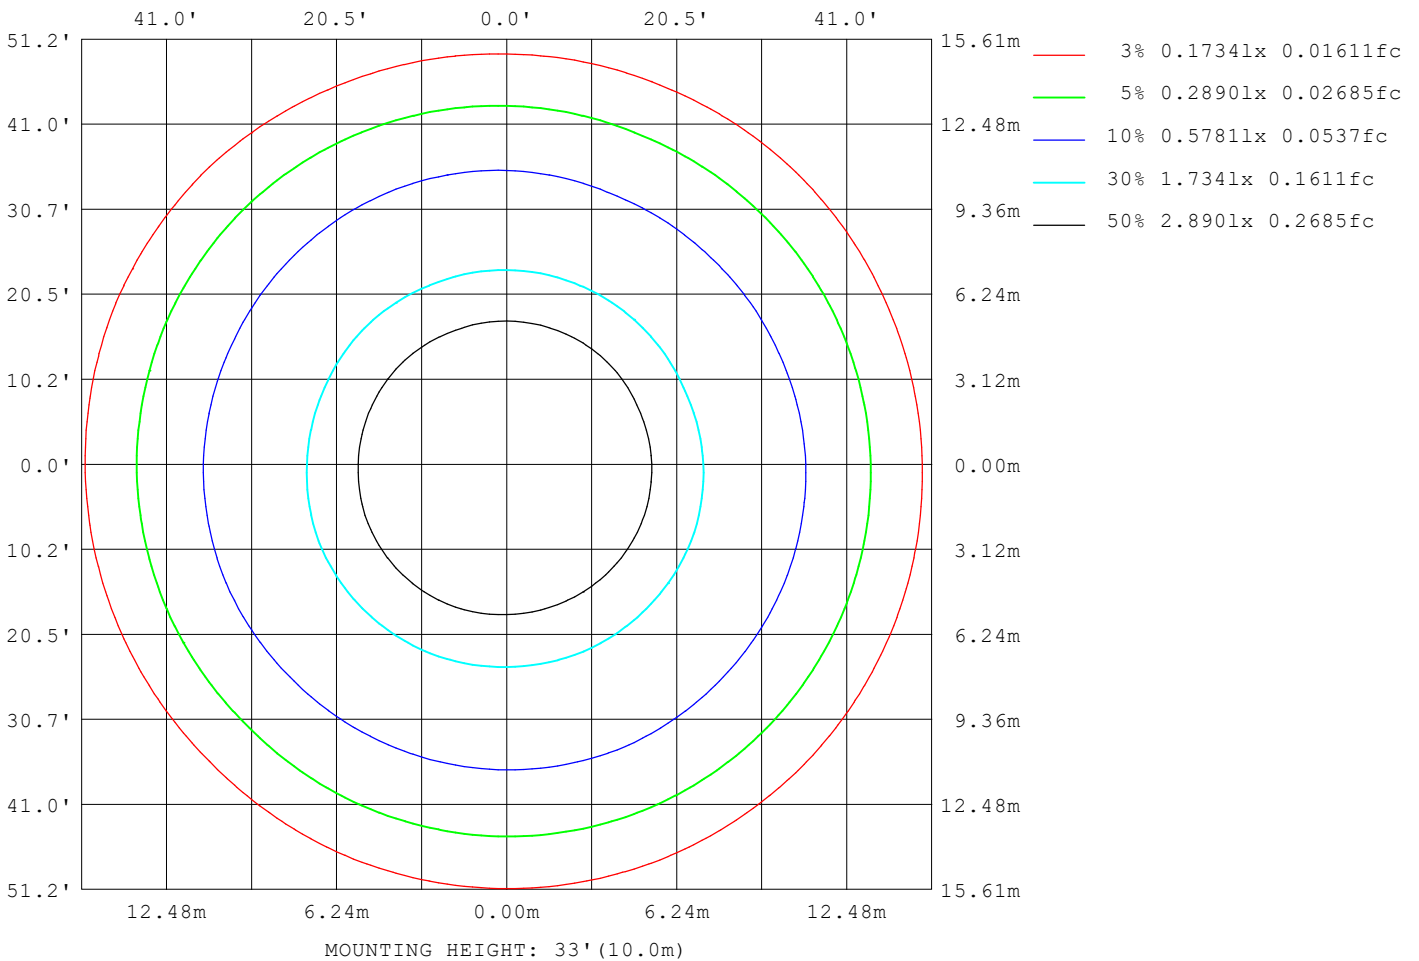

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.48V I:0.0911A P:9.8299W PF:0.9027 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1010.97x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 10W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	18374
L_0~180 (75) av	15214
L_0~180 (85) av	10806
L_90~270 (65) av	18345
L_90~270 (75) av	15175
L_90~270 (85) av	5199
L_45 (65) av	18485
L_45 (75) av	15235
L_45 (85) av	7753

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

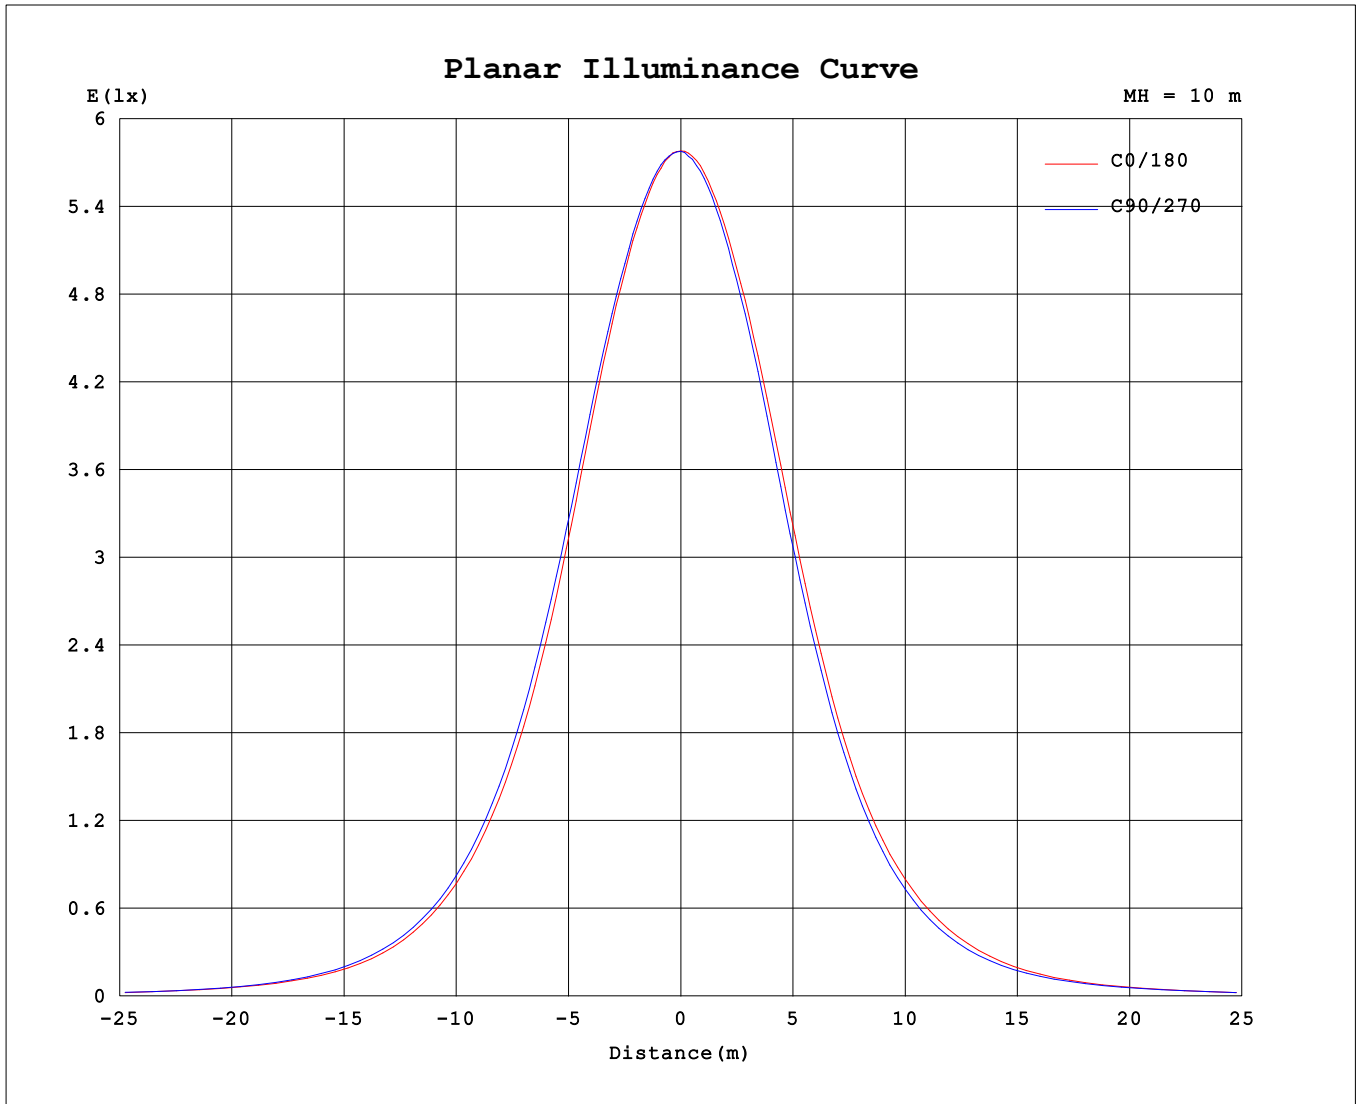

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.48V I:0.0911A P:9.8299W PF:0.9027 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1010.97x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 10W	WEIGHT:
SPEC.: 2700K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	578	578	578	577	578	577	577	576	578	578	578	577	578	577	577	576			
5	573	574	575	574	575	575	575	574	574	573	572	571	571	570	569	569			
10	560	560	562	563	564	564	564	564	561	559	558	556	556	554	554	554			
15	537	540	541	543	544	545	545	545	541	537	536	533	531	529	530	531			
20	504	506	508	513	515	516	515	515	510	507	503	499	496	495	496	499			
25	455	459	462	468	472	476	475	473	467	461	455	449	447	446	449	449			
30	397	406	411	413	418	424	424	419	410	404	400	391	390	389	390	388			
35	336	347	351	355	357	362	362	359	346	339	337	329	328	324	322	323			
40	276	285	288	294	294	295	296	294	283	275	273	268	265	258	257	259			
45	218	225	228	235	233	232	231	233	226	217	214	212	207	199	199	206			
50	165	170	174	179	178	176	173	175	174	169	165	161	155	149	151	158			
55	119	123	127	129	129	128	124	125	126	126	123	117	112	110	113	115			
60	84.2	87.0	88.8	90.3	90.5	89.9	87.9	87.2	87.8	89.6	88.4	83.2	80.7	81.3	82.3	81.9			
65	60.4	61.5	61.8	62.8	62.7	63.0	62.4	62.0	61.5	62.0	61.7	59.7	59.0	59.0	59.3	58.9			
70	43.5	44.0	44.0	44.5	44.5	44.7	44.5	44.4	43.7	43.5	43.5	43.1	43.1	42.8	42.8	42.7			
75	30.7	30.9	30.9	31.3	31.2	31.6	31.5	31.6	31.2	31.0	30.9	30.3	30.4	30.5	30.5	30.3			
80	18.3	19.0	18.7	18.6	18.4	18.9	19.3	19.2	19.2	19.4	18.6	17.4	16.8	17.5	18.0	18.0			
85	6.86	7.85	5.88	4.57	3.88	4.73	5.32	7.17	7.93	7.94	5.46	4.02	3.24	3.68	4.56	5.99			
90	0.29	0.28	0.28	0.25	0.24	0.21	0.24	0.23	0.50	0.50	0.46	0.50	0.48	0.50	0.46	0.47			

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-06	Remarks: