
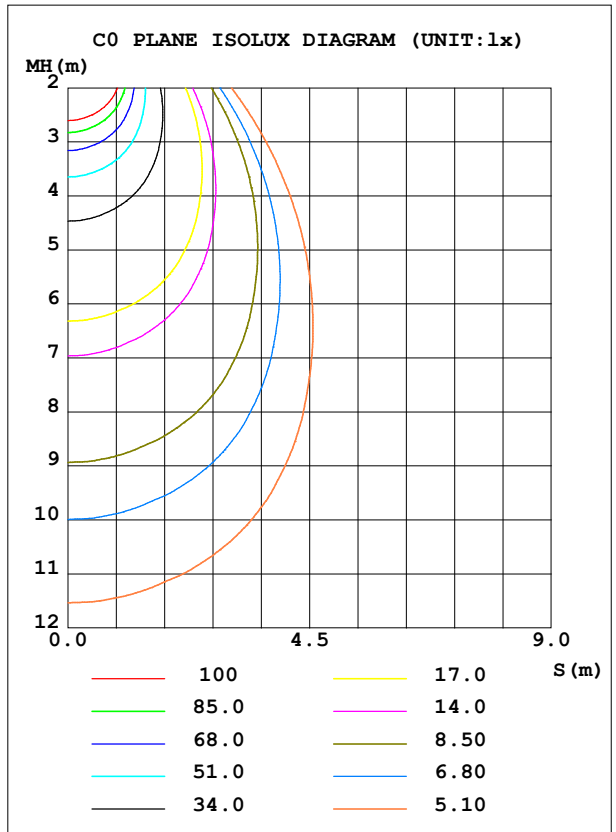


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.47V I:0.1098A P:11.710W PF:0.8928 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1185.89x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 12W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-4-16W-M-A5C5	Imax (cd)	678.7	S/MH (C0/180)	1.07
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.05
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1185.9	<input type="checkbox"/> UP, DN (C0-180)	0.0, 51.2
NOMINAL FLUX (lm)	1185.89	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 48.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

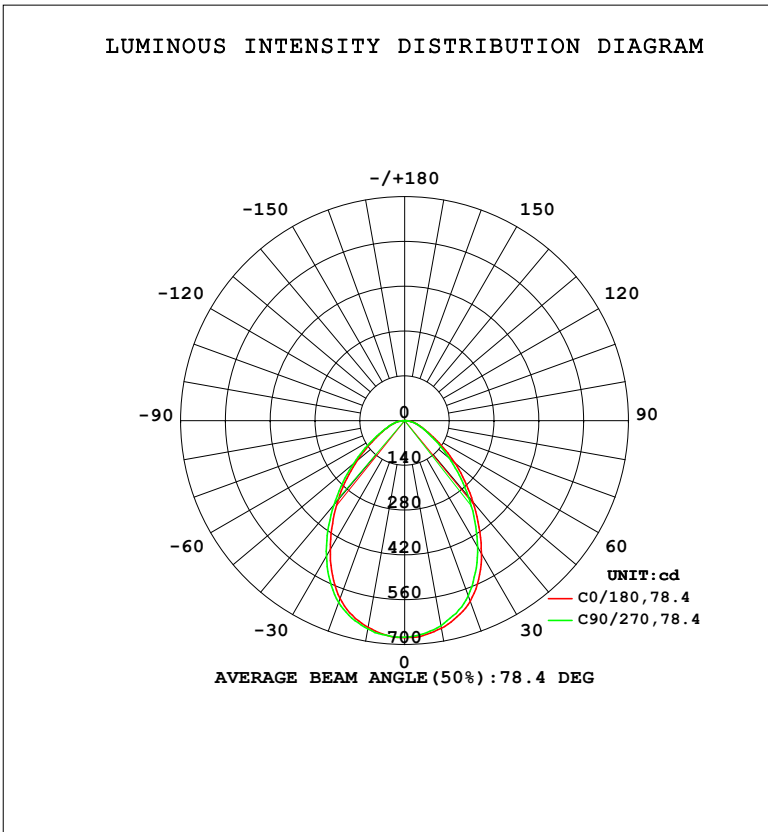

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	656.0	658.7	661.1	661.4	659.2	654.4	651.1	649.9	0- 10	63.64	63.64	5.37,5.37
20	591.2	595.4	604.8	604.9	600.5	590.4	582.0	581.5	10- 20	177.4	241.1	20.3,20.3
30	465.6	481.7	489.2	496.9	481.1	467.5	457.0	456.3	20- 30	247.3	488.4	41.2,41.2
40	323.4	338.1	344.7	346.6	332.2	319.5	310.3	301.2	30- 40	250.0	738.4	62.3,62.3
50	193.5	204.5	208.5	202.5	204.2	193.1	182.0	177.3	40- 50	199.0	937.4	79,79
60	98.71	104.4	106.0	103.2	103.2	103.7	94.60	96.42	50- 60	129.0	1066	89.9,89.9
70	51.12	51.73	52.26	52.22	51.36	51.02	50.57	50.21	60- 70	72.29	1139	96,96
80	21.53	21.99	21.61	22.68	22.65	21.80	19.70	21.13	70- 80	38.37	1177	99.3,99.3
90	0.3474	0.3409	0.2950	0.3081	0.6079	0.5506	0.5768	0.5441	80- 90	8.851	1186	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 846.24 lm

%lum = 71.4%

%lamp = 71.4%

Conical surface Flux(130deg): 1108 lm

%lum = 93.4%


%lamp = 93.4%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.47V I:0.1098A P:11.710W PF:0.8928 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1185.89x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 12W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

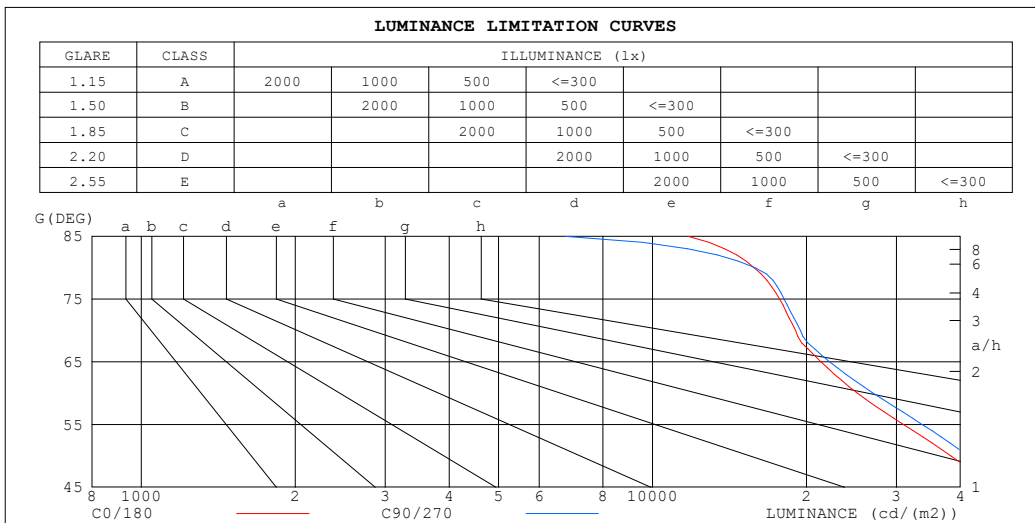

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	11742	6735
80	15793	15853
75	17719	18073
70	19041	19466
65	21361	22186
60	25148	27001
55	30976	33681
50	38355	41326
45	46081	49257


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.47V I:0.1098A P:11.710W PF:0.8928 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:1185.89x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 12W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.86	.94	.89	.85	.91	.86	.83	.88	.84	.81	.85	.82	.79	.77
3.0	.86	.79	.74	.85	.78	.73	.82	.77	.72	.79	.75	.71	.77	.73	.70	.68
4.0	.78	.71	.65	.77	.70	.64	.74	.68	.64	.72	.67	.63	.70	.66	.62	.60
5.0	.71	.63	.57	.70	.63	.57	.68	.62	.57	.66	.60	.56	.64	.59	.55	.54
6.0	.65	.57	.51	.64	.57	.51	.62	.56	.51	.61	.55	.50	.59	.54	.50	.48
7.0	.60	.52	.46	.59	.51	.46	.57	.51	.46	.56	.50	.46	.55	.49	.45	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.35	.33

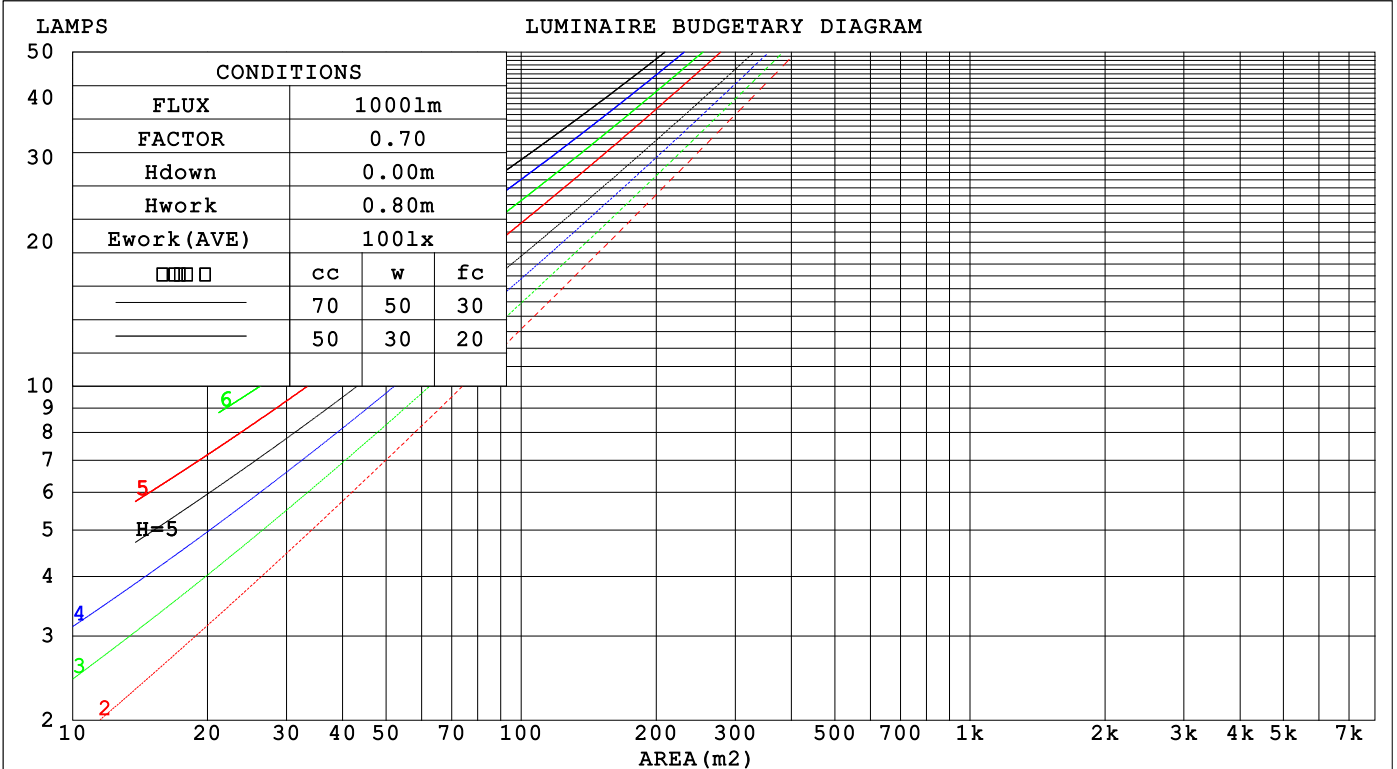

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.47V I:0.1098A P:11.710W PF:0.8928 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1185.89x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 12W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.250	.142	.045	.243	.138	.044	.230	.132	.042	.218	.126	.040	.207	.120	.039	
2.0	.239	.131	.040	.233	.129	.040	.222	.124	.038	.212	.119	.037	.202	.114	.036	
3.0	.225	.120	.036	.220	.118	.036	.210	.114	.035	.201	.110	.034	.193	.107	.033	
4.0	.212	.110	.032	.207	.108	.032	.198	.105	.031	.190	.102	.031	.183	.099	.030	
5.0	.198	.101	.029	.194	.100	.029	.187	.097	.029	.180	.095	.028	.173	.092	.028	
6.0	.186	.093	.027	.183	.092	.027	.176	.090	.026	.170	.088	.026	.164	.086	.026	
7.0	.175	.087	.025	.172	.086	.024	.166	.084	.024	.161	.082	.024	.155	.081	.024	
8.0	.166	.081	.023	.163	.080	.023	.157	.079	.022	.152	.077	.022	.147	.076	.022	
9.0	.156	.076	.021	.154	.075	.021	.149	.074	.021	.144	.072	.021	.140	.071	.021	
10.0	.148	.071	.020	.146	.071	.020	.142	.069	.020	.137	.068	.019	.133	.067	.019	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.176	.157	.139	.151	.134	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
3.0	.165	.132	.104	.142	.114	.090	.097	.079	.063	.056	.046	.037	.018	.015	.012	
4.0	.156	.114	.081	.134	.098	.070	.092	.068	.049	.053	.040	.029	.017	.013	.009	
5.0	.148	.100	.064	.127	.087	.056	.087	.060	.039	.050	.035	.023	.016	.012	.008	
6.0	.140	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006	
7.0	.133	.081	.043	.114	.070	.037	.079	.049	.027	.046	.029	.016	.015	.009	.005	
8.0	.127	.074	.036	.109	.064	.032	.075	.045	.022	.044	.026	.013	.014	.009	.004	
9.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.012	.014	.008	.004	
10.0	.115	.063	.027	.099	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.110	.058	.024	.095	.051	.021	.066	.036	.015	.038	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.47V I:0.1098A P:11.710W PF:0.8928 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1185.89x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 12W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.0	25.4	24.3	25.5	25.7	24.3	25.6	24.6	25.8	26.0
3H	24.7	25.9	25.0	26.1	26.3	24.9	26.1	25.2	26.3	26.6
4H	25.0	26.1	25.3	26.3	26.6	25.2	26.3	25.5	26.6	26.8
6H	25.2	26.2	25.5	26.5	26.8	25.4	26.5	25.7	26.7	27.0
8H	25.2	26.3	25.6	26.5	26.8	25.4	26.5	25.8	26.7	27.0
12H	25.3	26.2	25.6	26.5	26.8	25.4	26.4	25.8	26.7	27.0
4H 2H	24.3	25.4	24.6	25.7	25.9	24.5	25.7	24.8	25.9	26.2
3H	25.1	26.1	25.4	26.4	26.7	25.3	26.3	25.7	26.6	26.9
4H	25.5	26.4	25.9	26.7	27.0	25.7	26.6	26.1	26.9	27.2
6H	25.9	26.6	26.2	27.0	27.3	26.0	26.8	26.4	27.2	27.5
8H	26.0	26.7	26.4	27.1	27.4	26.1	26.8	26.5	27.2	27.6
12H	26.0	26.7	26.4	27.1	27.5	26.1	26.8	26.5	27.2	27.6
8H 4H	25.6	26.4	26.0	26.7	27.1	25.8	26.6	26.2	26.9	27.3
6H	26.1	26.7	26.5	27.1	27.5	26.3	26.9	26.7	27.3	27.7
8H	26.3	26.8	26.7	27.2	27.7	26.4	26.9	26.9	27.4	27.8
12H	26.4	26.9	26.9	27.3	27.8	26.4	26.9	26.9	27.3	27.8
12H 4H	25.6	26.3	26.1	26.7	27.1	25.8	26.5	26.2	26.9	27.3
6H	26.1	26.7	26.6	27.1	27.5	26.3	26.8	26.7	27.2	27.7
8H	26.3	26.8	26.8	27.2	27.7	26.4	26.9	26.9	27.3	27.8

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.5 / - 0.6	+ 0.5 / - 0.6
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.3
2.0H	+ 1.1 / - 0.9	+ 1.2 / - 1.0

CIE Pub.117, 1186 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.6)
 Area: 0.00785 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-06	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.47V I:0.1098A P:11.710W PF:0.8928 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1185.89x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 12W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	47
0.80	78	68	62	77	68	62	75	67	61	56
1.00	85	76	70	84	76	70	82	76	69	64
1.25	91	83	77	90	82	77	88	81	76	70
1.50	95	88	82	94	87	82	91	85	81	74
2.00	101	94	89	99	93	88	96	91	87	80
2.50	104	98	93	102	96	92	98	94	90	83
3.00	106	101	97	104	99	96	101	97	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	106	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.47V I:0.1098A P:11.710W PF:0.8928 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1185.89x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 12W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

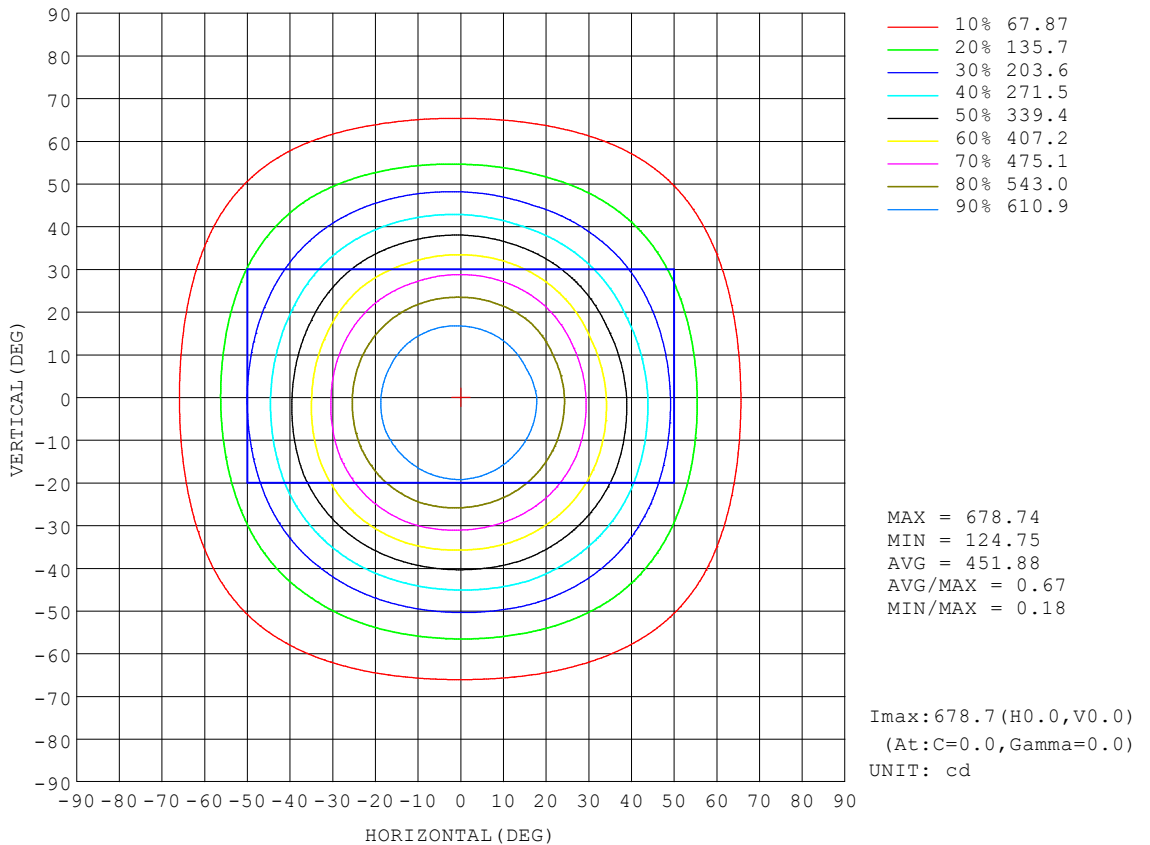


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.47V I:0.1098A P:11.710W PF:0.8928 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1185.89x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 12W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

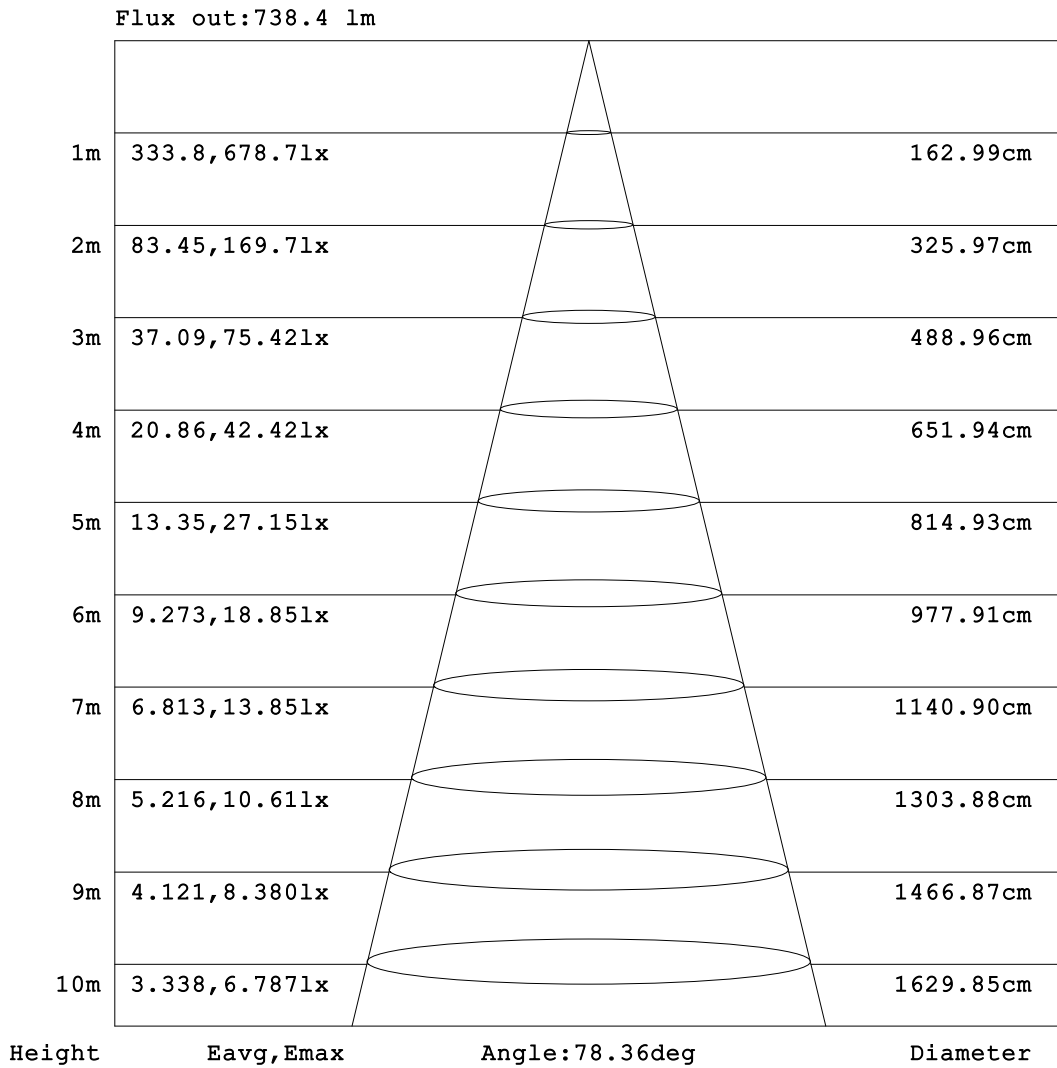


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.47V I:0.1098A P:11.710W PF:0.8928 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1185.89x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 12W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

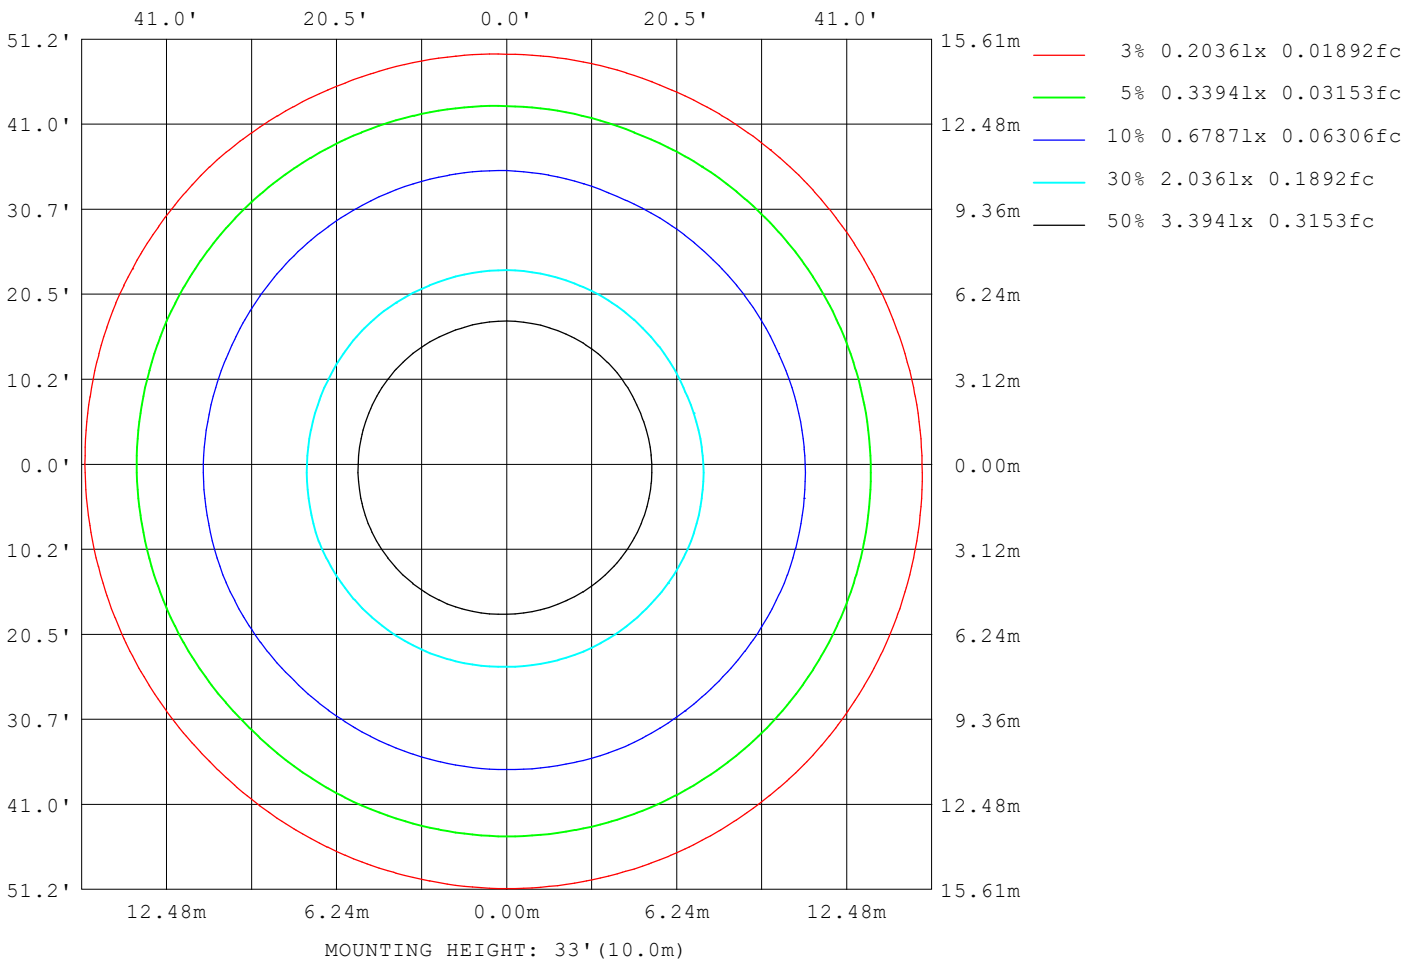

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.47V I:0.1098A P:11.710W PF:0.8928 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1185.89x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 12W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	21568
L_0~180 (75) av	17873
L_0~180 (85) av	12728
L_90~270 (65) av	21530
L_90~270 (75) av	17820
L_90~270 (85) av	6141
L_45 (65) av	21678
L_45 (75) av	17874
L_45 (85) av	9166

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

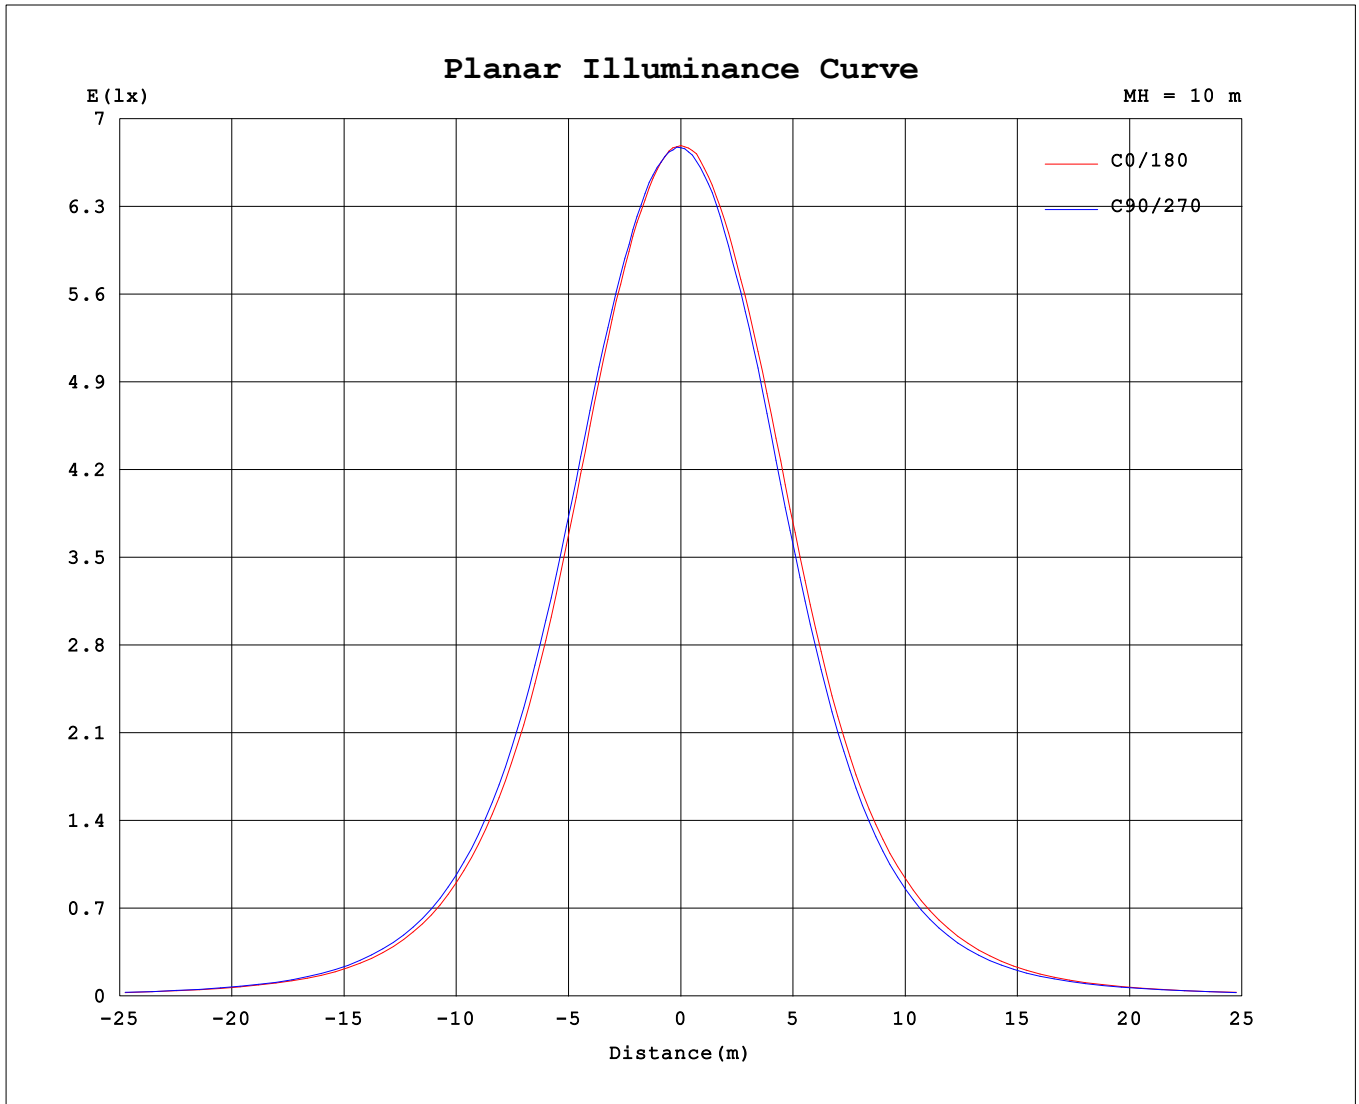

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.47V I:0.1098A P:11.710W PF:0.8928 Freq:60.01Hz UTHDi:0.00% ITTHDi:0.00% KDisp:0 Lamp Flux:1185.89x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 12W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	679	678	678	677	677	677	677	675	679	678	678	677	677	677	677	675			
5	673	673	674	674	673	675	674	673	674	673	671	670	669	667	668	668			
10	656	659	659	660	661	661	661	660	659	657	654	652	651	649	650	649			
15	630	633	635	637	639	640	640	638	634	631	628	625	623	620	622	622			
20	591	592	595	601	605	605	605	605	600	594	590	585	582	583	581	584			
25	534	538	543	549	553	558	557	554	548	541	534	527	524	523	528	526			
30	466	476	482	485	489	498	497	492	481	474	467	458	457	457	456	456			
35	394	406	412	416	418	425	425	420	406	399	395	386	384	380	378	378			
40	323	334	338	345	345	346	347	346	332	322	319	315	310	302	301	305			
45	256	264	268	275	273	272	271	273	266	255	251	248	243	232	234	240			
50	194	200	205	210	209	206	203	205	204	198	193	189	182	175	177	185			
55	139	145	149	152	152	150	145	147	148	148	144	137	132	130	132	135			
60	98.7	102	104	106	106	105	103	102	103	105	104	97.6	94.6	95.4	96.4	95.9			
65	70.9	72.2	72.6	73.6	73.6	73.8	73.2	72.8	72.2	72.8	72.3	70.2	69.2	69.4	69.6	69.1			
70	51.1	51.6	51.7	52.2	52.3	52.5	52.2	52.1	51.4	51.1	51.0	50.5	50.6	50.2	50.2	50.2			
75	36.0	36.3	36.3	36.7	36.7	37.1	37.0	37.1	36.6	36.5	36.1	35.7	35.7	35.7	35.8	35.6			
80	21.5	22.3	22.0	21.8	21.6	22.2	22.7	22.5	22.6	22.8	21.8	20.4	19.7	20.5	21.1	21.2			
85	8.03	9.23	6.94	5.39	4.61	5.57	6.31	8.44	9.38	9.34	6.46	4.74	3.79	4.33	5.37	7.04			
90	0.35	0.32	0.34	0.30	0.29	0.27	0.31	0.29	0.61	0.60	0.55	0.59	0.58	0.60	0.54	0.56			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks: