
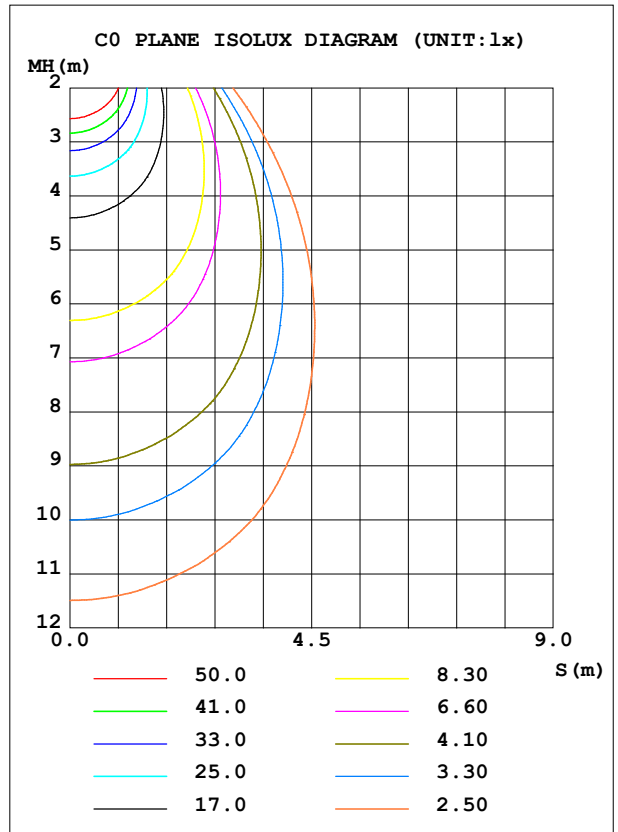


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.48V I:0.0506A P:5.5301W PF:0.9144 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:578.633x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-4-16W-M-A5C5	Imax (cd)	330.3	S/MH (C0/180)	1.07
NOMINAL POWER (W)	6	LOR (%)	100.0	S/MH (C90/270)	1.06
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	578.63	<input type="checkbox"/> UP, DN (C0-180)	0.0, 51.1
NOMINAL FLUX (lm)	578.633	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 48.9
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

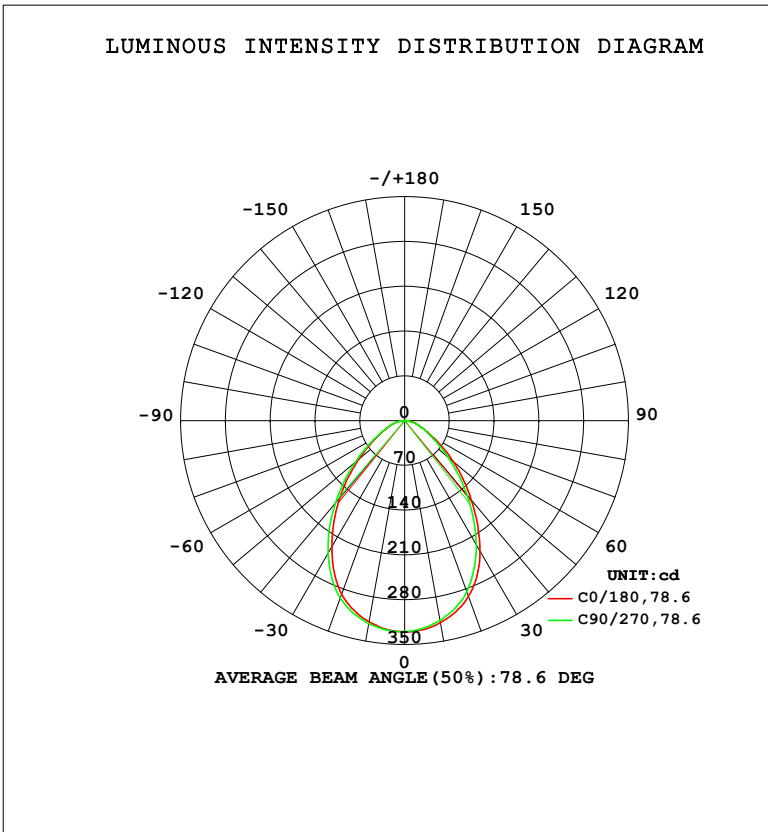

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	319.4	321.0	322.1	322.3	320.9	319.0	317.0	316.7	0- 10	31.00	31.00	5.36,5.36
20	288.6	290.9	294.9	295.0	292.3	288.3	284.6	284.7	10- 20	86.50	117.5	20.3,20.3
30	227.9	235.2	239.7	243.0	235.7	229.8	224.2	223.9	20- 30	120.9	238.4	41.2,41.2
40	158.1	165.1	168.4	169.9	162.5	156.7	152.0	147.4	30- 40	122.5	360.9	62.4,62.4
50	93.55	99.00	101.1	98.34	99.04	93.91	88.36	86.09	40- 50	97.02	458.0	79.1,79.1
60	47.91	50.50	51.34	50.02	50.03	50.39	46.10	46.87	50- 60	62.46	520.4	89.9,89.9
70	24.90	25.26	25.54	25.49	25.13	24.94	24.71	24.54	60- 70	35.22	555.6	96,96
80	10.44	10.70	10.48	11.04	11.02	10.62	9.587	10.30	70- 80	18.73	574.4	99.3,99.3
90	0.1311	0.1311	0.1114	0.1114	0.2568	0.2229	0.2425	0.2229	80- 90	4.274	578.6	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 413.61 lm

%lum = 71.5%

%lamp = 71.5%

Conical surface Flux(130deg): 540.65 lm

%lum = 93.4%


%lamp = 93.4%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.48V I:0.0506A P:5.5301W PF:0.9144 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:578.633x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

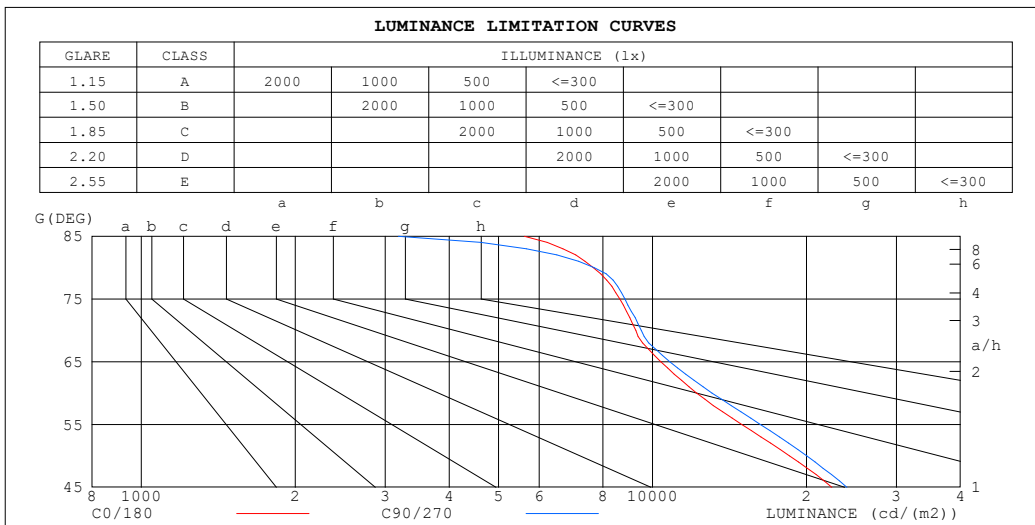

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5617	3184
80	7661	7688
75	8636	8827
70	9275	9513
65	10386	10808
60	12207	13080
55	14958	16265
50	18540	20027
45	22428	23990


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.48V I:0.0506A P:5.5301W PF:0.9144 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:578.633x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.86	.94	.89	.85	.91	.86	.83	.88	.84	.81	.85	.82	.79	.77
3.0	.86	.79	.74	.85	.78	.73	.82	.77	.72	.79	.75	.71	.77	.73	.70	.68
4.0	.78	.71	.65	.77	.70	.64	.74	.68	.64	.72	.67	.63	.70	.66	.62	.60
5.0	.71	.63	.57	.70	.63	.57	.68	.62	.57	.66	.60	.56	.64	.59	.56	.54
6.0	.65	.57	.51	.64	.57	.51	.62	.56	.51	.61	.55	.50	.59	.54	.50	.48
7.0	.60	.52	.46	.59	.52	.46	.57	.51	.46	.56	.50	.46	.55	.49	.45	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.35	.33

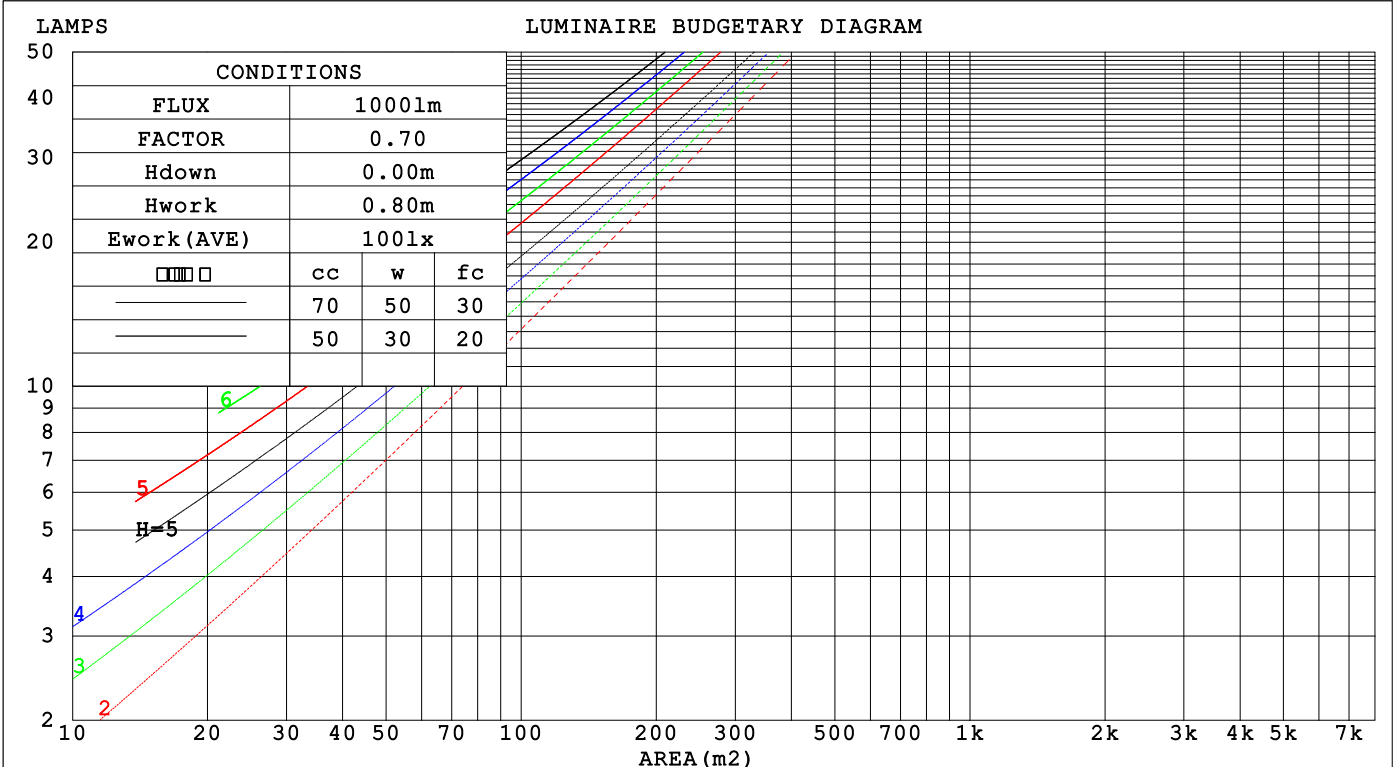

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.48V I:0.0506A P:5.5301W PF:0.9144 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:578.633x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients(WEC)			
0.0						
1.0	.249 .142 .045	.242 .138 .044	.229 .132 .042	.218 .125 .040	.207 .120 .039	
2.0	.239 .131 .040	.233 .128 .040	.222 .123 .038	.212 .119 .037	.202 .114 .036	
3.0	.225 .120 .036	.220 .118 .035	.210 .114 .035	.201 .110 .034	.193 .107 .033	
4.0	.211 .110 .032	.207 .108 .032	.198 .105 .031	.190 .102 .031	.183 .099 .030	
5.0	.198 .101 .029	.194 .100 .029	.187 .097 .029	.180 .095 .028	.173 .092 .028	
6.0	.186 .093 .027	.183 .092 .027	.176 .090 .026	.170 .088 .026	.164 .086 .026	
7.0	.175 .087 .025	.172 .086 .024	.166 .084 .024	.160 .082 .024	.155 .081 .024	
8.0	.165 .081 .023	.163 .080 .023	.157 .079 .022	.152 .077 .022	.147 .076 .022	
9.0	.156 .076 .021	.154 .075 .021	.149 .074 .021	.144 .072 .021	.140 .071 .021	
10.0	.148 .071 .020	.146 .070 .020	.142 .069 .020	.137 .068 .019	.133 .067 .019	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients(CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.176 .157 .139	.151 .134 .120	.103 .093 .083	.059 .054 .048	.019 .017 .016	
2.0	.165 .132 .104	.142 .114 .090	.097 .079 .063	.056 .046 .037	.018 .015 .012	
3.0	.156 .114 .081	.134 .098 .070	.092 .068 .049	.053 .040 .029	.017 .013 .009	
4.0	.148 .100 .064	.127 .087 .056	.087 .060 .039	.050 .035 .023	.016 .012 .008	
5.0	.140 .089 .052	.120 .077 .045	.083 .054 .032	.048 .032 .019	.015 .010 .006	
6.0	.133 .081 .043	.114 .070 .038	.079 .049 .027	.046 .029 .016	.015 .009 .005	
7.0	.127 .074 .036	.109 .064 .032	.075 .045 .022	.044 .026 .013	.014 .009 .004	
8.0	.121 .068 .031	.104 .059 .027	.072 .041 .019	.042 .024 .012	.014 .008 .004	
9.0	.115 .063 .027	.099 .054 .024	.069 .038 .017	.040 .023 .010	.013 .007 .003	
10.0	.110 .058 .024	.095 .051 .021	.066 .036 .015	.038 .021 .009	.012 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.48V I:0.0506A P:5.5301W PF:0.9144 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:578.633x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.5	22.8	21.8	23.0	23.2	21.8	23.1	22.1	23.3	23.5
3H	22.1	23.3	22.4	23.6	23.8	22.4	23.6	22.7	23.8	24.0
4H	22.4	23.6	22.7	23.8	24.0	22.7	23.8	23.0	24.0	24.3
6H	22.6	23.7	23.0	24.0	24.2	22.9	24.0	23.2	24.2	24.5
8H	22.7	23.7	23.0	24.0	24.3	22.9	24.0	23.3	24.2	24.5
12H	22.7	23.7	23.1	24.0	24.3	22.9	23.9	23.3	24.2	24.5
4H 2H	21.8	22.9	22.1	23.1	23.4	22.0	23.1	22.3	23.4	23.6
3H	22.6	23.6	22.9	23.8	24.1	22.8	23.8	23.1	24.1	24.4
4H	23.0	23.9	23.4	24.2	24.5	23.2	24.1	23.6	24.4	24.7
6H	23.3	24.1	23.7	24.5	24.8	23.5	24.3	23.9	24.7	25.0
8H	23.4	24.2	23.8	24.5	24.9	23.6	24.3	24.0	24.7	25.1
12H	23.5	24.2	23.9	24.5	24.9	23.6	24.3	24.0	24.7	25.1
8H 4H	23.1	23.9	23.5	24.2	24.6	23.3	24.0	23.7	24.4	24.8
6H	23.6	24.2	24.0	24.6	25.0	23.8	24.4	24.2	24.8	25.2
8H	23.8	24.3	24.2	24.7	25.2	23.9	24.4	24.3	24.8	25.3
12H	23.9	24.3	24.4	24.8	25.3	23.9	24.4	24.4	24.8	25.3
12H 4H	23.1	23.8	23.5	24.2	24.6	23.3	24.0	23.7	24.4	24.7
6H	23.6	24.1	24.1	24.6	25.0	23.8	24.3	24.2	24.7	25.2
8H	23.8	24.3	24.3	24.7	25.2	23.9	24.4	24.4	24.8	25.3

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.5 / - 0.7	+ 0.5 / - 0.6
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.3
2.0H	+ 1.1 / - 0.9	+ 1.2 / - 0.9

CIE Pub.117, 578.6 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.9)
 Area: 0.00785 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-06	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.48V I:0.0506A P:5.5301W PF:0.9144 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:578.633x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	58	52	47
0.80	78	68	62	77	68	62	75	67	62	56
1.00	85	76	70	84	76	70	82	76	70	64
1.25	91	83	77	90	82	77	88	81	76	70
1.50	95	88	82	94	87	82	91	85	81	74
2.00	101	94	89	99	93	88	96	91	87	80
2.50	104	98	93	102	96	92	98	94	90	83
3.00	106	101	97	104	100	96	101	97	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	108	104	109	106	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.48V I:0.0506A P:5.5301W PF:0.9144 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:578.633x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

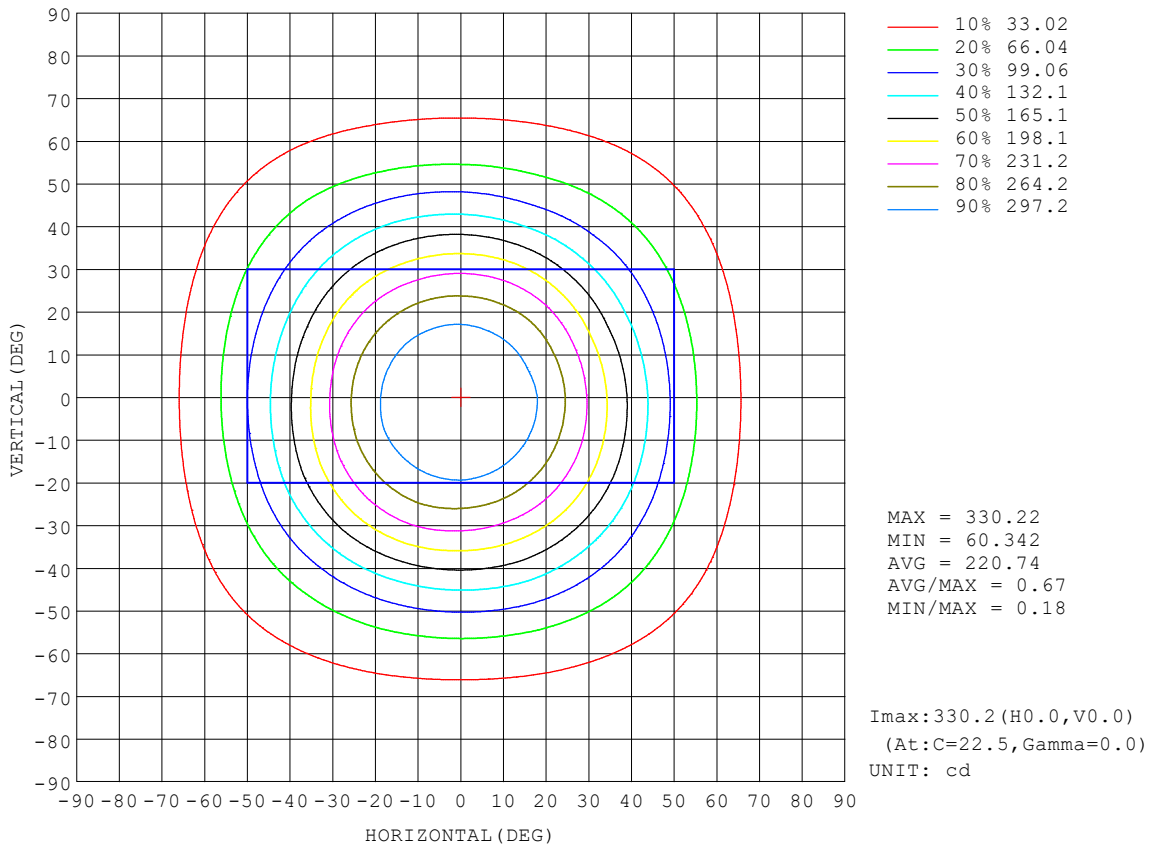


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.48V I:0.0506A P:5.5301W PF:0.9144 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:578.633x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

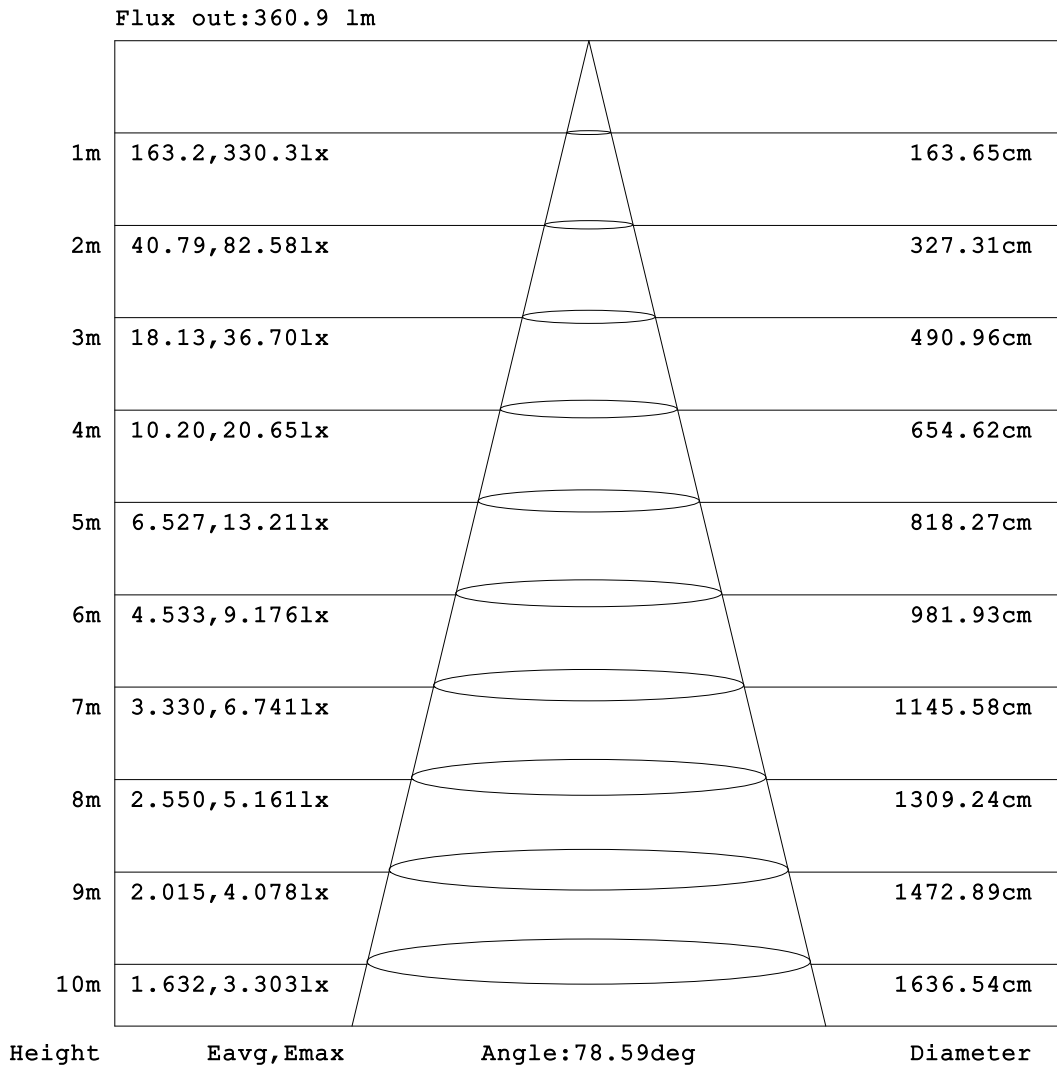


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.48V I:0.0506A P:5.5301W PF:0.9144 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:578.633x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

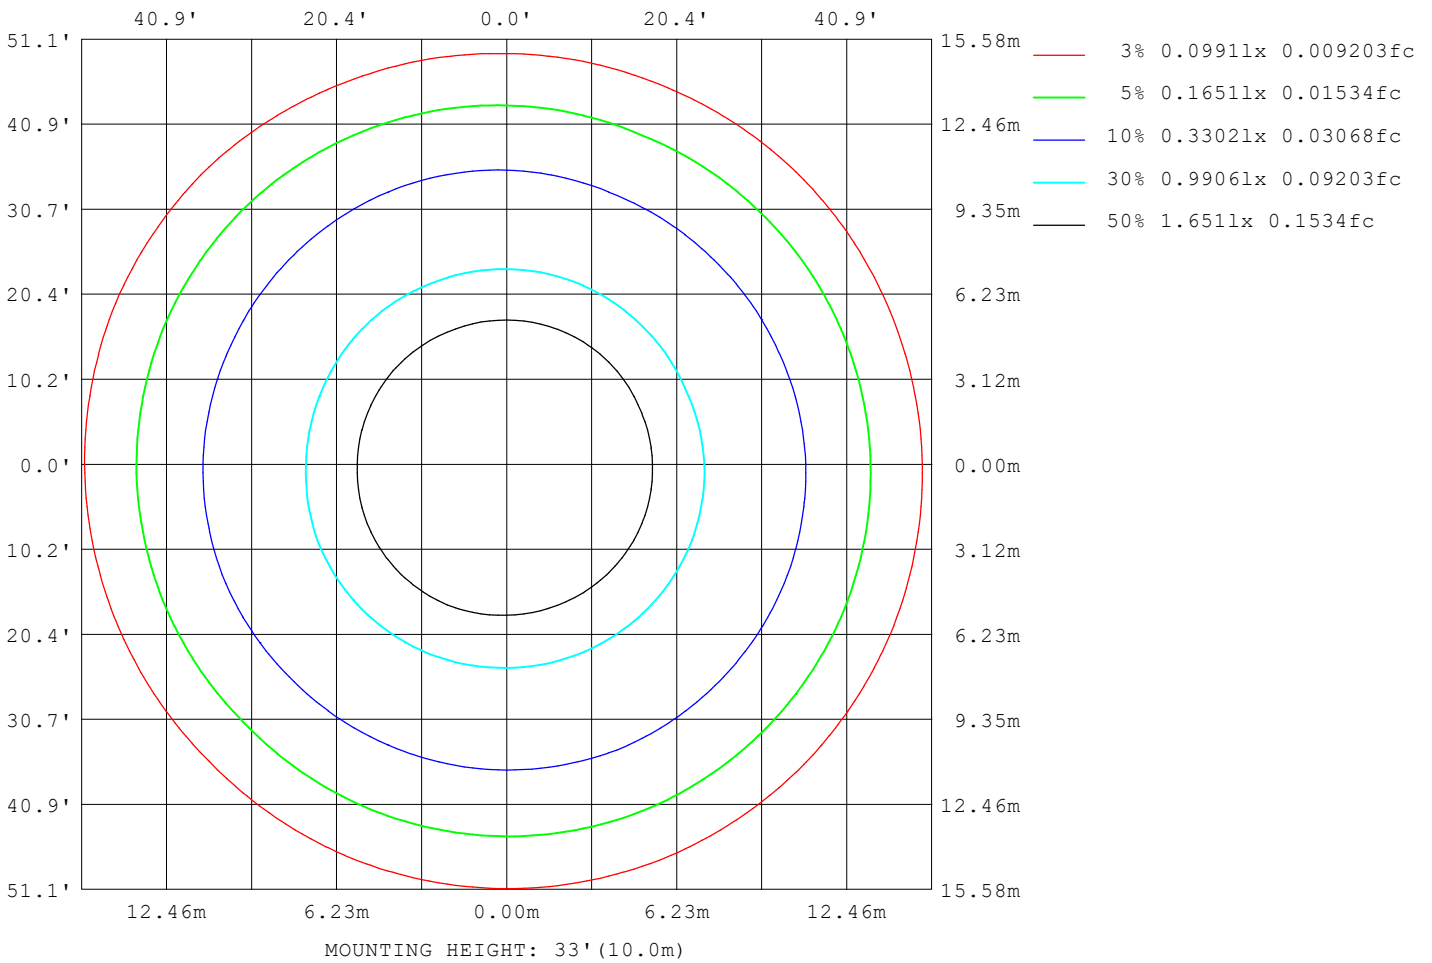

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.48V I:0.0506A P:5.5301W PF:0.9144 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:578.633x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10505
L_0~180 (75) av	8721
L_0~180 (85) av	6137
L_90~270 (65) av	10508
L_90~270 (75) av	8704
L_90~270 (85) av	2927
L_45 (65) av	10572
L_45 (75) av	8723
L_45 (85) av	4394

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

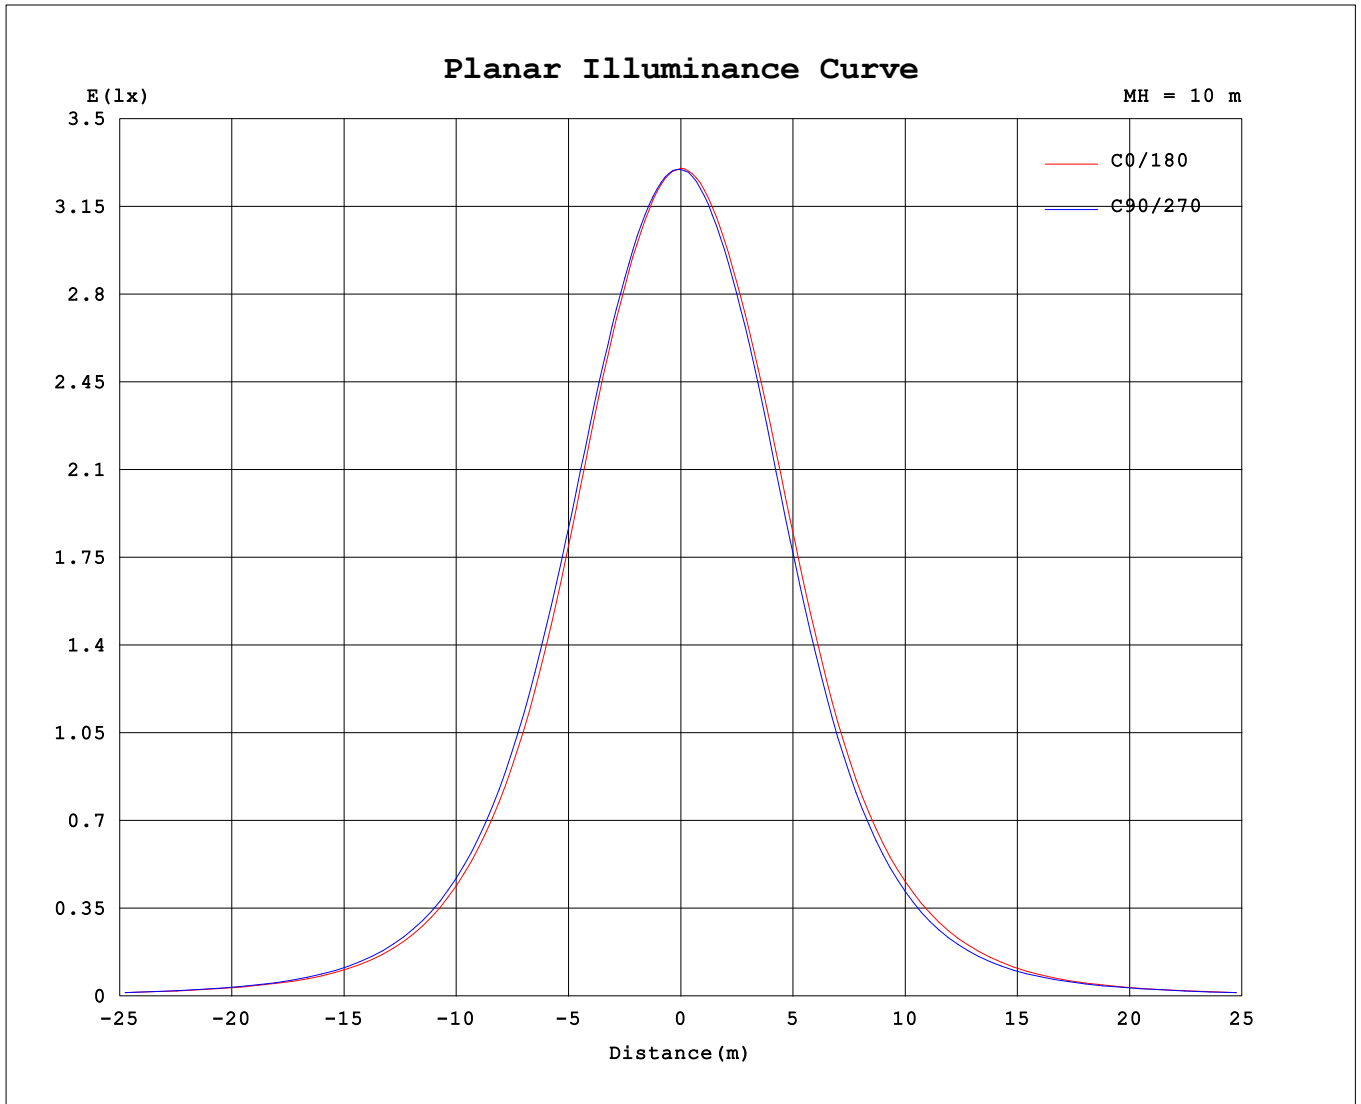

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.48V I:0.0506A P:5.5301W PF:0.9144 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:578.633x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	330	330	330	330	330	330	329	329	330	330	330	330	330	330	329	329			
5	327	328	328	328	328	329	328	328	328	327	327	326	326	326	325	325			
10	319	320	321	322	322	322	322	322	321	320	319	318	317	316	317	317			
15	307	308	309	310	311	312	312	311	310	308	307	305	304	303	303	304			
20	289	289	291	293	295	295	295	295	292	290	288	286	285	284	285	285			
25	261	263	265	268	270	272	272	271	268	265	262	258	257	257	258	258			
30	228	233	235	238	240	243	243	241	236	233	230	225	224	224	224	224			
35	193	198	202	204	205	208	208	206	199	196	194	190	188	187	185	186			
40	158	163	165	168	168	169	170	169	162	158	157	154	152	148	147	149			
45	124	128	130	134	133	132	132	133	129	125	123	121	118	114	114	118			
50	93.5	96.7	99.0	101	101	99.7	98.3	99.7	99.0	96.3	93.9	91.6	88.4	85.0	86.1	89.5			
55	67.3	69.7	71.9	73.3	73.2	72.5	70.4	71.2	71.8	71.6	70.0	66.4	64.0	62.8	64.0	65.3			
60	47.9	49.4	50.5	51.4	51.3	51.1	50.0	49.7	50.0	51.1	50.4	47.4	46.1	46.3	46.9	46.6			
65	34.5	35.2	35.4	35.9	35.9	36.0	35.7	35.5	35.2	35.5	35.3	34.2	33.9	33.8	33.9	33.7			
70	24.9	25.1	25.3	25.5	25.5	25.7	25.5	25.5	25.1	25.0	24.9	24.7	24.7	24.6	24.5	24.5			
75	17.5	17.7	17.7	17.9	17.9	18.1	18.0	18.1	17.9	17.8	17.7	17.4	17.4	17.5	17.5	17.4			
80	10.4	10.8	10.7	10.6	10.5	10.8	11.0	10.9	11.0	11.1	10.6	9.93	9.59	9.99	10.3	10.3			
85	3.84	4.45	3.32	2.60	2.18	2.69	3.03	4.09	4.55	4.52	3.08	2.25	1.83	2.04	2.59	3.36			
90	0.13	0.12	0.13	0.10	0.11	0.09	0.11	0.10	0.26	0.25	0.22	0.25	0.24	0.26	0.22	0.24			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-07-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks: