
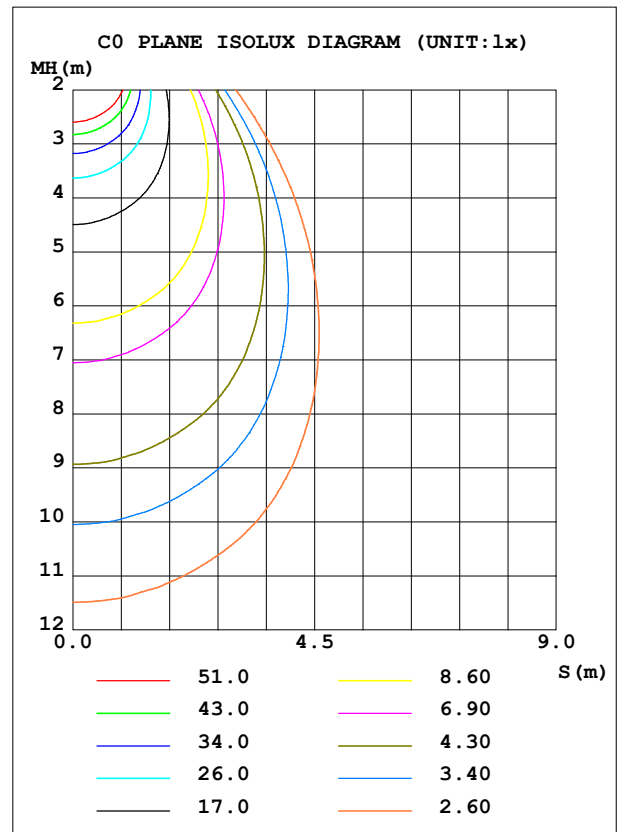


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.48V I:0.0506A P:5.5379W PF:0.9152 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:604.802x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3500K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-4-16W-M-A5C5	Imax (cd)	343.3	S/MH (C0/180)	1.08
NOMINAL POWER (W)	6	LOR (%)	100.0	S/MH (C90/270)	1.07
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	604.80	<input type="checkbox"/> UP, DN (C0-180)	0.0, 51.1
NOMINAL FLUX (lm)	604.802	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 48.9
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

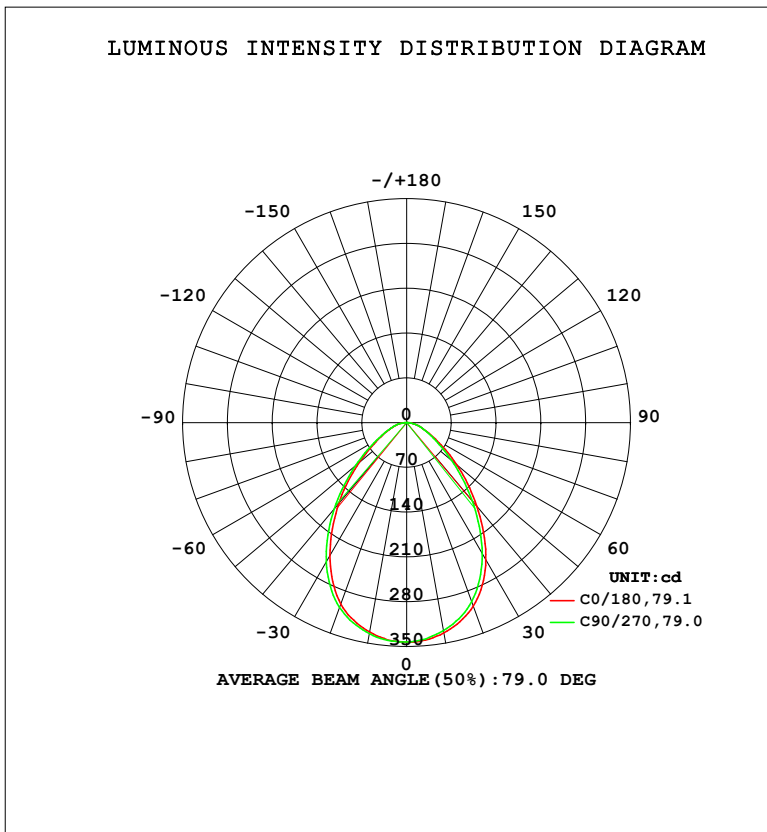

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	332.5	333.9	334.9	334.9	333.7	332.1	330.1	329.9	0- 10	32.24	32.24	5.33,5.33
20	301.2	303.5	307.2	307.5	305.0	301.4	297.8	297.3	10- 20	90.14	122.4	20.2,20.2
30	240.2	246.3	251.8	254.6	248.0	241.9	236.8	236.3	20- 30	126.8	249.2	41.2,41.2
40	165.4	172.8	176.1	178.4	170.8	164.9	159.6	155.2	30- 40	128.8	378.0	62.5,62.5
50	96.77	102.2	104.2	101.9	102.2	97.40	91.68	89.19	40- 50	101.2	479.1	79.2,79.2
60	49.88	52.33	53.13	51.90	51.97	52.22	48.07	48.71	50- 60	64.53	543.7	89.9,89.9
70	26.22	26.64	26.92	26.89	26.45	26.31	26.04	25.87	60- 70	36.89	580.6	96,96
80	11.01	11.26	11.05	11.60	11.60	11.19	10.08	10.85	70- 80	19.73	600.3	99.3,99.3
90	0.1442	0.1442	0.1245	0.1180	0.2753	0.2425	0.2557	0.2360	80- 90	4.502	604.8	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 433.1 lm

%lum = 71.6%

%lamp = 71.6%

Conical surface Flux(130deg): 564.8 lm

%lum = 93.4%


%lamp = 93.4%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-06

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:119.48V I:0.0506A P:5.5379W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:604.802x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3500K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

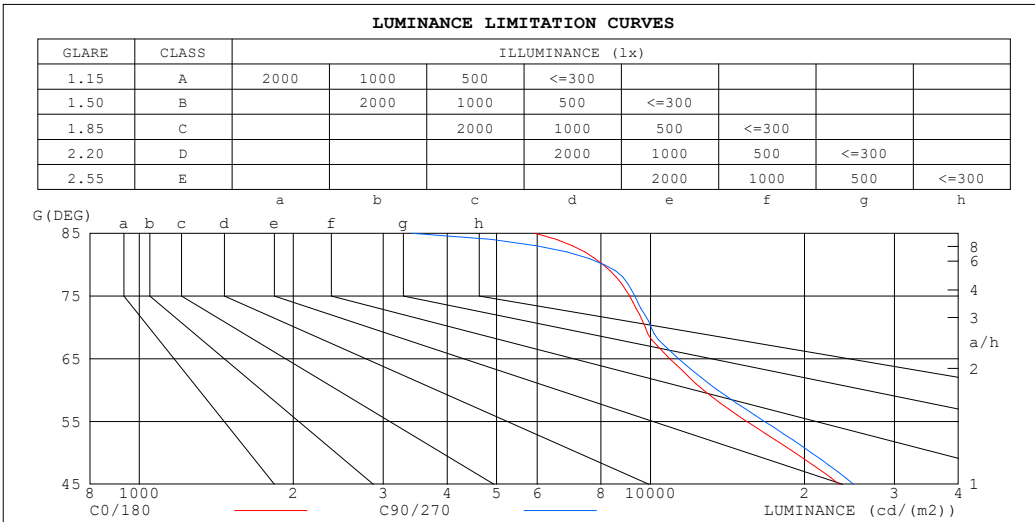

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5948	3415
80	8079	8107
75	9106	9319
70	9765	10025
65	10910	11359
60	12709	13536
55	15437	16717
50	19178	20653
45	23372	24952


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.48V I:0.0506A P:5.5379W PF:0.9152 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:604.802x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3500K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.86	.94	.89	.85	.91	.86	.83	.88	.84	.81	.85	.82	.79	.77
3.0	.86	.79	.74	.85	.78	.73	.82	.77	.72	.79	.75	.71	.77	.73	.70	.68
4.0	.78	.71	.65	.77	.70	.64	.74	.68	.64	.72	.67	.63	.70	.66	.62	.60
5.0	.71	.63	.58	.70	.63	.57	.68	.62	.57	.66	.60	.56	.64	.59	.56	.54
6.0	.65	.57	.51	.64	.57	.51	.62	.56	.51	.61	.55	.50	.59	.54	.50	.48
7.0	.60	.52	.46	.59	.52	.46	.57	.51	.46	.56	.50	.46	.55	.49	.45	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.35	.33

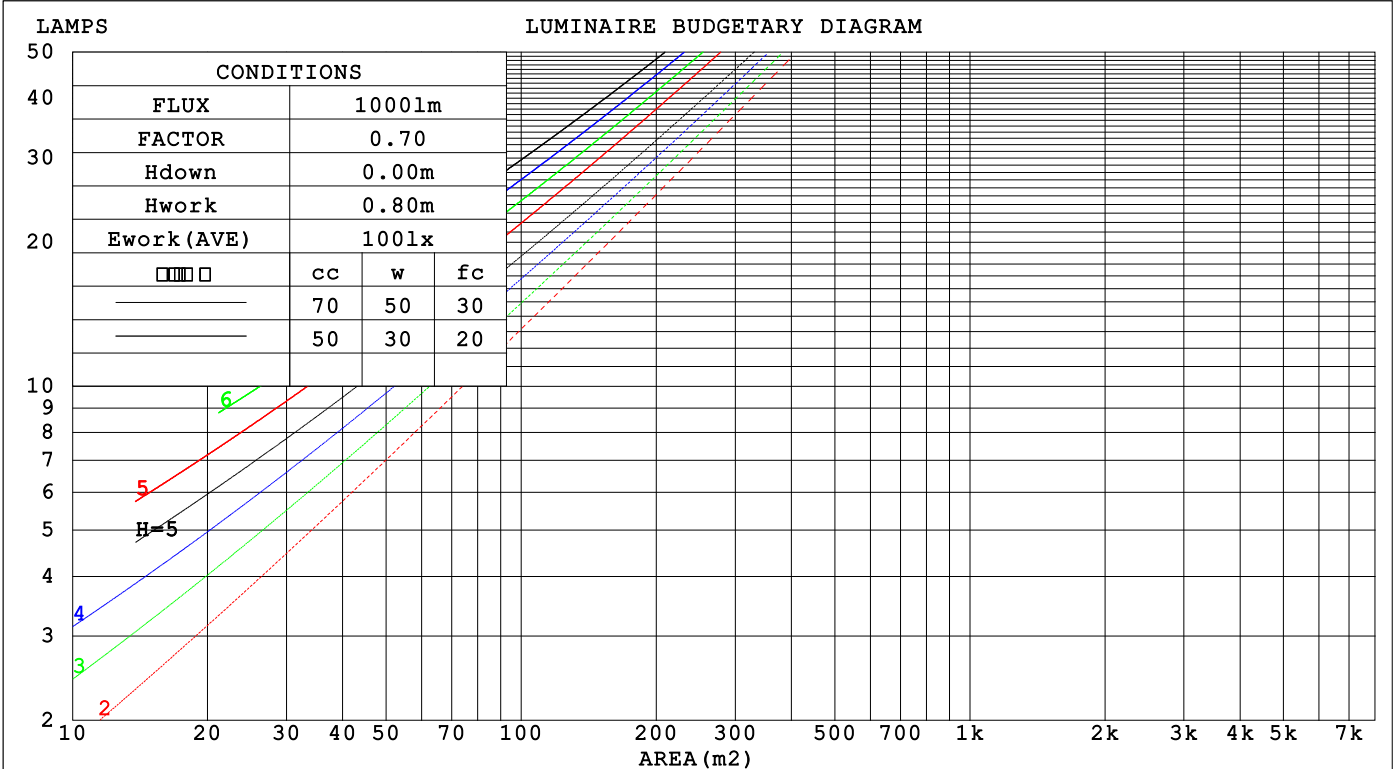

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-06

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:119.48V I:0.0506A P:5.5379W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:604.802x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3500K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.249	.142	.045	.243	.138	.044	.230	.132	.042	.218	.126	.040	.207	.120	.039	
2.0	.239	.131	.040	.233	.128	.040	.222	.123	.038	.212	.119	.037	.202	.114	.036	
3.0	.225	.120	.036	.220	.118	.035	.210	.114	.035	.201	.110	.034	.193	.107	.033	
4.0	.211	.110	.032	.207	.108	.032	.198	.105	.031	.190	.102	.031	.183	.099	.030	
5.0	.198	.101	.029	.194	.100	.029	.187	.097	.029	.180	.095	.028	.173	.092	.028	
6.0	.186	.093	.027	.183	.092	.027	.176	.090	.026	.170	.088	.026	.164	.086	.026	
7.0	.175	.087	.025	.172	.086	.024	.166	.084	.024	.160	.082	.024	.155	.081	.024	
8.0	.165	.081	.023	.163	.080	.023	.157	.079	.022	.152	.077	.022	.147	.076	.022	
9.0	.156	.076	.021	.154	.075	.021	.149	.074	.021	.144	.072	.021	.140	.071	.021	
10.0	.148	.071	.020	.146	.070	.020	.142	.069	.020	.137	.068	.019	.133	.067	.019	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.176	.157	.139	.151	.134	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
2.0	.165	.132	.104	.142	.114	.090	.097	.079	.063	.056	.046	.037	.018	.015	.012	
3.0	.156	.114	.081	.134	.098	.070	.092	.068	.049	.053	.040	.029	.017	.013	.009	
4.0	.148	.100	.064	.127	.087	.056	.087	.060	.039	.050	.035	.023	.016	.012	.008	
5.0	.140	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006	
6.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005	
7.0	.127	.074	.036	.109	.064	.032	.075	.045	.022	.044	.026	.013	.014	.009	.004	
8.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.012	.014	.008	.004	
9.0	.115	.063	.027	.099	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.110	.058	.024	.095	.051	.021	.066	.036	.015	.038	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.48V I:0.0506A P:5.5379W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:604.802x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3500K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.6	22.9	21.9	23.1	23.3	21.9	23.2	22.2	23.4	23.6
3H	22.3	23.5	22.6	23.7	23.9	22.5	23.7	22.8	23.9	24.2
4H	22.6	23.7	22.9	23.9	24.2	22.8	23.9	23.1	24.2	24.4
6H	22.8	23.9	23.1	24.1	24.4	23.0	24.1	23.3	24.3	24.6
8H	22.9	23.9	23.2	24.2	24.4	23.1	24.1	23.4	24.4	24.6
12H	22.9	23.9	23.2	24.1	24.4	23.1	24.0	23.4	24.3	24.6
4H 2H	21.9	23.0	22.2	23.2	23.5	22.1	23.2	22.4	23.5	23.7
3H	22.7	23.7	23.1	24.0	24.3	22.9	23.9	23.3	24.2	24.5
4H	23.1	24.0	23.5	24.3	24.7	23.3	24.2	23.7	24.5	24.9
6H	23.5	24.3	23.9	24.6	25.0	23.7	24.5	24.1	24.8	25.2
8H	23.6	24.3	24.0	24.7	25.1	23.8	24.5	24.2	24.8	25.2
12H	23.7	24.3	24.1	24.7	25.1	23.8	24.4	24.2	24.8	25.2
8H 4H	23.3	24.0	23.7	24.4	24.7	23.5	24.2	23.9	24.6	24.9
6H	23.7	24.4	24.2	24.8	25.2	23.9	24.5	24.3	24.9	25.3
8H	23.9	24.5	24.4	24.9	25.3	24.0	24.6	24.5	25.0	25.4
12H	24.0	24.5	24.5	25.0	25.4	24.1	24.5	24.6	25.0	25.5
12H 4H	23.3	23.9	23.7	24.3	24.7	23.4	24.1	23.9	24.5	24.9
6H	23.8	24.3	24.2	24.7	25.2	23.9	24.5	24.4	24.9	25.3
8H	24.0	24.4	24.5	24.9	25.4	24.1	24.5	24.6	25.0	25.5

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.5 / - 0.7	+ 0.5 / - 0.6
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.3
2.0H	+ 1.1 / - 0.9	+ 1.2 / - 0.9

CIE Pub.117, 604.8 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.7)  
 Area: 0.00785 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-06	Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.48V I:0.0506A P:5.5379W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:604.802x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3500K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	58	52	47
0.80	78	68	62	77	68	62	75	67	62	56
1.00	85	76	70	84	76	70	82	76	70	64
1.25	91	83	77	90	82	77	88	81	76	70
1.50	96	88	82	94	87	82	91	85	81	74
2.00	101	94	89	99	93	88	96	91	87	80
2.50	104	98	93	102	96	92	98	94	90	83
3.00	106	101	97	104	100	96	101	97	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	108	104	109	106	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.48V I:0.0506A P:5.5379W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:604.802x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3500K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

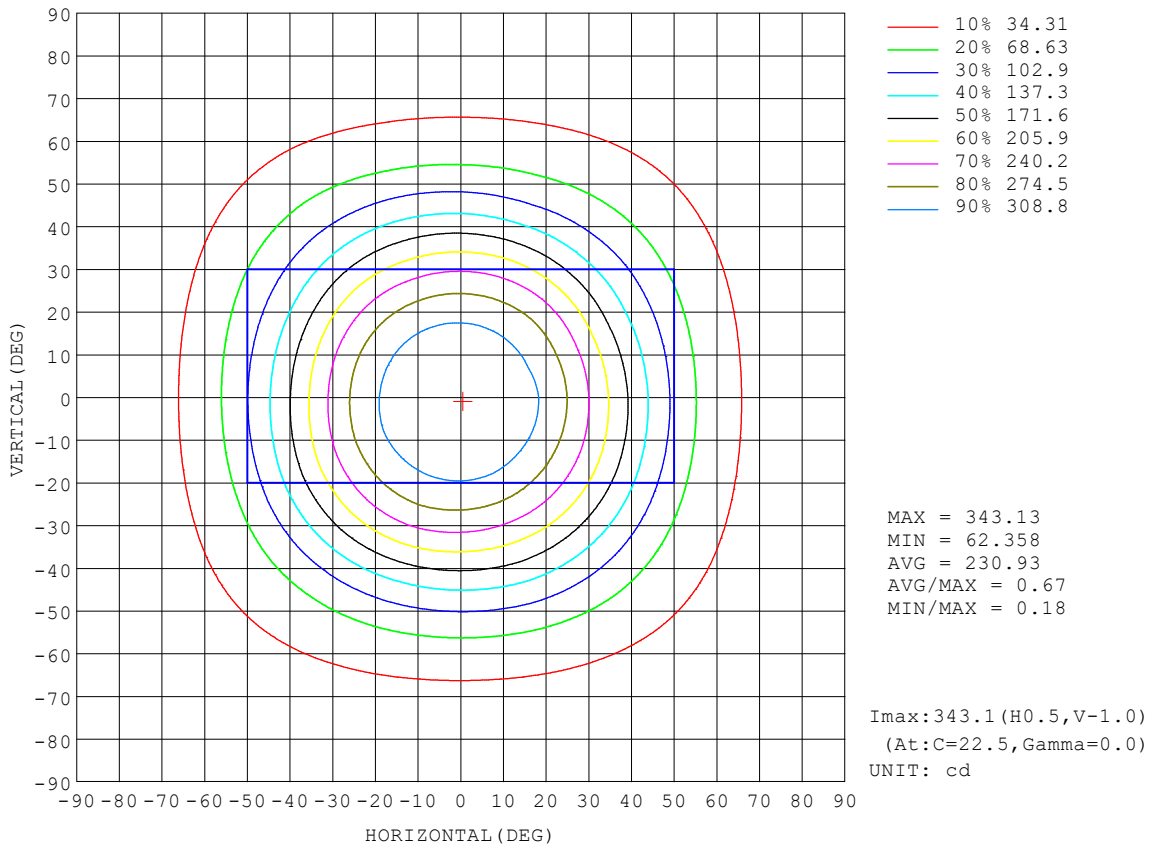


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.48V I:0.0506A P:5.5379W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:604.802x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3500K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

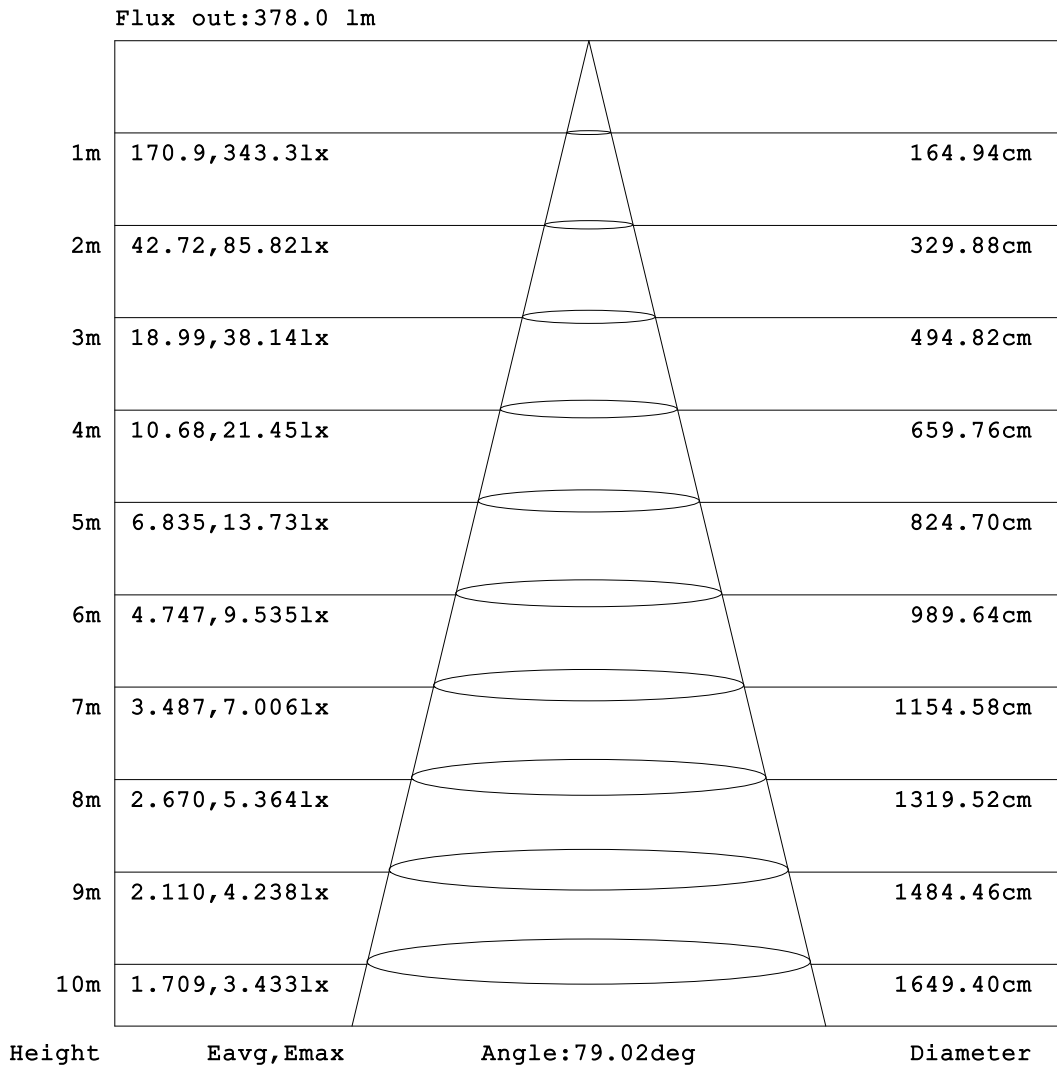


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.48V I:0.0506A P:5.5379W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:604.802x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3500K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

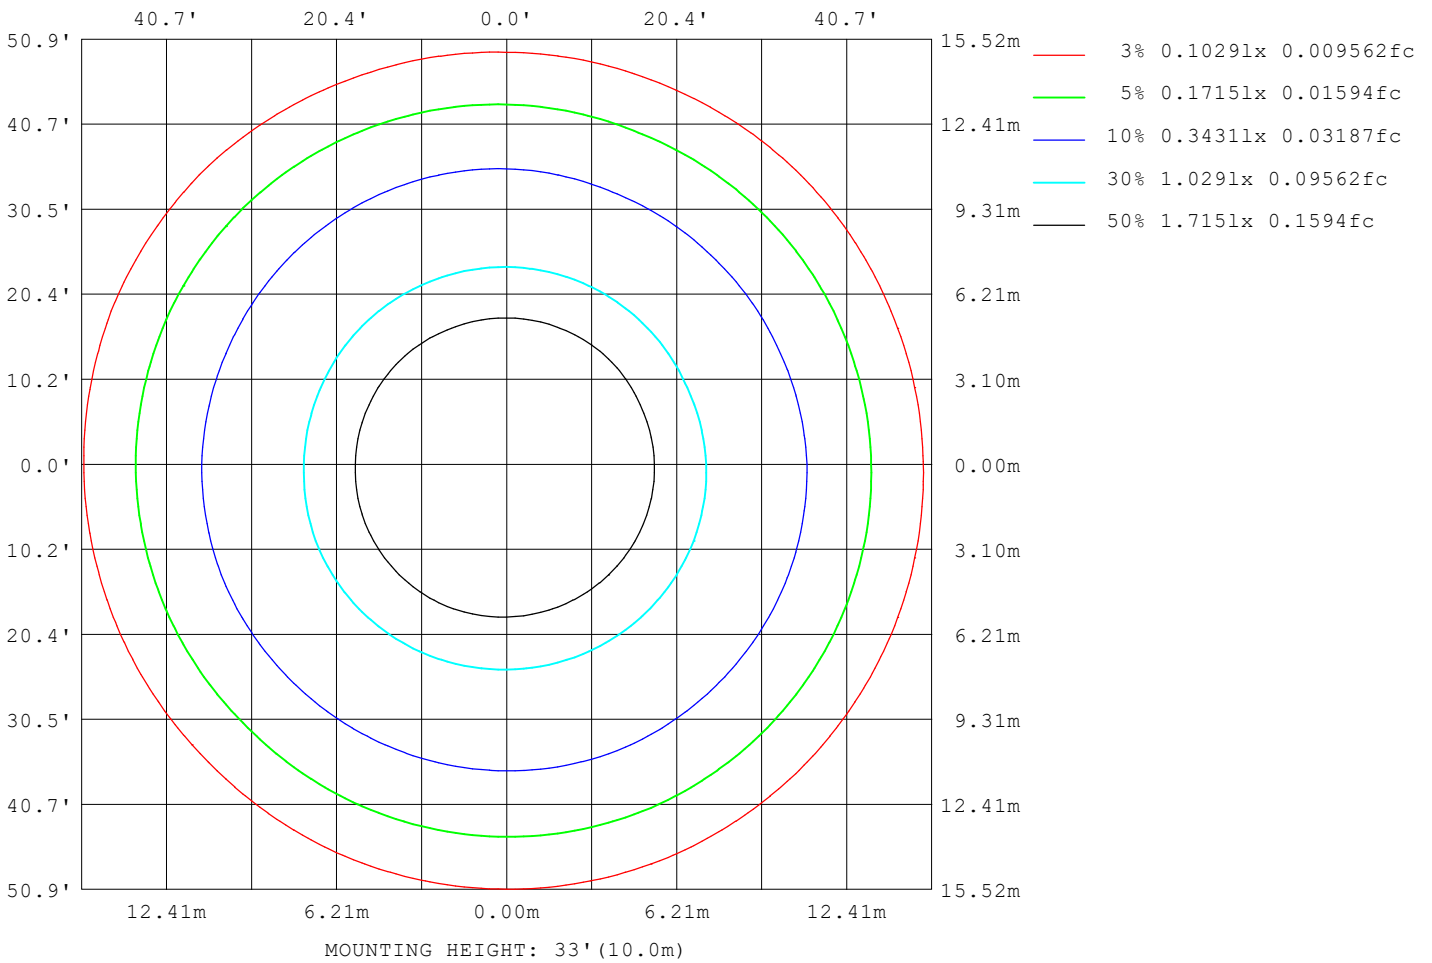

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.48V I:0.0506A P:5.5379W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:604.802x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3500K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	11037
L_0~180 (75) av	9192
L_0~180 (85) av	6484
L_90~270 (65) av	11044
L_90~270 (75) av	9178
L_90~270 (85) av	3120
L_45 (65) av	11097
L_45 (75) av	9193
L_45 (85) av	4632

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:DAMIN  
 Test Date:2023-07-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

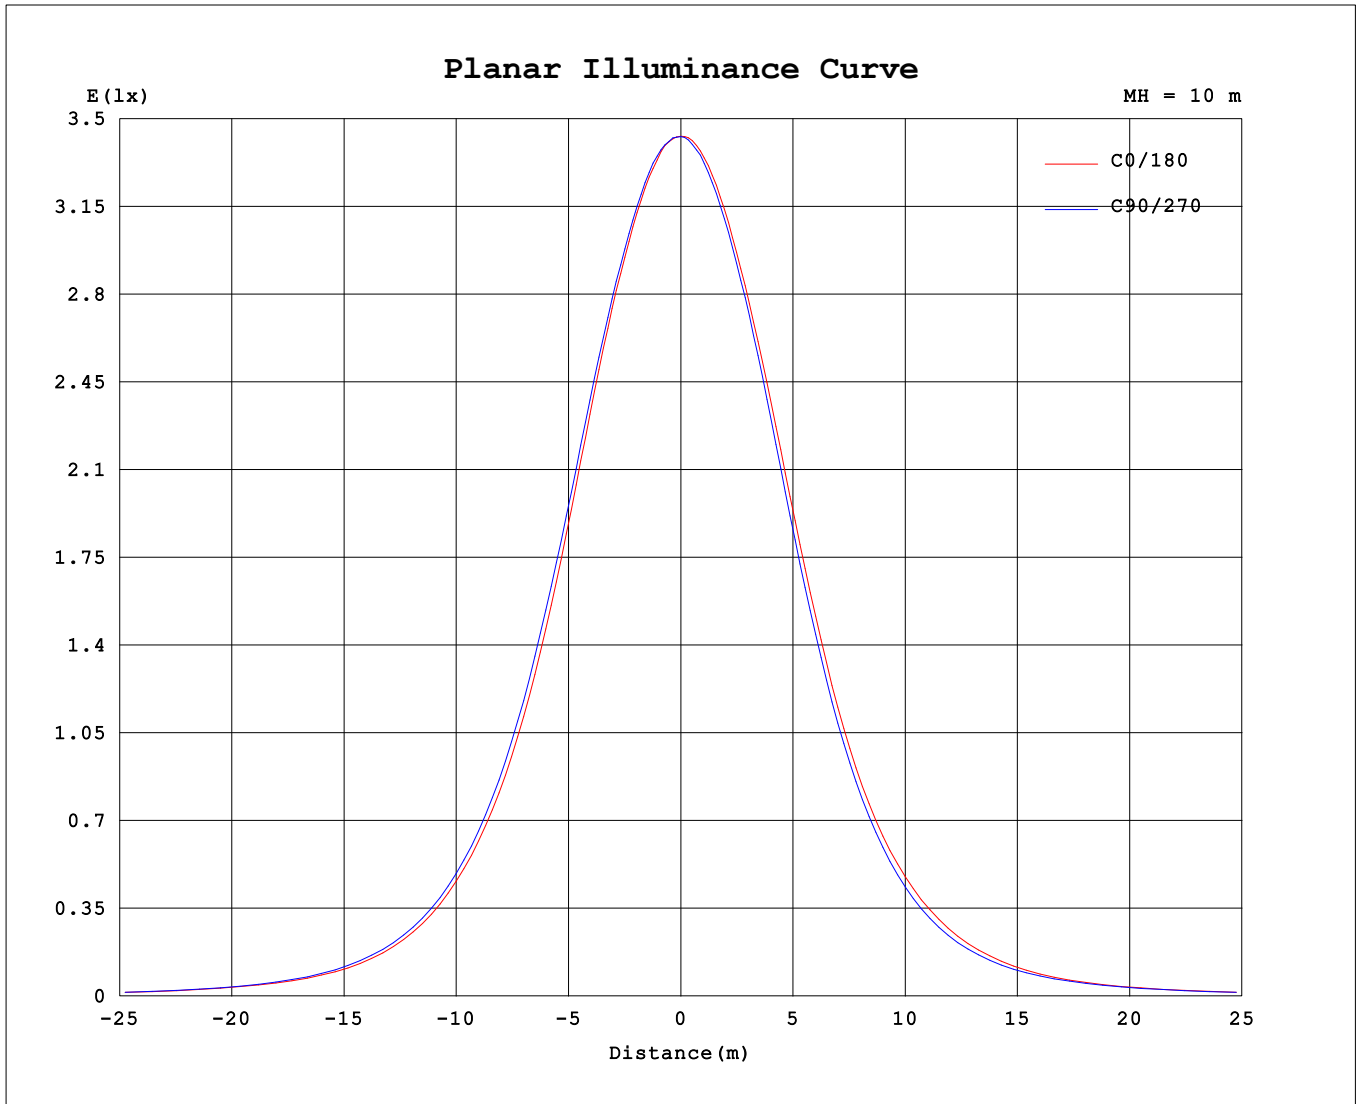

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.48V I:0.0506A P:5.5379W PF:0.9152 Freq:60.01Hz UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:604.802x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 3500K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	343	343	343	343	343	343	343	342	343	343	343	343	343	343	343	342			
5	341	341	341	341	342	342	341	341	341	341	340	339	339	339	339	339			
10	333	333	334	335	335	335	335	335	334	333	332	331	330	330	330	330			
15	320	321	322	323	324	324	324	324	322	321	320	318	317	316	316	317			
20	301	302	304	306	307	308	308	308	305	303	301	299	298	297	297	298			
25	274	275	277	281	283	285	284	283	280	278	275	272	270	270	271	271			
30	240	244	246	248	252	255	255	253	248	245	242	238	237	236	236	236			
35	203	208	211	213	215	218	218	216	210	206	204	200	198	197	196	196			
40	165	170	173	176	176	177	178	177	171	167	165	162	160	157	155	157			
45	130	134	136	139	139	138	138	139	135	130	128	127	123	119	119	122			
50	96.8	99.9	102	105	104	103	102	103	102	99.7	97.4	94.9	91.7	88.3	89.2	92.5			
55	69.5	71.8	73.9	75.4	75.3	74.5	72.8	73.4	74.0	73.9	72.2	68.6	66.2	65.1	66.1	67.4			
60	49.9	51.3	52.3	53.2	53.1	52.9	51.9	51.7	52.0	52.8	52.2	49.4	48.1	48.2	48.7	48.5			
65	36.2	36.9	37.1	37.7	37.7	37.8	37.5	37.3	37.0	37.1	37.0	35.9	35.6	35.5	35.6	35.4			
70	26.2	26.5	26.6	26.9	26.9	27.0	26.9	26.8	26.4	26.3	26.3	26.0	26.0	25.9	25.9	25.8			
75	18.5	18.6	18.7	18.9	18.9	19.1	19.0	19.1	18.9	18.7	18.6	18.3	18.4	18.4	18.4	18.3			
80	11.0	11.4	11.3	11.2	11.1	11.4	11.6	11.5	11.6	11.7	11.2	10.4	10.1	10.5	10.8	10.9			
85	4.07	4.70	3.52	2.76	2.34	2.85	3.18	4.30	4.80	4.75	3.27	2.33	1.93	2.16	2.71	3.54			
90	0.14	0.13	0.14	0.11	0.12	0.09	0.12	0.10	0.28	0.27	0.24	0.26	0.26	0.28	0.24	0.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-06

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks: