
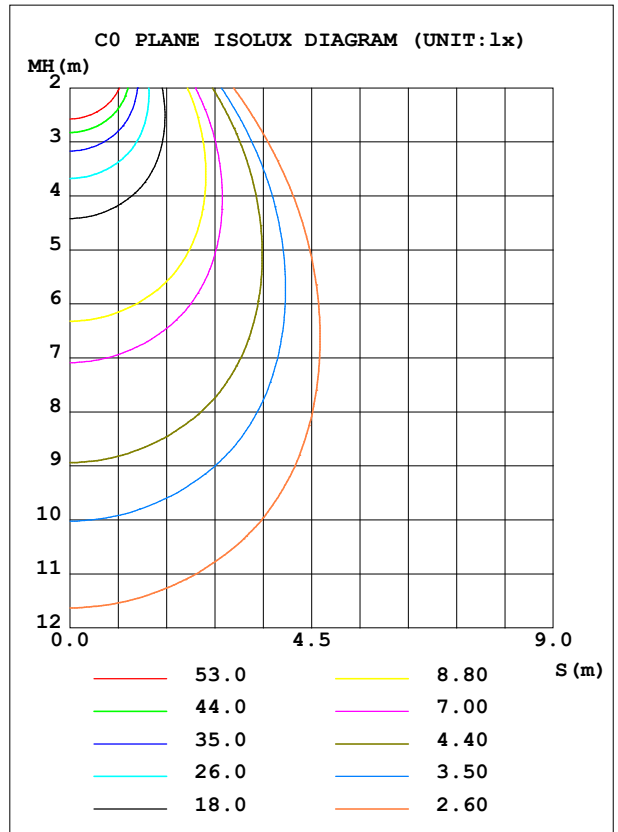


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.48V I:0.0505A P:5.5254W PF:0.9151 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:621.914x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-4-16W-M-A5C5	Imax (cd)	351.6	S/MH (C0/180)	1.09
NOMINAL POWER (W)	6	LOR (%)	100.0	S/MH (C90/270)	1.08
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	621.91	<input type="checkbox"/> UP, DN (C0-180)	0.0,51.0
NOMINAL FLUX (lm)	621.914	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0,49.0
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

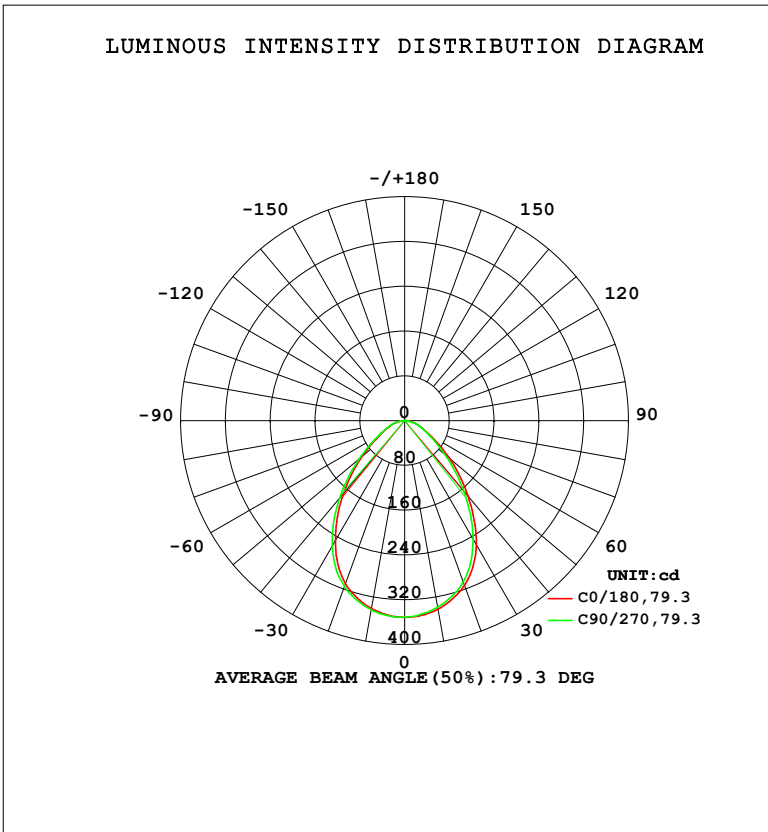

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	340.7	342.0	343.2	343.2	342.0	340.5	338.3	337.9	0- 10	33.03	33.03	5.31,5.31
20	309.7	311.9	315.6	315.4	313.0	309.9	306.3	305.8	10- 20	92.47	125.5	20.2,20.2
30	247.9	253.9	259.0	262.2	256.3	250.3	244.9	245.0	20- 30	130.7	256.2	41.2,41.2
40	170.5	177.9	181.2	183.7	176.0	170.3	164.9	160.4	30- 40	133.1	389.2	62.6,62.6
50	98.55	103.9	106.0	104.0	104.5	99.54	93.73	91.13	40- 50	103.8	493.1	79.3,79.3
60	51.10	53.38	54.20	53.13	53.13	53.38	49.37	49.89	50- 60	65.76	558.8	89.9,89.9
70	27.13	27.54	27.88	27.77	27.38	27.21	26.93	26.71	60- 70	38.00	596.8	96,96
80	11.38	11.67	11.43	12.01	11.99	11.56	10.46	11.24	70- 80	20.42	617.3	99.3,99.3
90	0.1573	0.1442	0.1245	0.1245	0.2819	0.2491	0.2622	0.2491	80- 90	4.656	621.9	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 445.96 lm

%lum = 71.7%

%lamp = 71.7%

Conical surface Flux(130deg): 580.54 lm

%lum = 93.3%


%lamp = 93.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.48V I:0.0505A P:5.5254W PF:0.9151 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:621.914x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

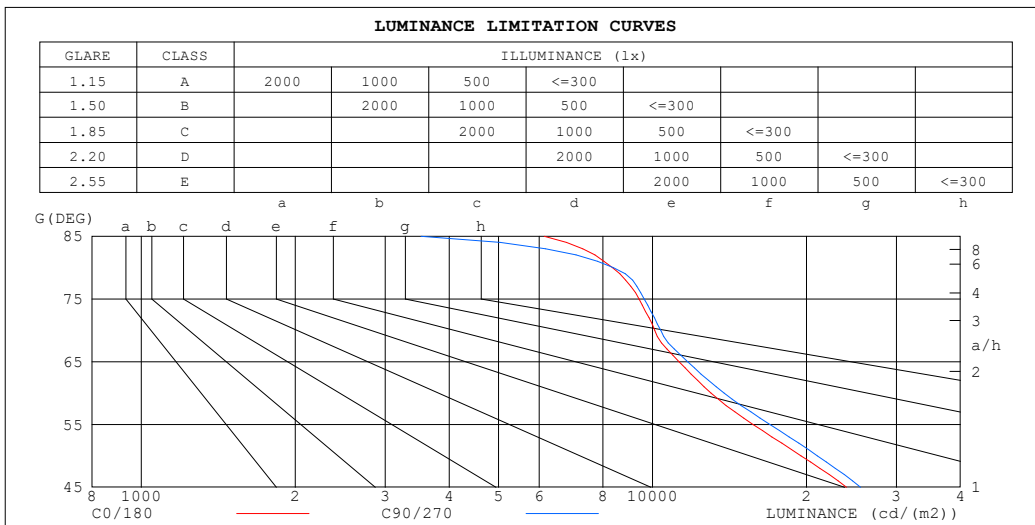

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6141	3526
80	8347	8384
75	9405	9630
70	10104	10382
65	11267	11712
60	13020	13809
55	15718	16962
50	19531	21017
45	23947	25536


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.48V I:0.0505A P:5.5254W PF:0.9151 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:621.914x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.86	.94	.89	.85	.91	.86	.83	.88	.84	.81	.85	.82	.79	.77
3.0	.86	.79	.74	.85	.78	.73	.82	.77	.72	.79	.75	.71	.77	.73	.70	.68
4.0	.78	.71	.65	.77	.70	.64	.74	.68	.64	.72	.67	.63	.70	.66	.62	.60
5.0	.71	.63	.58	.70	.63	.57	.68	.62	.57	.66	.60	.56	.64	.59	.56	.54
6.0	.65	.57	.51	.64	.57	.51	.62	.56	.51	.61	.55	.50	.59	.54	.50	.48
7.0	.60	.52	.46	.59	.52	.46	.57	.51	.46	.56	.50	.46	.55	.49	.45	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.35	.33

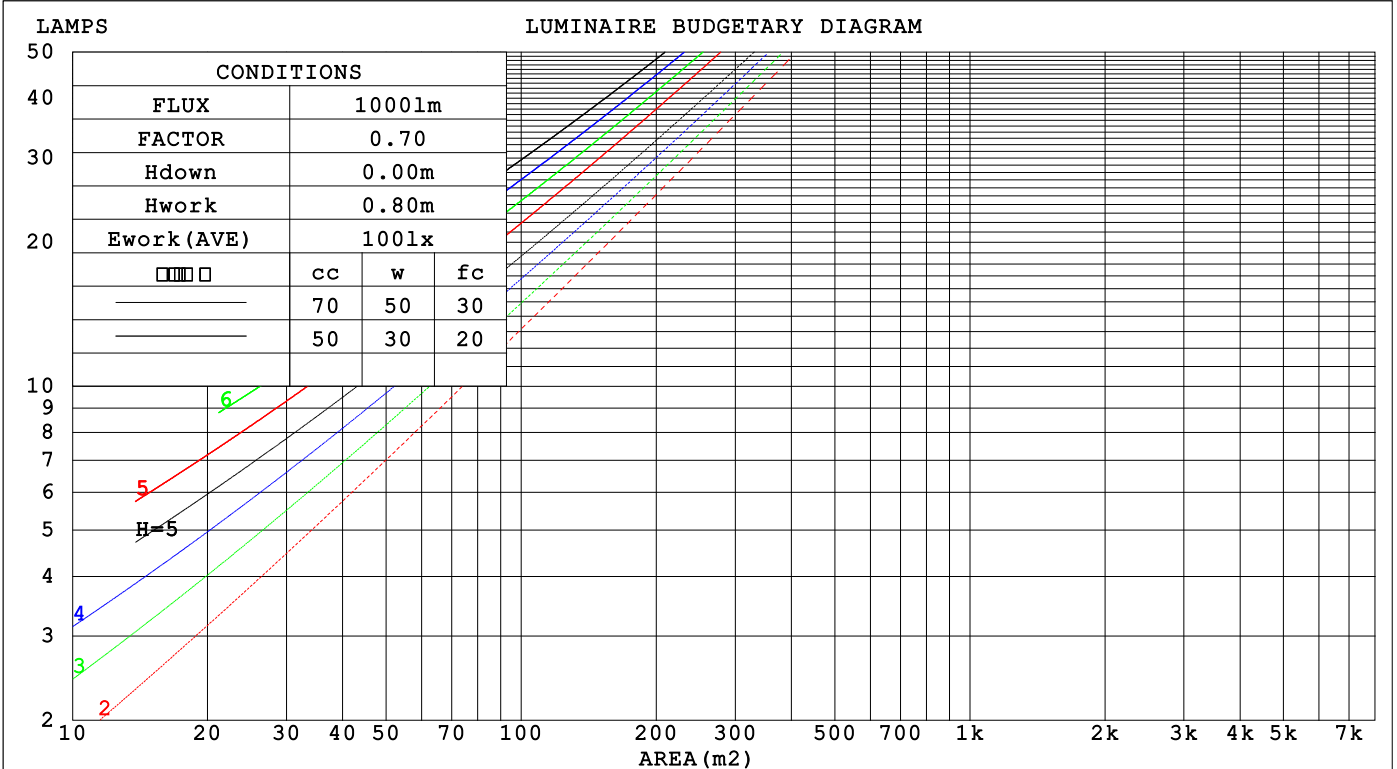

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.48V I:0.0505A P:5.5254W PF:0.9151 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:621.914x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients(WEC)			
0.0						
1.0	.250 .142 .045	.243 .138 .044	.230 .132 .042	.218 .126 .040	.207 .120 .039	
2.0	.239 .131 .040	.233 .128 .040	.222 .123 .038	.212 .119 .037	.202 .114 .036	
3.0	.225 .120 .036	.220 .118 .035	.210 .114 .035	.201 .110 .034	.193 .107 .033	
4.0	.211 .110 .032	.207 .108 .032	.198 .105 .031	.190 .102 .031	.183 .099 .030	
5.0	.198 .101 .029	.194 .100 .029	.187 .097 .029	.180 .095 .028	.173 .092 .028	
6.0	.186 .093 .027	.183 .092 .027	.176 .090 .026	.170 .088 .026	.164 .086 .026	
7.0	.175 .087 .025	.172 .086 .024	.166 .084 .024	.160 .082 .024	.155 .081 .024	
8.0	.165 .081 .023	.163 .080 .023	.157 .079 .022	.152 .077 .022	.147 .076 .022	
9.0	.156 .076 .021	.154 .075 .021	.149 .074 .021	.144 .072 .021	.140 .071 .021	
10.0	.148 .071 .020	.146 .070 .020	.142 .069 .020	.137 .068 .019	.133 .067 .019	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients(CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.176 .157 .139	.151 .134 .120	.103 .093 .083	.059 .054 .048	.019 .017 .016	
2.0	.165 .132 .104	.142 .114 .090	.097 .079 .063	.056 .046 .037	.018 .015 .012	
3.0	.156 .114 .081	.134 .098 .070	.092 .068 .049	.053 .040 .029	.017 .013 .009	
4.0	.148 .100 .064	.127 .087 .056	.087 .060 .039	.050 .035 .023	.016 .012 .008	
5.0	.140 .089 .052	.120 .077 .045	.083 .054 .032	.048 .032 .019	.015 .010 .006	
6.0	.133 .081 .043	.114 .070 .038	.079 .049 .027	.046 .029 .016	.015 .009 .005	
7.0	.127 .074 .036	.109 .064 .032	.075 .045 .022	.044 .026 .013	.014 .009 .004	
8.0	.121 .068 .031	.104 .059 .027	.072 .041 .019	.042 .024 .012	.014 .008 .004	
9.0	.115 .063 .027	.099 .054 .024	.069 .038 .017	.040 .023 .010	.013 .007 .003	
10.0	.110 .058 .024	.095 .051 .021	.066 .036 .015	.038 .021 .009	.012 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.48V I:0.0505A P:5.5254W PF:0.9151 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:621.914x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.7	23.0	21.9	23.2	23.4	22.0	23.3	22.2	23.4	23.6
3H	22.4	23.6	22.6	23.8	24.0	22.6	23.8	22.9	24.0	24.2
4H	22.7	23.8	23.0	24.0	24.3	22.9	24.0	23.2	24.3	24.5
6H	22.9	24.0	23.2	24.2	24.5	23.1	24.2	23.4	24.4	24.7
8H	23.0	24.0	23.3	24.3	24.5	23.2	24.2	23.5	24.4	24.7
12H	23.0	24.0	23.3	24.2	24.5	23.1	24.1	23.5	24.4	24.7
4H 2H	21.9	23.1	22.2	23.3	23.6	22.2	23.3	22.5	23.5	23.8
3H	22.8	23.8	23.1	24.1	24.4	23.0	24.0	23.3	24.3	24.6
4H	23.2	24.1	23.6	24.4	24.8	23.4	24.3	23.8	24.6	24.9
6H	23.6	24.4	24.0	24.7	25.1	23.8	24.6	24.2	24.9	25.3
8H	23.7	24.4	24.1	24.8	25.2	23.8	24.6	24.3	24.9	25.3
12H	23.8	24.4	24.2	24.8	25.2	23.9	24.5	24.3	24.9	25.3
8H 4H	23.4	24.1	23.8	24.5	24.8	23.5	24.3	24.0	24.6	25.0
6H	23.9	24.5	24.3	24.9	25.3	24.0	24.6	24.4	25.0	25.4
8H	24.0	24.6	24.5	25.0	25.4	24.1	24.7	24.6	25.1	25.5
12H	24.2	24.6	24.6	25.1	25.5	24.2	24.6	24.7	25.1	25.6
12H 4H	23.4	24.0	23.8	24.4	24.8	23.5	24.2	24.0	24.6	25.0
6H	23.9	24.4	24.3	24.8	25.3	24.0	24.6	24.5	25.0	25.4
8H	24.1	24.6	24.6	25.0	25.5	24.2	24.6	24.7	25.1	25.6

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.5 / - 0.7	+ 0.5 / - 0.6
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.3
2.0H	+ 1.1 / - 0.8	+ 1.2 / - 0.9

CIE Pub.117, 621.9 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.7)
 Area: 0.00785 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-06	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.48V I:0.0505A P:5.5254W PF:0.9151 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:621.914x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	53	67	58	52	66	58	52	47
0.80	78	68	62	77	68	62	75	67	62	56
1.00	85	76	70	84	76	70	82	77	70	64
1.25	91	83	77	90	82	77	88	81	76	70
1.50	96	88	82	94	87	82	91	85	81	75
2.00	101	94	89	99	93	88	96	91	87	80
2.50	104	98	93	102	96	92	98	94	90	83
3.00	106	101	97	104	100	96	101	97	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	108	104	109	106	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.48V I:0.0505A P:5.5254W PF:0.9151 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:621.914x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

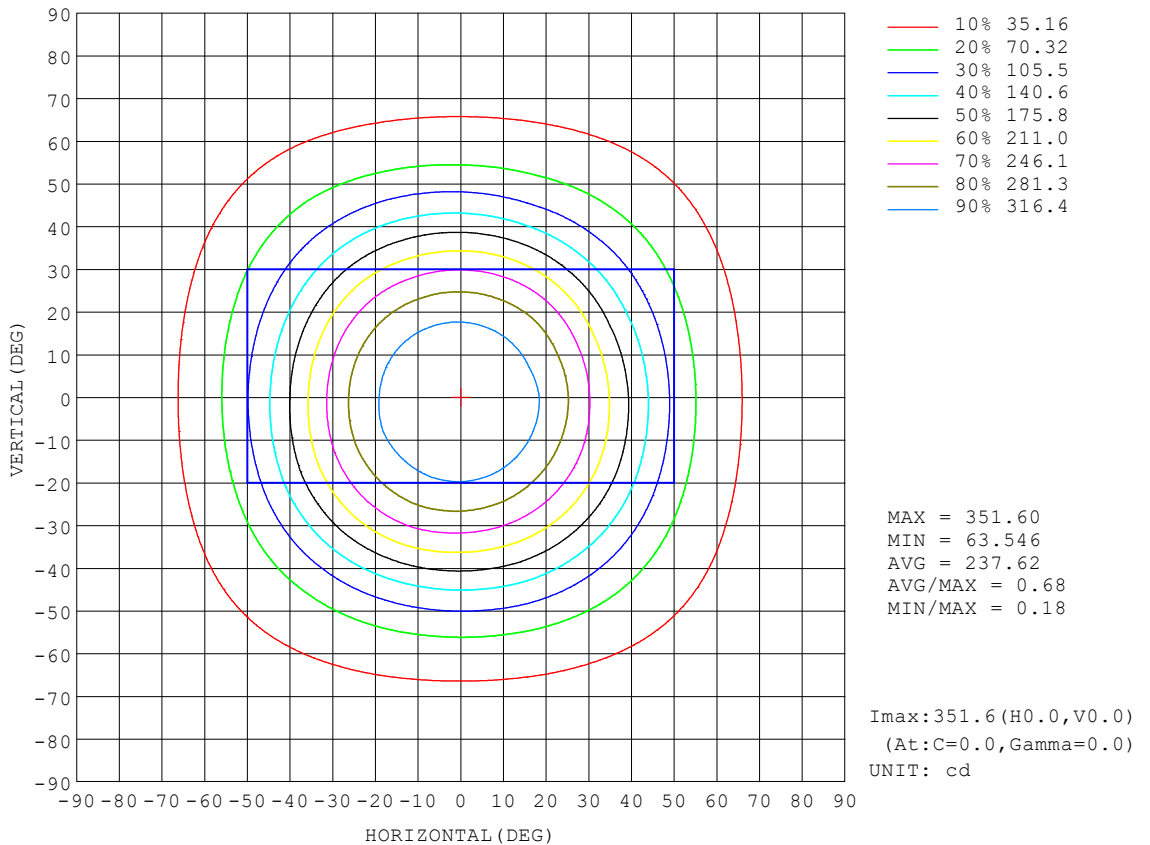


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.48V I:0.0505A P:5.5254W PF:0.9151 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:621.914x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

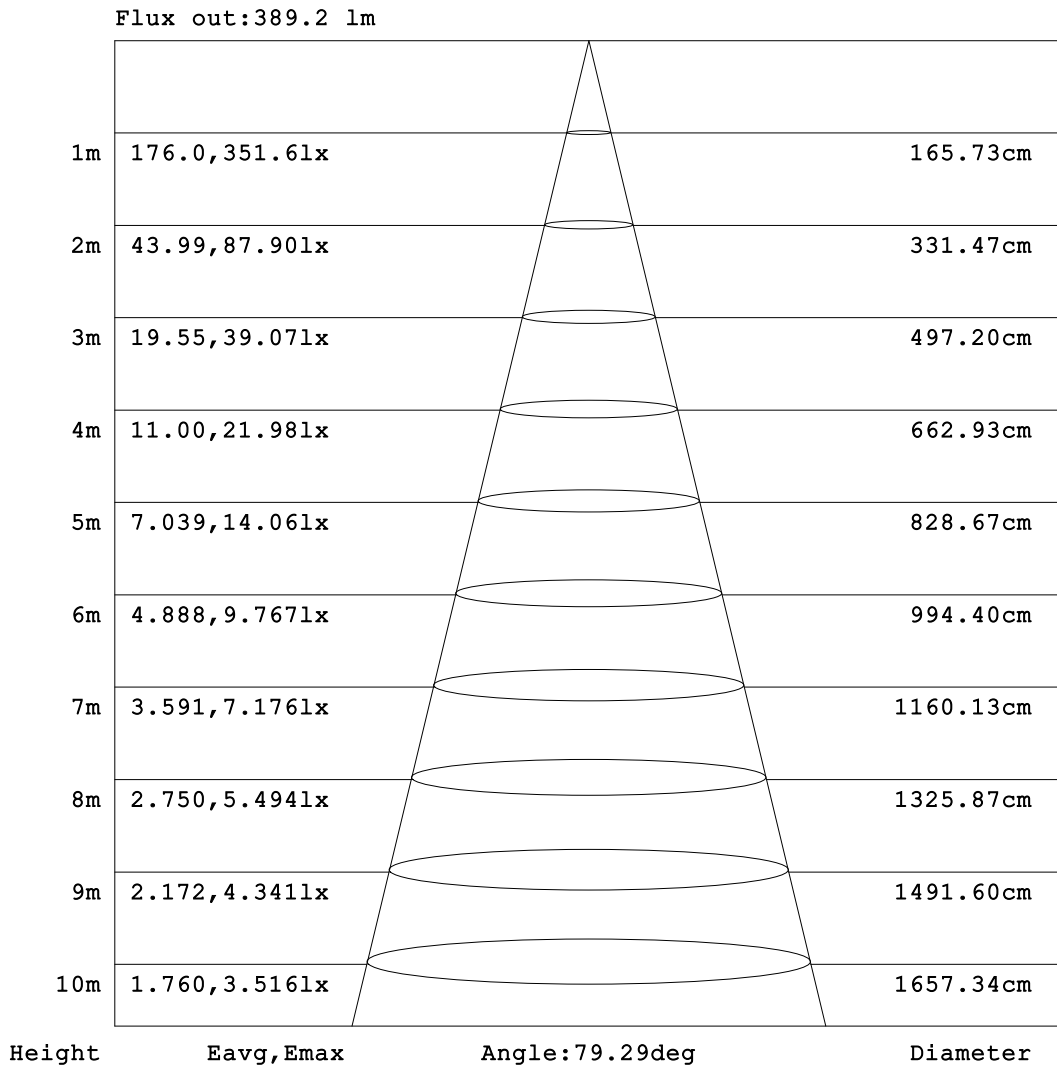


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.48V I:0.0505A P:5.5254W PF:0.9151 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:621.914x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

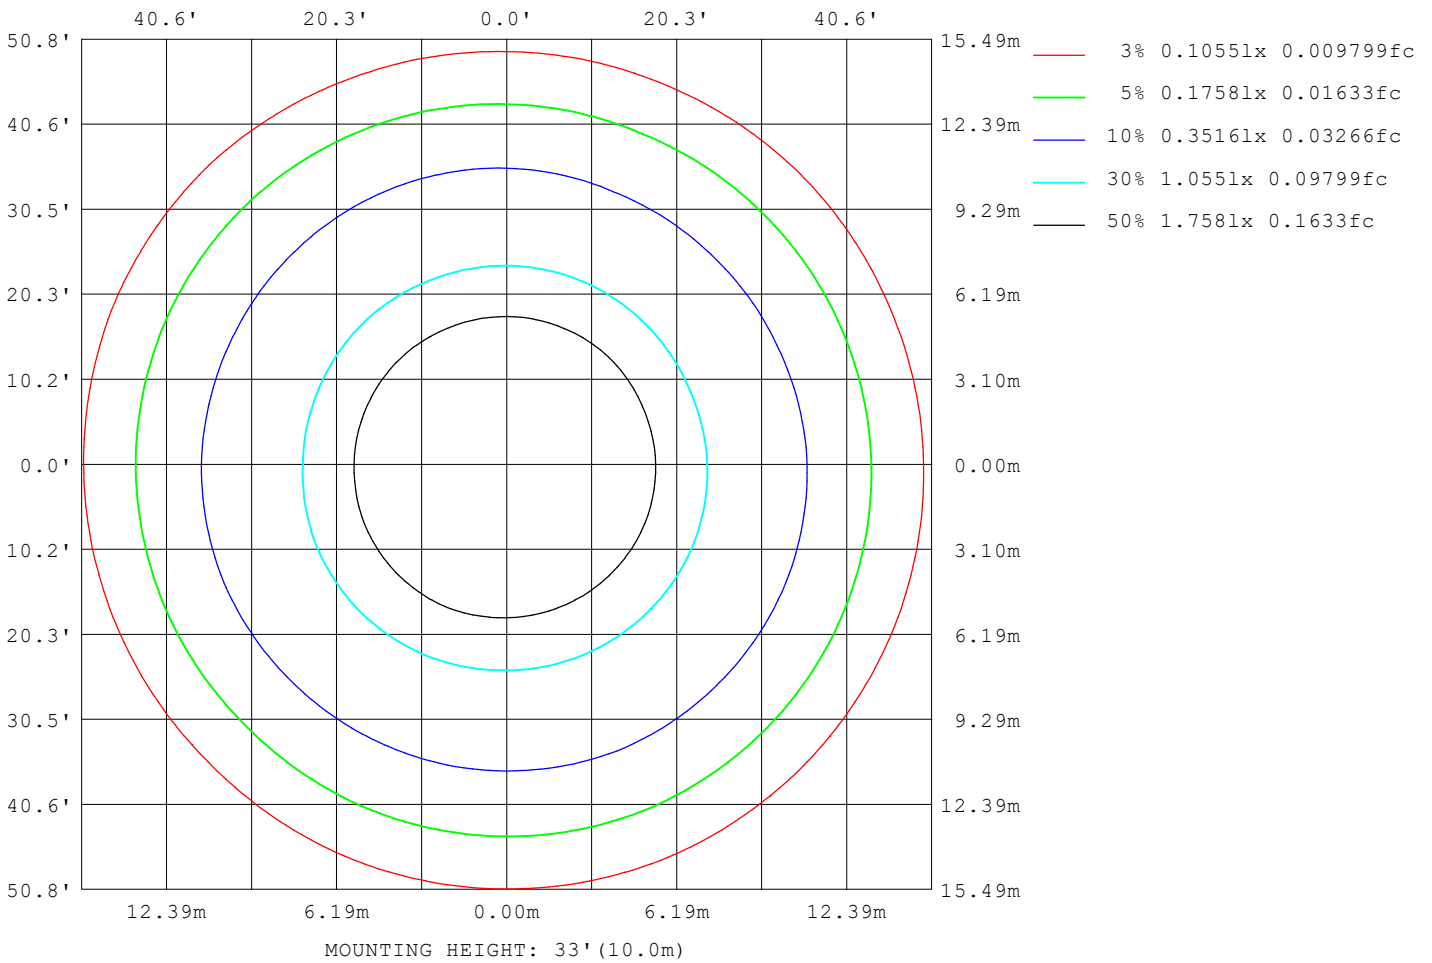

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.48V I:0.0505A P:5.5254W PF:0.9151 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:621.914x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	11388
L_0~180 (75) av	9496
L_0~180 (85) av	6685
L_90~270 (65) av	11401
L_90~270 (75) av	9491
L_90~270 (85) av	3221
L_45 (65) av	11440
L_45 (75) av	9514
L_45 (85) av	4793

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

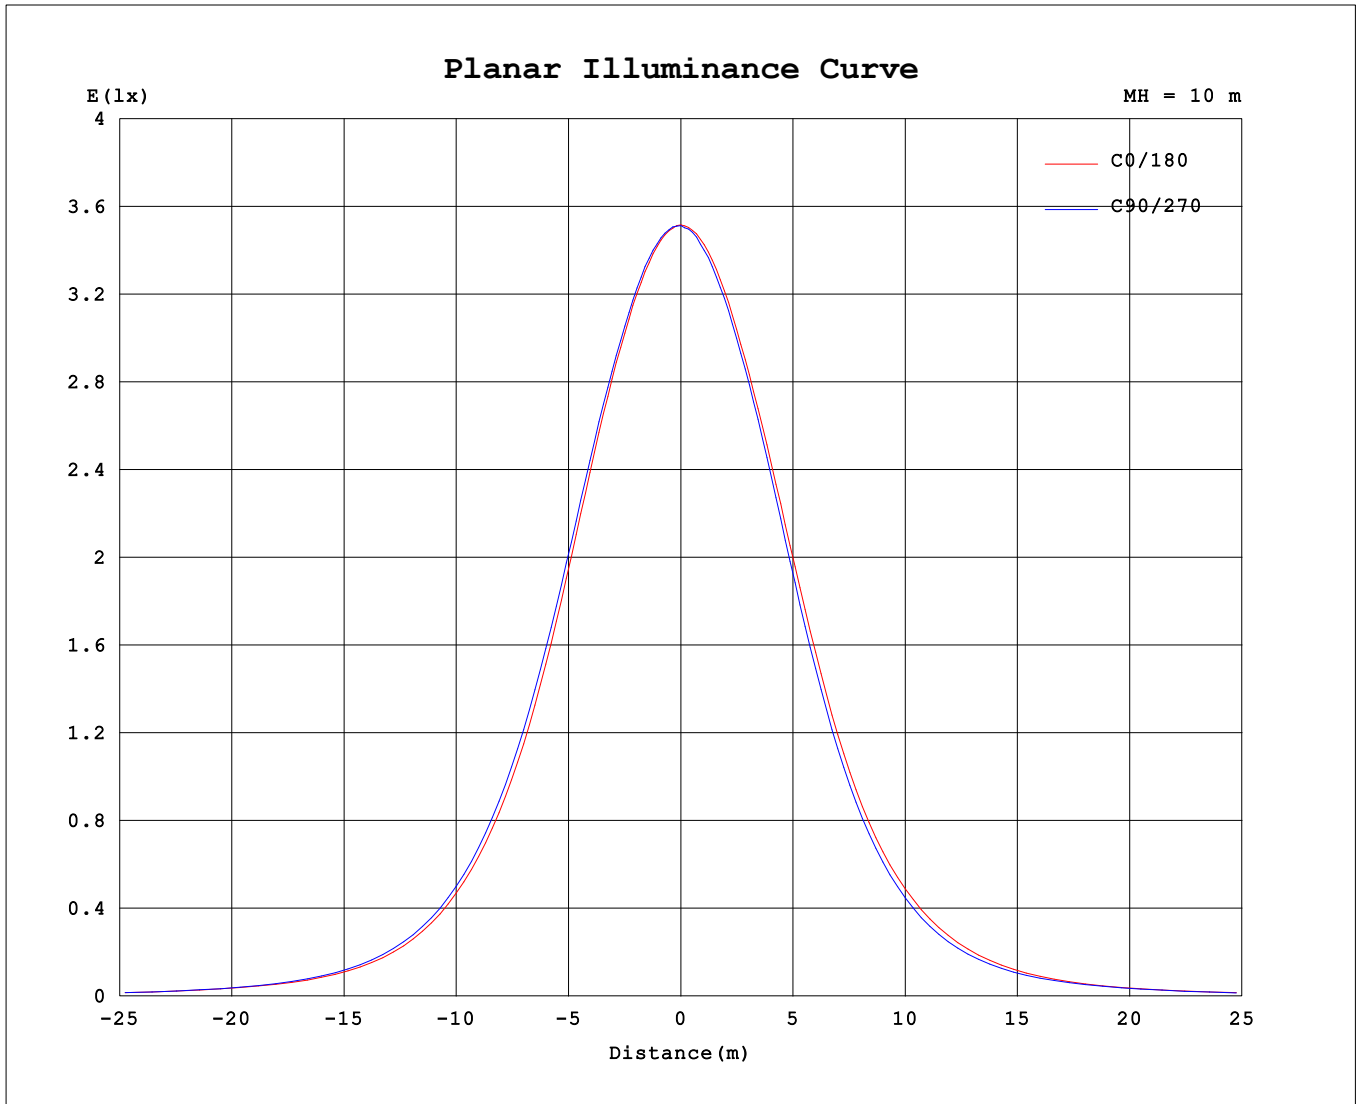

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.48V I:0.0505A P:5.5254W PF:0.9151 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:621.914x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	352	351	351	351	351	351	351	351	352	351	351	351	351	351	351	351			
5	349	349	349	349	350	350	349	349	349	348	348	348	347	347	346	347			
10	341	341	342	343	343	343	343	343	342	341	341	339	338	338	338	338			
15	328	329	330	331	332	332	332	332	330	329	328	326	325	325	325	325			
20	310	310	312	314	316	316	315	316	313	311	310	308	306	306	306	306			
25	283	284	285	289	291	293	292	292	289	287	284	281	279	279	280	279			
30	248	252	254	256	259	263	262	260	256	253	250	246	245	245	245	244			
35	209	215	218	220	221	225	225	223	217	214	211	207	205	204	203	203			
40	170	176	178	180	181	183	184	183	176	172	170	167	165	162	160	162			
45	133	137	139	142	142	141	142	142	139	134	132	130	127	122	122	126			
50	98.6	102	104	107	106	105	104	105	104	102	99.5	96.9	93.7	90.3	91.1	94.3			
55	70.8	73.2	75.0	76.4	76.4	75.7	73.9	74.8	75.3	75.3	73.6	70.1	67.7	66.4	67.4	68.7			
60	51.1	52.5	53.4	54.3	54.2	53.9	53.1	52.9	53.1	53.9	53.4	50.7	49.4	49.4	49.9	49.7			
65	37.4	38.0	38.3	38.9	38.9	39.0	38.7	38.5	38.2	38.3	38.2	37.1	36.8	36.7	36.7	36.6			
70	27.1	27.4	27.5	27.8	27.9	28.0	27.8	27.8	27.4	27.2	27.2	26.9	26.9	26.8	26.7	26.7			
75	19.1	19.3	19.3	19.5	19.6	19.7	19.7	19.7	19.5	19.4	19.2	18.9	19.0	19.0	19.0	18.9			
80	11.4	11.8	11.7	11.6	11.4	11.8	12.0	11.9	12.0	12.1	11.6	10.8	10.5	10.8	11.2	11.2			
85	4.20	4.85	3.63	2.85	2.41	2.92	3.30	4.46	4.95	4.90	3.38	2.44	1.99	2.24	2.81	3.67			
90	0.16	0.13	0.14	0.12	0.12	0.10	0.12	0.10	0.28	0.27	0.25	0.28	0.26	0.29	0.25	0.26			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks: