
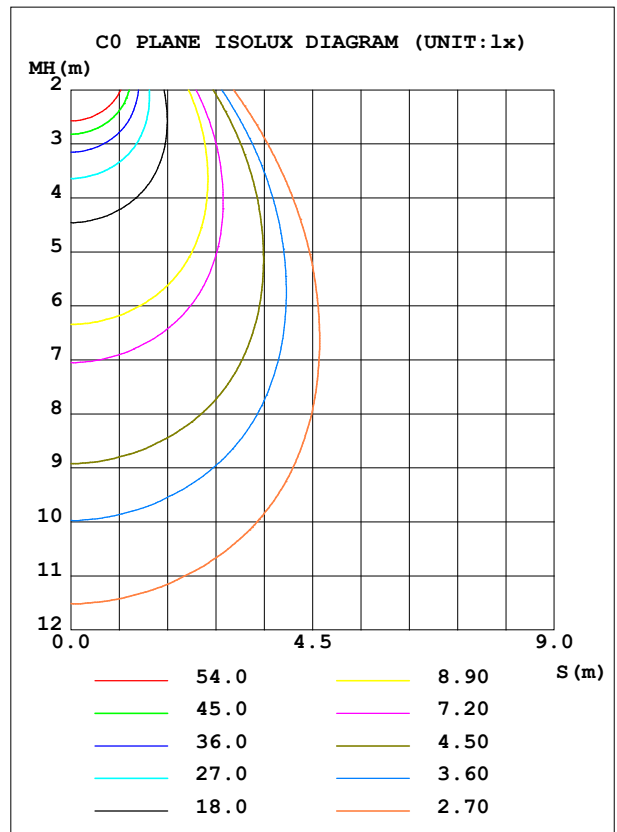


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.47V I:0.0502A P:5.4924W PF:0.9152 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:636.384x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-4-16W-M-A5C5	Imax (cd)	358.8	S/MH (C0/180)	1.09
NOMINAL POWER (W)	6	LOR (%)	100.0	S/MH (C90/270)	1.09
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	636.38	<input type="checkbox"/> UP, DN (C0-180)	0.0,51.0
NOMINAL FLUX (lm)	636.384	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0,49.0
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

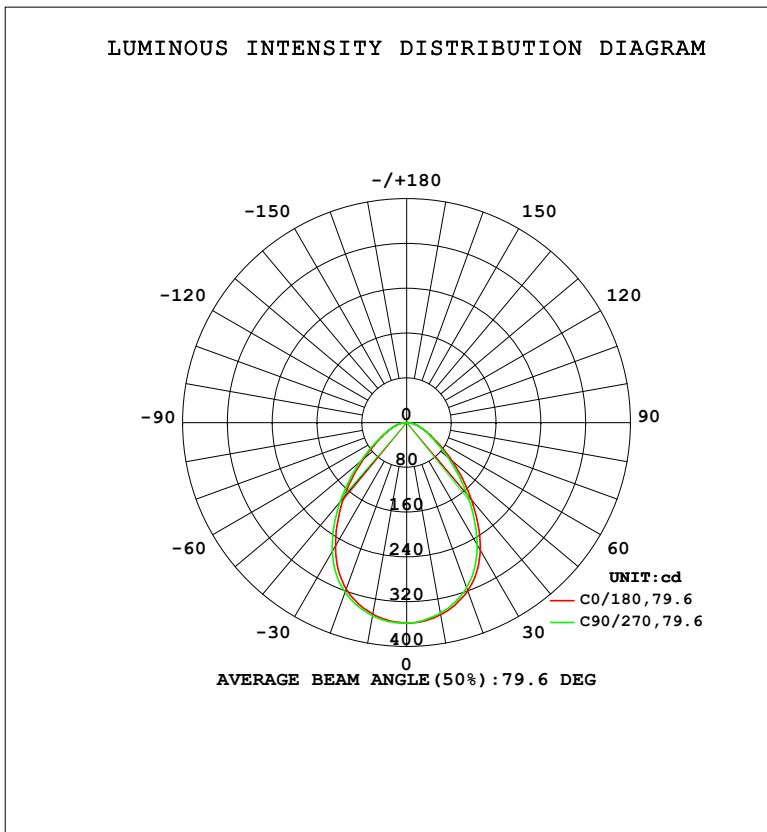

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	347.2	348.9	350.5	350.1	348.4	347.5	345.6	345.2	0- 10	33.70	33.70	5.29,5.29
20	316.2	318.7	321.7	322.3	319.4	316.8	313.5	313.3	10- 20	94.44	128.1	20.1,20.1
30	254.8	260.3	265.7	268.8	263.0	257.2	251.8	252.5	20- 30	133.9	262.1	41.2,41.2
40	174.5	182.3	185.7	188.3	180.6	175.0	169.1	165.0	30- 40	136.7	398.7	62.7,62.7
50	100.2	105.5	107.8	105.9	106.1	101.2	95.53	92.91	40- 50	106.1	504.8	79.3,79.3
60	52.10	54.34	55.12	54.14	54.05	54.32	50.59	50.91	50- 60	66.83	571.7	89.8,89.8
70	27.90	28.32	28.67	28.63	28.10	27.96	27.75	27.52	60- 70	38.94	610.6	95.9,95.9
80	11.68	12.01	11.77	12.36	12.30	11.89	10.72	11.54	70- 80	21.00	631.6	99.2,99.2
90	0.1573	0.1442	0.1245	0.1311	0.2819	0.2622	0.2753	0.2491	80- 90	4.786	636.4	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 456.79 lm

%lum = 71.8%

%lamp = 71.8%

Conical surface Flux(130deg): 593.85 lm

%lum = 93.3%


%lamp = 93.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.47V I:0.0502A P:5.4924W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:636.384x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

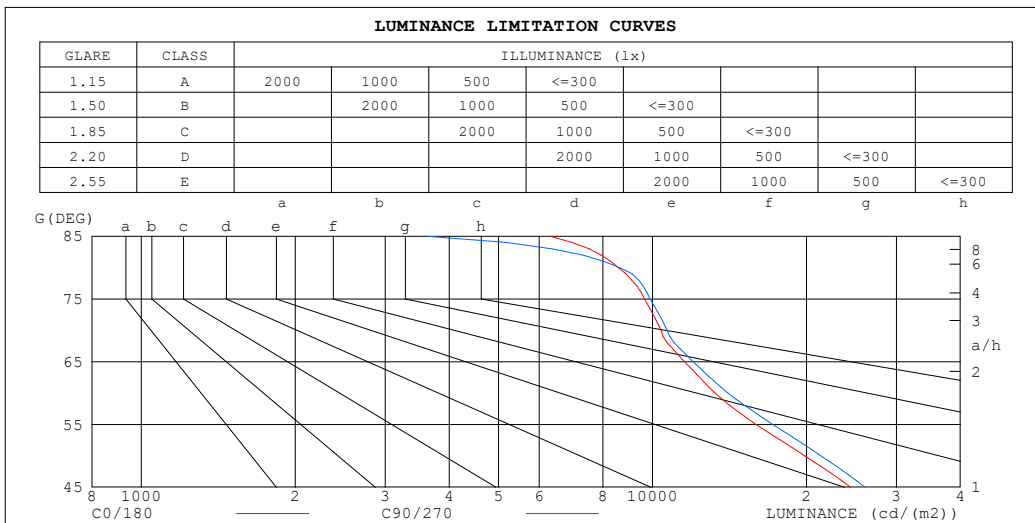

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6308	3628
80	8571	8631
75	9646	9890
70	10391	10679
65	11550	12016
60	13273	14043
55	15948	17203
50	19857	21354
45	24409	26052


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.47V I:0.0502A P:5.4924W PF:0.9152 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:636.384x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.86	.94	.89	.85	.91	.86	.83	.88	.84	.81	.85	.82	.79	.77
3.0	.86	.79	.74	.85	.78	.73	.82	.77	.72	.79	.75	.71	.77	.73	.70	.68
4.0	.78	.71	.65	.77	.70	.64	.74	.68	.64	.72	.67	.63	.70	.66	.62	.60
5.0	.71	.63	.58	.70	.63	.57	.68	.62	.57	.66	.60	.56	.64	.59	.56	.54
6.0	.65	.57	.51	.64	.57	.51	.62	.56	.51	.61	.55	.50	.59	.54	.50	.48
7.0	.60	.52	.46	.59	.52	.46	.57	.51	.46	.56	.50	.46	.55	.49	.45	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.35	.33

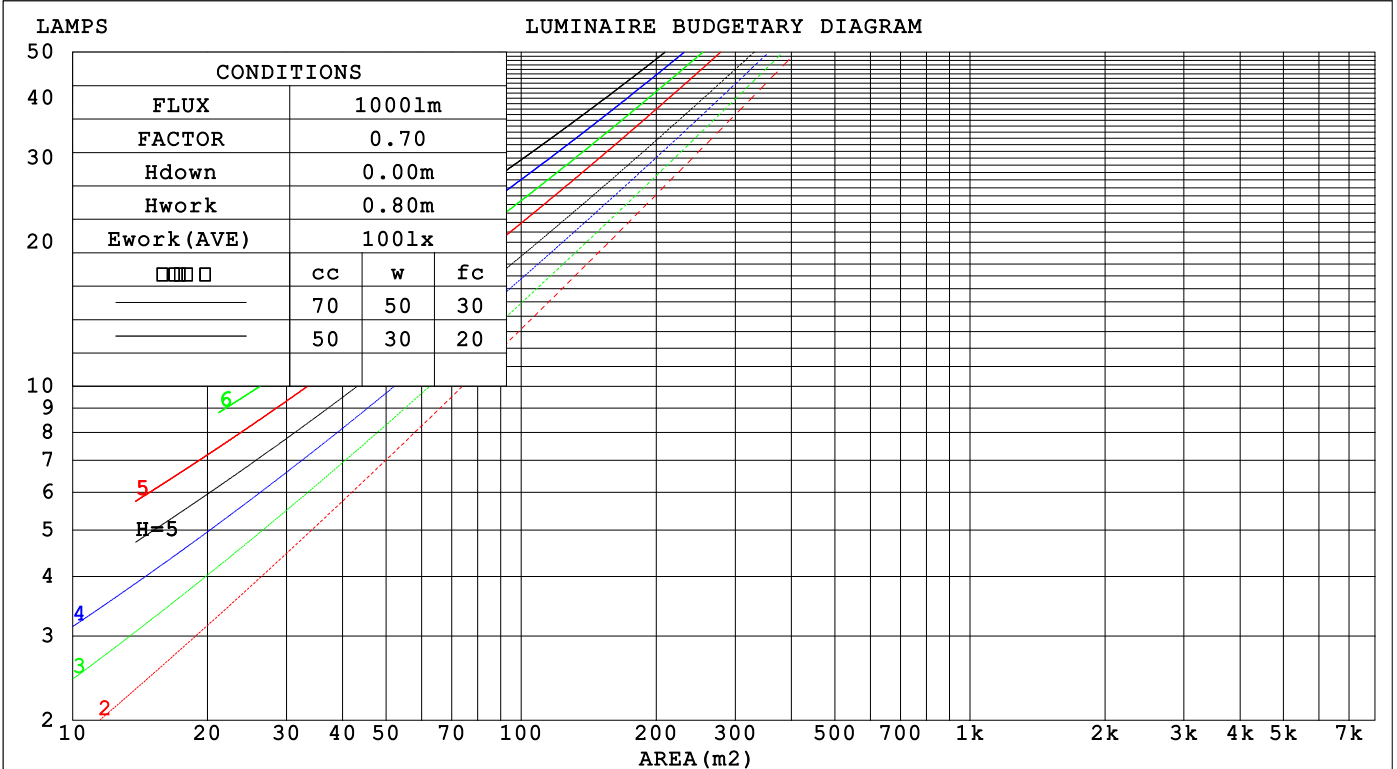

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.47V I:0.0502A P:5.4924W PF:0.9152 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:636.384x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

<input type="checkbox"/> cc	80%		70%		50%		30%		10%		0				
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0		
<input type="checkbox"/> fc	20%		20%		20%		20%		20%		0				
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)								
0.0															
1.0	.250	.142	.045	.243	.138	.044	.230	.132	.042	.218	.126	.040	.207	.120	.039
2.0	.239	.131	.040	.233	.129	.040	.222	.123	.038	.212	.119	.037	.202	.114	.036
3.0	.225	.120	.036	.220	.118	.035	.210	.114	.035	.201	.110	.034	.193	.107	.033
4.0	.211	.110	.032	.207	.108	.032	.198	.105	.031	.190	.102	.031	.183	.099	.030
5.0	.198	.101	.029	.194	.100	.029	.187	.097	.029	.180	.095	.028	.173	.092	.028
6.0	.186	.093	.027	.183	.092	.027	.176	.090	.026	.170	.088	.026	.164	.086	.026
7.0	.175	.087	.025	.172	.086	.024	.166	.084	.024	.160	.082	.024	.155	.081	.024
8.0	.165	.081	.023	.163	.080	.023	.157	.079	.022	.152	.077	.022	.147	.076	.022
9.0	.156	.076	.021	.154	.075	.021	.149	.074	.021	.144	.072	.021	.140	.071	.021
10.0	.148	.071	.020	.146	.071	.020	.142	.069	.020	.137	.068	.019	.133	.067	.019

<input type="checkbox"/> cc	80%		70%		50%		30%		10%		0				
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0		
<input type="checkbox"/> fc	20%		20%		20%		20%		20%		0				
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)								
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020
1.0	.176	.157	.139	.151	.134	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016
2.0	.165	.132	.104	.142	.114	.090	.097	.079	.063	.056	.046	.037	.018	.015	.012
3.0	.156	.114	.081	.134	.098	.070	.092	.068	.049	.053	.040	.029	.017	.013	.009
4.0	.148	.100	.064	.127	.087	.056	.087	.060	.039	.050	.035	.023	.016	.012	.008
5.0	.140	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006
6.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005
7.0	.127	.074	.036	.109	.064	.032	.075	.045	.022	.044	.026	.013	.014	.009	.004
8.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.012	.014	.008	.004
9.0	.115	.063	.027	.099	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003
10.0	.110	.058	.024	.095	.051	.021	.066	.036	.015	.038	.021	.009	.012	.007	.003

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.47V I:0.0502A P:5.4924W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:636.384x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.7	23.0	22.0	23.2	23.4	22.0	23.3	22.3	23.5	23.7
3H	22.4	23.6	22.7	23.8	24.1	22.7	23.9	22.9	24.1	24.3
4H	22.7	23.9	23.0	24.1	24.3	23.0	24.1	23.3	24.3	24.6
6H	23.0	24.0	23.3	24.3	24.6	23.2	24.2	23.5	24.5	24.8
8H	23.0	24.1	23.4	24.3	24.6	23.2	24.3	23.6	24.5	24.8
12H	23.0	24.0	23.4	24.3	24.6	23.2	24.2	23.6	24.5	24.8
4H 2H	22.0	23.1	22.3	23.4	23.6	22.2	23.4	22.5	23.6	23.8
3H	22.9	23.9	23.2	24.1	24.4	23.1	24.1	23.4	24.3	24.6
4H	23.3	24.2	23.7	24.5	24.8	23.5	24.4	23.9	24.7	25.0
6H	23.7	24.5	24.1	24.8	25.2	23.8	24.6	24.2	25.0	25.3
8H	23.8	24.5	24.2	24.9	25.3	23.9	24.7	24.3	25.0	25.4
12H	23.8	24.5	24.3	24.9	25.3	23.9	24.6	24.4	25.0	25.4
8H 4H	23.5	24.2	23.9	24.5	24.9	23.6	24.4	24.0	24.7	25.1
6H	23.9	24.5	24.4	24.9	25.4	24.1	24.7	24.5	25.1	25.5
8H	24.1	24.7	24.6	25.1	25.5	24.2	24.8	24.7	25.2	25.6
12H	24.2	24.7	24.7	25.1	25.6	24.3	24.7	24.7	25.2	25.6
12H 4H	23.4	24.1	23.9	24.5	24.9	23.6	24.3	24.0	24.7	25.1
6H	24.0	24.5	24.4	24.9	25.4	24.1	24.6	24.6	25.1	25.5
8H	24.2	24.6	24.7	25.1	25.6	24.3	24.7	24.8	25.2	25.7

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.5 / - 0.7	+ 0.5 / - 0.6
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.3
2.0H	+ 1.1 / - 0.8	+ 1.2 / - 0.8

CIE Pub.117, 636.4 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.6)
 Area: 0.00785 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-06	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.47V I:0.0502A P:5.4924W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:636.384x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	53	68	58	53	66	58	52	47
0.80	78	68	62	77	68	62	75	67	62	56
1.00	85	76	70	84	76	70	82	77	70	64
1.25	91	83	77	90	82	77	88	81	76	70
1.50	96	88	82	94	87	82	91	85	81	75
2.00	101	94	89	99	93	88	96	91	87	80
2.50	104	98	93	102	96	92	98	94	90	83
3.00	106	101	97	104	100	96	101	97	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	108	104	109	106	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.47V I:0.0502A P:5.4924W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:636.384x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

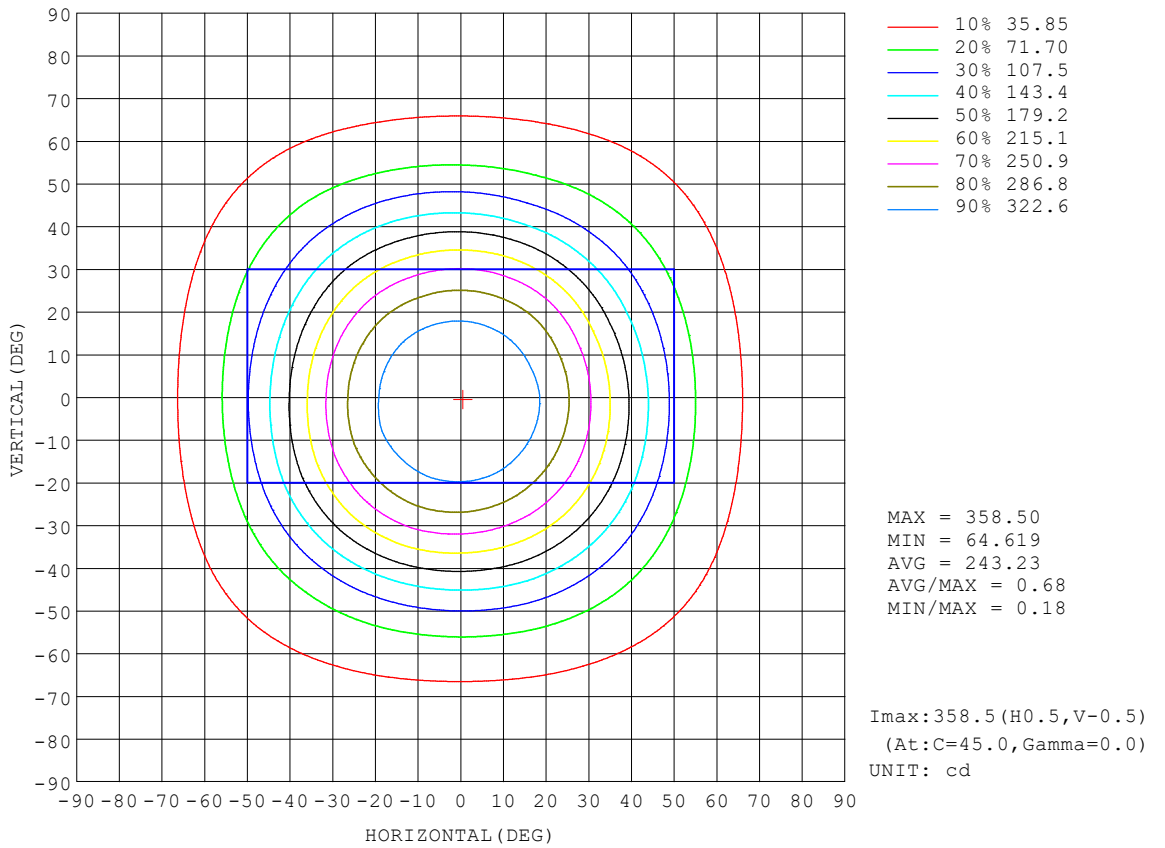


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.47V I:0.0502A P:5.4924W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:636.384x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

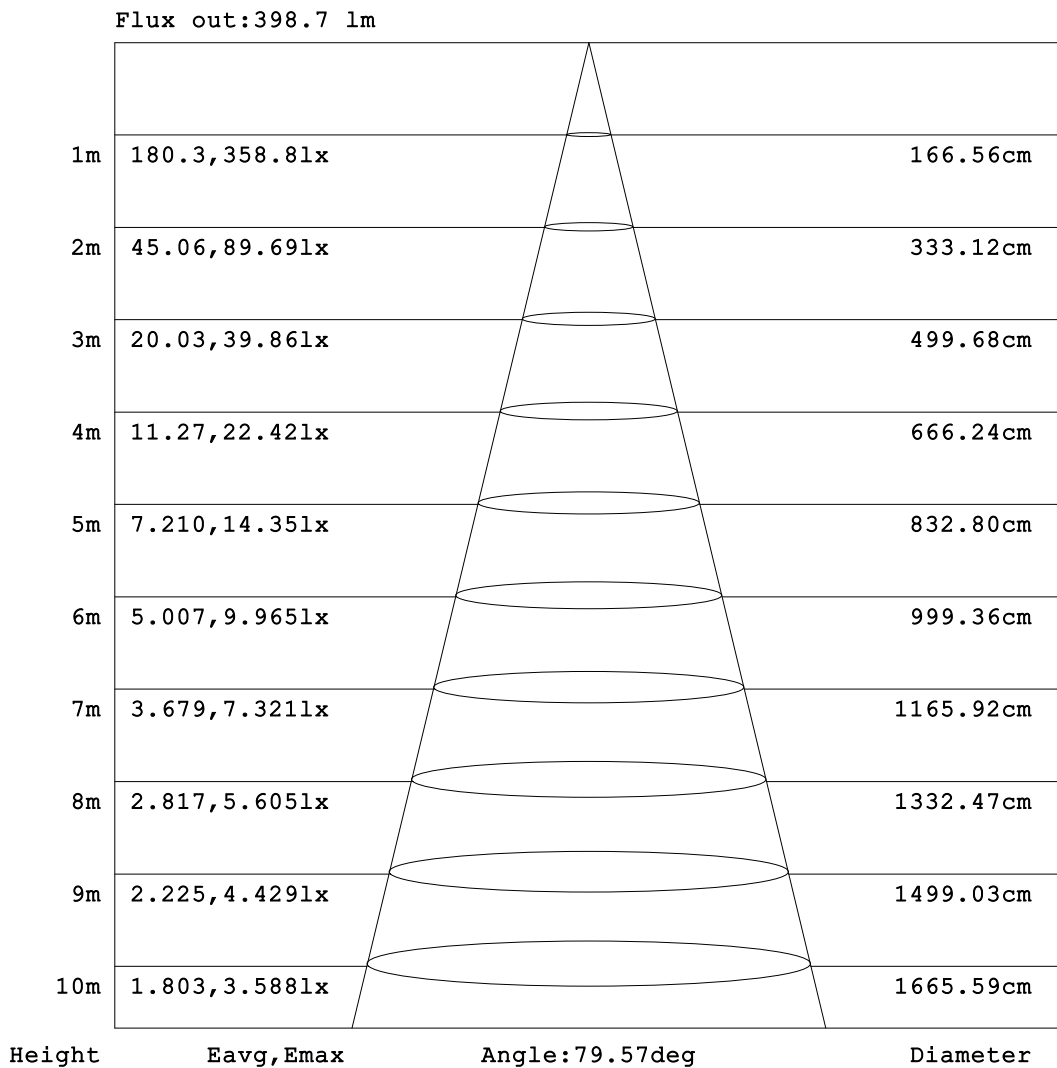


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.47V I:0.0502A P:5.4924W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:636.384x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

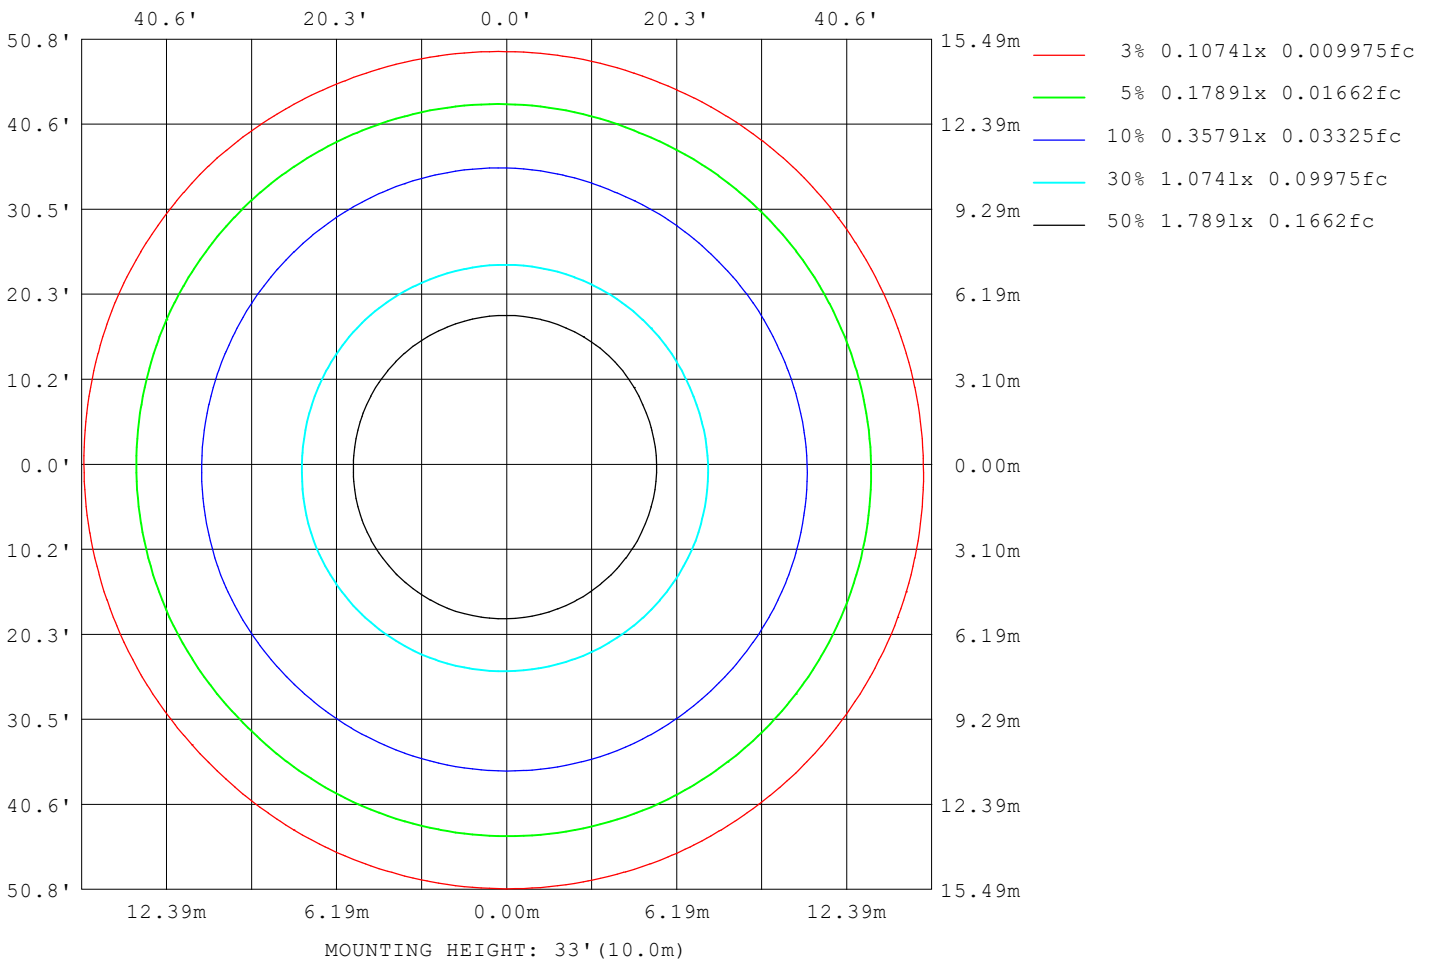

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.47V I:0.0502A P:5.4924W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:636.384x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	11675
L_0~180 (75) av	9749
L_0~180 (85) av	6857
L_90~270 (65) av	11715
L_90~270 (75) av	9754
L_90~270 (85) av	3315
L_45 (65) av	11739
L_45 (75) av	9778
L_45 (85) av	4958

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

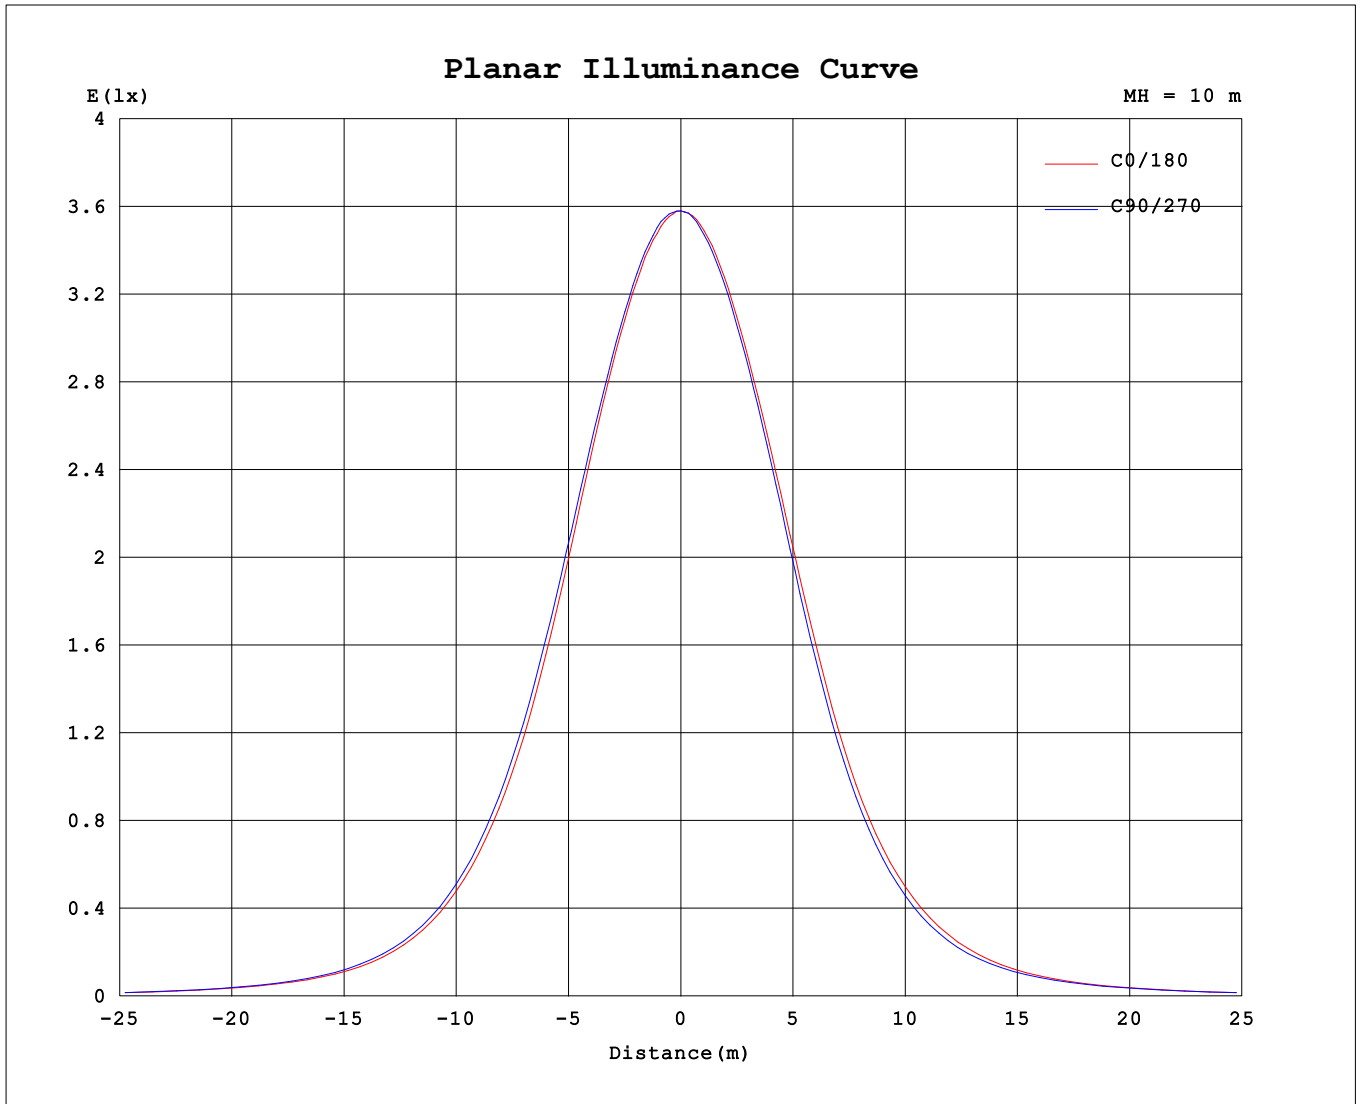

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.47V I:0.0502A P:5.4924W PF:0.9152 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:636.384x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 6W	WEIGHT:
SPEC.: 5000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	358	358	359	358	358	358	358	358	358	358	359	358	358	358	358	358			
5	355	356	356	357	357	357	357	356	356	355	355	355	354	354	354	354			
10	347	349	349	350	351	351	350	350	348	348	347	346	346	345	345	346			
15	335	336	337	338	339	339	339	339	337	335	335	333	332	332	332	332			
20	316	317	319	321	322	323	322	323	319	318	317	315	313	313	313	314			
25	289	290	292	296	298	300	299	299	295	294	291	288	287	287	288	287			
30	255	258	260	263	266	269	269	267	263	260	257	253	252	251	252	251			
35	215	220	223	225	227	231	231	229	223	220	217	213	211	210	210	209			
40	175	180	182	185	186	187	188	187	181	177	175	172	169	166	165	167			
45	135	140	142	145	145	145	145	145	141	137	135	133	130	125	125	129			
50	100	103	106	108	108	107	106	107	106	104	101	98.8	95.5	92.0	92.9	96.1			
55	71.8	74.2	76.1	77.6	77.5	76.9	75.2	75.9	76.2	76.3	74.8	71.4	68.9	67.6	68.7	69.8			
60	52.1	53.5	54.3	55.3	55.1	55.0	54.1	54.0	54.1	54.8	54.3	51.7	50.6	50.4	50.9	50.8			
65	38.3	39.0	39.3	39.9	39.9	40.1	39.7	39.6	39.1	39.2	39.1	38.1	37.9	37.6	37.7	37.6			
70	27.9	28.2	28.3	28.6	28.7	28.9	28.6	28.6	28.1	28.0	28.0	27.7	27.7	27.5	27.5	27.4			
75	19.6	19.8	19.9	20.1	20.1	20.4	20.2	20.3	20.0	19.9	19.8	19.5	19.5	19.5	19.6	19.5			
80	11.7	12.1	12.0	11.9	11.8	12.2	12.4	12.3	12.3	12.4	11.9	11.1	10.7	11.1	11.5	11.6			
85	4.32	5.01	3.78	2.93	2.48	3.04	3.39	4.59	5.07	5.03	3.48	2.49	2.05	2.28	2.92	3.76			
90	0.16	0.14	0.14	0.12	0.12	0.10	0.13	0.11	0.28	0.29	0.26	0.29	0.28	0.30	0.25	0.27			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks: