
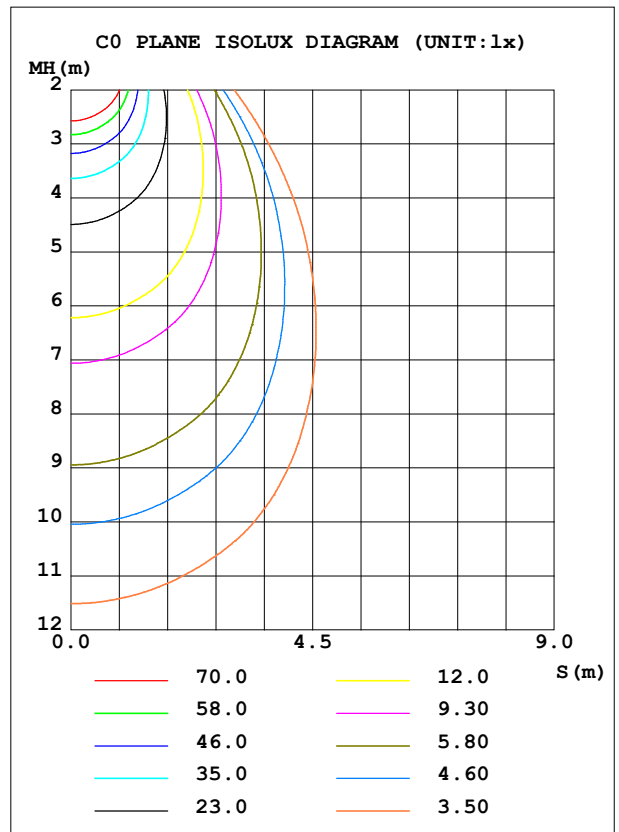


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.45V I:0.0673A P:7.6582W PF:0.9524 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:813.875x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-4-16W-M-A5C5	Imax (cd)	463.9	S/MH (C0/180)	1.07
NOMINAL POWER (W)	8	LOR (%)	100.0	S/MH (C90/270)	1.06
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	813.88	<input type="checkbox"/> UP, DN (C0-180)	0.0,51.1
NOMINAL FLUX (lm)	813.875	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0,48.9
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

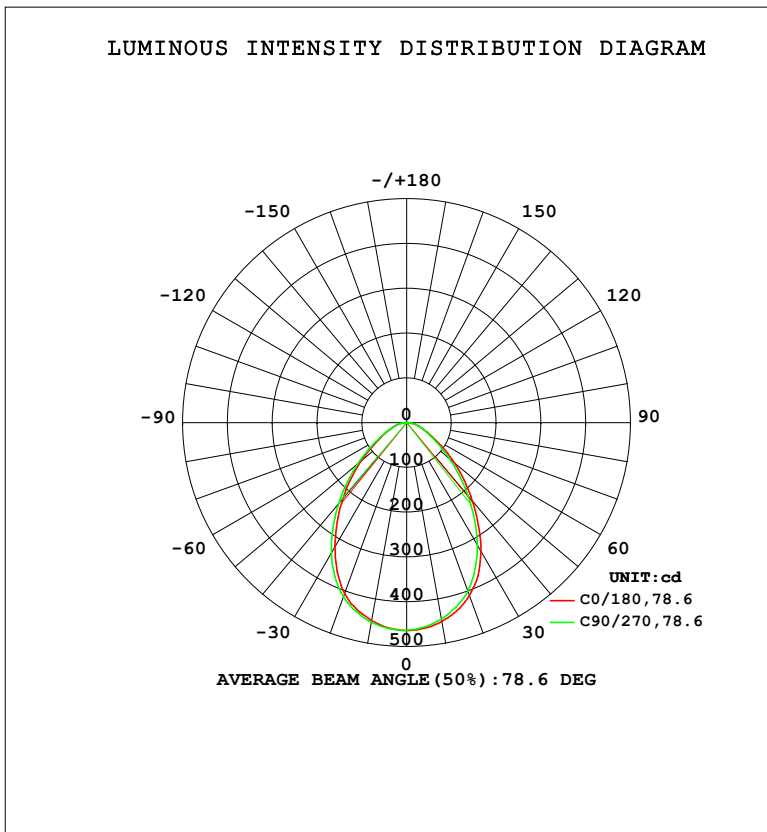

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum,lamp
10	449.0	451.1	452.6	452.6	451.1	448.1	445.4	444.6	0- 10	43.54	43.54	5.35,5.35
20	405.3	407.9	413.2	413.6	410.6	405.0	400.3	399.8	10- 20	121.5	165.0	20.3,20.3
30	320.3	330.2	336.8	341.2	332.0	323.8	316.1	315.5	20- 30	170.1	335.1	41.2,41.2
40	221.8	231.9	236.3	238.2	228.7	220.5	213.7	207.8	30- 40	172.2	507.3	62.3,62.3
50	131.8	139.2	142.2	138.3	139.2	132.0	124.4	121.3	40- 50	136.6	643.8	79.1,79.1
60	67.52	71.11	72.36	70.47	70.40	70.90	64.92	66.07	50- 60	87.94	731.8	89.9,89.9
70	35.15	35.57	35.99	35.90	35.34	35.14	34.80	34.64	60- 70	49.64	781.4	96,96
80	14.81	15.12	14.82	15.55	15.52	15.00	13.57	14.59	70- 80	26.42	807.8	99.3,99.3
90	0.2229	0.2032	0.1835	0.1835	0.3868	0.3409	0.3540	0.3409	80- 90	6.062	813.9	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 581.39 lm

%lum = 71.4%

%lamp = 71.4%

Conical surface Flux(130deg): 760.27 lm

%lum = 93.4%


%lamp = 93.4%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.45V I:0.0673A P:7.6582W PF:0.9524 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:813.875x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

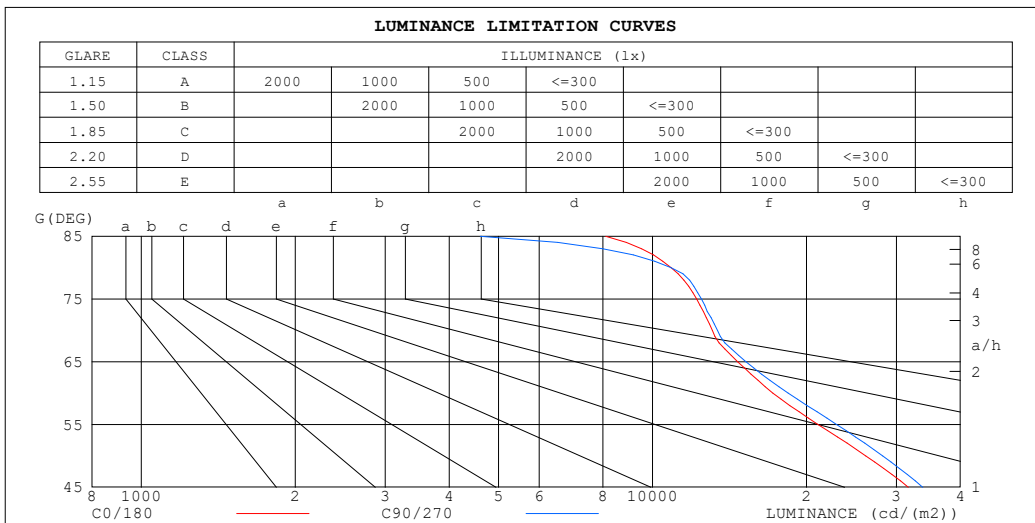

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8104	4602
80	10863	10872
75	12206	12462
70	13092	13405
65	14665	15230
60	17203	18436
55	21071	22900
50	26129	28178
45	31643	33786


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.45V I:0.0673A P:7.6582W PF:0.9524 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:813.875x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.00	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.86	.94	.89	.85	.91	.86	.83	.88	.84	.81	.85	.82	.79	.77
3.0	.86	.79	.74	.85	.78	.73	.82	.77	.72	.79	.75	.71	.77	.73	.70	.68
4.0	.78	.71	.65	.77	.70	.64	.74	.68	.64	.72	.67	.63	.70	.66	.62	.60
5.0	.71	.63	.57	.70	.63	.57	.68	.62	.57	.66	.60	.56	.64	.59	.55	.54
6.0	.65	.57	.51	.64	.57	.51	.62	.56	.51	.61	.55	.50	.59	.54	.50	.48
7.0	.60	.52	.46	.59	.51	.46	.57	.51	.46	.56	.50	.46	.55	.49	.45	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.35	.33

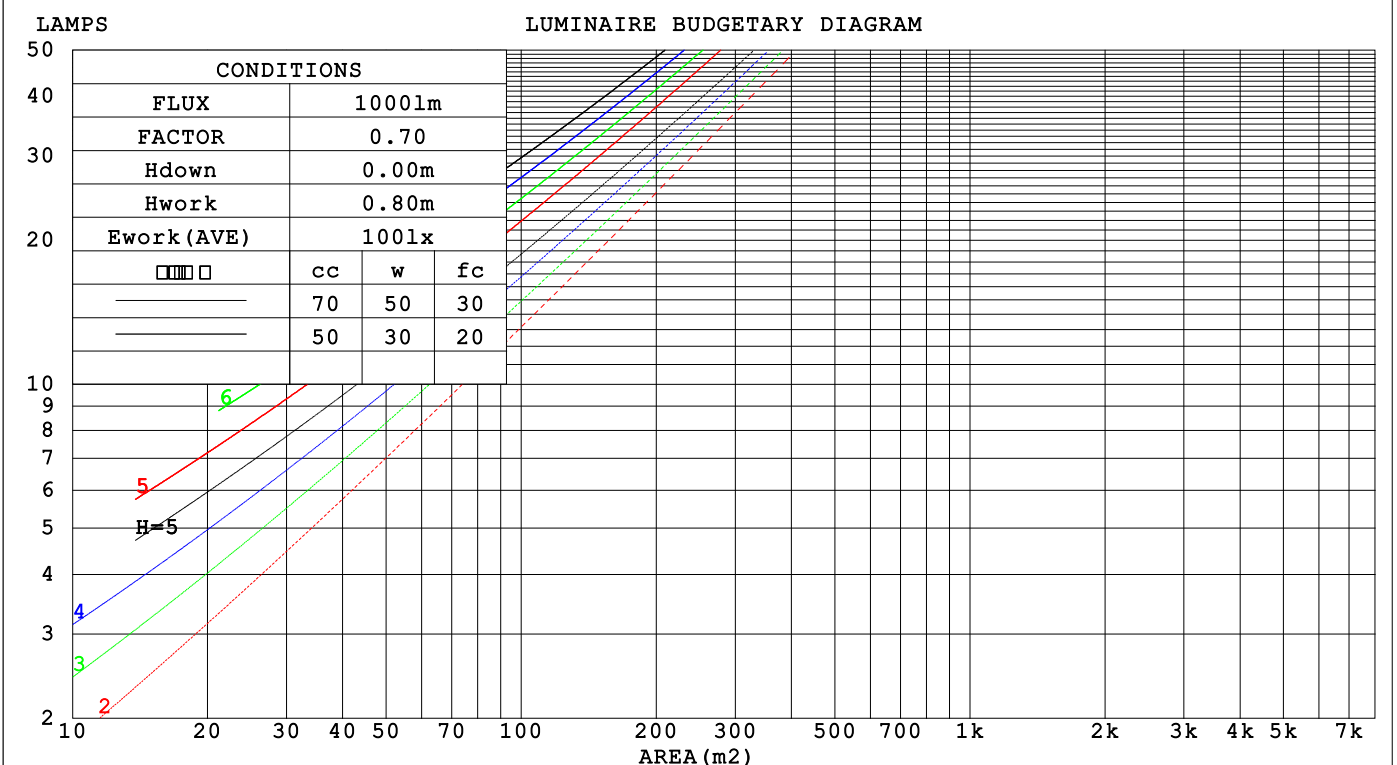

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.45V I:0.0673A P:7.6582W PF:0.9524 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:813.875x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.250 .142 .045	.243 .138 .044	.230 .132 .042	.218 .126 .040	.207 .120 .039	
2.0	.239 .131 .040	.233 .129 .040	.222 .123 .038	.212 .119 .037	.202 .114 .036	
3.0	.225 .120 .036	.220 .118 .036	.210 .114 .035	.201 .110 .034	.193 .107 .033	
4.0	.212 .110 .032	.207 .108 .032	.198 .105 .031	.190 .102 .031	.183 .099 .030	
5.0	.198 .101 .029	.194 .100 .029	.187 .097 .029	.180 .095 .028	.173 .092 .028	
6.0	.186 .093 .027	.183 .092 .027	.176 .090 .026	.170 .088 .026	.164 .086 .026	
7.0	.175 .087 .025	.172 .086 .024	.166 .084 .024	.161 .082 .024	.155 .081 .024	
8.0	.166 .081 .023	.163 .080 .023	.157 .079 .022	.152 .077 .022	.147 .076 .022	
9.0	.157 .076 .021	.154 .075 .021	.149 .074 .021	.144 .072 .021	.140 .071 .021	
10.0	.148 .071 .020	.146 .071 .020	.142 .069 .020	.137 .068 .019	.133 .067 .019	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.176 .157 .139	.151 .134 .120	.103 .093 .083	.059 .054 .048	.019 .017 .016	
2.0	.165 .132 .104	.142 .114 .090	.097 .079 .063	.056 .046 .037	.018 .015 .012	
3.0	.156 .114 .081	.134 .098 .070	.092 .068 .049	.053 .040 .029	.017 .013 .009	
4.0	.148 .100 .064	.127 .087 .056	.087 .060 .039	.050 .035 .023	.016 .012 .008	
5.0	.140 .089 .052	.120 .077 .045	.083 .054 .032	.048 .032 .019	.015 .010 .006	
6.0	.133 .081 .043	.114 .070 .037	.079 .049 .027	.046 .029 .016	.015 .009 .005	
7.0	.127 .074 .036	.109 .064 .032	.075 .045 .022	.044 .026 .013	.014 .009 .004	
8.0	.121 .068 .031	.104 .059 .027	.072 .041 .019	.042 .024 .012	.014 .008 .004	
9.0	.115 .063 .027	.099 .054 .024	.069 .038 .017	.040 .023 .010	.013 .007 .003	
10.0	.110 .058 .024	.095 .051 .021	.066 .036 .015	.038 .021 .009	.012 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.45V I:0.0673A P:7.6582W PF:0.9524 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:813.875x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.7	24.0	23.0	24.2	24.4	23.0	24.3	23.2	24.5	24.7
3H	23.3	24.5	23.6	24.8	25.0	23.6	24.8	23.9	25.0	25.2
4H	23.6	24.8	23.9	25.0	25.2	23.9	25.0	24.2	25.2	25.5
6H	23.9	24.9	24.2	25.2	25.4	24.1	25.1	24.4	25.4	25.7
8H	23.9	24.9	24.2	25.2	25.5	24.1	25.1	24.5	25.4	25.7
12H	23.9	24.9	24.3	25.2	25.5	24.1	25.1	24.4	25.4	25.7
4H 2H	23.0	24.1	23.3	24.3	24.6	23.2	24.3	23.5	24.6	24.8
3H	23.8	24.8	24.1	25.0	25.3	24.0	25.0	24.3	25.3	25.5
4H	24.2	25.1	24.6	25.4	25.7	24.4	25.3	24.7	25.6	25.9
6H	24.5	25.3	24.9	25.7	26.0	24.7	25.5	25.1	25.8	26.2
8H	24.6	25.4	25.1	25.7	26.1	24.8	25.5	25.2	25.9	26.3
12H	24.7	25.4	25.1	25.8	26.2	24.8	25.5	25.2	25.9	26.3
8H 4H	24.3	25.1	24.7	25.4	25.8	24.5	25.2	24.9	25.6	26.0
6H	24.8	25.4	25.2	25.8	26.2	24.9	25.6	25.4	26.0	26.4
8H	25.0	25.5	25.4	25.9	26.4	25.1	25.6	25.5	26.0	26.5
12H	25.1	25.5	25.6	26.0	26.5	25.1	25.6	25.6	26.0	26.5
12H 4H	24.3	25.0	24.7	25.4	25.8	24.5	25.2	24.9	25.5	25.9
6H	24.8	25.3	25.3	25.8	26.2	25.0	25.5	25.4	25.9	26.4
8H	25.0	25.5	25.5	25.9	26.4	25.1	25.6	25.6	26.0	26.5

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.5 / - 0.6	+ 0.5 / - 0.6
1.5H	+ 0.3 / - 0.4	+ 0.3 / - 0.3
2.0H	+ 1.1 / - 0.9	+ 1.2 / - 0.9

CIE Pub.117, 813.9 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.7)
 Area: 0.00785 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.45V I:0.0673A P:7.6582W PF:0.9524 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:813.875x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	47
0.80	78	68	62	77	68	62	75	67	61	56
1.00	85	76	70	84	76	70	82	76	69	64
1.25	91	83	77	90	82	77	88	81	76	70
1.50	95	88	82	94	87	82	91	85	81	74
2.00	101	94	89	99	93	88	96	91	87	80
2.50	104	98	93	102	96	92	98	94	90	83
3.00	106	101	97	104	100	96	101	97	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	108	104	109	106	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.45V I:0.0673A P:7.6582W PF:0.9524 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:813.875x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

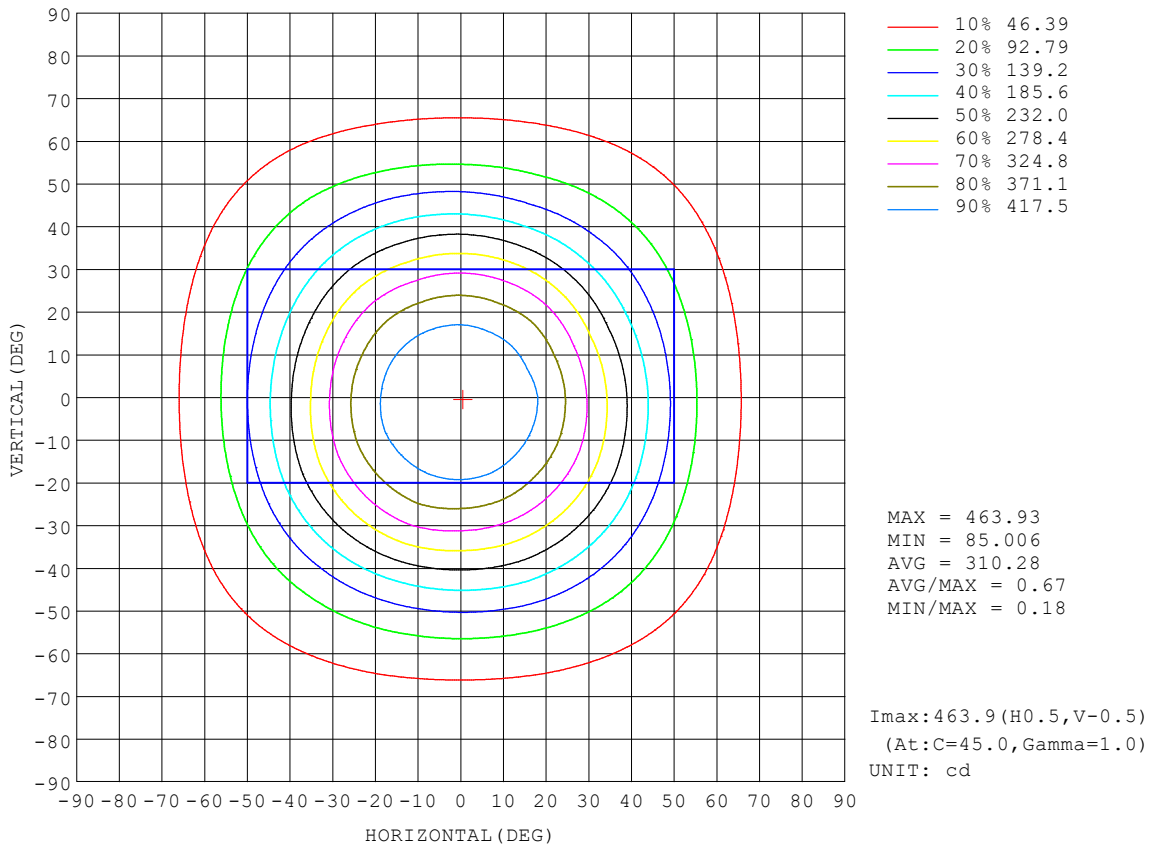


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.45V I:0.0673A P:7.6582W PF:0.9524 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:813.875x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

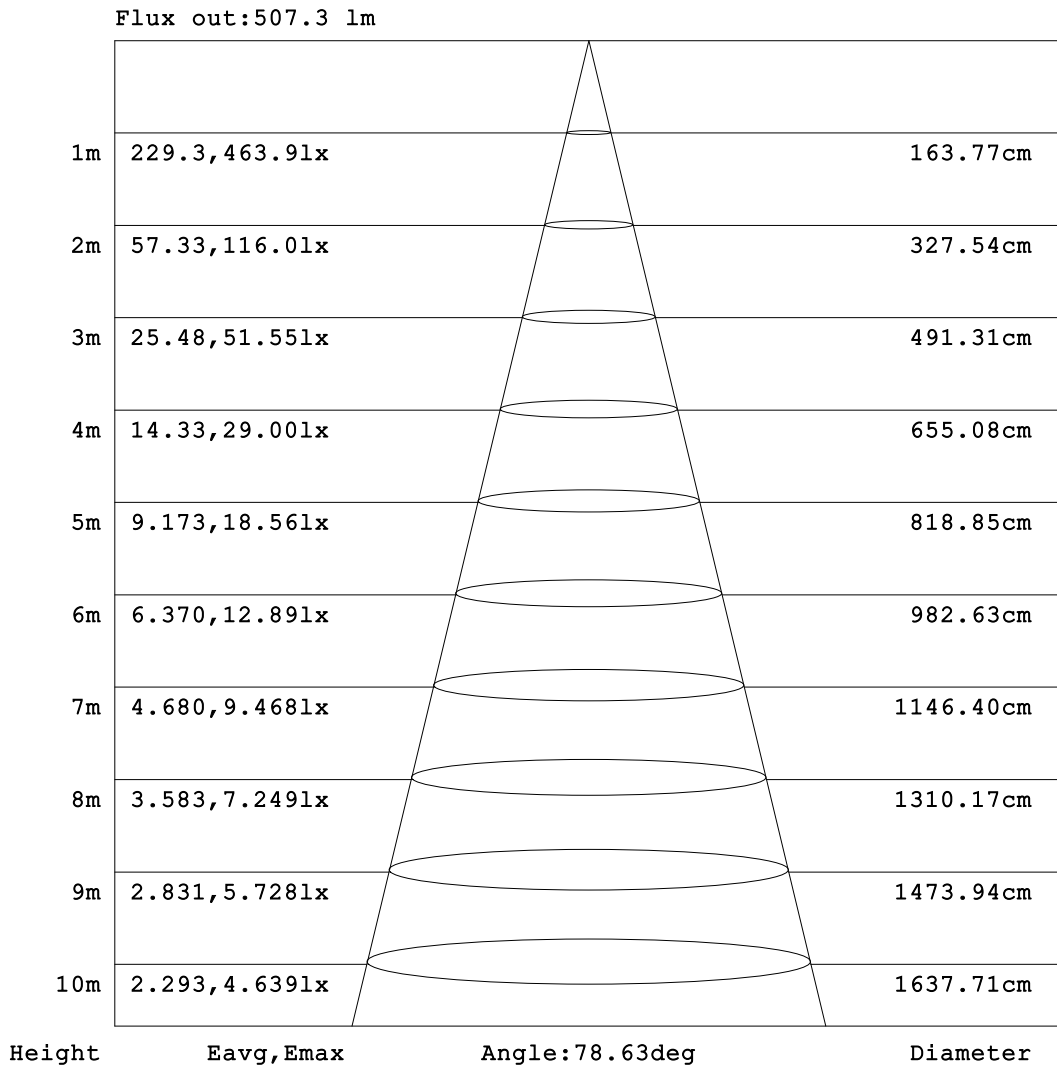


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.45V I:0.0673A P:7.6582W PF:0.9524 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:813.875x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

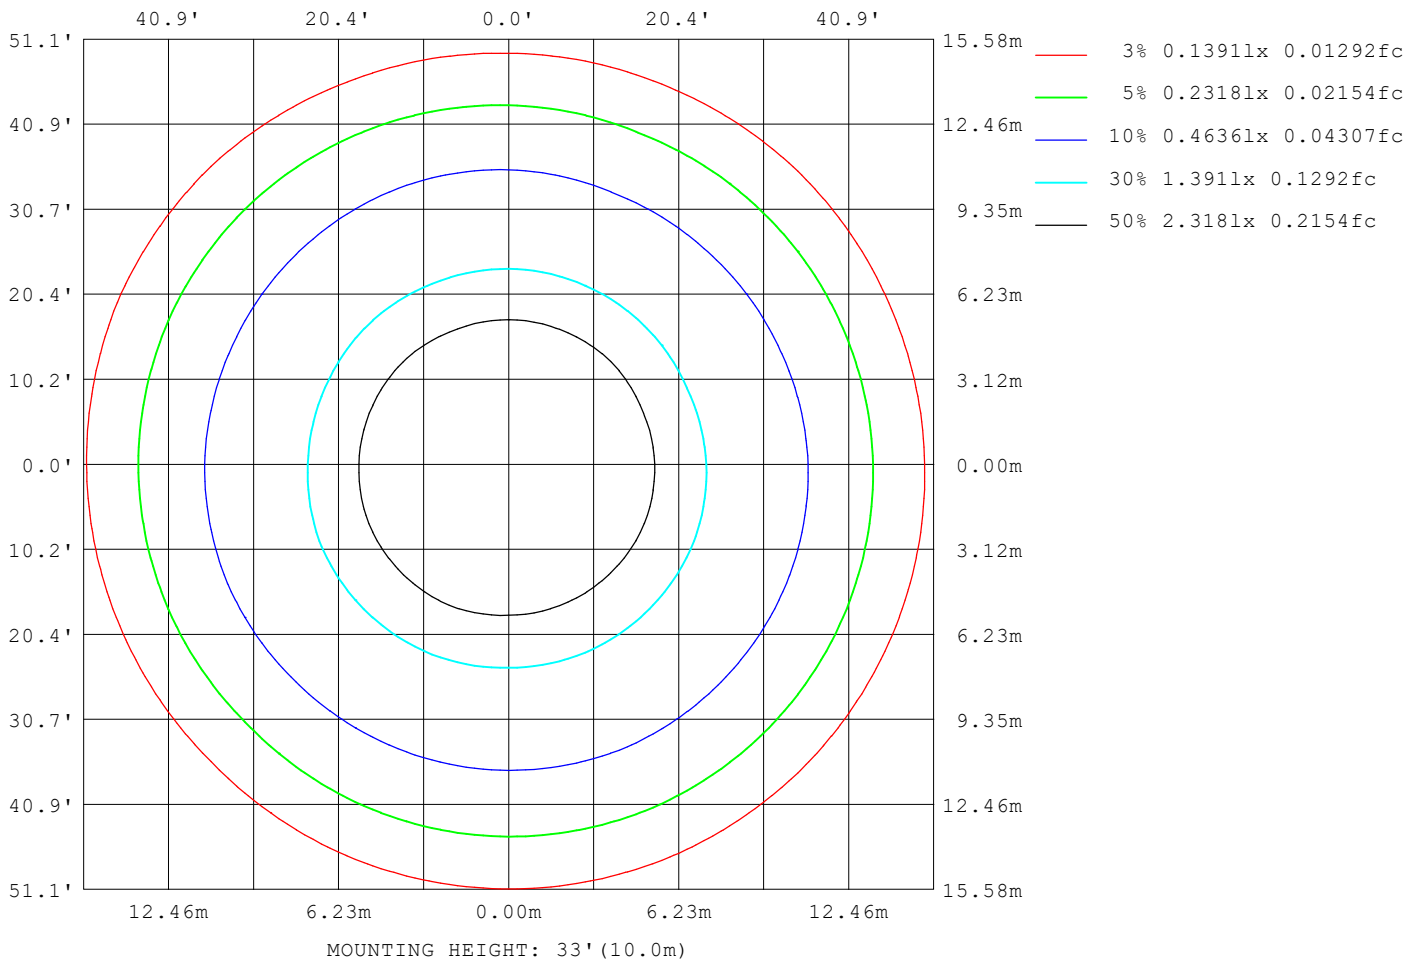

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.45V I:0.0673A P:7.6582W PF:0.9524 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:813.875x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	14817
L_0~180 (75) av	12302
L_0~180 (85) av	8743
L_90~270 (65) av	14804
L_90~270 (75) av	12278
L_90~270 (85) av	4231
L_45 (65) av	14906
L_45 (75) av	12309
L_45 (85) av	6290

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

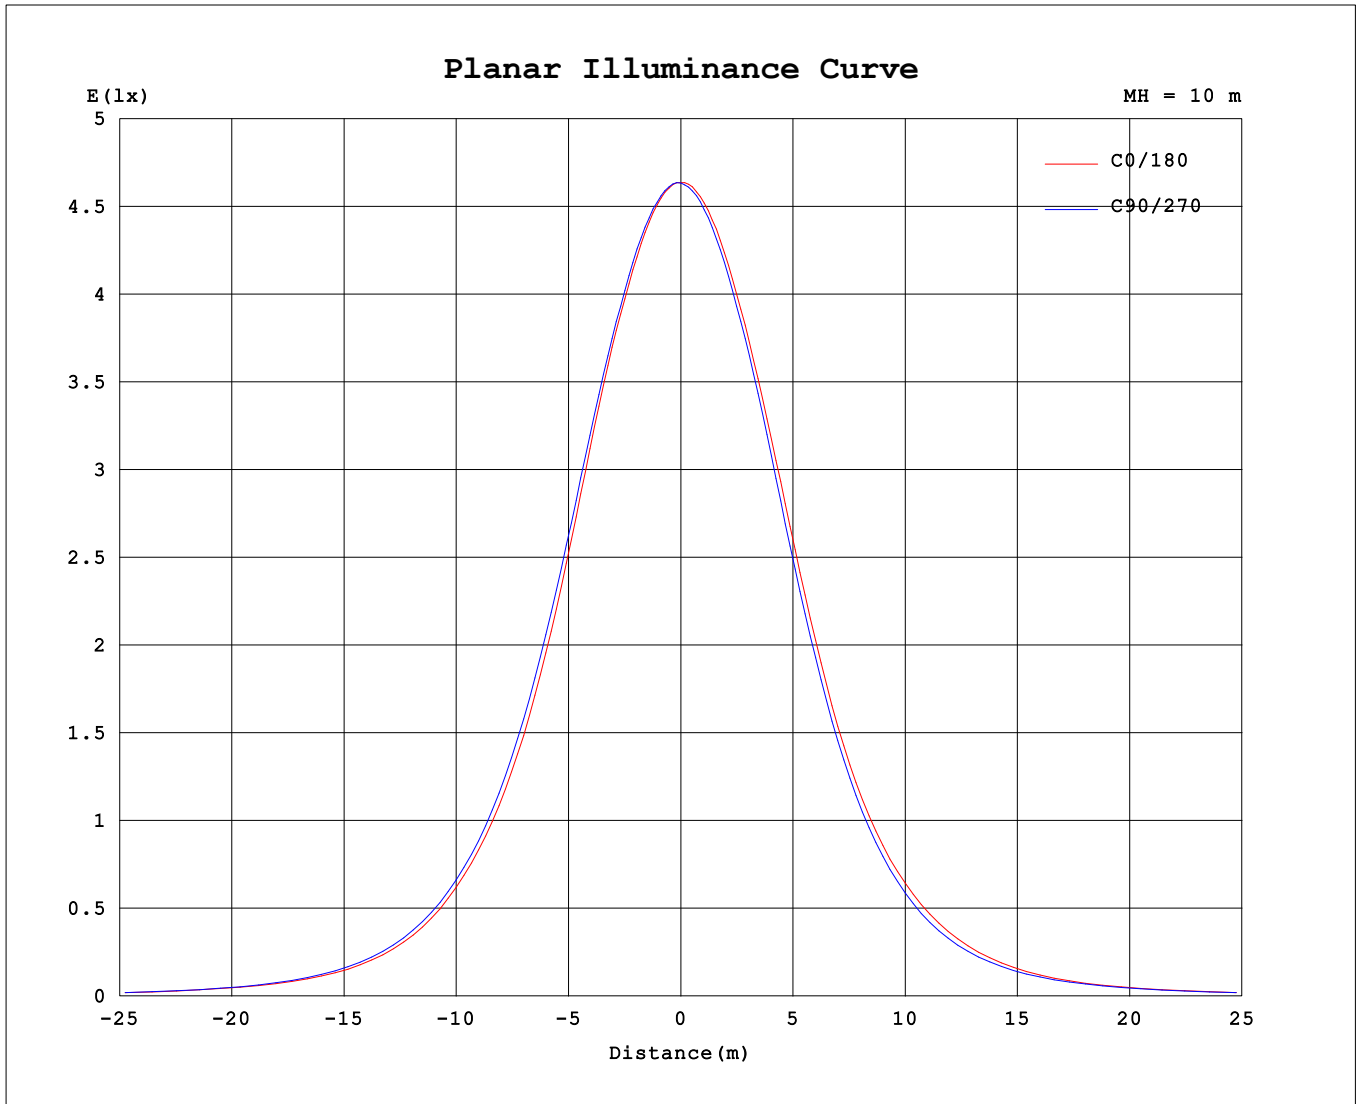

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.45V I:0.0673A P:7.6582W PF:0.9524 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:813.875x1 lm		
NAME: DL254-4-16W-M-A5C5	TYPE: 8W	WEIGHT:
SPEC.: 3000K	DIM.: 0.295	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.10	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	464	464	464	463	463	463	463	462	464	464	464	463	463	463	463	462			
5	460	461	461	461	461	462	461	460	461	460	459	459	458	457	457	457			
10	449	450	451	452	453	453	453	453	451	449	448	446	445	444	445	445			
15	431	434	434	436	436	438	438	437	435	432	430	428	427	426	426	426			
20	405	407	408	412	413	414	414	414	411	407	405	402	400	398	400	401			
25	367	371	373	377	380	384	382	382	377	371	369	363	362	360	364	362			
30	320	328	330	334	337	343	341	339	332	327	324	316	316	315	315	314			
35	270	280	283	286	287	293	292	290	280	275	273	266	265	263	261	261			
40	222	229	232	236	236	238	238	238	229	222	220	216	214	209	208	210			
45	176	181	183	188	188	186	187	187	182	176	173	171	166	160	161	165			
50	132	136	139	143	142	140	138	140	139	135	132	129	124	120	121	126			
55	94.9	98.2	101	103	103	102	99.2	100	101	101	98.5	93.6	90.0	88.4	90.2	92.1			
60	67.5	69.6	71.1	72.3	72.4	72.0	70.5	70.0	70.4	71.9	70.9	66.9	64.9	65.2	66.1	65.7			
65	48.7	49.5	49.9	50.6	50.5	50.8	50.3	50.1	49.7	50.0	49.7	48.3	47.7	47.7	47.9	47.5			
70	35.1	35.5	35.6	35.9	36.0	36.2	35.9	35.9	35.3	35.2	35.1	34.8	34.8	34.6	34.6	34.5			
75	24.8	25.0	25.0	25.2	25.3	25.5	25.4	25.6	25.2	25.1	24.9	24.5	24.6	24.6	24.7	24.5			
80	14.8	15.3	15.1	15.0	14.8	15.3	15.6	15.5	15.5	15.7	15.0	14.0	13.6	14.1	14.6	14.6			
85	5.54	6.31	4.78	3.65	3.15	3.79	4.28	5.78	6.42	6.41	4.44	3.25	2.64	2.95	3.72	4.82			
90	0.22	0.20	0.20	0.18	0.18	0.14	0.18	0.18	0.39	0.39	0.34	0.38	0.35	0.39	0.34	0.35			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks: