
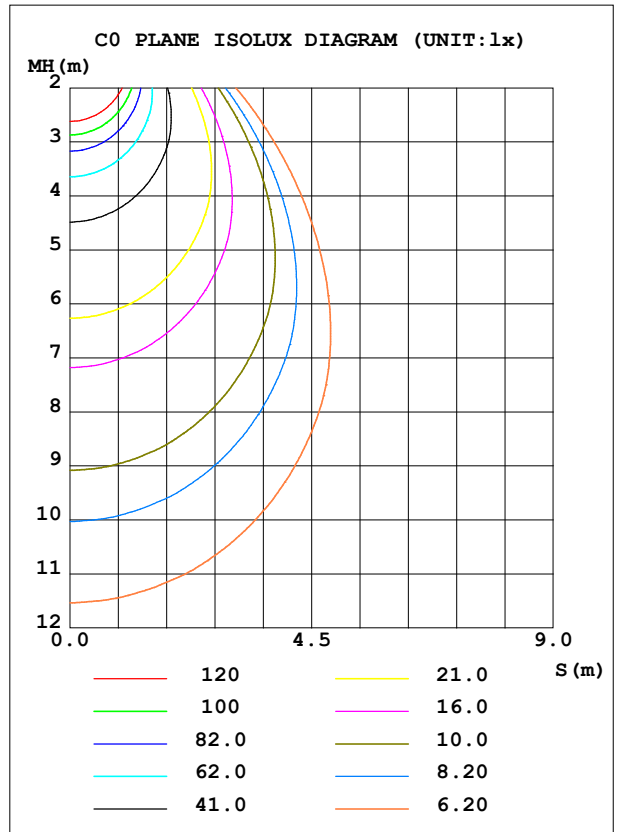


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.48V I:0.0965A P:11.147W PF:0.9667 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1511.72x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 12W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-6-30W-M-A5C5-HO	Imax (cd)	824.7	S/MH (C0/180)	1.13
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.13
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1511.7	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	1511.72	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

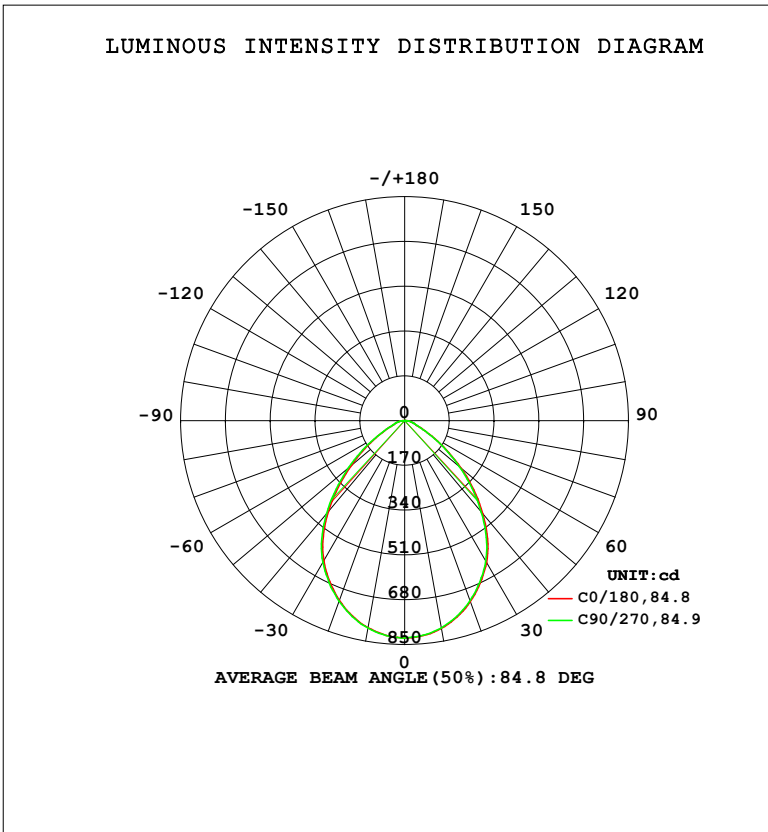

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	798.2	798.2	800.2	801.6	800.9	800.8	799.2	796.9	0- 10	77.50	77.50	5.13,5.13
20	725.2	726.3	729.7	732.4	730.7	730.0	726.9	723.6	10- 20	216.4	293.9	19.4,19.4
30	614.2	617.5	621.3	624.0	621.7	620.0	615.9	612.8	20- 30	311.2	605.2	40,40
40	451.0	455.9	461.8	464.7	462.1	458.1	453.4	449.3	30- 40	338.7	943.9	62.4,62.4
50	264.7	272.3	277.5	278.0	279.0	275.7	270.9	265.0	40- 50	280.1	1224	81,81
60	117.8	119.8	123.0	123.1	121.3	123.3	119.8	116.2	50- 60	171.1	1395	92.3,92.3
70	43.71	43.71	43.99	44.24	44.40	44.29	44.14	43.96	60- 70	73.44	1469	97.1,97.1
80	20.02	20.01	20.30	20.80	20.52	18.23	20.21	21.01	70- 80	34.10	1503	99.4,99.4
90	0.3736	0.3540	0.3212	0.3343	0.6162	0.6162	0.6358	0.6424	80- 90	9.064	1512	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1095.7 lm

%lum = 72.5%

%lamp = 72.5%

Conical surface Flux(130deg): 1440.6 lm

%lum = 95.3%


%lamp = 95.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.48V I:0.0965A P:11.147W PF:0.9667 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1511.72x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 12W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

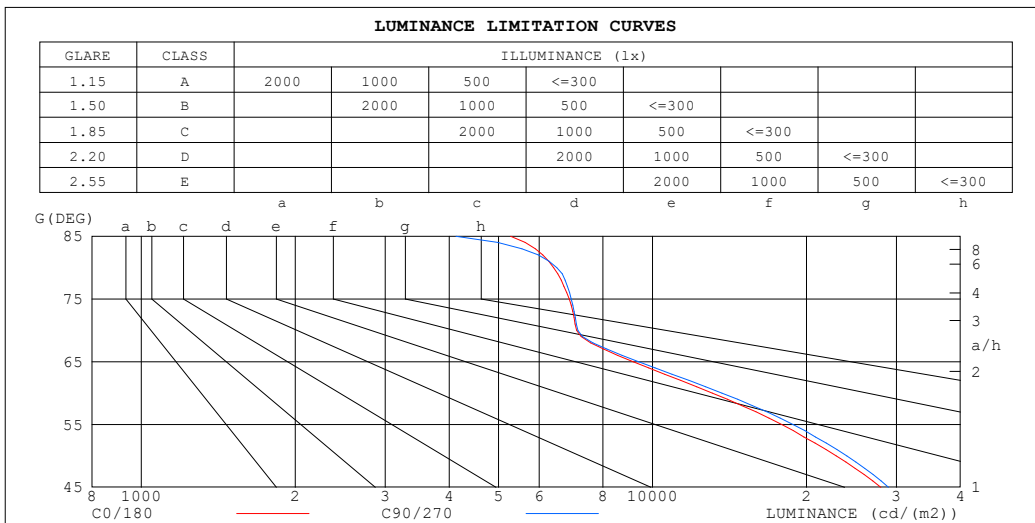

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5279	4124
80	6405	6493
75	6870	6932
70	7100	7146
65	9164	9397
60	13090	13669
55	17893	18822
50	22876	23981
45	27961	28950


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.48V I:0.0965A P:11.147W PF:0.9667 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:1511.72x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 12W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.99	.96	.97	.95	.93	.94	.92	.91	.89
2.0	.96	.91	.86	.95	.90	.85	.91	.87	.83	.88	.85	.82	.85	.82	.80	.78
3.0	.87	.80	.75	.85	.79	.74	.83	.77	.73	.80	.75	.72	.78	.74	.70	.69
4.0	.79	.71	.65	.77	.70	.65	.75	.69	.64	.73	.68	.63	.71	.66	.63	.61
5.0	.71	.64	.58	.70	.63	.58	.68	.62	.57	.66	.61	.56	.65	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.52	.63	.56	.51	.61	.55	.51	.60	.54	.50	.48
7.0	.60	.52	.47	.59	.52	.46	.58	.51	.46	.56	.50	.46	.55	.50	.46	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.43	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.39	.35	.33

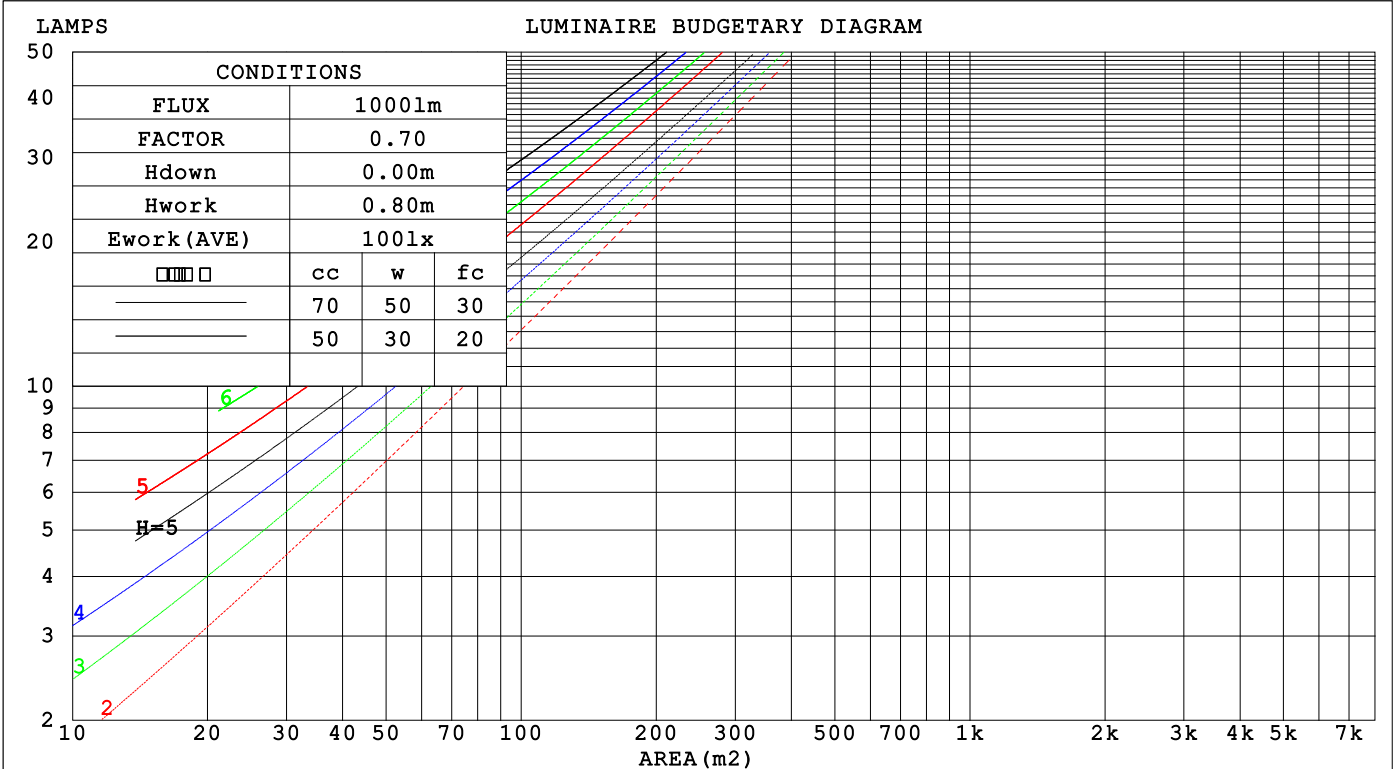

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.48V I:0.0965A P:11.147W PF:0.9667 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1511.72x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 12W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.242 .138 .044	.235 .134 .043	.222 .128 .041	.211 .121 .039	.200 .116 .037	
2.0	.234 .128 .039	.228 .126 .039	.217 .121 .037	.207 .116 .036	.197 .111 .035	
3.0	.222 .118 .035	.217 .116 .035	.207 .112 .034	.198 .108 .033	.189 .105 .032	
4.0	.209 .109 .032	.205 .107 .032	.196 .104 .031	.188 .101 .030	.181 .098 .030	
5.0	.197 .100 .029	.193 .099 .029	.185 .097 .028	.178 .094 .028	.172 .092 .028	
6.0	.186 .093 .027	.182 .092 .026	.175 .090 .026	.169 .088 .026	.163 .086 .025	
7.0	.175 .087 .025	.172 .086 .024	.166 .084 .024	.160 .082 .024	.155 .080 .024	
8.0	.165 .081 .023	.163 .080 .023	.157 .079 .022	.152 .077 .022	.147 .076 .022	
9.0	.157 .076 .021	.154 .075 .021	.149 .074 .021	.145 .072 .021	.140 .071 .021	
10.0	.149 .071 .020	.146 .071 .020	.142 .070 .020	.138 .068 .019	.134 .067 .019	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.176 .157 .140	.150 .135 .120	.103 .093 .083	.059 .054 .048	.019 .017 .016	
2.0	.165 .132 .105	.141 .114 .091	.097 .079 .063	.056 .046 .037	.018 .015 .012	
3.0	.155 .114 .081	.133 .098 .070	.091 .068 .049	.053 .040 .029	.017 .013 .010	
4.0	.147 .100 .064	.126 .086 .056	.087 .060 .039	.050 .035 .023	.016 .011 .008	
5.0	.140 .089 .052	.120 .077 .045	.083 .054 .032	.048 .032 .019	.015 .010 .006	
6.0	.133 .081 .043	.114 .070 .038	.079 .049 .027	.046 .029 .016	.015 .009 .005	
7.0	.126 .074 .036	.109 .064 .032	.075 .045 .022	.044 .026 .013	.014 .009 .004	
8.0	.121 .068 .031	.104 .059 .027	.072 .041 .019	.042 .024 .012	.014 .008 .004	
9.0	.115 .063 .027	.099 .054 .024	.069 .038 .017	.040 .023 .010	.013 .007 .003	
10.0	.110 .058 .024	.095 .051 .021	.066 .036 .015	.038 .021 .009	.012 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.48V I:0.0965A P:11.147W PF:0.9667 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1511.72x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 12W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.1	23.4	22.4	23.6	23.8	22.3	23.6	22.5	23.8	23.9
3H	22.3	23.5	22.6	23.7	24.0	22.5	23.7	22.8	23.9	24.1
4H	22.4	23.6	22.7	23.8	24.0	22.6	23.7	22.9	23.9	24.2
6H	22.5	23.6	22.8	23.8	24.1	22.7	23.7	23.0	24.0	24.2
8H	22.6	23.6	22.9	23.8	24.1	22.7	23.7	23.0	24.0	24.2
12H	22.6	23.5	22.9	23.8	24.1	22.7	23.6	23.0	23.9	24.2
4H 2H	22.2	23.3	22.5	23.6	23.8	22.3	23.5	22.6	23.7	23.9
3H	22.5	23.5	22.9	23.8	24.1	22.7	23.6	23.0	23.9	24.2
4H	22.7	23.6	23.1	23.9	24.2	22.8	23.7	23.2	24.0	24.4
6H	22.9	23.7	23.3	24.0	24.4	23.0	23.8	23.4	24.2	24.5
8H	23.0	23.7	23.4	24.1	24.4	23.1	23.8	23.5	24.2	24.5
12H	23.0	23.7	23.4	24.0	24.4	23.1	23.8	23.5	24.1	24.5
8H 4H	22.8	23.5	23.2	23.8	24.2	22.9	23.6	23.3	23.9	24.3
6H	23.0	23.6	23.5	24.0	24.4	23.1	23.7	23.6	24.1	24.6
8H	23.1	23.7	23.6	24.1	24.5	23.3	23.8	23.7	24.2	24.6
12H	23.2	23.7	23.7	24.1	24.6	23.3	23.8	23.8	24.2	24.7
12H 4H	22.7	23.4	23.2	23.8	24.2	22.8	23.5	23.3	23.9	24.3
6H	23.0	23.6	23.5	24.0	24.4	23.1	23.7	23.6	24.1	24.5
8H	23.2	23.6	23.6	24.1	24.5	23.3	23.7	23.8	24.2	24.6

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.8 / - 1.0	+ 0.8 / - 1.0
1.5H	+ 0.4 / - 0.4	+ 0.4 / - 0.4
2.0H	+ 1.7 / - 1.8	+ 1.7 / - 1.9

CIE Pub.117, 1512 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.4)
 Area: 0.018 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-03	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.48V I:0.0965A P:11.147W PF:0.9667 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1511.72x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 12W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	46
0.80	78	68	62	77	68	62	75	67	62	56
1.00	86	77	71	84	76	71	82	77	70	64
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	88	83	95	88	83	92	86	82	75
2.00	101	95	90	100	94	89	97	92	88	81
2.50	104	98	94	102	97	93	99	94	91	84
3.00	107	102	97	105	100	96	101	97	94	87
4.00	110	105	102	107	104	100	104	100	98	90
5.00	111	108	105	109	106	103	105	102	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.48V I:0.0965A P:11.147W PF:0.9667 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1511.72x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 12W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

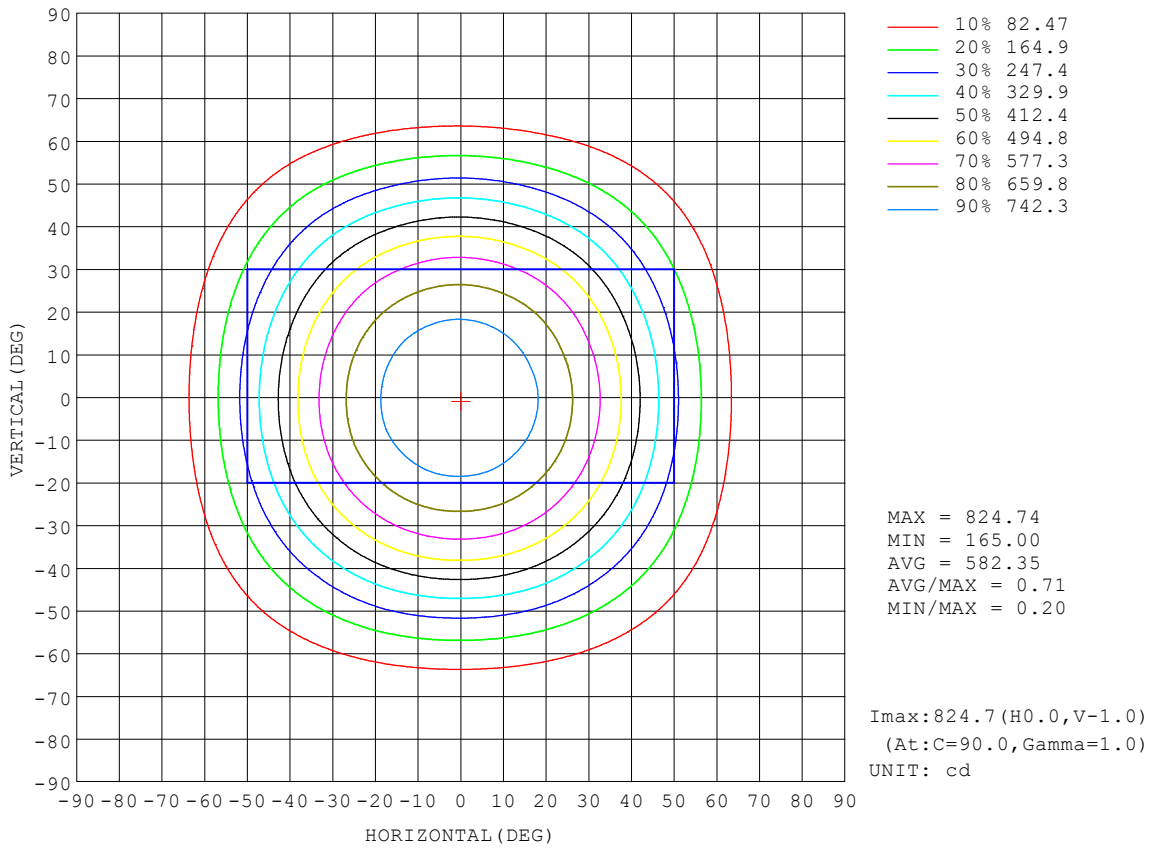


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.48V I:0.0965A P:11.147W PF:0.9667 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1511.72x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 12W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

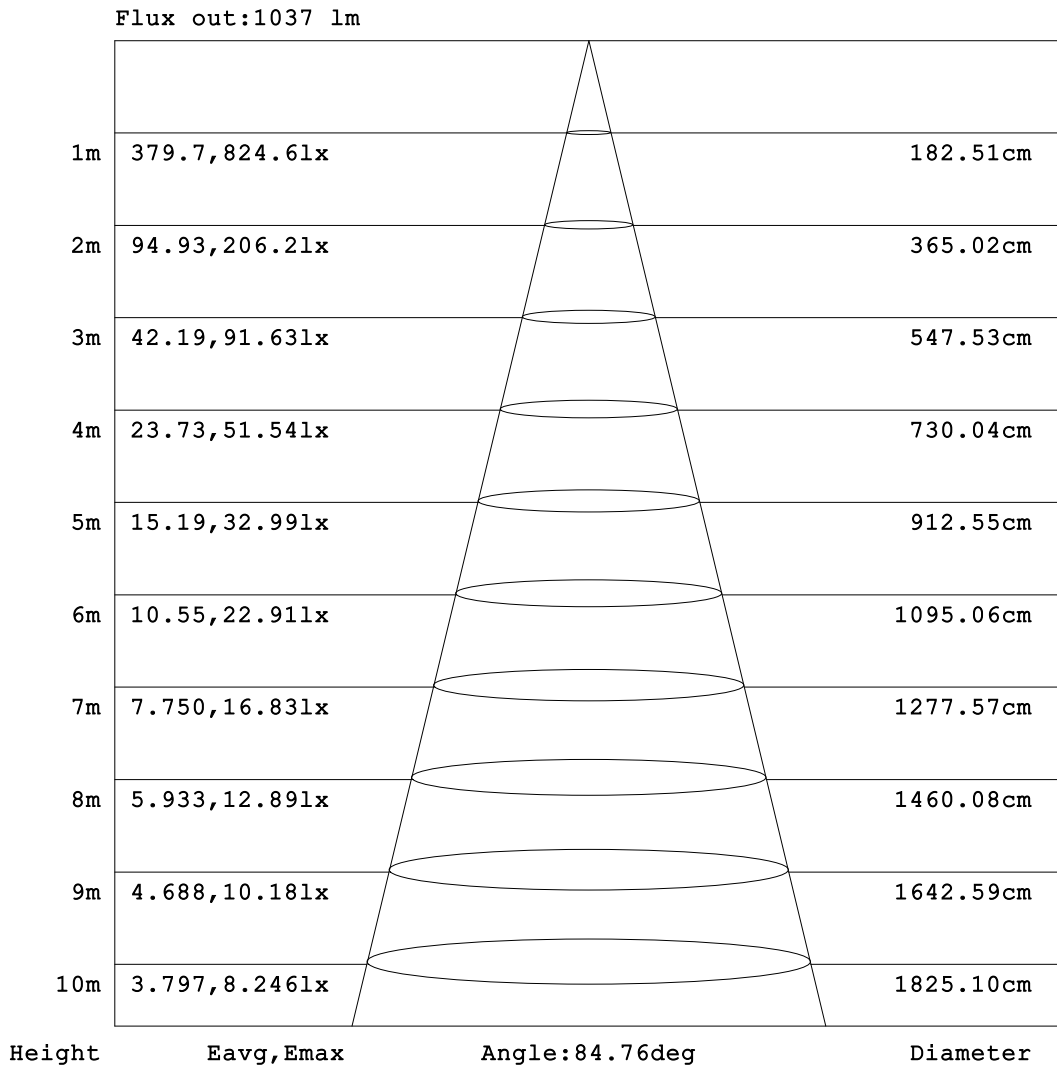


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.48V I:0.0965A P:11.147W PF:0.9667 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1511.72x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 12W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

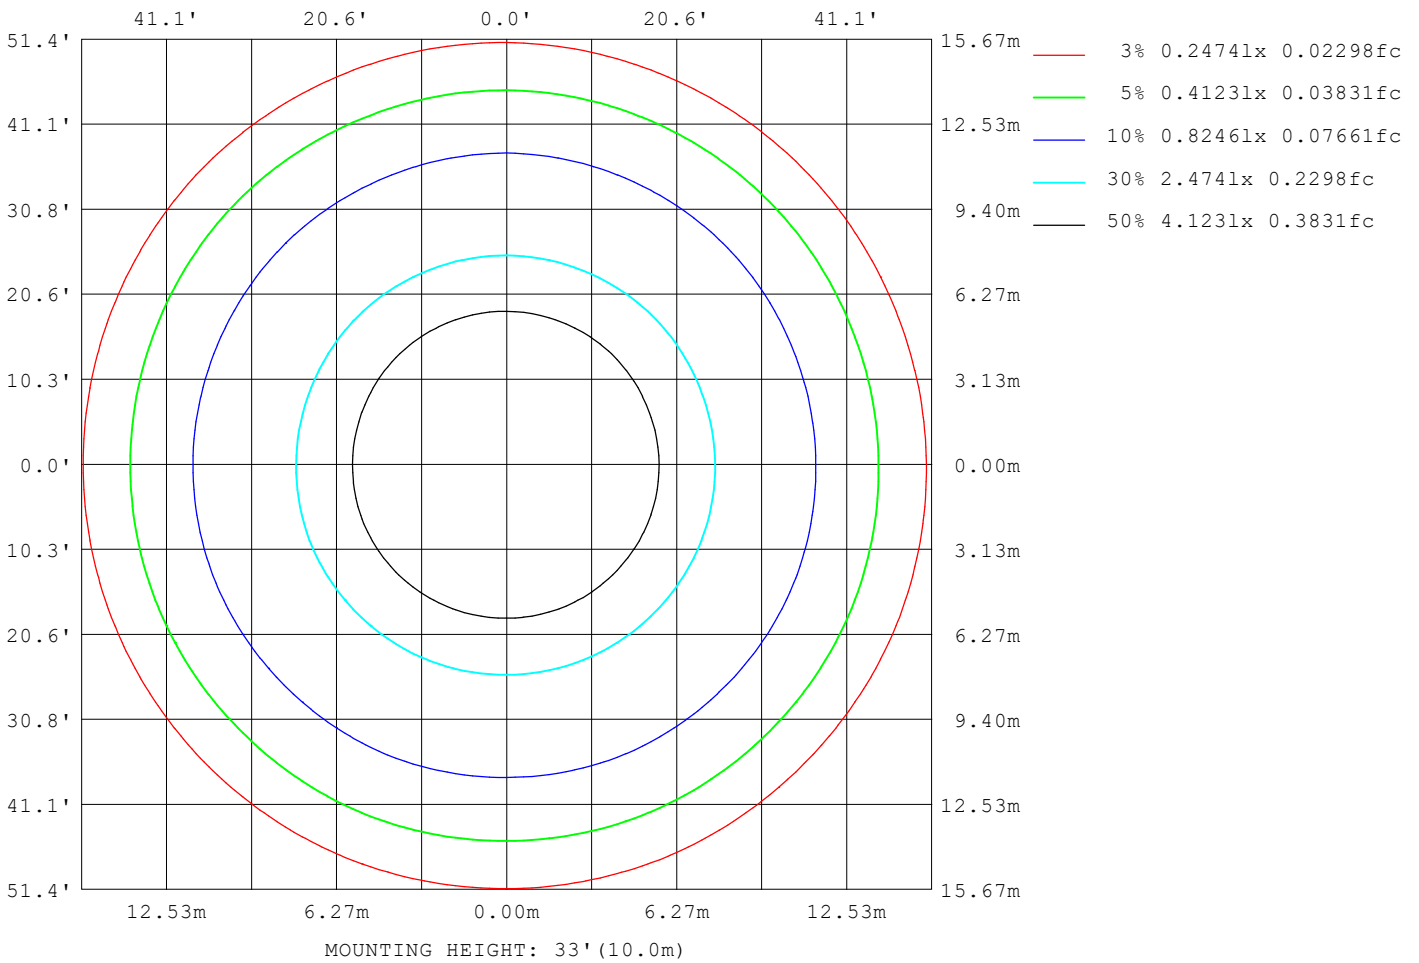

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.48V I:0.0965A P:11.147W PF:0.9667 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1511.72x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 12W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	9272
L_0~180 (75) av	6925
L_0~180 (85) av	5419
L_90~270 (65) av	9318
L_90~270 (75) av	6959
L_90~270 (85) av	4150
L_45 (65) av	9289
L_45 (75) av	6967
L_45 (85) av	4628

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

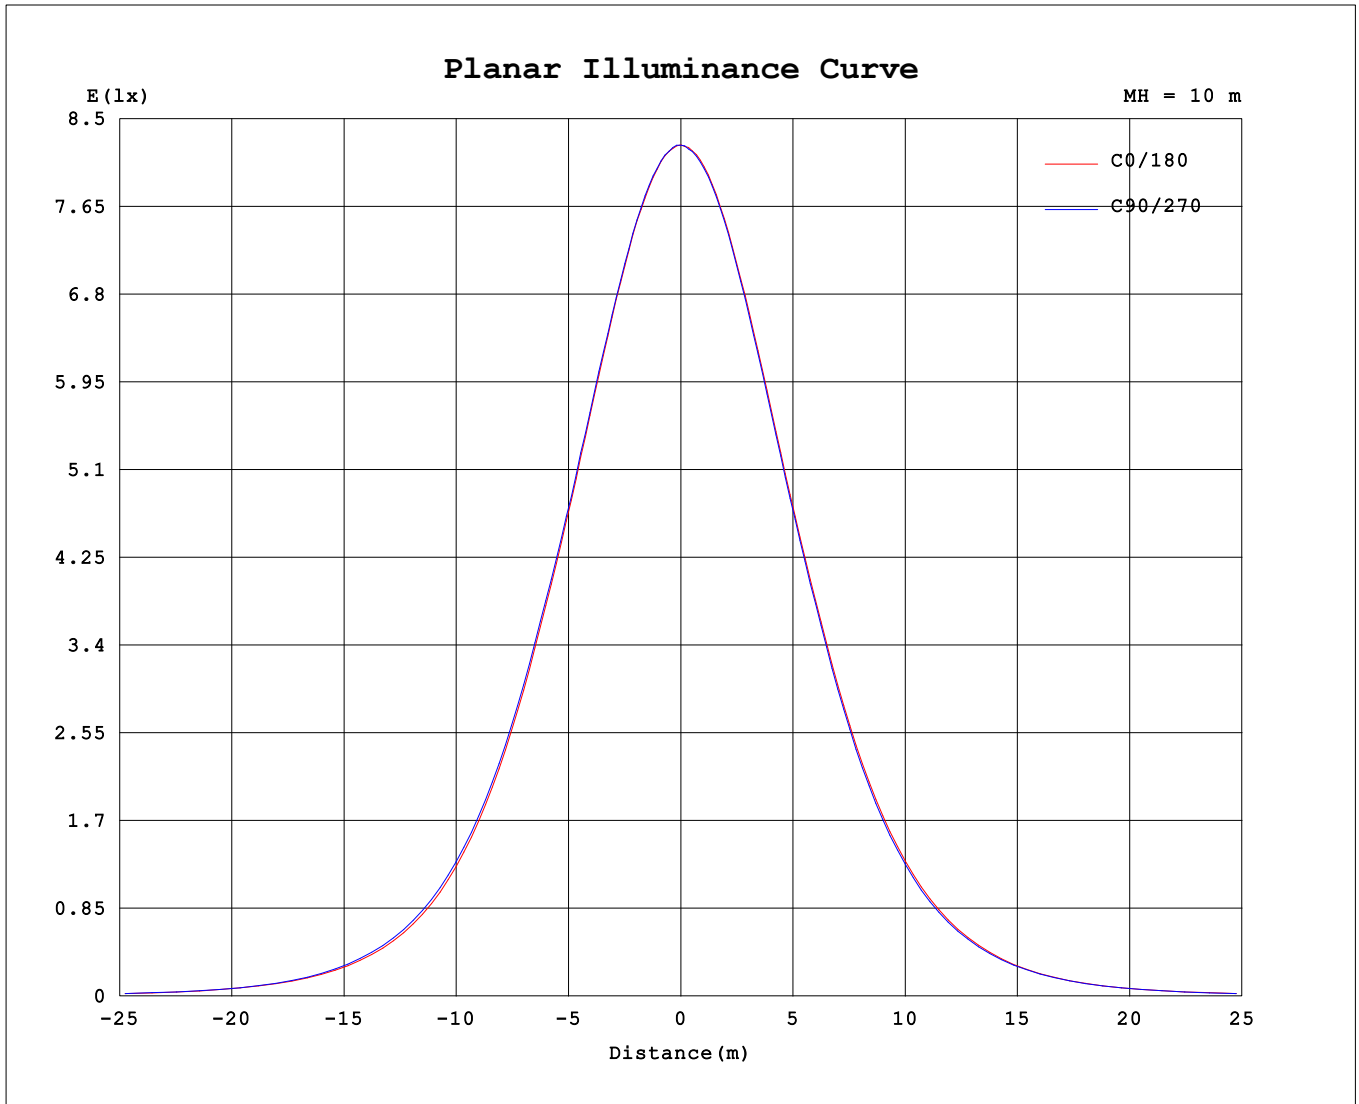

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.48V I:0.0965A P:11.147W PF:0.9667 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1511.72x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 12W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	825	824	824	824	825	824	824	823	825	824	824	824	825	824	824	823			
5	818	818	818	818	818	819	819	819	819	819	819	818	817	816	818	816			
10	798	798	798	800	800	801	802	803	801	800	801	800	799	798	797	797			
15	768	768	768	769	770	771	773	773	771	772	770	769	768	767	766	765			
20	725	727	726	729	730	731	732	733	731	730	730	728	727	724	724	723			
25	673	676	676	678	679	681	682	682	680	679	679	677	675	673	672	671			
30	614	617	617	621	621	623	624	625	622	620	620	618	616	614	613	611			
35	540	543	545	548	549	551	552	552	548	546	545	543	542	539	537	536			
40	451	454	456	461	462	464	465	466	462	459	458	454	453	450	449	447			
45	356	361	363	369	368	372	371	373	371	367	366	362	361	357	356	353			
50	265	270	272	278	277	281	278	280	279	276	276	271	271	266	265	263			
55	185	189	190	193	194	196	194	194	193	193	194	190	189	185	183	182			
60	118	120	120	122	123	124	123	122	121	122	123	122	120	117	116	116			
65	69.7	70.2	70.2	71.2	71.5	72.1	71.6	71.7	71.3	70.6	71.3	70.6	70.3	69.2	69.5	69.7			
70	43.7	43.8	43.7	44.0	44.0	44.2	44.2	44.4	44.4	44.2	44.3	44.0	44.1	44.0	44.0	43.8			
75	32.0	32.0	32.1	32.3	32.3	32.5	32.5	32.6	32.5	32.4	32.6	32.5	32.5	32.5	32.6	32.5			
80	20.0	20.0	20.0	20.5	20.3	20.6	20.8	20.7	20.5	20.4	18.2	20.3	20.2	20.2	21.0	20.8			
85	8.28	8.09	7.04	7.10	6.47	7.15	8.04	8.73	8.72	8.21	5.85	6.81	6.55	6.84	8.11	8.83			
90	0.37	0.33	0.35	0.31	0.32	0.31	0.33	0.31	0.62	0.66	0.62	0.64	0.64	0.66	0.64	0.66			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks: