
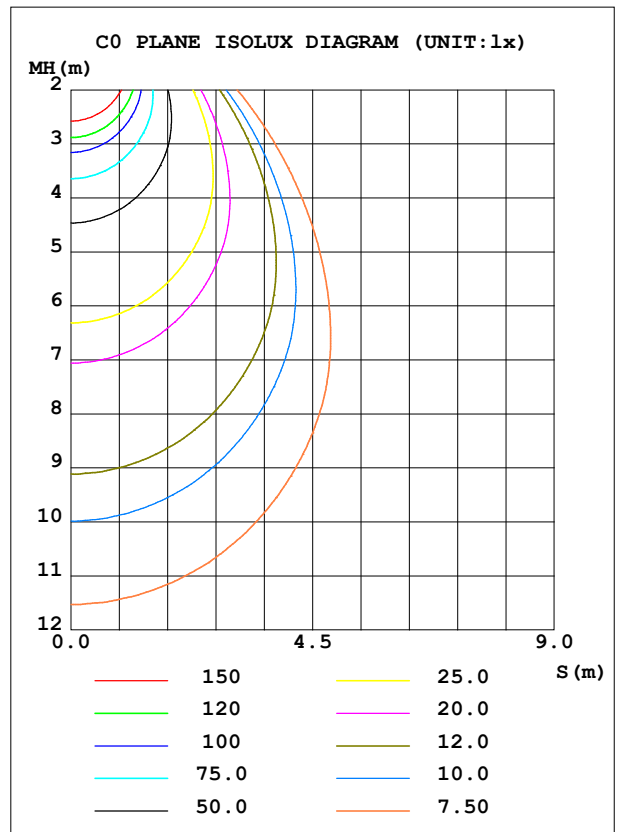


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.49V I:0.1284A P:15.045W PF:0.9804 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1820.3x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-6-30W-M-A5C5-HO	Imax (cd)	996.7	S/MH (C0/180)	1.13
NOMINAL POWER (W)	16	LOR (%)	100.0	S/MH (C90/270)	1.13
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1820.3	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.3
NOMINAL FLUX (lm)	1820.3	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.7
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

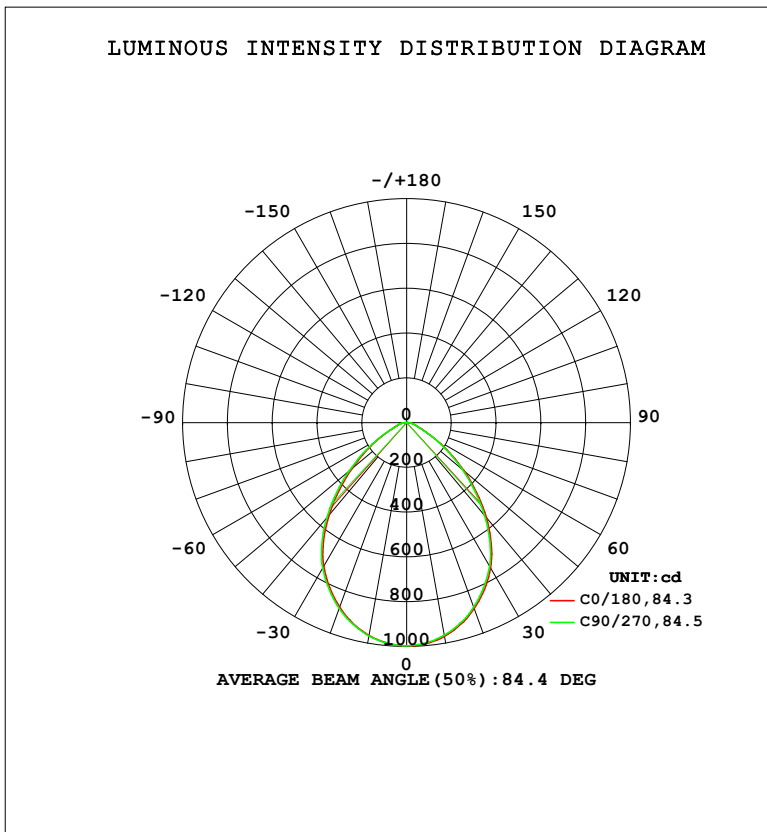

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	965.4	965.6	967.8	969.0	969.8	967.6	964.3	962.4	0- 10	93.64	93.64	5.14,5.14
20	876.7	879.4	882.5	885.1	883.1	881.2	876.6	872.8	10- 20	261.5	355.2	19.5,19.5
30	740.6	745.6	750.1	753.7	750.1	746.8	741.4	736.4	20- 30	375.8	730.9	40.2,40.2
40	539.7	547.7	555.5	556.7	553.7	547.4	541.3	535.1	30- 40	406.9	1138	62.5,62.5
50	318.8	328.8	334.7	334.8	334.4	330.0	323.6	317.4	40- 50	335.2	1473	80.9,80.9
60	143.9	146.5	150.6	150.7	148.0	150.0	145.4	141.4	50- 60	207.2	1680	92.3,92.3
70	52.01	52.07	52.32	52.63	52.90	52.67	52.47	52.25	60- 70	88.61	1769	97.2,97.2
80	23.88	23.87	24.13	24.78	24.48	21.73	24.09	24.96	70- 80	40.56	1809	99.4,99.4
90	0.4654	0.4523	0.4261	0.4261	0.7538	0.7538	0.7671	0.7670	80- 90	10.83	1820	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1319.4 lm

%lum = 72.5%

%lamp = 72.5%

Conical surface Flux(130deg): 1735.5 lm

%lum = 95.3%


%lamp = 95.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.49V I:0.1284A P:15.045W PF:0.9804 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1820.3x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

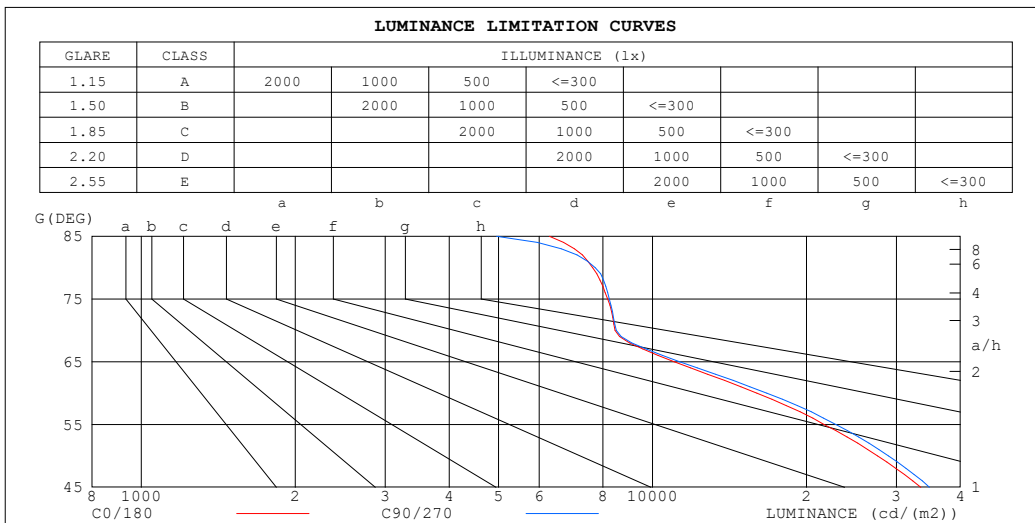

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6288	4955
80	7640	7719
75	8174	8231
70	8448	8498
65	11022	11303
60	15991	16737
55	21659	22846
50	27552	28929
45	33480	34823


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.49V I:0.1284A P:15.045W PF:0.9804 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:1820.3x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.99	.96	.97	.95	.93	.94	.92	.91	.89
2.0	.96	.91	.86	.95	.90	.85	.91	.87	.83	.88	.85	.82	.85	.82	.80	.78
3.0	.87	.80	.75	.85	.79	.74	.83	.77	.73	.80	.75	.72	.78	.74	.70	.69
4.0	.79	.71	.66	.77	.70	.65	.75	.69	.64	.73	.68	.63	.71	.66	.63	.61
5.0	.71	.64	.58	.70	.63	.58	.68	.62	.57	.67	.61	.57	.65	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.52	.63	.56	.51	.61	.55	.51	.60	.54	.50	.49
7.0	.60	.52	.47	.59	.52	.46	.58	.51	.46	.56	.50	.46	.55	.50	.46	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.44	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.39	.35	.33

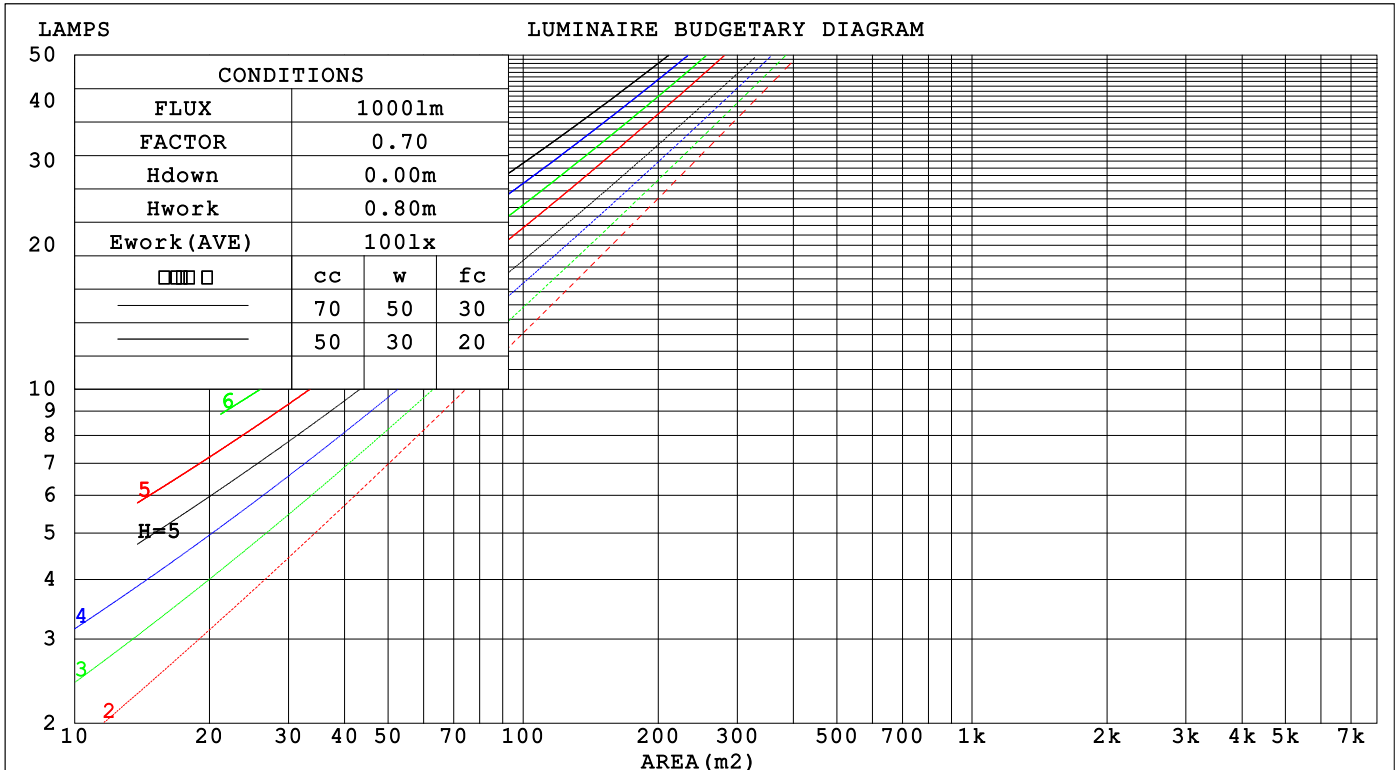

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.49V I:0.1284A P:15.045W PF:0.9804 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1820.3x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.242	.138	.044	.235	.134	.043	.222	.128	.041	.210	.121	.039	.199	.116	.037	
2.0	.234	.128	.039	.228	.125	.039	.217	.120	.037	.206	.116	.036	.197	.111	.035	
3.0	.222	.118	.035	.216	.116	.035	.207	.112	.034	.198	.108	.033	.189	.105	.032	
4.0	.209	.109	.032	.204	.107	.032	.196	.104	.031	.188	.101	.030	.180	.098	.030	
5.0	.197	.100	.029	.193	.099	.029	.185	.096	.028	.178	.094	.028	.172	.092	.028	
6.0	.186	.093	.027	.182	.092	.026	.175	.090	.026	.169	.088	.026	.163	.086	.025	
7.0	.175	.087	.025	.172	.086	.024	.166	.084	.024	.160	.082	.024	.155	.080	.024	
8.0	.165	.081	.023	.163	.080	.023	.157	.079	.022	.152	.077	.022	.147	.076	.022	
9.0	.157	.076	.021	.154	.075	.021	.149	.074	.021	.145	.072	.021	.140	.071	.021	
10.0	.149	.071	.020	.146	.071	.020	.142	.069	.020	.138	.068	.019	.134	.067	.019	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.176	.157	.140	.150	.135	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
3.0	.165	.132	.105	.141	.114	.091	.097	.079	.063	.056	.046	.037	.018	.015	.012	
4.0	.155	.114	.081	.133	.098	.070	.091	.068	.049	.053	.040	.029	.017	.013	.010	
5.0	.147	.100	.064	.126	.086	.056	.087	.060	.039	.050	.035	.023	.016	.011	.008	
6.0	.140	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006	
7.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005	
8.0	.126	.074	.036	.109	.064	.032	.075	.045	.023	.044	.026	.013	.014	.009	.004	
9.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.012	.014	.008	.004	
10.0	.115	.063	.027	.099	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.110	.058	.024	.095	.051	.021	.066	.036	.015	.038	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.49V I:0.1284A P:15.045W PF:0.9804 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1820.3x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.8	24.1	23.0	24.3	24.5	22.9	24.2	23.2	24.4	24.6
3H	23.0	24.2	23.3	24.4	24.6	23.1	24.3	23.4	24.6	24.8
4H	23.1	24.2	23.4	24.5	24.7	23.2	24.4	23.5	24.6	24.8
6H	23.2	24.2	23.5	24.5	24.8	23.3	24.4	23.6	24.6	24.9
8H	23.2	24.2	23.5	24.5	24.8	23.3	24.4	23.7	24.6	24.9
12H	23.2	24.2	23.5	24.5	24.7	23.3	24.3	23.7	24.6	24.9
4H 2H	22.9	24.0	23.2	24.2	24.5	23.0	24.1	23.3	24.4	24.6
3H	23.2	24.2	23.5	24.4	24.7	23.3	24.3	23.7	24.6	24.9
4H	23.4	24.3	23.7	24.6	24.9	23.5	24.4	23.9	24.7	25.0
6H	23.6	24.3	23.9	24.7	25.0	23.7	24.5	24.1	24.8	25.2
8H	23.6	24.3	24.0	24.7	25.1	23.7	24.5	24.1	24.8	25.2
12H	23.7	24.3	24.1	24.7	25.1	23.8	24.4	24.2	24.8	25.2
8H 4H	23.4	24.1	23.8	24.5	24.9	23.5	24.2	23.9	24.6	25.0
6H	23.7	24.3	24.1	24.7	25.1	23.8	24.4	24.2	24.8	25.2
8H	23.8	24.3	24.2	24.7	25.2	23.9	24.4	24.4	24.8	25.3
12H	23.9	24.3	24.3	24.7	25.2	24.0	24.4	24.4	24.8	25.3
12H 4H	23.4	24.0	23.8	24.4	24.8	23.5	24.2	23.9	24.5	24.9
6H	23.7	24.2	24.1	24.6	25.1	23.8	24.3	24.2	24.7	25.2
8H	23.8	24.3	24.3	24.7	25.2	23.9	24.4	24.4	24.8	25.3

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.8 / - 1.0	+ 0.7 / - 1.0
1.5H	+ 0.4 / - 0.4	+ 0.4 / - 0.5
2.0H	+ 1.6 / - 1.9	+ 1.7 / - 1.9

CIE Pub.117, 1820 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.1)
 Area: 0.018 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-03	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.49V I:0.1284A P:15.045W PF:0.9804 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1820.3x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	46
0.80	78	68	62	77	68	62	75	67	62	56
1.00	86	77	71	84	76	71	83	77	70	64
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	88	83	95	88	83	92	86	82	75
2.00	101	95	90	100	94	89	97	92	88	81
2.50	104	98	94	102	97	93	99	94	91	84
3.00	107	102	97	105	100	96	101	97	94	87
4.00	110	105	102	107	104	100	104	100	98	90
5.00	111	108	105	109	106	103	105	102	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.49V I:0.1284A P:15.045W PF:0.9804 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1820.3x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

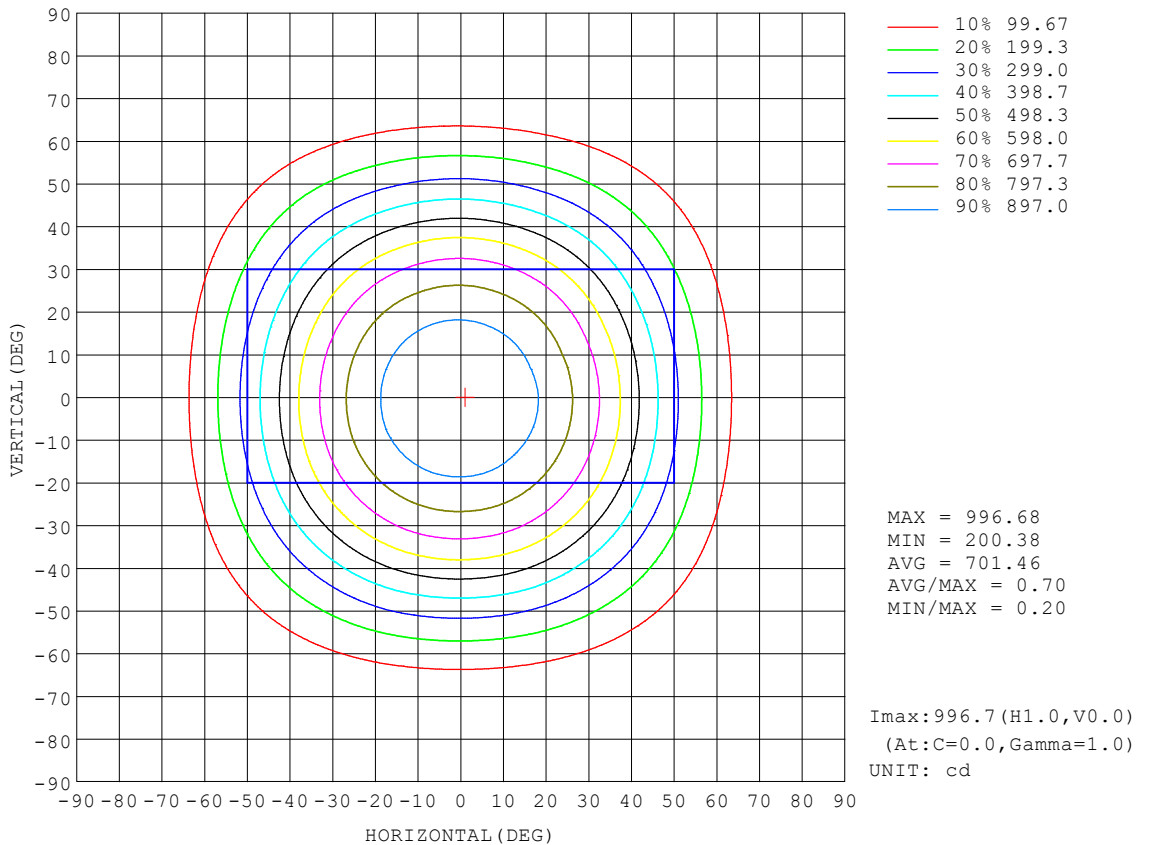


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.49V I:0.1284A P:15.045W PF:0.9804 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1820.3x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

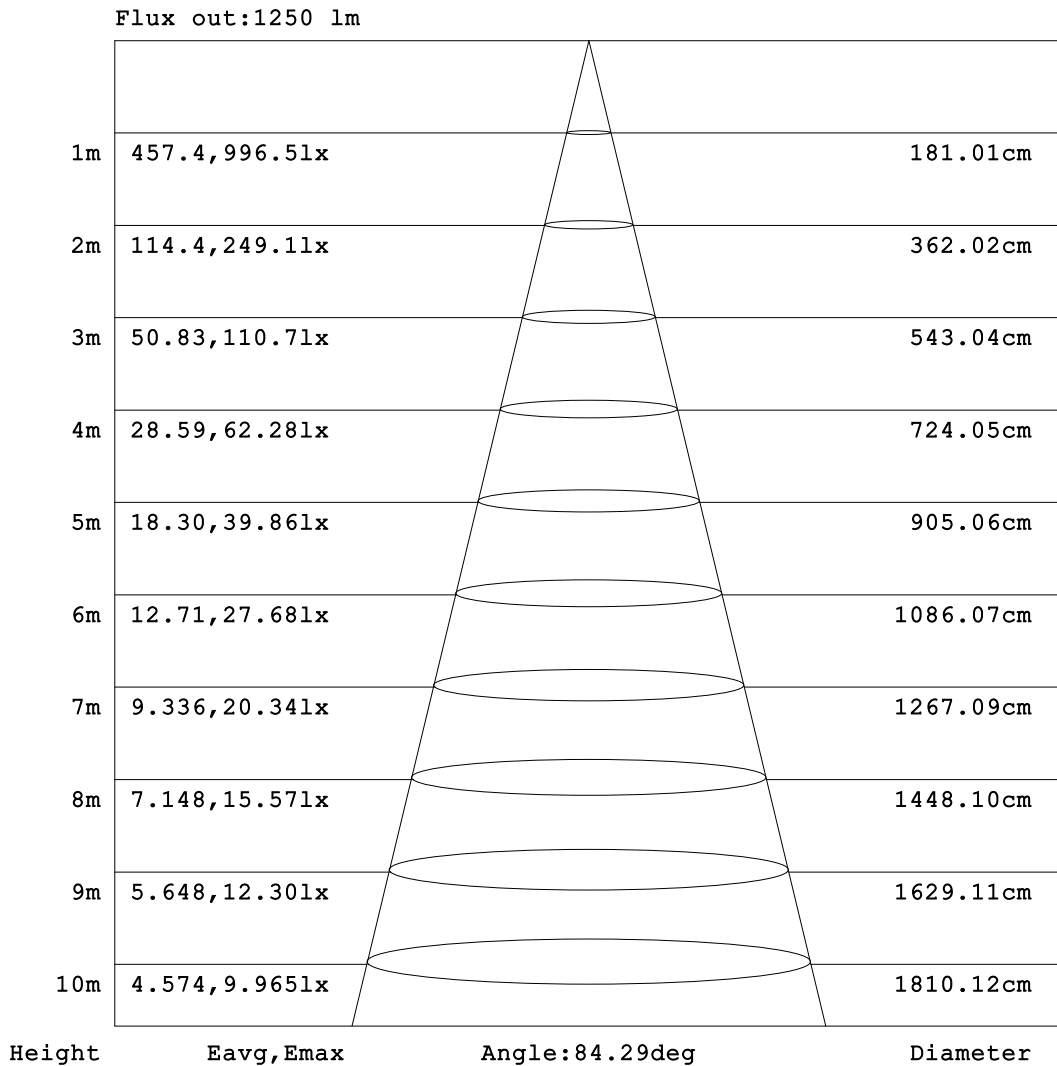


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.49V I:0.1284A P:15.045W PF:0.9804 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1820.3x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

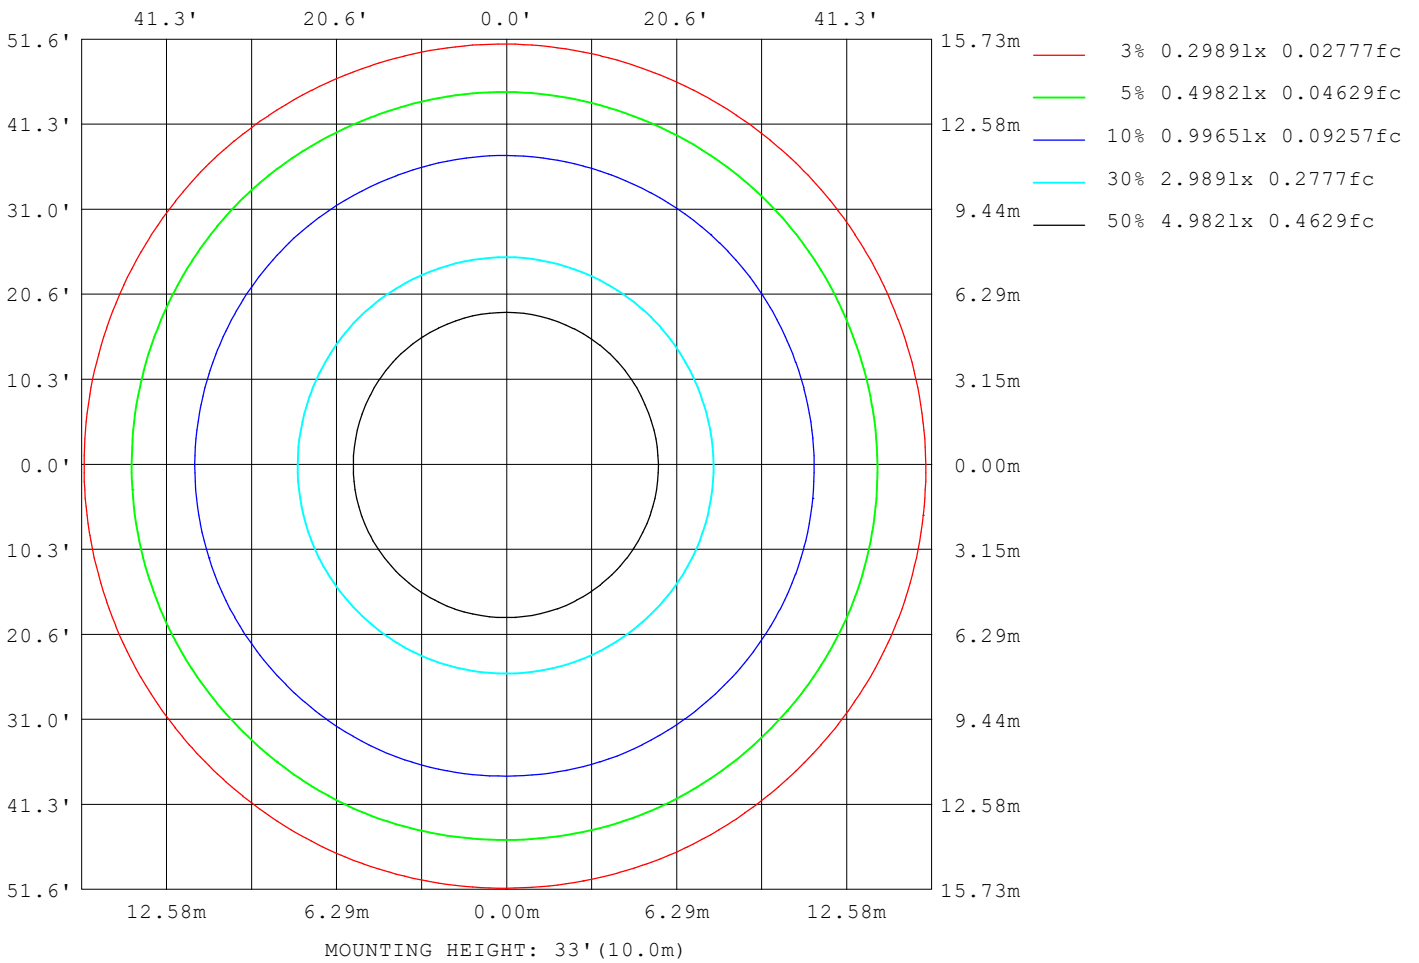

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.49V I:0.1284A P:15.045W PF:0.9804 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1820.3x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	11147
L_0~180 (75) av	8241
L_0~180 (85) av	6474
L_90~270 (65) av	11212
L_90~270 (75) av	8272
L_90~270 (85) av	4996
L_45 (65) av	11172
L_45 (75) av	8289
L_45 (85) av	5524

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

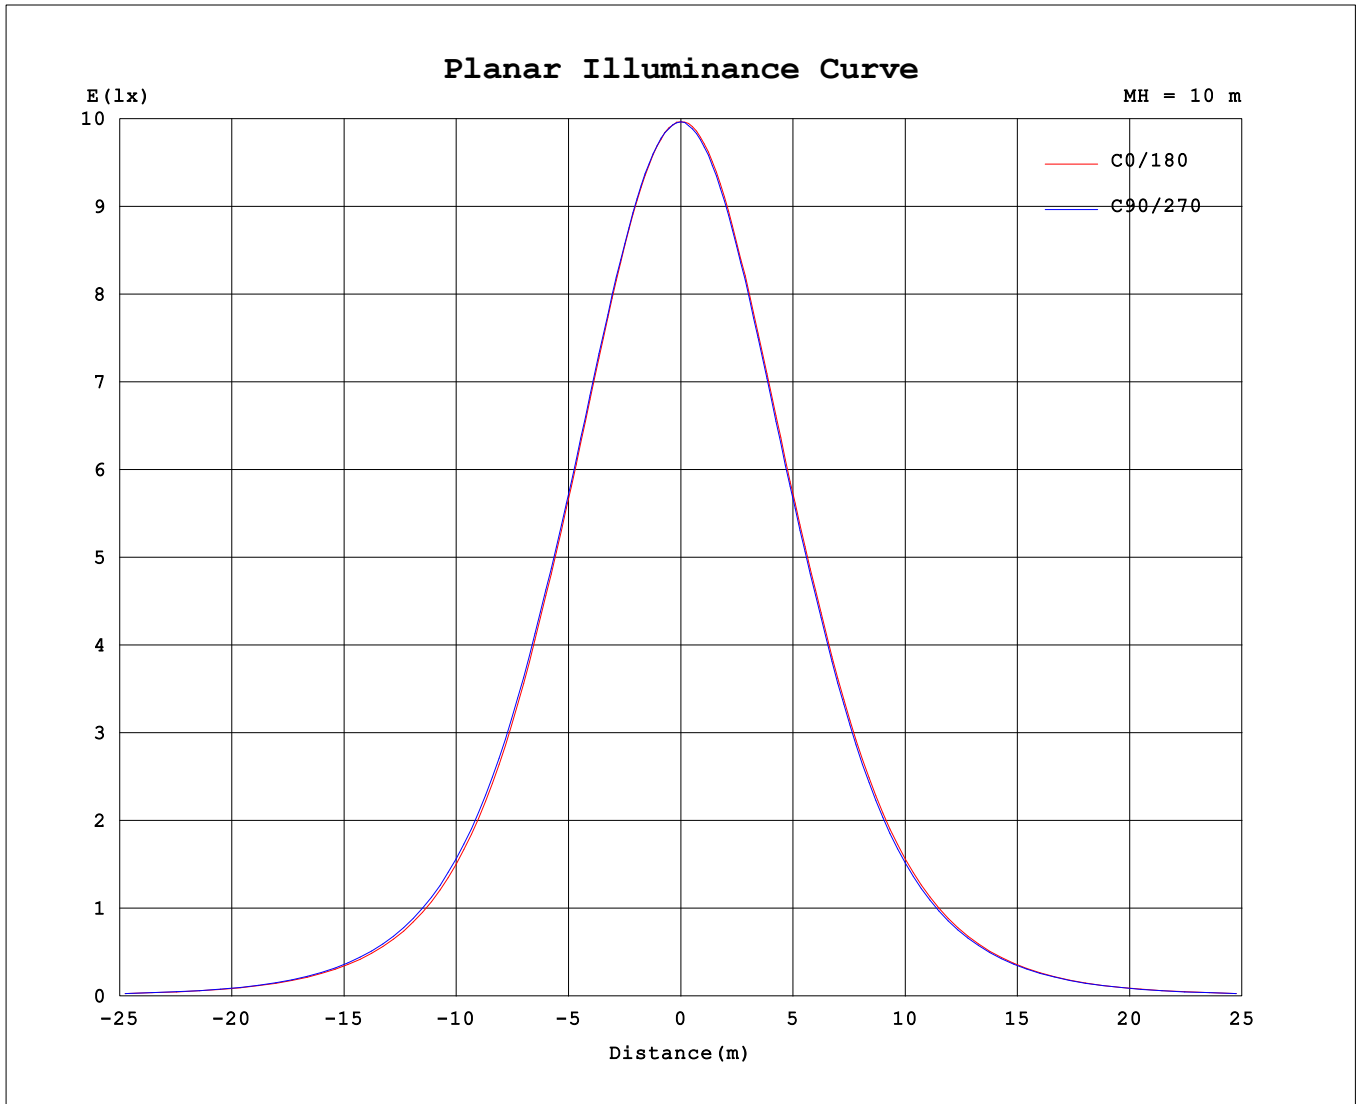

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.49V I:0.1284A P:15.045W PF:0.9804 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1820.3x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	996	996	996	996	996	995	995	995	996	996	996	996	996	995	995	995			
5	988	989	989	989	989	989	990	989	990	990	990	988	987	987	985	986			
10	965	965	966	967	968	969	969	969	970	969	968	965	964	963	962	962			
15	928	928	930	930	931	934	934	934	932	932	931	929	927	925	925	923			
20	877	879	879	881	882	884	885	886	883	883	881	879	877	874	873	872			
25	814	816	817	820	821	824	824	825	822	820	819	816	813	811	809	807			
30	741	744	746	750	750	753	754	754	750	748	747	743	741	738	736	735			
35	649	653	656	660	662	664	663	664	659	656	655	650	649	645	644	642			
40	540	545	548	554	555	558	557	558	554	549	547	542	541	537	535	534			
45	426	432	436	443	443	446	444	446	442	438	436	431	430	425	424	422			
50	319	326	329	335	335	338	335	336	334	331	330	324	324	318	317	315			
55	224	230	231	236	236	239	235	235	234	233	234	228	228	222	222	220			
60	144	146	147	150	151	151	151	149	148	148	150	148	145	142	141	141			
65	83.8	84.5	84.5	85.7	86.0	86.9	86.1	86.0	85.7	84.9	85.9	85.1	84.6	82.9	83.4	83.7			
70	52.0	52.1	52.1	52.3	52.3	52.7	52.6	52.8	52.9	52.6	52.7	52.3	52.5	52.2	52.3	52.1			
75	38.1	38.1	38.1	38.4	38.3	38.7	38.7	38.8	38.7	38.5	38.8	38.7	38.7	38.7	38.8	38.6			
80	23.9	23.8	23.9	24.4	24.1	24.6	24.8	24.6	24.5	24.3	21.7	24.2	24.1	24.1	25.0	24.8			
85	9.86	9.68	8.45	8.52	7.77	8.55	9.64	10.4	10.4	9.81	6.87	8.21	7.90	8.23	9.70	10.5			
90	0.47	0.45	0.45	0.42	0.43	0.39	0.43	0.41	0.75	0.80	0.75	0.80	0.77	0.81	0.77	0.79			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks: