
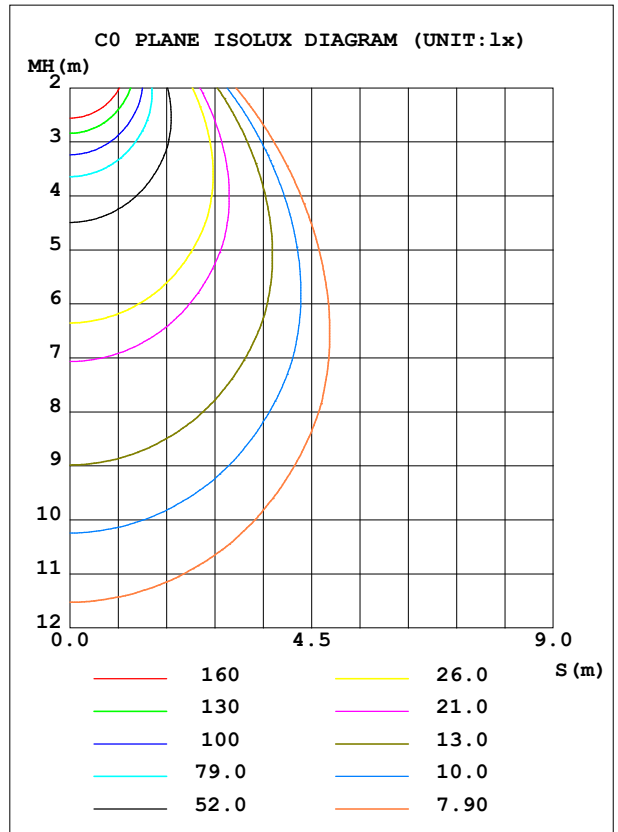


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.48V I:0.1282A P:15.012W PF:0.9804 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1918.52x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-6-30W-M-A5C5-HO	Imax (cd)	1049	S/MH (C0/180)	1.13
NOMINAL POWER (W)	16	LOR (%)	100.0	S/MH (C90/270)	1.13
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1918.5	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.3
NOMINAL FLUX (lm)	1918.52	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.7
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

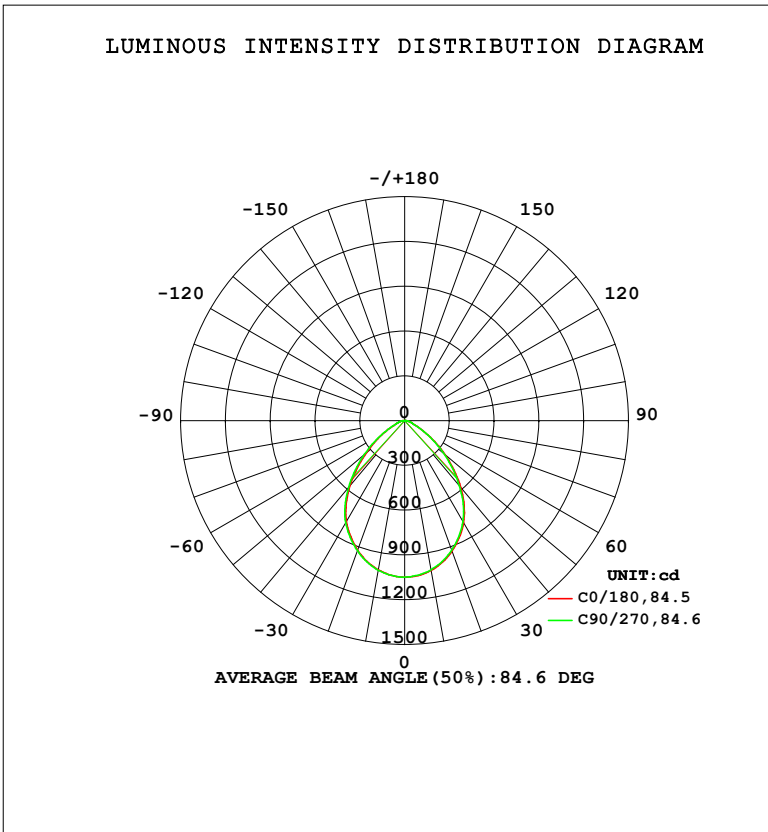

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum,lamp
10	1016	1016	1018	1020	1019	1018	1016	1013	0- 10	98.56	98.56	5.14,5.14
20	922.6	924.5	927.0	931.2	929.8	927.4	923.0	918.7	10- 20	275.3	373.8	19.5,19.5
30	781.8	785.1	790.5	793.5	791.1	786.5	781.0	776.7	20- 30	395.7	769.5	40.1,40.1
40	570.1	577.8	585.8	588.0	584.5	578.4	571.9	566.8	30- 40	429.3	1199	62.5,62.5
50	335.6	346.4	352.9	352.9	353.7	348.3	342.0	335.3	40- 50	354.1	1553	80.9,80.9
60	150.6	153.5	157.6	157.7	155.4	157.4	152.8	148.4	50- 60	217.9	1771	92.3,92.3
70	55.04	55.08	55.36	55.72	56.09	55.82	55.54	55.40	60- 70	93.32	1864	97.2,97.2
80	25.24	25.28	25.58	26.20	25.90	22.98	25.48	26.46	70- 80	42.98	1907	99.4,99.4
90	0.4982	0.4720	0.4458	0.4589	0.7997	0.8063	0.8325	0.8325	80- 90	11.47	1919	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1390.6 lm

%lum = 72.5%

%lamp = 72.5%

Conical surface Flux(130deg): 1828.8 lm

%lum = 95.3%


%lamp = 95.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.48V I:0.1282A P:15.012W PF:0.9804 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1918.52x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

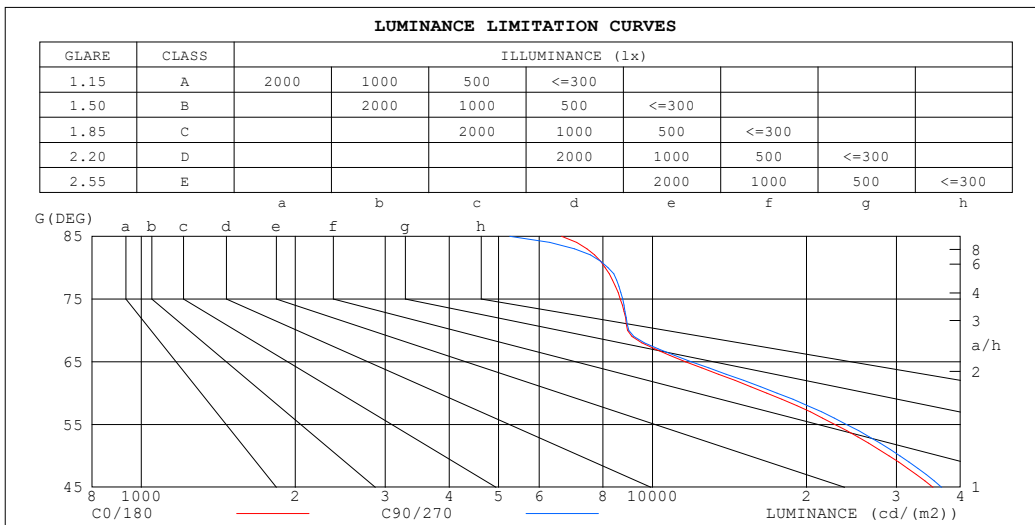

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6638	5259
80	8075	8185
75	8646	8740
70	8940	8993
65	11597	11909
60	16735	17516
55	22740	23966
50	29001	30497
45	35372	36747


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.48V I:0.1282A P:15.012W PF:0.9804 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:1918.52x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.99	.96	.97	.95	.93	.94	.92	.91	.89
2.0	.96	.91	.86	.95	.90	.85	.91	.87	.83	.88	.85	.82	.85	.82	.80	.78
3.0	.87	.80	.75	.85	.79	.74	.83	.77	.73	.80	.75	.72	.78	.74	.70	.69
4.0	.79	.71	.65	.77	.70	.65	.75	.69	.64	.73	.68	.63	.71	.66	.63	.61
5.0	.71	.64	.58	.70	.63	.58	.68	.62	.57	.66	.61	.57	.65	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.52	.63	.56	.51	.61	.55	.51	.60	.54	.50	.49
7.0	.60	.52	.47	.59	.52	.46	.58	.51	.46	.56	.50	.46	.55	.50	.46	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.43	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.39	.35	.33

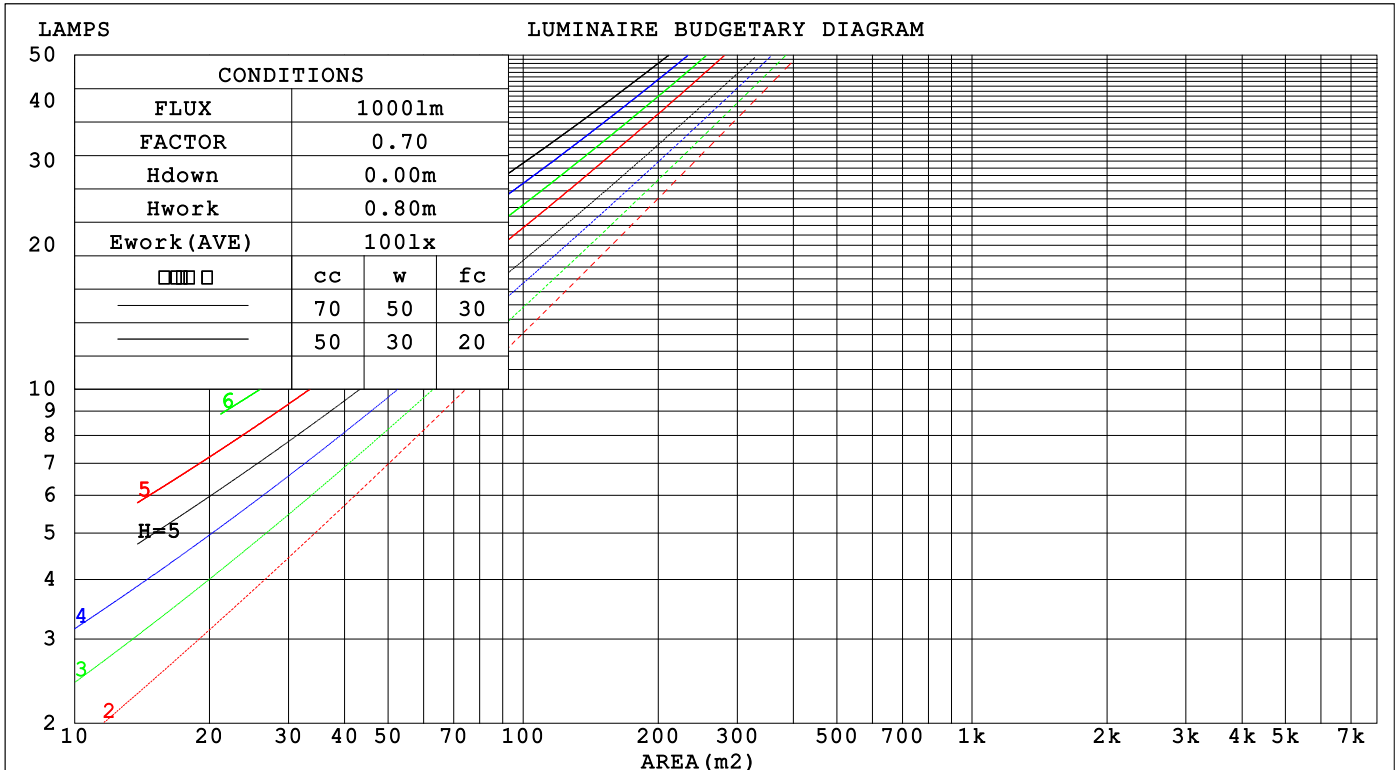

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.48V I:0.1282A P:15.012W PF:0.9804 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1918.52x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.242 .138 .044	.235 .134 .043	.222 .128 .041	.210 .121 .039	.200 .116 .037	
2.0	.234 .128 .039	.228 .126 .039	.217 .121 .037	.206 .116 .036	.197 .111 .035	
3.0	.222 .118 .035	.217 .116 .035	.207 .112 .034	.198 .108 .033	.189 .105 .032	
4.0	.209 .109 .032	.205 .107 .032	.196 .104 .031	.188 .101 .030	.181 .098 .030	
5.0	.197 .100 .029	.193 .099 .029	.185 .096 .028	.178 .094 .028	.172 .092 .028	
6.0	.186 .093 .027	.182 .092 .026	.175 .090 .026	.169 .088 .026	.163 .086 .025	
7.0	.175 .087 .025	.172 .086 .024	.166 .084 .024	.160 .082 .024	.155 .080 .024	
8.0	.165 .081 .023	.163 .080 .023	.157 .079 .022	.152 .077 .022	.147 .076 .022	
9.0	.157 .076 .021	.154 .075 .021	.149 .074 .021	.145 .072 .021	.140 .071 .021	
10.0	.149 .071 .020	.146 .071 .020	.142 .069 .020	.138 .068 .019	.134 .067 .019	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.176 .157 .140	.150 .135 .120	.103 .093 .083	.059 .054 .048	.019 .017 .016	
2.0	.165 .132 .105	.141 .114 .091	.097 .079 .063	.056 .046 .037	.018 .015 .012	
3.0	.155 .114 .081	.133 .098 .070	.091 .068 .049	.053 .040 .029	.017 .013 .010	
4.0	.147 .100 .064	.126 .086 .056	.087 .060 .039	.050 .035 .023	.016 .011 .008	
5.0	.140 .089 .052	.120 .077 .045	.083 .054 .032	.048 .032 .019	.015 .010 .006	
6.0	.133 .081 .043	.114 .070 .038	.079 .049 .027	.046 .029 .016	.015 .009 .005	
7.0	.126 .074 .036	.109 .064 .032	.075 .045 .023	.044 .026 .013	.014 .009 .004	
8.0	.121 .068 .031	.104 .059 .027	.072 .041 .019	.042 .024 .012	.014 .008 .004	
9.0	.115 .063 .027	.099 .054 .024	.069 .038 .017	.040 .023 .010	.013 .007 .003	
10.0	.110 .058 .024	.095 .051 .021	.066 .036 .015	.038 .021 .009	.012 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.48V I:0.1282A P:15.012W PF:0.9804 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1918.52x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.0	24.2	23.2	24.4	24.6	23.1	24.4	23.4	24.6	24.8
3H	23.2	24.4	23.4	24.6	24.8	23.3	24.5	23.6	24.7	24.9
4H	23.3	24.4	23.6	24.6	24.9	23.4	24.5	23.7	24.8	25.0
6H	23.4	24.4	23.7	24.7	24.9	23.5	24.6	23.8	24.8	25.1
8H	23.4	24.4	23.7	24.7	24.9	23.5	24.5	23.9	24.8	25.1
12H	23.4	24.4	23.7	24.6	24.9	23.5	24.5	23.9	24.8	25.1
4H 2H	23.0	24.2	23.3	24.4	24.6	23.2	24.3	23.5	24.5	24.8
3H	23.4	24.3	23.7	24.6	24.9	23.5	24.5	23.8	24.8	25.0
4H	23.6	24.4	23.9	24.7	25.1	23.7	24.6	24.0	24.9	25.2
6H	23.7	24.5	24.1	24.9	25.2	23.9	24.6	24.3	25.0	25.3
8H	23.8	24.5	24.2	24.9	25.3	23.9	24.6	24.3	25.0	25.4
12H	23.8	24.5	24.3	24.9	25.3	23.9	24.6	24.4	25.0	25.4
8H 4H	23.6	24.3	24.0	24.7	25.0	23.7	24.4	24.1	24.8	25.2
6H	23.9	24.4	24.3	24.8	25.3	24.0	24.6	24.4	25.0	25.4
8H	24.0	24.5	24.4	24.9	25.4	24.1	24.6	24.5	25.0	25.5
12H	24.0	24.5	24.5	24.9	25.4	24.1	24.6	24.6	25.0	25.5
12H 4H	23.6	24.2	24.0	24.6	25.0	23.7	24.3	24.1	24.7	25.1
6H	23.9	24.4	24.3	24.8	25.2	24.0	24.5	24.4	24.9	25.4
8H	24.0	24.4	24.5	24.9	25.4	24.1	24.6	24.6	25.0	25.5

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.8 / - 1.0	+ 0.7 / - 1.0
1.5H	+ 0.4 / - 0.4	+ 0.4 / - 0.4
2.0H	+ 1.7 / - 1.9	+ 1.7 / - 1.9

CIE Pub.117, 1919 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.3)
 Area: 0.018 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-03	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.48V I:0.1282A P:15.012W PF:0.9804 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1918.52x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	46
0.80	78	68	62	77	68	62	75	67	62	56
1.00	86	77	71	84	76	71	82	77	70	64
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	88	83	95	88	83	92	86	82	75
2.00	101	95	90	100	94	89	97	92	88	81
2.50	104	98	94	102	97	93	99	94	91	84
3.00	107	102	97	105	100	96	101	97	94	87
4.00	110	105	102	107	104	100	104	100	98	90
5.00	111	108	105	109	106	103	105	102	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.48V I:0.1282A P:15.012W PF:0.9804 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1918.52x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

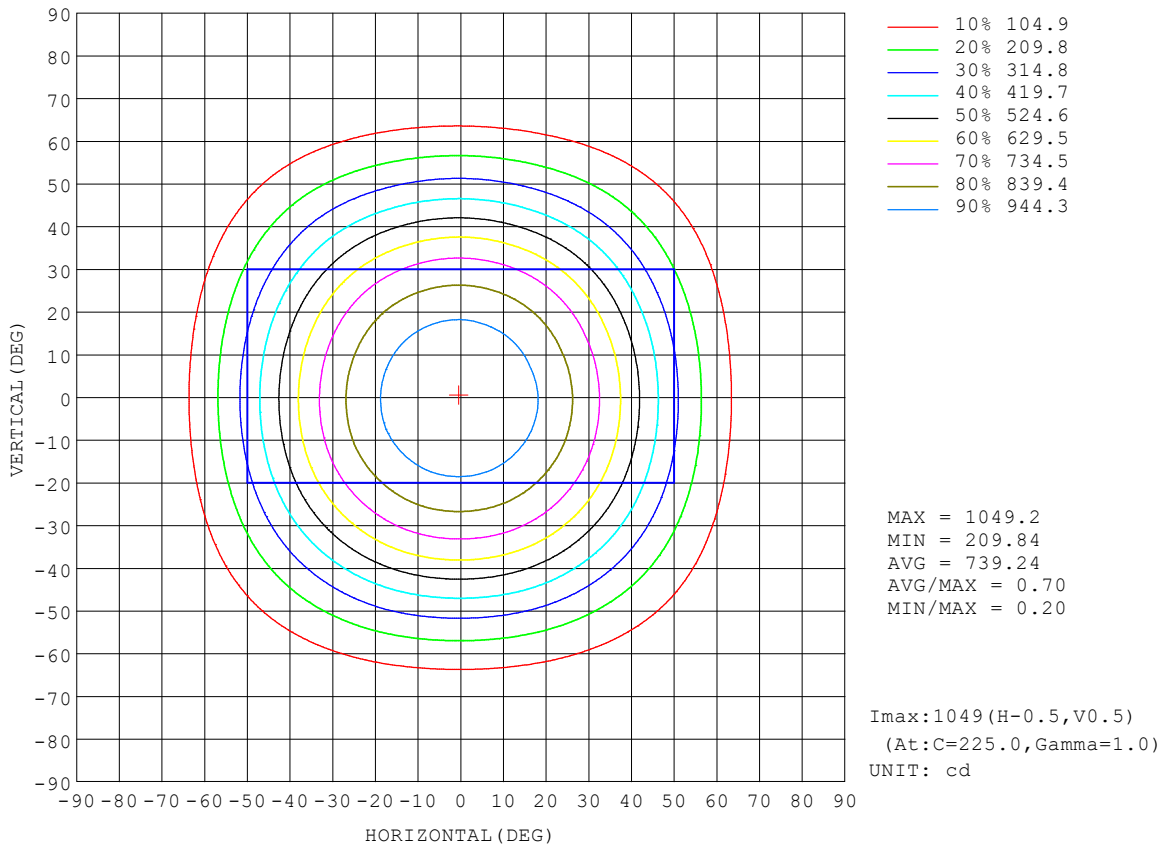


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.48V I:0.1282A P:15.012W PF:0.9804 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1918.52x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

Flux out:1317 lm

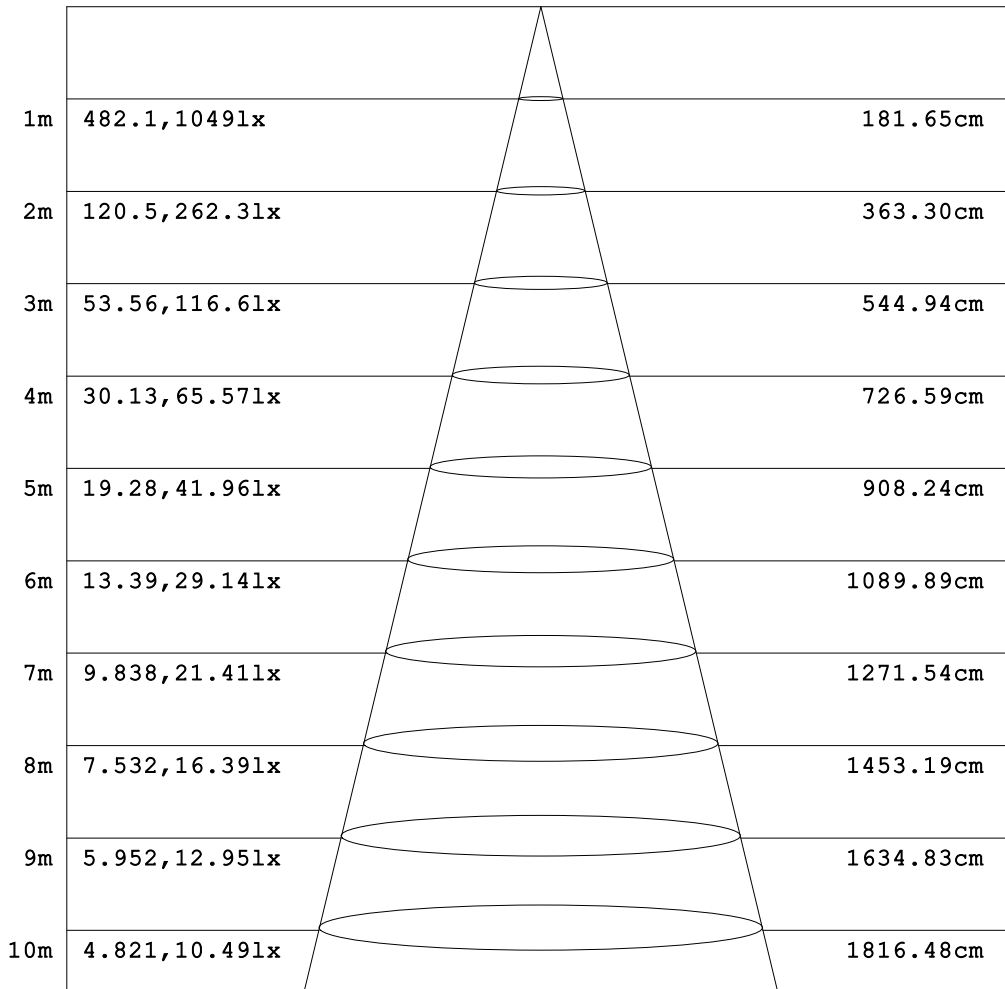

Height Eavg, Emax Angle:84.49deg Diameter


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.48V I:0.1282A P:15.012W PF:0.9804 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1918.52x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

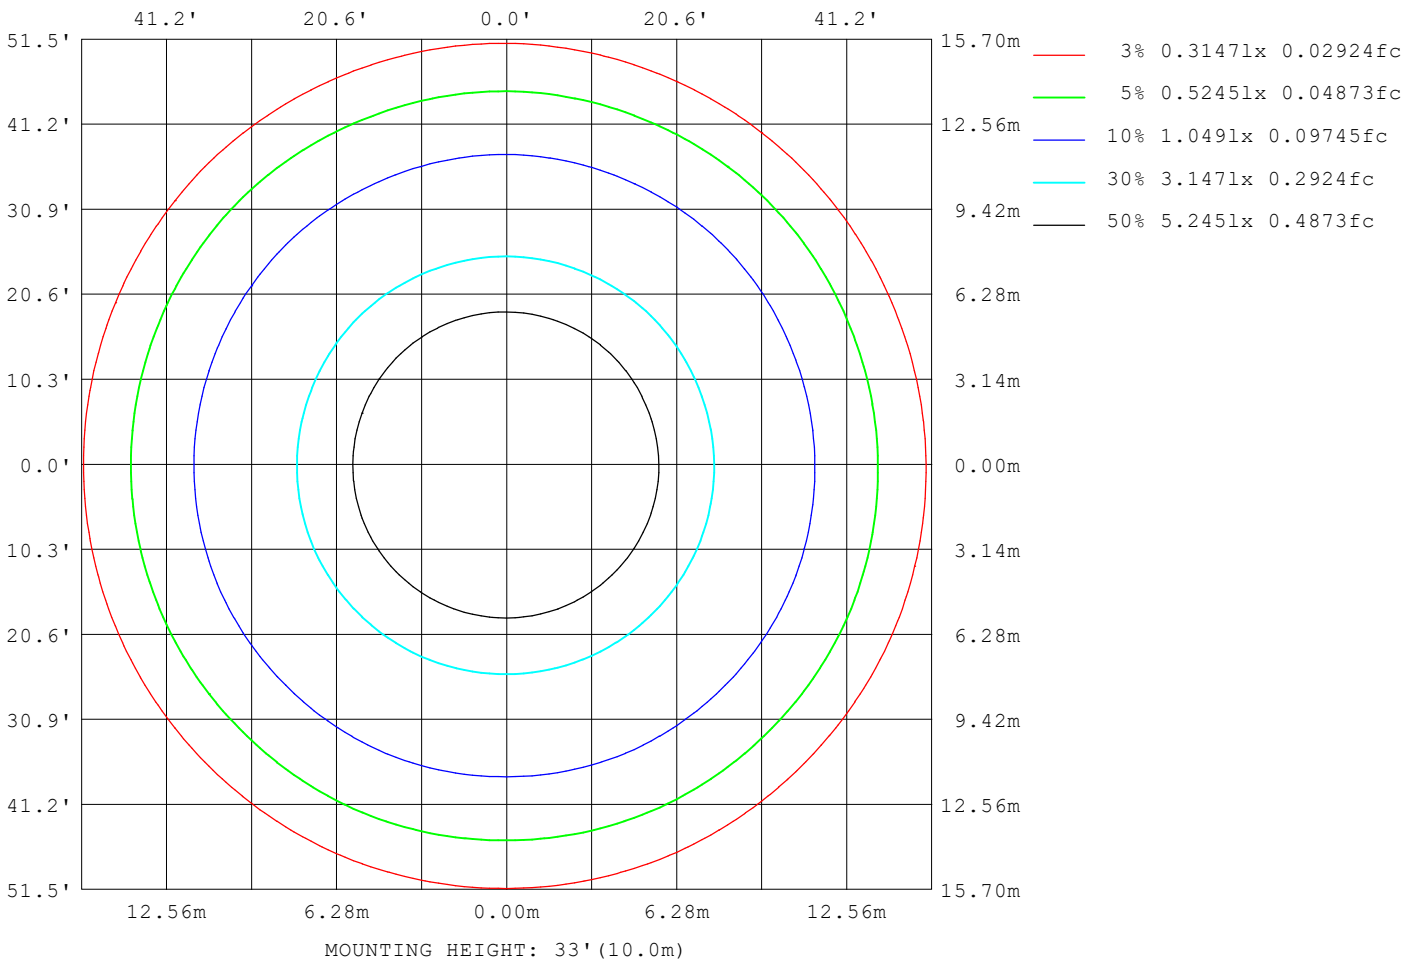

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.48V I:0.1282A P:15.012W PF:0.9804 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1918.52x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	11750
L_0~180 (75) av	8729
L_0~180 (85) av	6852
L_90~270 (65) av	11819
L_90~270 (75) av	8778
L_90~270 (85) av	5295
L_45 (65) av	11775
L_45 (75) av	8781
L_45 (85) av	5841

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

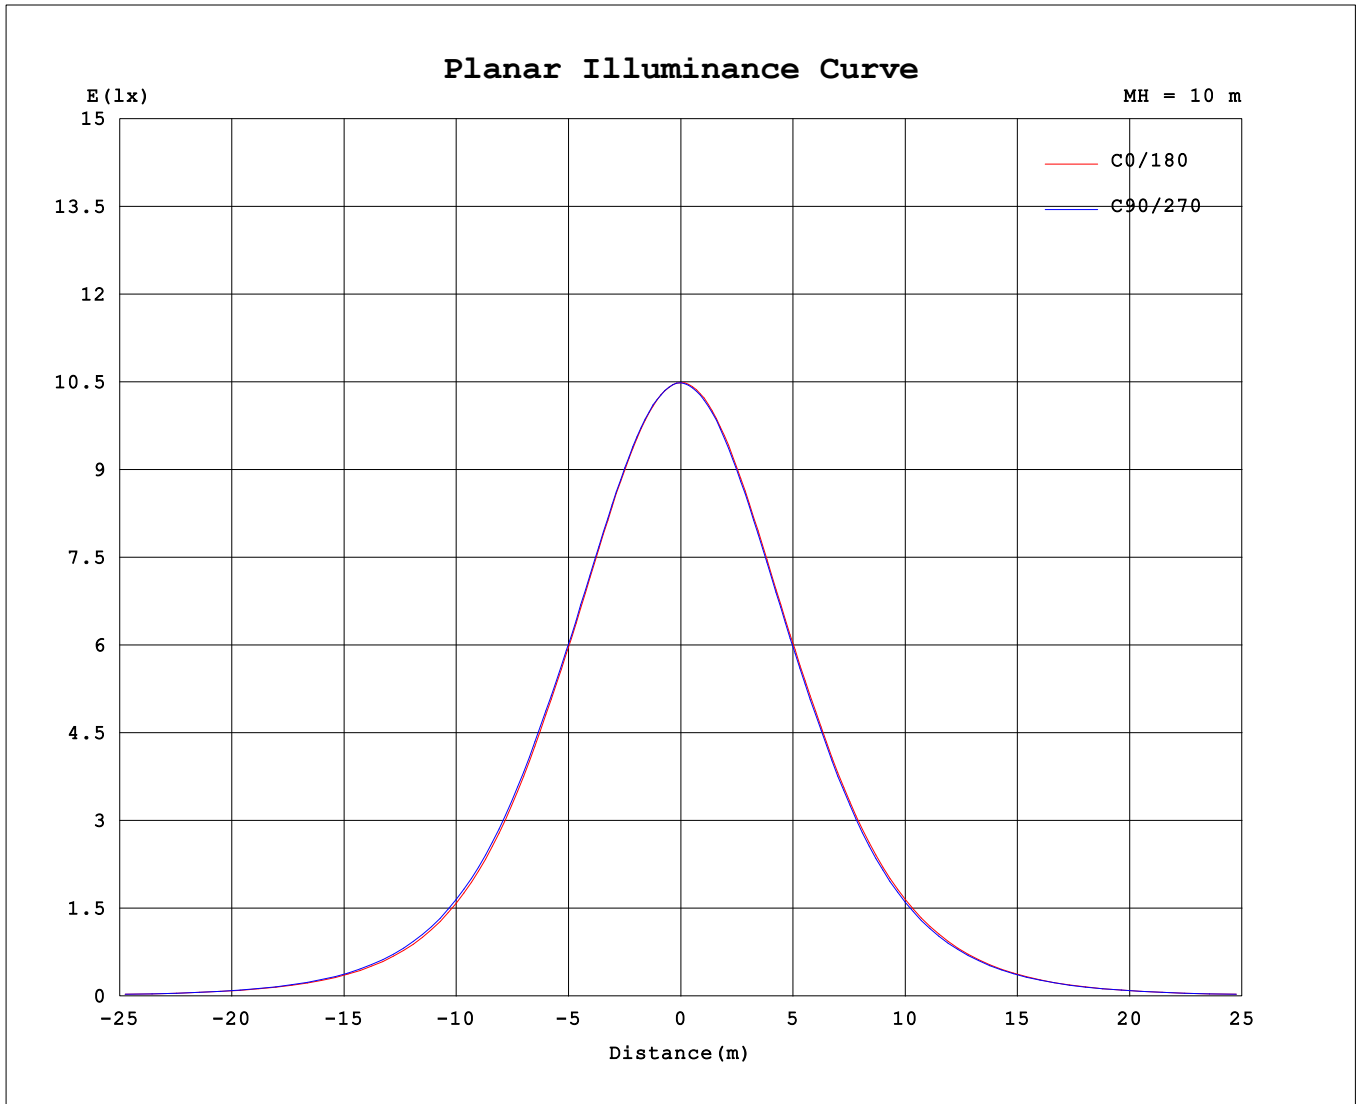

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.48V I:0.1282A P:15.012W PF:0.9804 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1918.52x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 16W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1049	1049	1049	1048	1049	1048	1048	1048	1049	1049	1049	1048	1049	1048	1048	1048			
5	1040	1040	1040	1041	1040	1041	1042	1041	1042	1042	1041	1040	1039	1039	1039	1038			
10	1016	1016	1016	1018	1018	1019	1020	1020	1019	1019	1018	1017	1016	1014	1013	1012			
15	977	978	978	979	980	981	983	983	982	981	980	978	976	973	973	972			
20	923	924	924	927	927	931	931	932	930	929	927	925	923	920	919	918			
25	857	860	860	863	863	867	868	869	866	863	862	859	858	854	853	852			
30	782	784	785	789	791	792	793	795	791	787	787	784	781	778	777	775			
35	684	689	692	696	697	700	699	700	695	692	691	686	685	681	680	678			
40	570	575	578	585	586	589	588	590	585	580	578	574	572	568	567	564			
45	450	456	460	467	468	470	469	471	468	464	461	456	455	450	448	446			
50	336	343	346	353	353	356	353	354	354	349	348	343	342	336	335	332			
55	235	241	242	247	247	250	246	247	246	246	246	240	239	235	233	231			
60	151	153	153	157	158	159	158	156	155	156	157	155	153	149	148	148			
65	88.2	89.0	89.1	90.5	90.6	91.6	90.7	90.9	90.5	89.5	90.4	89.6	89.2	87.5	88.0	88.2			
70	55.0	55.2	55.1	55.4	55.4	55.8	55.7	55.9	56.1	55.8	55.8	55.5	55.5	55.3	55.4	55.2			
75	40.3	40.3	40.4	40.7	40.7	41.0	41.0	41.1	41.1	40.8	41.1	41.0	41.1	41.0	41.1	40.9			
80	25.2	25.2	25.3	25.9	25.6	26.0	26.2	26.1	25.9	25.8	23.0	25.6	25.5	25.5	26.5	26.2			
85	10.4	10.3	8.95	9.02	8.25	9.05	10.2	11.1	11.1	10.4	7.24	8.67	8.36	8.72	10.3	11.1			
90	0.50	0.48	0.47	0.45	0.45	0.43	0.46	0.45	0.80	0.85	0.81	0.84	0.83	0.87	0.83	0.85			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks: