
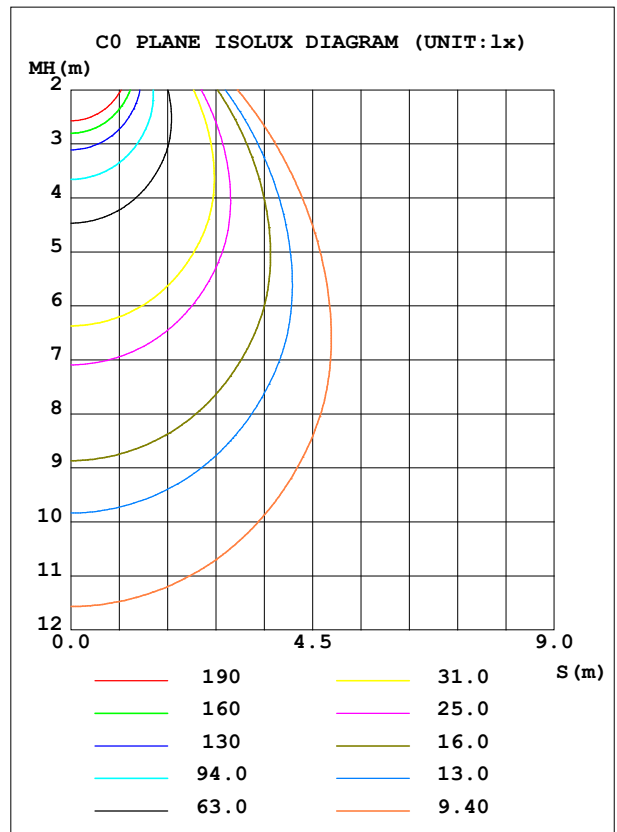


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:119.46V I:0.1702A P:20.011W PF:0.9841 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2295.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-6-30W-M-A5C5-HO	Imax (cd)	1258	S/MH (C0/180)	1.13
NOMINAL POWER (W)	22	LOR (%)	100.0	S/MH (C90/270)	1.13
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2295.3	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.3
NOMINAL FLUX (lm)	2295.25	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.7
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

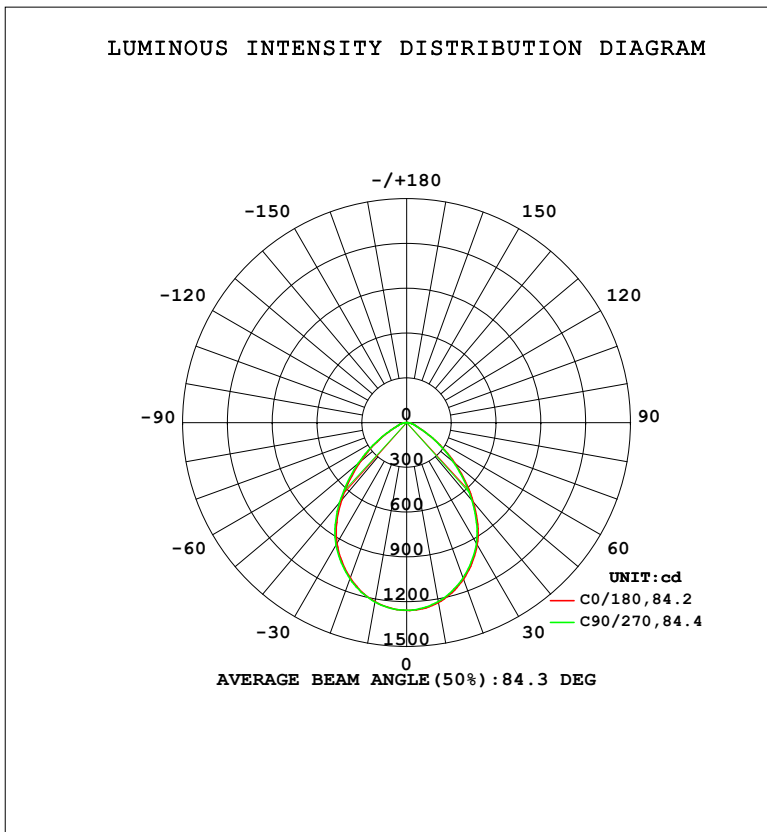

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1218	1220	1221	1224	1223	1220	1218	1214	0- 10	118.2	118.2	5.15,5.15
20	1106	1109	1113	1118	1116	1112	1106	1102	10- 20	330.1	448.3	19.5,19.5
30	934.8	941.6	947.2	950.8	946.9	941.1	935.1	928.8	20- 30	474.1	922.4	40.2,40.2
40	679.6	690.0	700.3	701.4	696.2	687.7	680.5	674.2	30- 40	512.8	1435	62.5,62.5
50	402.1	416.1	422.7	422.5	420.7	414.9	407.3	399.8	40- 50	422.0	1857	80.9,80.9
60	182.2	185.6	190.7	190.2	187.1	189.5	183.8	178.9	50- 60	261.6	2119	92.3,92.3
70	65.42	65.36	65.73	66.14	66.46	66.20	65.87	65.75	60- 70	111.8	2231	97.2,97.2
80	30.02	30.00	30.38	31.12	30.74	27.32	30.31	31.49	70- 80	51.01	2282	99.4,99.4
90	0.6031	0.5834	0.5506	0.5506	0.9702	0.9833	1.010	1.016	80- 90	13.63	2295	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1663.8 lm

%lum = 72.5%

%lamp = 72.5%

Conical surface Flux(130deg): 2188.6 lm

%lum = 95.4%


%lamp = 95.4%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:119.46V I:0.1702A P:20.011W PF:0.9841 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2295.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

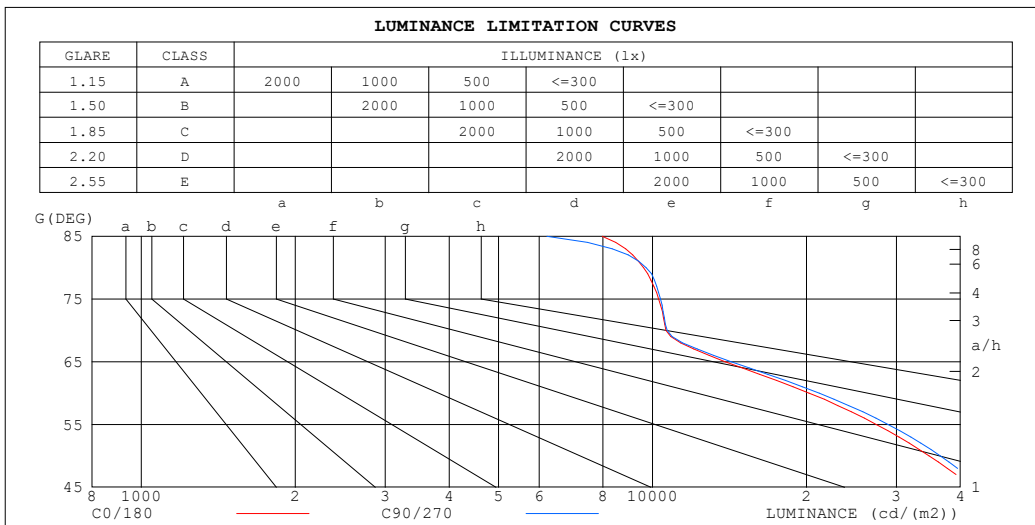

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7968	6216
80	9604	9719
75	10271	10367
70	10627	10677
65	13879	14246
60	20249	21193
55	27388	28882
50	34756	36532
45	42181	43923


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.46V I:0.1702A P:20.011W PF:0.9841 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:2295.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.99	.96	.97	.95	.93	.94	.92	.91	.89
2.0	.96	.91	.86	.95	.90	.85	.91	.87	.83	.88	.85	.82	.85	.82	.80	.78
3.0	.87	.80	.75	.85	.79	.74	.83	.77	.73	.80	.75	.72	.78	.74	.71	.69
4.0	.79	.71	.66	.77	.70	.65	.75	.69	.64	.73	.68	.63	.71	.66	.63	.61
5.0	.71	.64	.58	.70	.63	.58	.68	.62	.57	.67	.61	.57	.65	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.52	.63	.56	.51	.61	.55	.51	.60	.54	.50	.49
7.0	.60	.52	.47	.59	.52	.46	.58	.51	.46	.56	.50	.46	.55	.50	.46	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.35	.33

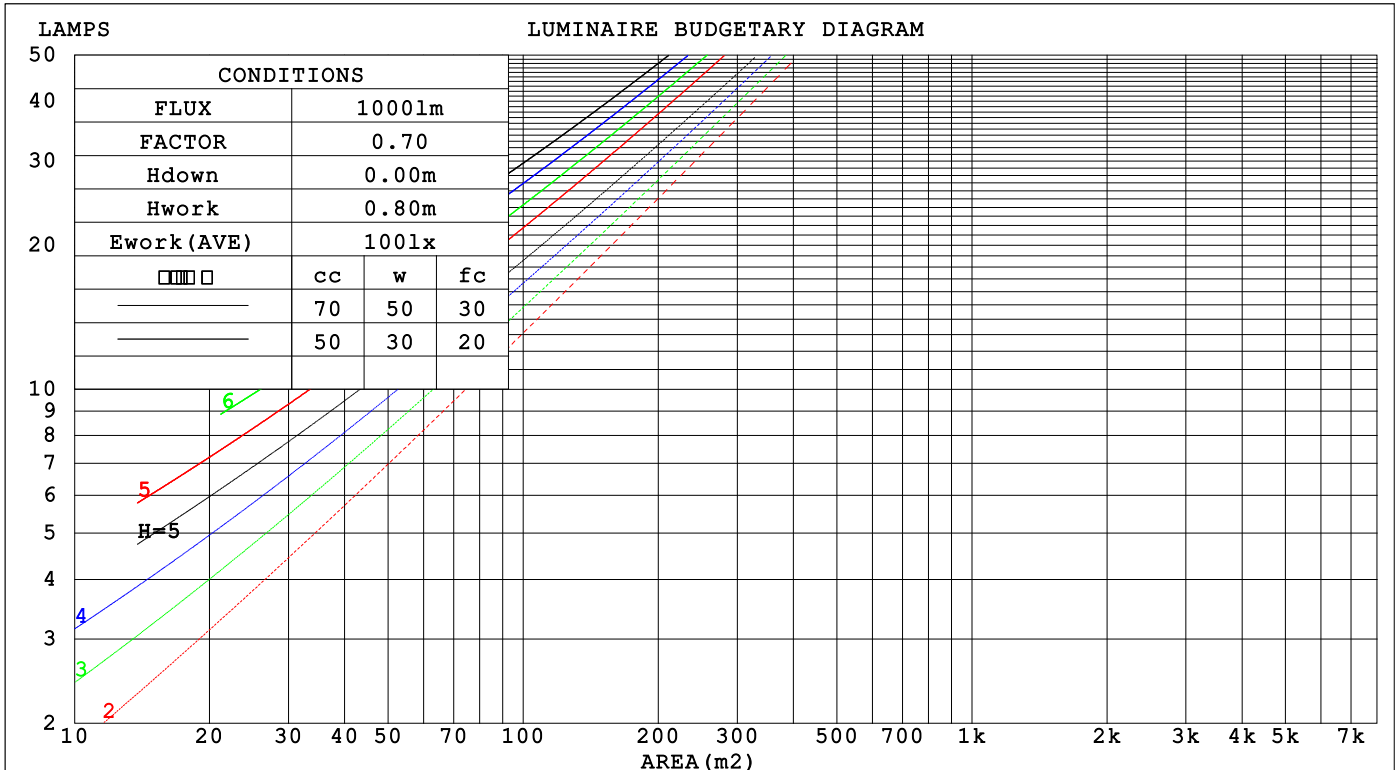

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:119.46V I:0.1702A P:20.011W PF:0.9841 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2295.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.242	.138	.044	.235	.134	.043	.222	.127	.041	.210	.121	.039	.199	.116	.037	
2.0	.234	.128	.039	.228	.125	.039	.217	.120	.037	.206	.116	.036	.197	.111	.035	
3.0	.222	.118	.035	.216	.116	.035	.207	.112	.034	.198	.108	.033	.189	.105	.032	
4.0	.209	.109	.032	.204	.107	.032	.196	.104	.031	.188	.101	.030	.180	.098	.030	
5.0	.197	.100	.029	.193	.099	.029	.185	.096	.028	.178	.094	.028	.172	.092	.028	
6.0	.185	.093	.027	.182	.092	.026	.175	.090	.026	.169	.088	.026	.163	.086	.025	
7.0	.175	.087	.025	.172	.086	.024	.166	.084	.024	.160	.082	.024	.155	.080	.024	
8.0	.165	.081	.023	.163	.080	.023	.157	.078	.022	.152	.077	.022	.147	.076	.022	
9.0	.157	.076	.021	.154	.075	.021	.149	.074	.021	.145	.072	.021	.140	.071	.021	
10.0	.148	.071	.020	.146	.071	.020	.142	.069	.020	.138	.068	.019	.134	.067	.019	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.176	.157	.140	.150	.135	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
3.0	.165	.132	.105	.141	.114	.091	.097	.079	.063	.056	.046	.037	.018	.015	.012	
4.0	.155	.114	.081	.133	.098	.070	.091	.068	.049	.053	.040	.029	.017	.013	.010	
5.0	.147	.100	.064	.126	.086	.056	.087	.060	.039	.050	.035	.023	.016	.011	.008	
6.0	.140	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006	
7.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005	
8.0	.126	.074	.036	.109	.064	.032	.075	.045	.023	.044	.026	.013	.014	.009	.004	
9.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.012	.014	.008	.004	
10.0	.115	.063	.027	.099	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.110	.058	.024	.095	.051	.021	.066	.036	.015	.038	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.46V I:0.1702A P:20.011W PF:0.9841 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2295.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.6	24.9	23.8	25.1	25.3	23.8	25.1	24.0	25.2	25.4
3H	23.8	25.0	24.1	25.2	25.4	24.0	25.1	24.2	25.4	25.6
4H	23.9	25.0	24.2	25.3	25.5	24.1	25.2	24.4	25.4	25.7
6H	24.0	25.0	24.3	25.3	25.6	24.1	25.2	24.5	25.4	25.7
8H	24.0	25.0	24.3	25.3	25.6	24.2	25.2	24.5	25.4	25.7
12H	24.0	25.0	24.3	25.3	25.6	24.1	25.1	24.5	25.4	25.7
4H 2H	23.7	24.8	24.0	25.0	25.3	23.8	25.0	24.1	25.2	25.4
3H	24.0	25.0	24.3	25.3	25.5	24.1	25.1	24.5	25.4	25.7
4H	24.2	25.1	24.5	25.4	25.7	24.3	25.2	24.7	25.5	25.8
6H	24.4	25.1	24.8	25.5	25.8	24.5	25.3	24.9	25.6	26.0
8H	24.4	25.1	24.8	25.5	25.9	24.6	25.3	25.0	25.6	26.0
12H	24.5	25.1	24.9	25.5	25.9	24.6	25.2	25.0	25.6	26.0
8H 4H	24.2	24.9	24.6	25.3	25.7	24.3	25.0	24.7	25.4	25.8
6H	24.5	25.1	24.9	25.5	25.9	24.6	25.2	25.0	25.6	26.0
8H	24.6	25.1	25.0	25.5	26.0	24.7	25.2	25.2	25.6	26.1
12H	24.7	25.1	25.1	25.6	26.0	24.8	25.2	25.2	25.6	26.1
12H 4H	24.2	24.8	24.6	25.2	25.6	24.3	25.0	24.7	25.3	25.7
6H	24.5	25.0	24.9	25.4	25.9	24.6	25.1	25.1	25.5	26.0
8H	24.6	25.1	25.1	25.5	26.0	24.7	25.2	25.2	25.6	26.1

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.8 / - 1.0	+ 0.7 / - 1.0
1.5H	+ 0.3 / - 0.4	+ 0.4 / - 0.5
2.0H	+ 1.6 / - 1.9	+ 1.7 / - 1.9

CIE Pub.117, 2295 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.9)  
 Area: 0.018 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-03	Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.46V I:0.1702A P:20.011W PF:0.9841 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2295.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	46
0.80	78	68	62	77	68	62	75	67	62	56
1.00	86	77	71	84	76	71	83	77	70	64
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	88	83	95	88	83	92	86	82	75
2.00	101	95	90	100	94	89	97	92	88	81
2.50	104	98	94	102	97	93	99	94	91	84
3.00	107	102	97	105	100	96	101	97	94	87
4.00	110	105	102	107	104	100	104	100	98	90
5.00	111	108	105	109	106	103	105	102	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.46V I:0.1702A P:20.011W PF:0.9841 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2295.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

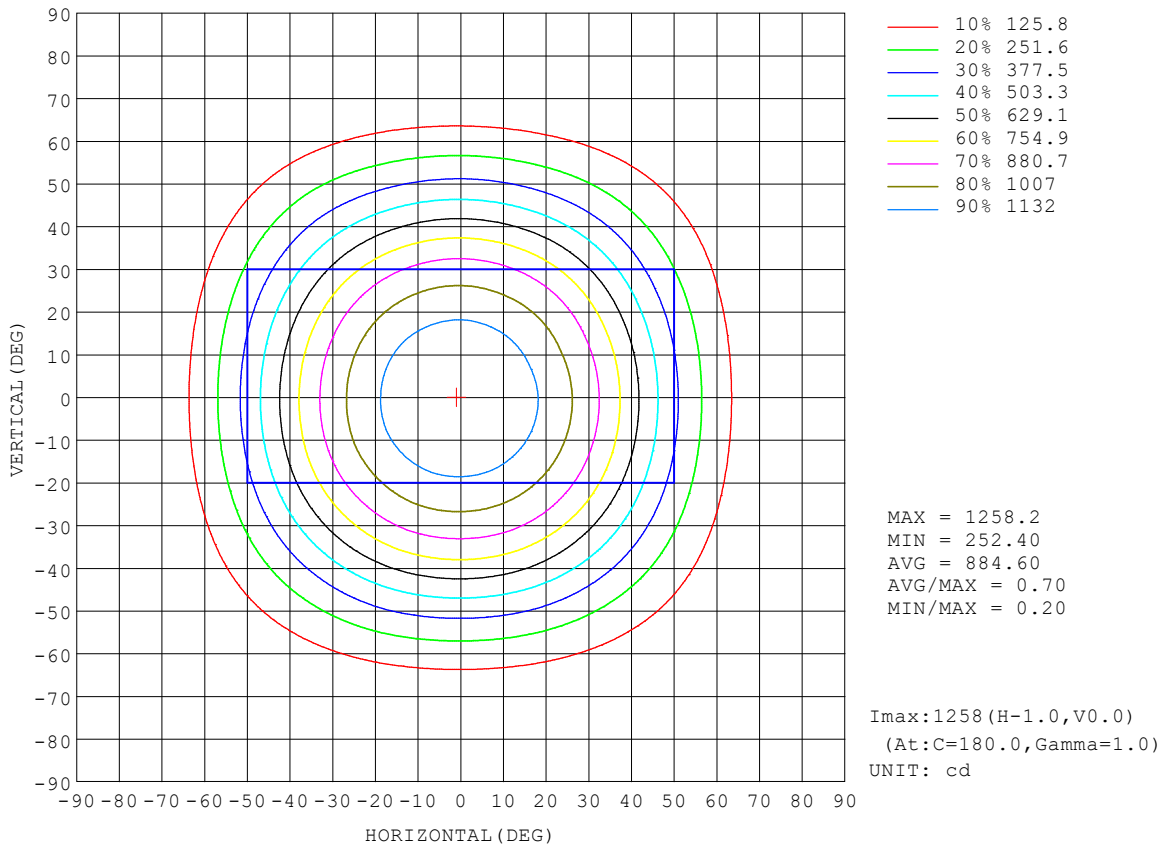


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.46V I:0.1702A P:20.011W PF:0.9841 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2295.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

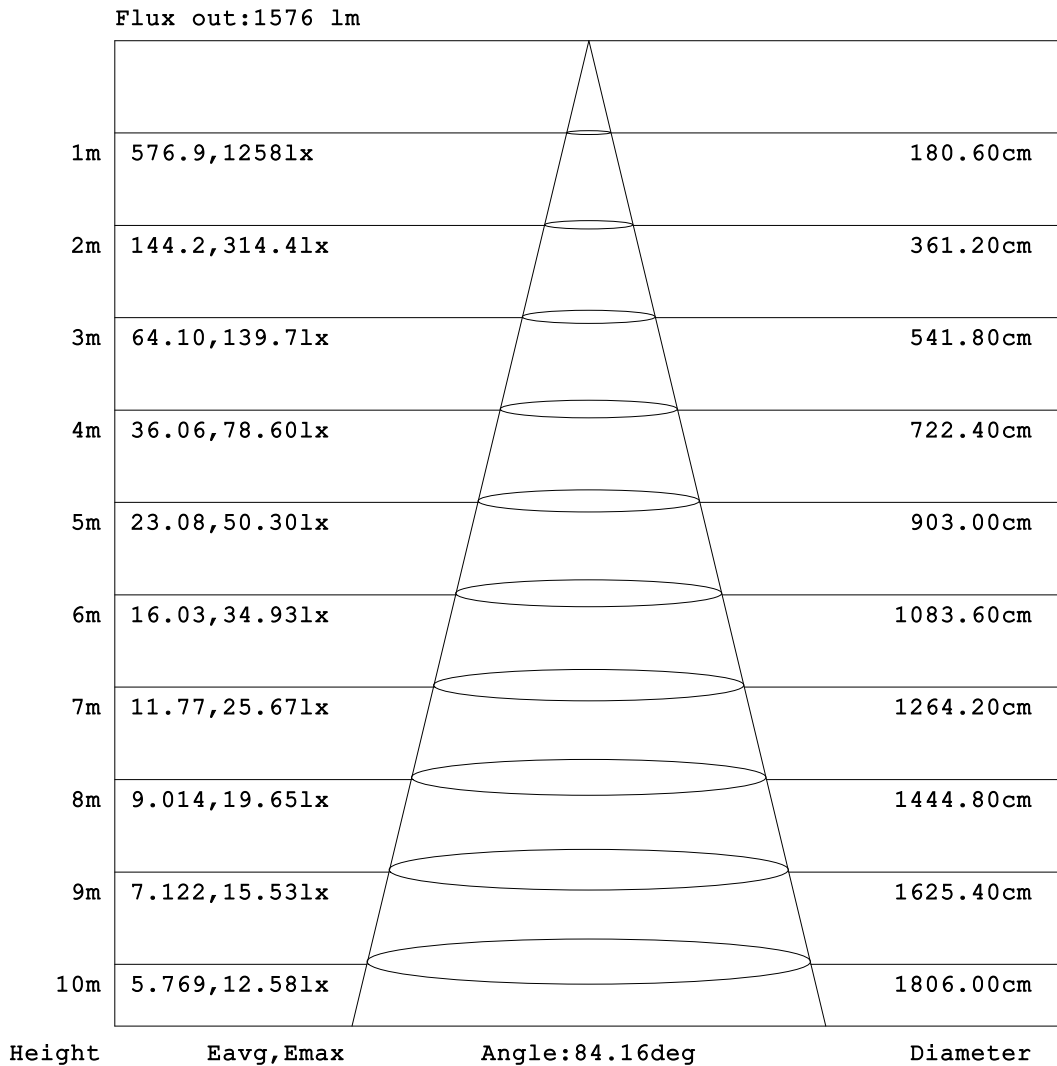


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.46V I:0.1702A P:20.011W PF:0.9841 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2295.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

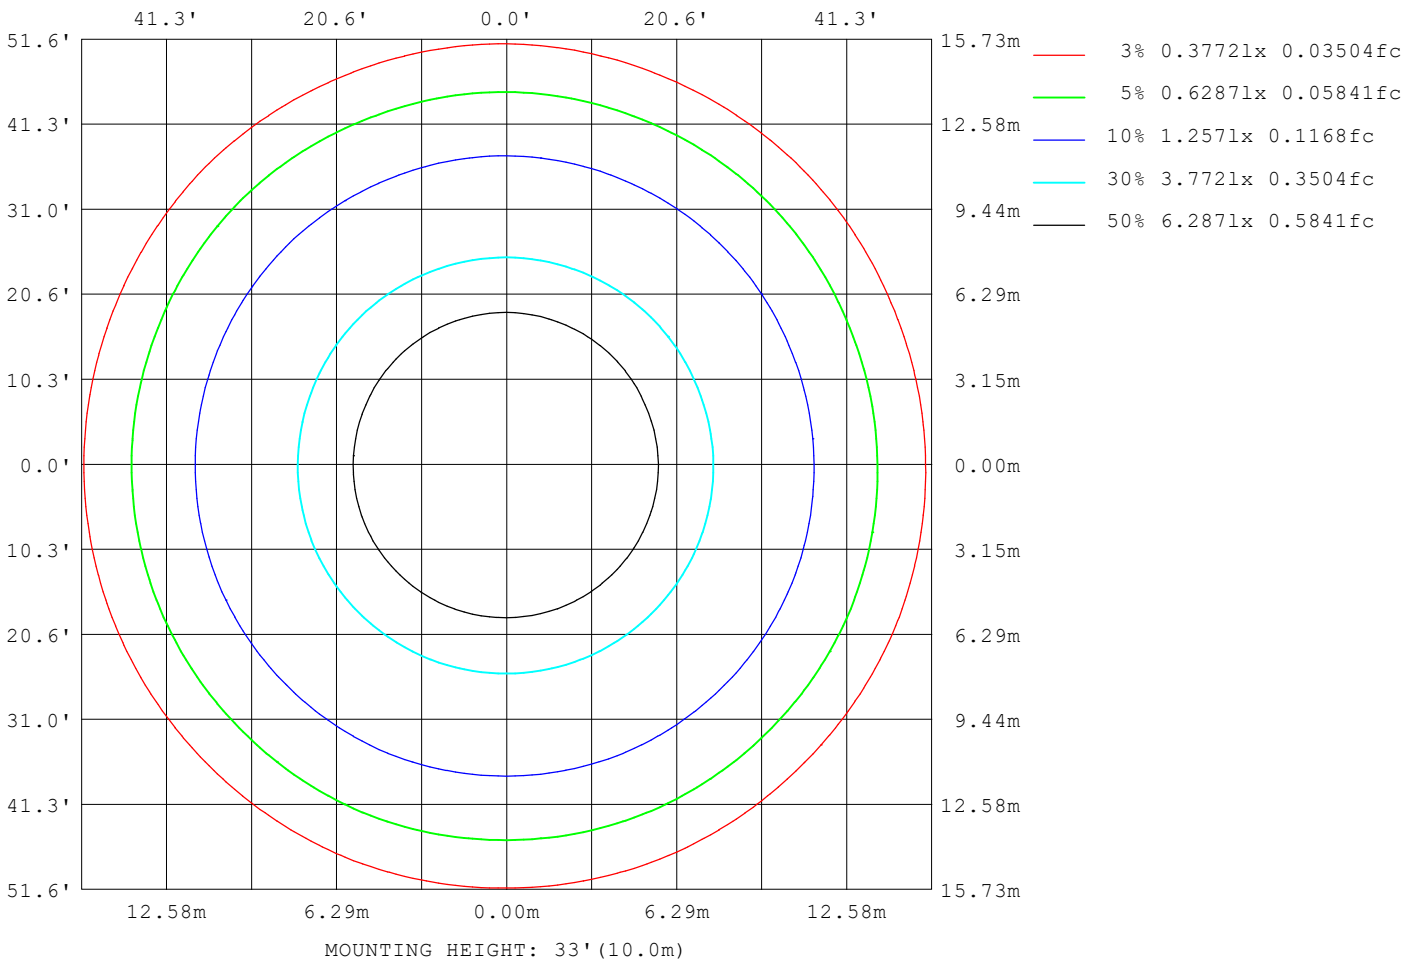

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.46V I:0.1702A P:20.011W PF:0.9841 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2295.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	14045
L_0~180 (75) av	10362
L_0~180 (85) av	8185
L_90~270 (65) av	14136
L_90~270 (75) av	10407
L_90~270 (85) av	6264
L_45 (65) av	14070
L_45 (75) av	10423
L_45 (85) av	6918

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

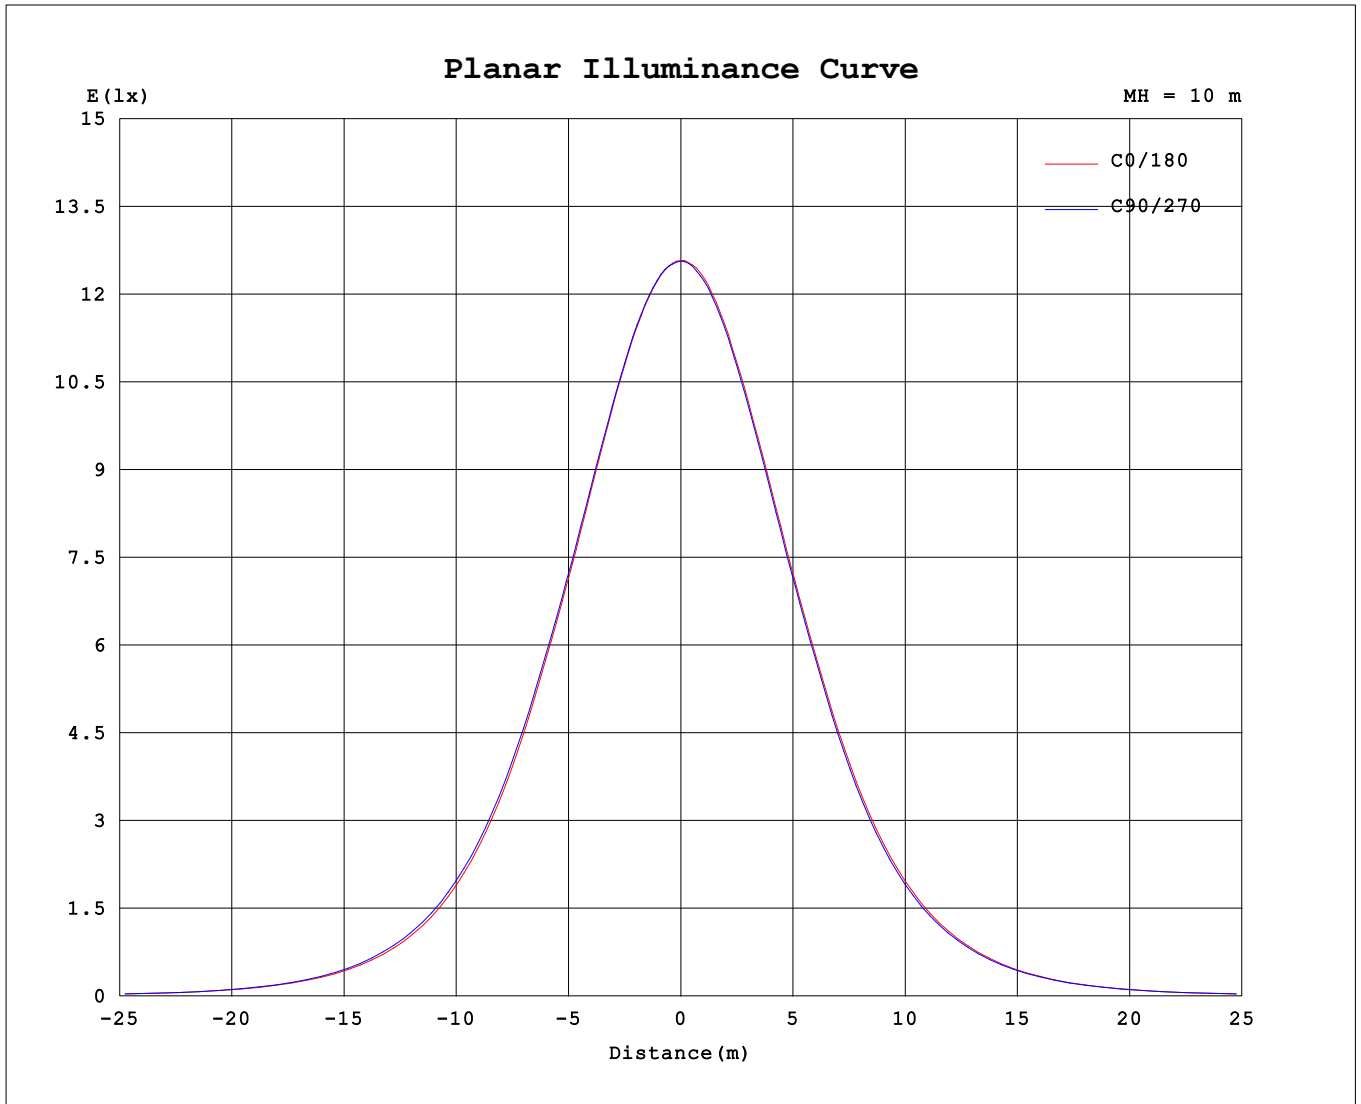

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.46V I:0.1702A P:20.011W PF:0.9841 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2295.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1257	1257	1257	1257	1257	1255	1257	1255	1257	1257	1257	1257	1257	1255	1257	1255			
5	1247	1247	1248	1248	1248	1248	1249	1249	1251	1250	1249	1247	1246	1245	1245	1244			
10	1218	1219	1220	1221	1221	1223	1224	1224	1223	1221	1220	1218	1218	1215	1214	1213			
15	1171	1173	1173	1175	1176	1178	1179	1180	1178	1176	1176	1172	1170	1168	1167	1165			
20	1106	1109	1109	1112	1113	1116	1118	1119	1116	1113	1112	1109	1106	1103	1102	1100			
25	1026	1029	1031	1035	1037	1041	1040	1041	1037	1034	1033	1029	1027	1022	1021	1019			
30	935	938	942	946	947	951	951	951	947	944	941	936	935	930	929	926			
35	817	823	827	834	835	838	836	837	831	826	824	820	817	813	811	810			
40	680	686	690	698	700	703	701	702	696	690	688	683	681	675	674	672			
45	537	544	549	558	559	561	560	560	557	551	548	542	540	534	533	531			
50	402	410	416	422	423	426	423	423	421	416	415	407	407	401	400	397			
55	283	290	292	298	298	302	297	297	296	294	295	288	287	281	280	278			
60	182	185	186	190	191	192	190	189	187	187	189	187	184	179	179	179			
65	106	106	107	108	108	110	108	109	108	107	108	107	107	104	105	105			
70	65.4	65.6	65.4	65.7	65.7	66.2	66.1	66.2	66.5	66.1	66.2	65.8	65.9	65.7	65.8	65.5			
75	47.9	47.8	48.0	48.4	48.3	48.6	48.6	48.8	48.7	48.4	48.8	48.6	48.7	48.7	48.8	48.6			
80	30.0	30.0	30.0	30.8	30.4	31.0	31.1	31.0	30.7	30.5	27.3	30.5	30.3	30.3	31.5	31.2			
85	12.5	12.2	10.7	10.7	9.75	10.8	12.1	13.2	13.2	12.4	8.43	10.3	9.90	10.3	12.2	13.3			
90	0.60	0.58	0.58	0.55	0.55	0.52	0.55	0.54	0.97	1.04	0.98	1.02	1.01	1.04	1.02	1.02			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-03

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks: