
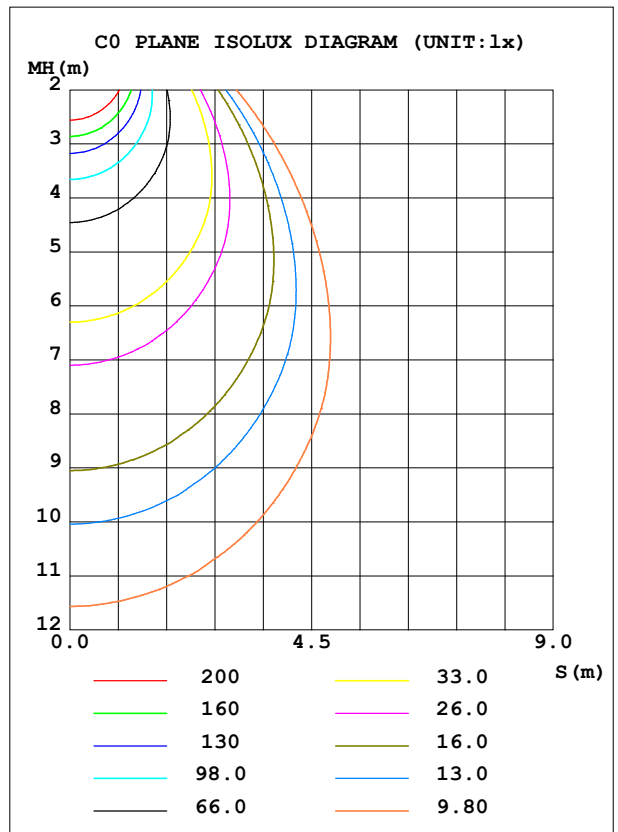


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.44V I:0.1707A P:20.063W PF:0.9842 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2391.64x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-6-30W-M-A5C5-HO	Imax (cd)	1310	S/MH (C0/180)	1.13
NOMINAL POWER (W)	22	LOR (%)	100.0	S/MH (C90/270)	1.13
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2391.6	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.3
NOMINAL FLUX (lm)	2391.64	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.7
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

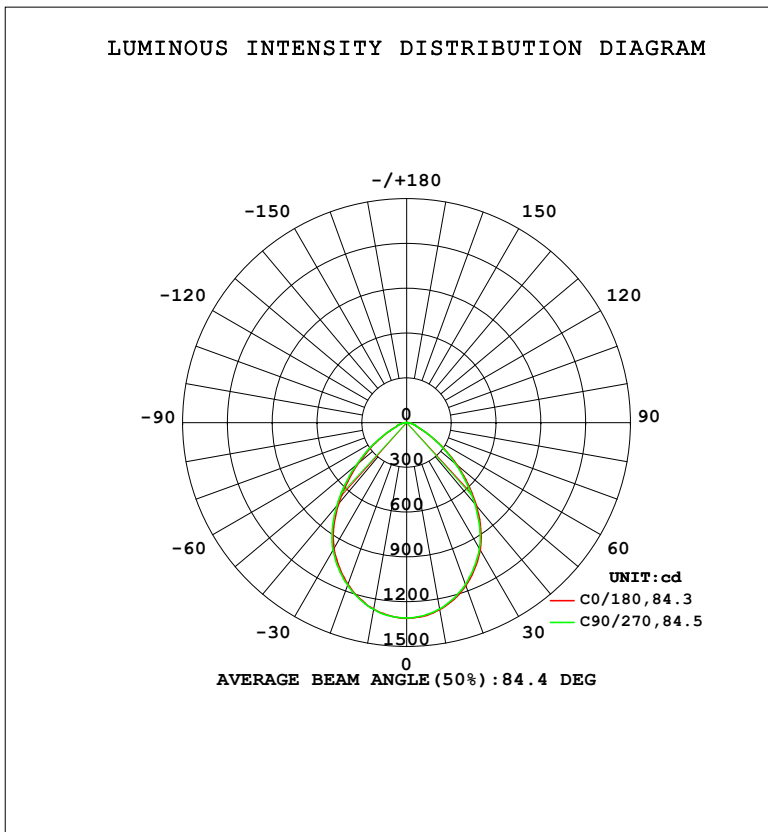

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum,lamp
10	1269	1268	1270	1272	1273	1270	1267	1265	0- 10	123.0	123.0	5.14,5.14
20	1152	1155	1157	1163	1162	1158	1153	1147	10- 20	343.6	466.7	19.5,19.5
30	973.7	979.5	986.4	990.5	986.0	981.4	974.7	968.3	20- 30	493.7	960.4	40.2,40.2
40	709.6	719.3	729.6	731.3	726.8	718.7	710.4	704.1	30- 40	534.7	1495	62.5,62.5
50	419.7	432.3	440.1	439.9	438.8	432.4	424.5	416.3	40- 50	440.4	1936	80.9,80.9
60	189.2	192.2	197.9	197.6	194.3	197.1	191.0	185.9	50- 60	272.1	2208	92.3,92.3
70	68.50	68.36	68.73	69.11	69.48	69.15	68.92	68.77	60- 70	116.4	2324	97.2,97.2
80	31.39	31.33	31.75	32.52	32.15	28.64	31.62	32.92	70- 80	53.32	2377	99.4,99.4
90	0.6227	0.6031	0.5572	0.5572	1.012	1.029	1.055	1.062	80- 90	14.24	2392	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1733.7 lm

%lum = 72.5%

%lamp = 72.5%

Conical surface Flux(130deg): 2280.2 lm

%lum = 95.3%


%lamp = 95.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.44V I:0.1707A P:20.063W PF:0.9842 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2391.64x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

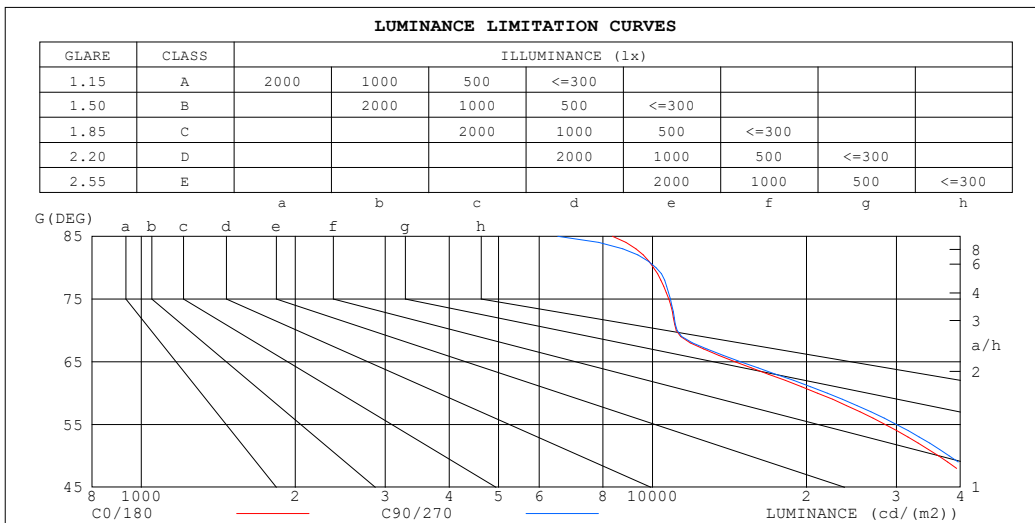

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8345	6525
80	10044	10159
75	10759	10840
70	11126	11165
65	14506	14865
60	21023	21987
55	28538	30005
50	36270	38034
45	44048	45795


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.44V I:0.1707A P:20.063W PF:0.9842 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:2391.64x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.99	.96	.97	.95	.93	.94	.92	.91	.89
2.0	.96	.91	.86	.95	.90	.85	.91	.87	.83	.88	.85	.82	.85	.82	.80	.78
3.0	.87	.80	.75	.85	.79	.74	.83	.77	.73	.80	.75	.72	.78	.74	.70	.69
4.0	.79	.71	.66	.77	.70	.65	.75	.69	.64	.73	.68	.63	.71	.66	.63	.61
5.0	.71	.64	.58	.70	.63	.58	.68	.62	.57	.67	.61	.57	.65	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.52	.63	.56	.51	.61	.55	.51	.60	.54	.50	.49
7.0	.60	.52	.47	.59	.52	.46	.58	.51	.46	.56	.50	.46	.55	.50	.46	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.44	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.39	.35	.33

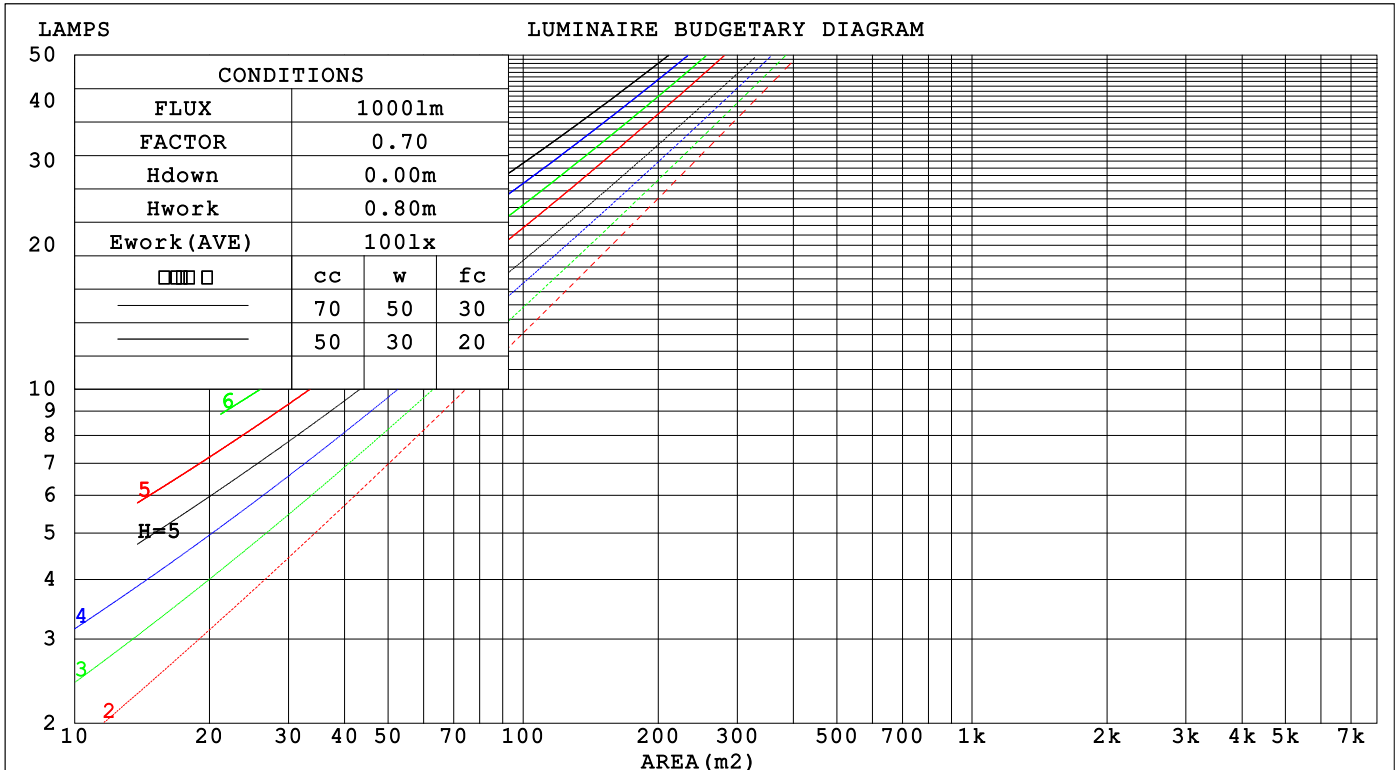

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.44V I:0.1707A P:20.063W PF:0.9842 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2391.64x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.242 .138 .044	.235 .134 .043	.222 .128 .041	.210 .121 .039	.199 .116 .037	
2.0	.234 .128 .039	.228 .125 .039	.217 .120 .037	.206 .116 .036	.197 .111 .035	
3.0	.222 .118 .035	.216 .116 .035	.207 .112 .034	.198 .108 .033	.189 .105 .032	
4.0	.209 .109 .032	.204 .107 .032	.196 .104 .031	.188 .101 .030	.180 .098 .030	
5.0	.197 .100 .029	.193 .099 .029	.185 .096 .028	.178 .094 .028	.172 .092 .028	
6.0	.186 .093 .027	.182 .092 .026	.175 .090 .026	.169 .088 .026	.163 .086 .025	
7.0	.175 .087 .025	.172 .086 .024	.166 .084 .024	.160 .082 .024	.155 .080 .024	
8.0	.165 .081 .023	.163 .080 .023	.157 .079 .022	.152 .077 .022	.147 .076 .022	
9.0	.157 .076 .021	.154 .075 .021	.149 .074 .021	.145 .072 .021	.140 .071 .021	
10.0	.149 .071 .020	.146 .071 .020	.142 .069 .020	.138 .068 .019	.134 .067 .019	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.176 .157 .140	.150 .135 .120	.103 .093 .083	.059 .054 .048	.019 .017 .016	
2.0	.165 .132 .105	.141 .114 .091	.097 .079 .063	.056 .046 .037	.018 .015 .012	
3.0	.155 .114 .081	.133 .098 .070	.091 .068 .049	.053 .040 .029	.017 .013 .010	
4.0	.147 .100 .064	.126 .086 .056	.087 .060 .039	.050 .035 .023	.016 .011 .008	
5.0	.140 .089 .052	.120 .077 .045	.083 .054 .032	.048 .032 .019	.015 .010 .006	
6.0	.133 .081 .043	.114 .070 .038	.079 .049 .027	.046 .029 .016	.015 .009 .005	
7.0	.126 .074 .036	.109 .064 .032	.075 .045 .023	.044 .026 .013	.014 .009 .004	
8.0	.121 .068 .031	.104 .059 .027	.072 .041 .019	.042 .024 .012	.014 .008 .004	
9.0	.115 .063 .027	.099 .054 .024	.069 .038 .017	.040 .023 .010	.013 .007 .003	
10.0	.110 .058 .024	.095 .051 .021	.066 .036 .015	.038 .021 .009	.012 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.44V I:0.1707A P:20.063W PF:0.9842 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2391.64x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.7	25.0	24.0	25.2	25.4	23.9	25.2	24.1	25.4	25.6
3H	23.9	25.1	24.2	25.3	25.6	24.1	25.3	24.4	25.5	25.7
4H	24.0	25.2	24.3	25.4	25.6	24.2	25.3	24.5	25.6	25.8
6H	24.1	25.2	24.4	25.4	25.7	24.3	25.3	24.6	25.6	25.9
8H	24.2	25.2	24.5	25.4	25.7	24.3	25.3	24.6	25.6	25.9
12H	24.2	25.1	24.5	25.4	25.7	24.3	25.3	24.6	25.5	25.8
4H 2H	23.8	24.9	24.1	25.2	25.4	24.0	25.1	24.3	25.3	25.6
3H	24.1	25.1	24.5	25.4	25.7	24.3	25.2	24.6	25.5	25.8
4H	24.3	25.2	24.7	25.5	25.8	24.5	25.3	24.8	25.6	26.0
6H	24.5	25.3	24.9	25.6	26.0	24.6	25.4	25.0	25.8	26.1
8H	24.6	25.3	25.0	25.7	26.0	24.7	25.4	25.1	25.8	26.1
12H	24.6	25.3	25.0	25.6	26.0	24.7	25.4	25.1	25.7	26.1
8H 4H	24.3	25.1	24.8	25.4	25.8	24.5	25.2	24.9	25.5	25.9
6H	24.6	25.2	25.1	25.6	26.0	24.7	25.3	25.2	25.7	26.1
8H	24.7	25.3	25.2	25.7	26.1	24.8	25.4	25.3	25.8	26.2
12H	24.8	25.3	25.3	25.7	26.2	24.9	25.3	25.4	25.8	26.3
12H 4H	24.3	25.0	24.7	25.4	25.8	24.4	25.1	24.9	25.5	25.9
6H	24.6	25.1	25.1	25.6	26.0	24.7	25.3	25.2	25.7	26.1
8H	24.8	25.2	25.2	25.6	26.1	24.9	25.3	25.3	25.8	26.2

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.8 / - 1.0	+ 0.7 / - 1.0
1.5H	+ 0.3 / - 0.4	+ 0.4 / - 0.4
2.0H	+ 1.6 / - 1.9	+ 1.7 / - 1.9

CIE Pub.117, 2392 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.0)
 Area: 0.018 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-03	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.44V I:0.1707A P:20.063W PF:0.9842 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2391.64x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	46
0.80	78	68	62	77	68	62	75	67	62	56
1.00	86	77	71	84	76	71	83	77	70	64
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	88	83	95	88	83	92	86	82	75
2.00	101	95	90	100	94	89	97	92	88	81
2.50	104	98	94	102	97	93	99	94	91	84
3.00	107	102	97	105	100	96	101	97	94	87
4.00	110	105	102	107	104	100	104	100	98	90
5.00	111	108	105	109	106	103	105	102	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.44V I:0.1707A P:20.063W PF:0.9842 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2391.64x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

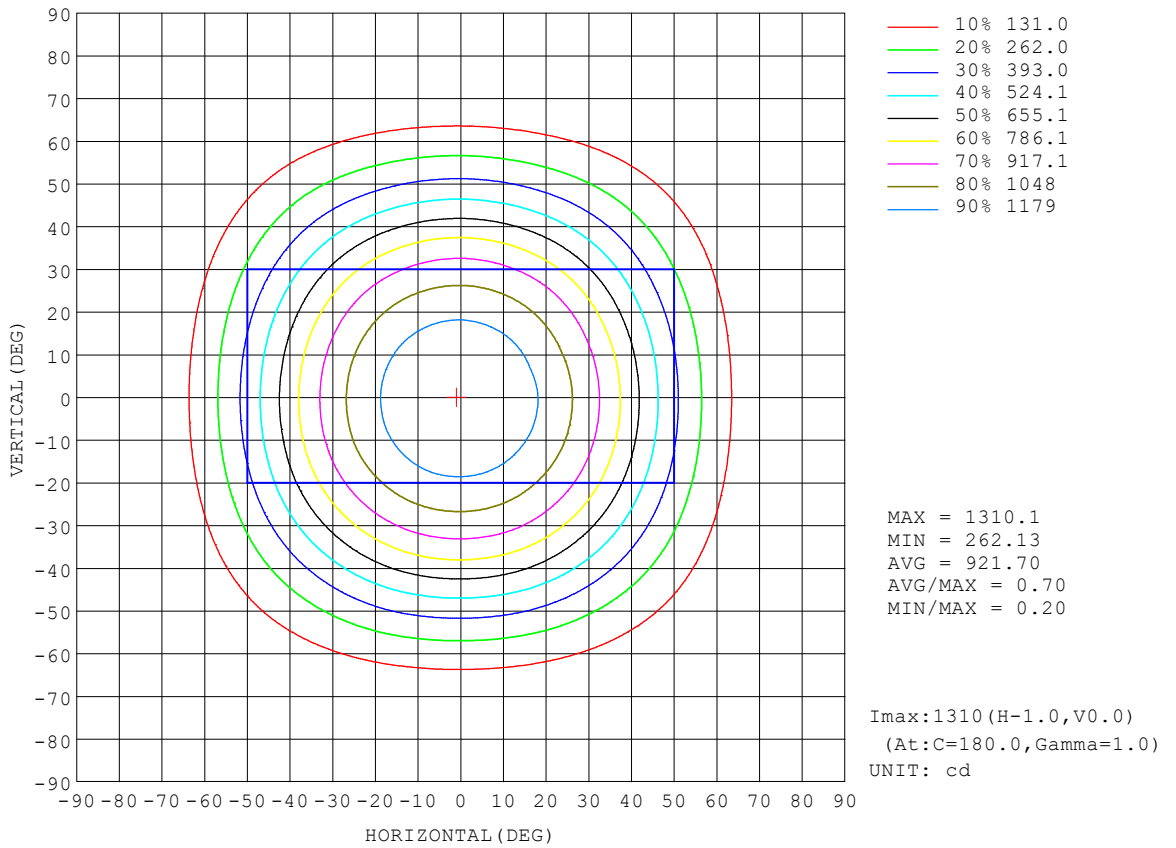


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.44V I:0.1707A P:20.063W PF:0.9842 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2391.64x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

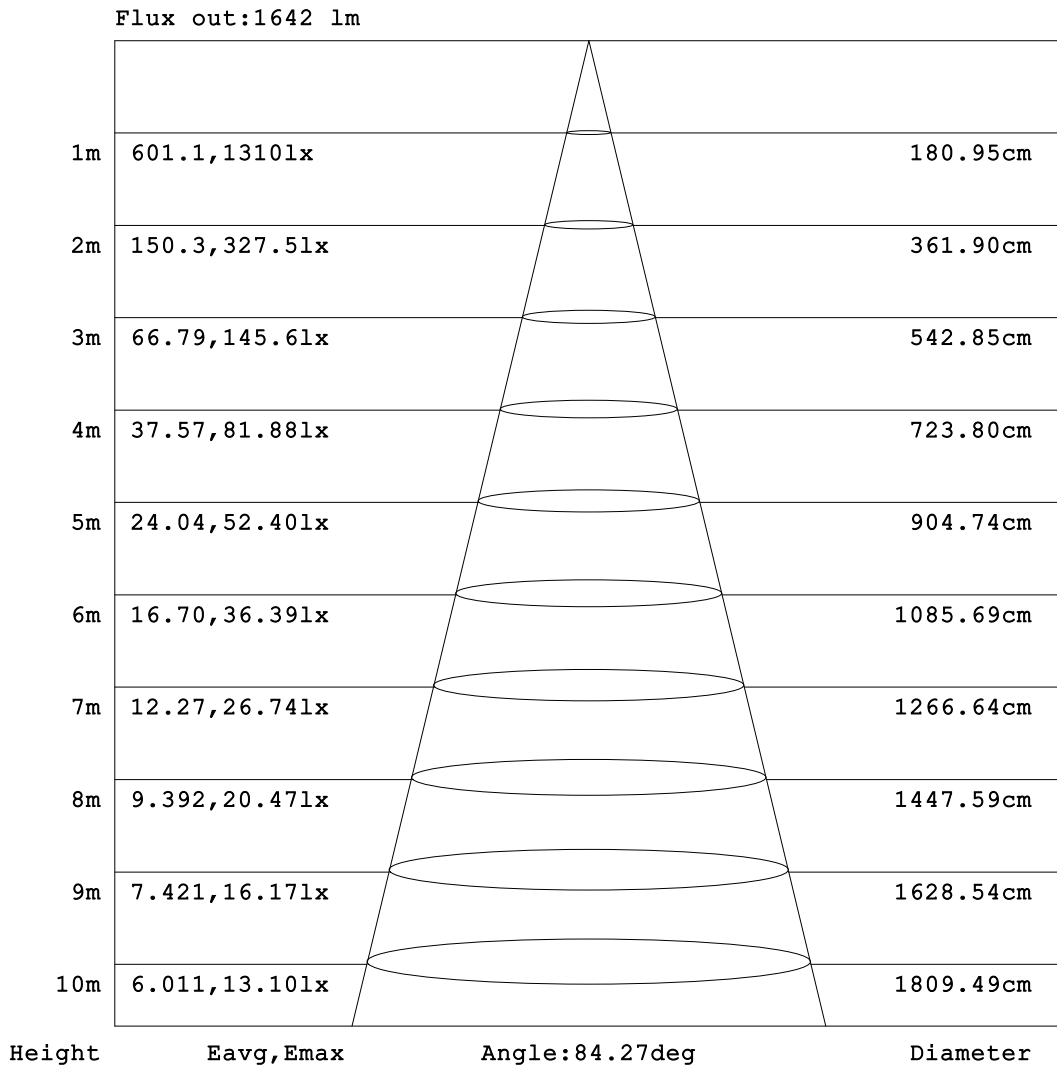


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.44V I:0.1707A P:20.063W PF:0.9842 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2391.64x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

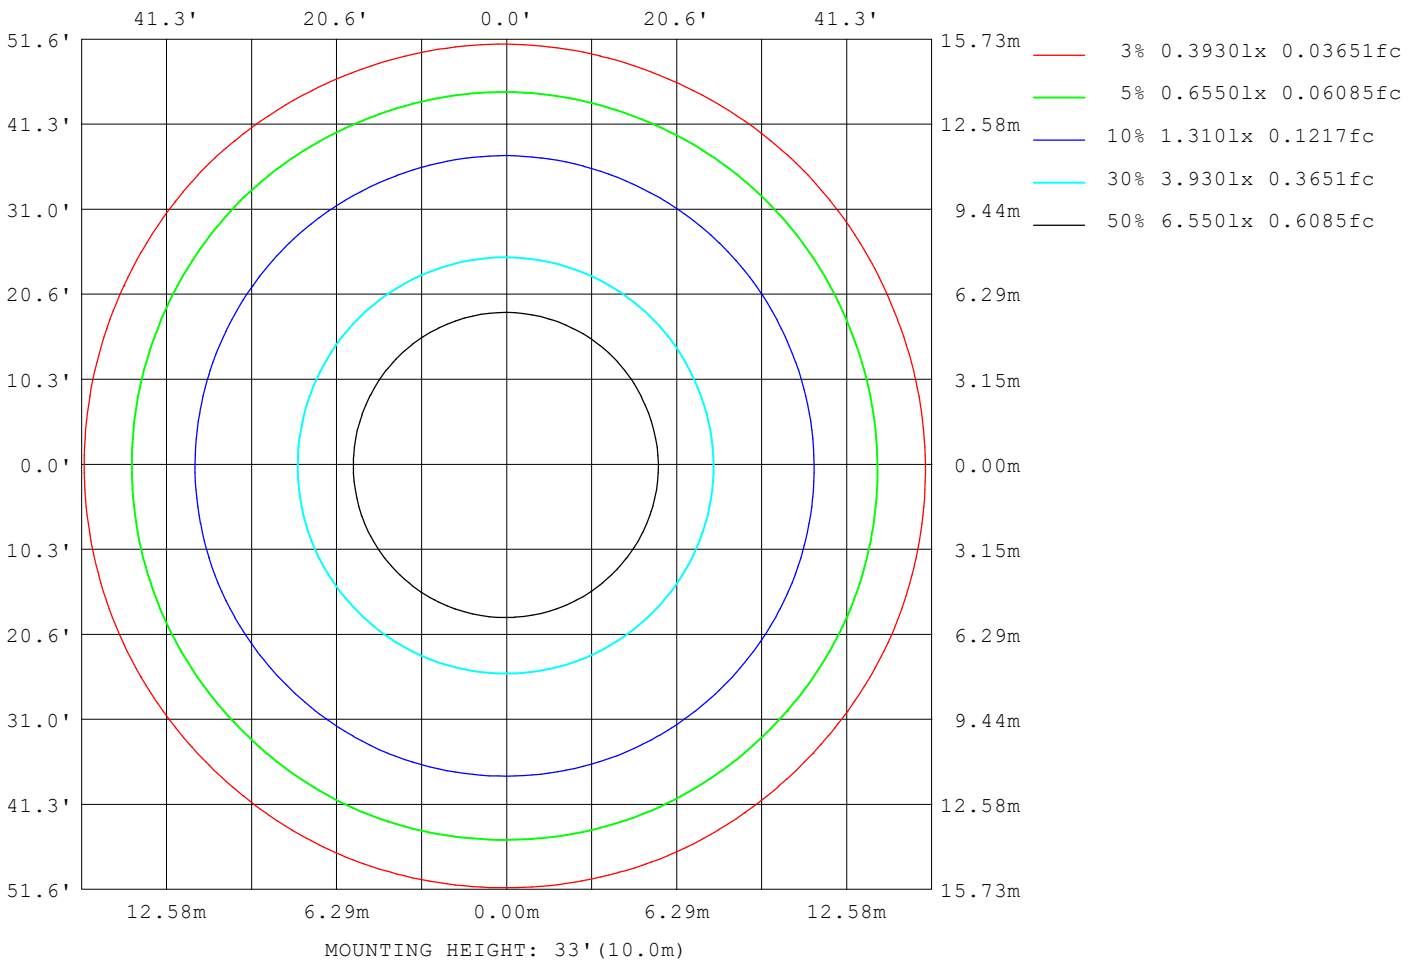

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.44V I:0.1707A P:20.063W PF:0.9842 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2391.64x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	14653
L_0~180 (75) av	10840
L_0~180 (85) av	8558
L_90~270 (65) av	14730
L_90~270 (75) av	10882
L_90~270 (85) av	6557
L_45 (65) av	14675
L_45 (75) av	10896
L_45 (85) av	7202

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

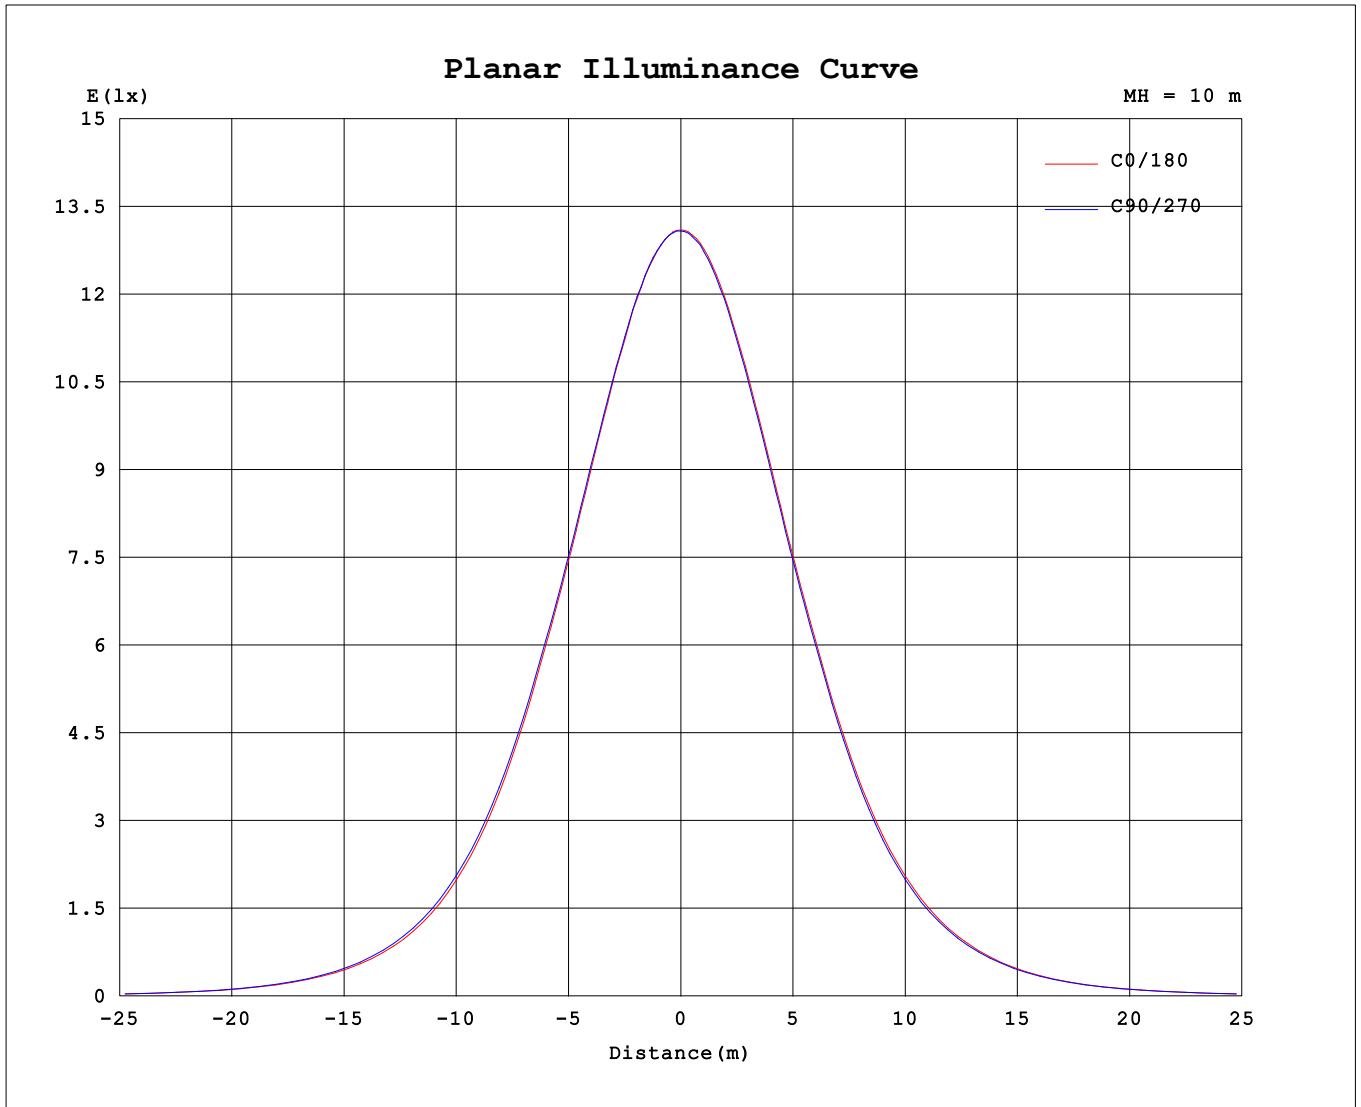

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.44V I:0.1707A P:20.063W PF:0.9842 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2391.64x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1310	1309	1309	1309	1308	1307	1308	1308	1310	1309	1309	1309	1308	1307	1308	1308			
5	1299	1299	1298	1299	1300	1300	1300	1299	1302	1301	1301	1298	1299	1296	1296	1295			
10	1269	1268	1268	1270	1270	1272	1272	1273	1273	1272	1270	1268	1267	1265	1265	1263			
15	1219	1220	1221	1222	1223	1226	1227	1229	1225	1224	1224	1219	1218	1215	1215	1213			
20	1152	1154	1155	1158	1157	1163	1163	1164	1162	1159	1158	1155	1153	1149	1147	1144			
25	1069	1072	1073	1077	1079	1083	1082	1085	1080	1077	1076	1072	1070	1066	1063	1062			
30	974	977	980	984	986	990	991	991	986	982	981	977	975	970	968	965			
35	853	859	862	868	869	873	872	872	866	862	861	855	853	848	846	844			
40	710	716	719	728	730	733	731	734	727	721	719	713	710	705	704	701			
45	561	567	573	581	583	586	583	586	581	575	572	566	565	559	557	554			
50	420	427	432	439	440	444	440	441	439	435	432	426	424	419	416	414			
55	295	302	303	310	310	314	309	309	307	306	307	300	299	293	292	289			
60	189	192	192	197	198	199	198	196	194	195	197	194	191	186	186	185			
65	110	111	111	113	113	114	113	113	113	112	113	112	111	109	110	110			
70	68.5	68.5	68.4	68.7	68.7	69.2	69.1	69.4	69.5	69.2	69.2	68.8	68.9	68.7	68.8	68.5			
75	50.1	50.1	50.1	50.6	50.5	50.9	50.8	51.1	50.9	50.7	51.0	50.8	50.9	50.9	51.1	50.7			
80	31.4	31.4	31.3	32.1	31.8	32.3	32.5	32.4	32.1	31.9	28.6	31.9	31.6	31.7	32.9	32.5			
85	13.1	12.8	11.1	11.2	10.2	11.3	12.6	13.8	13.8	12.9	8.68	10.8	10.3	10.8	12.8	13.8			
90	0.62	0.60	0.60	0.56	0.56	0.53	0.56	0.56	1.01	1.08	1.03	1.06	1.06	1.09	1.06	1.06			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2023-07-03

Range: 0 - 90DEG
 Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 9.680m [K=1.0000]
Remarks: