
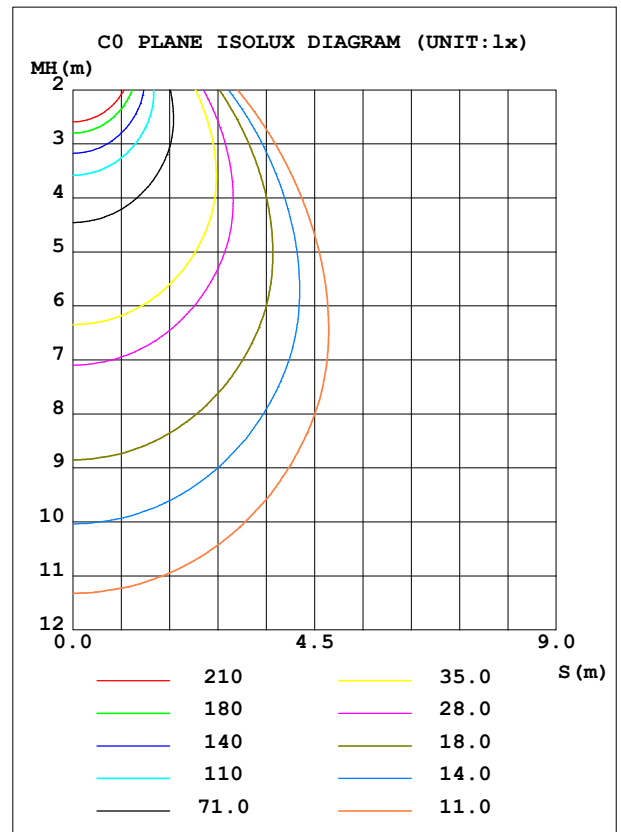


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.38V I:0.1701A P:19.982W PF:0.9841 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2580.33x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-6-30W-M-A5C5-HO	Imax (cd)	1411	S/MH (C0/180)	1.13
NOMINAL POWER (W)	22	LOR (%)	100.0	S/MH (C90/270)	1.13
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2580.3	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	2580.33	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

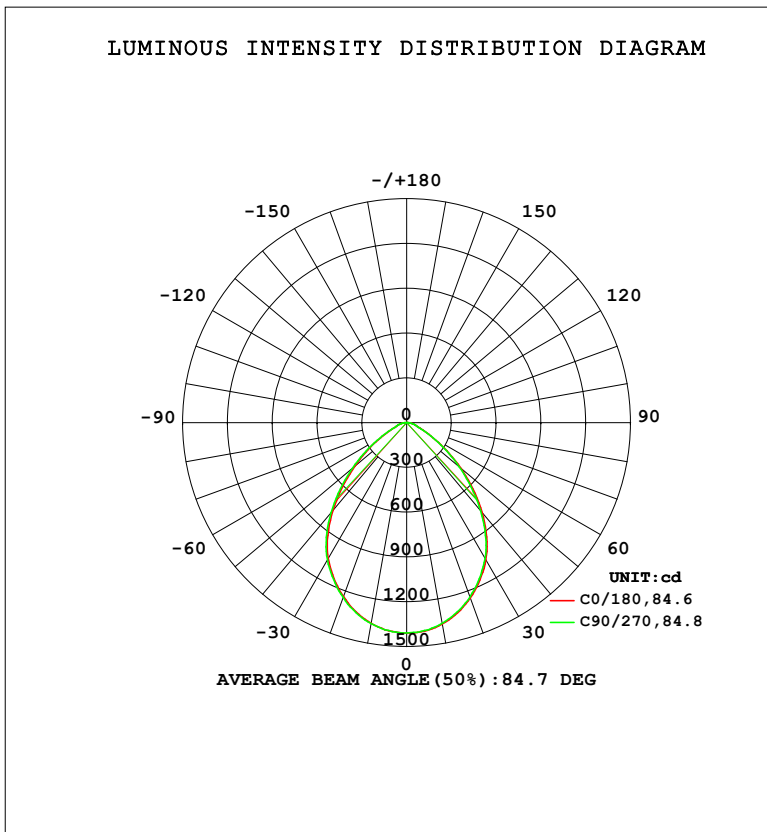

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1366	1366	1368	1369	1370	1369	1366	1362	0- 10	132.5	132.5	5.13,5.13
20	1240	1243	1246	1252	1249	1247	1242	1235	10- 20	370.0	502.5	19.5,19.5
30	1051	1056	1062	1067	1063	1059	1050	1045	20- 30	531.9	1034	40.1,40.1
40	769.0	777.9	787.6	792.2	787.0	779.1	771.2	762.4	30- 40	577.7	1612	62.5,62.5
50	452.8	466.3	474.3	475.6	474.0	468.7	460.3	449.7	40- 50	476.8	2089	81,81
60	202.6	205.9	210.1	210.3	207.7	211.1	204.9	198.9	50- 60	292.5	2381	92.3,92.3
70	74.46	74.23	74.75	75.22	75.58	75.25	74.97	74.68	60- 70	125.5	2507	97.2,97.2
80	34.17	34.10	34.52	35.42	34.90	31.10	34.39	35.64	70- 80	57.99	2565	99.4,99.4
90	0.6883	0.6555	0.6096	0.6358	1.103	1.121	1.147	1.160	80- 90	15.48	2580	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1870.5 lm

%lum = 72.5%

%lamp = 72.5%

Conical surface Flux(130deg): 2459.3 lm

%lum = 95.3%


%lamp = 95.3%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

<b>Test:U:119.38V I:0.1701A P:19.982W PF:0.9841 Freq:60.01Hz</b> <b>UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2580.33x1 lm</b>		
<b>NAME: DL254-6-30W-M-A5C5-HO</b>	<b>TYPE: 22W</b>	<b>WEIGHT:</b>
<b>SPEC.: 4000K</b>	<b>DIM.: 0.21</b>	<b>SERIAL No.: 1</b>
<b>MFR.: Lotus LED Lights</b>	<b>SUR.: 0.15</b>	<b>Shielding Angle:</b>

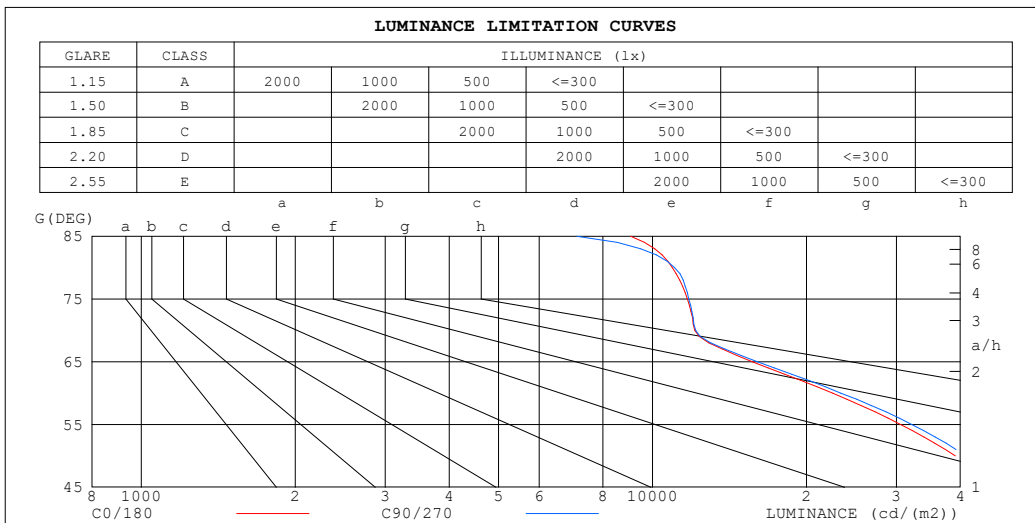

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9066	7119
80	10932	11046
75	11695	11774
70	12095	12142
65	15680	16042
60	22514	23344
55	30579	32156
50	39138	40997
45	47684	49470


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.38V I:0.1701A P:19.982W PF:0.9841 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:2580.33x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.99	.96	.97	.95	.93	.94	.92	.91	.89
2.0	.96	.91	.86	.95	.90	.85	.91	.87	.83	.88	.85	.82	.85	.82	.80	.78
3.0	.87	.80	.75	.85	.79	.74	.83	.77	.73	.80	.75	.72	.78	.74	.70	.69
4.0	.79	.71	.65	.77	.70	.65	.75	.69	.64	.73	.68	.63	.71	.66	.63	.61
5.0	.71	.64	.58	.70	.63	.58	.68	.62	.57	.66	.61	.57	.65	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.52	.63	.56	.51	.61	.55	.51	.60	.54	.50	.48
7.0	.60	.52	.47	.59	.52	.46	.58	.51	.46	.56	.50	.46	.55	.50	.46	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.43	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.39	.35	.33

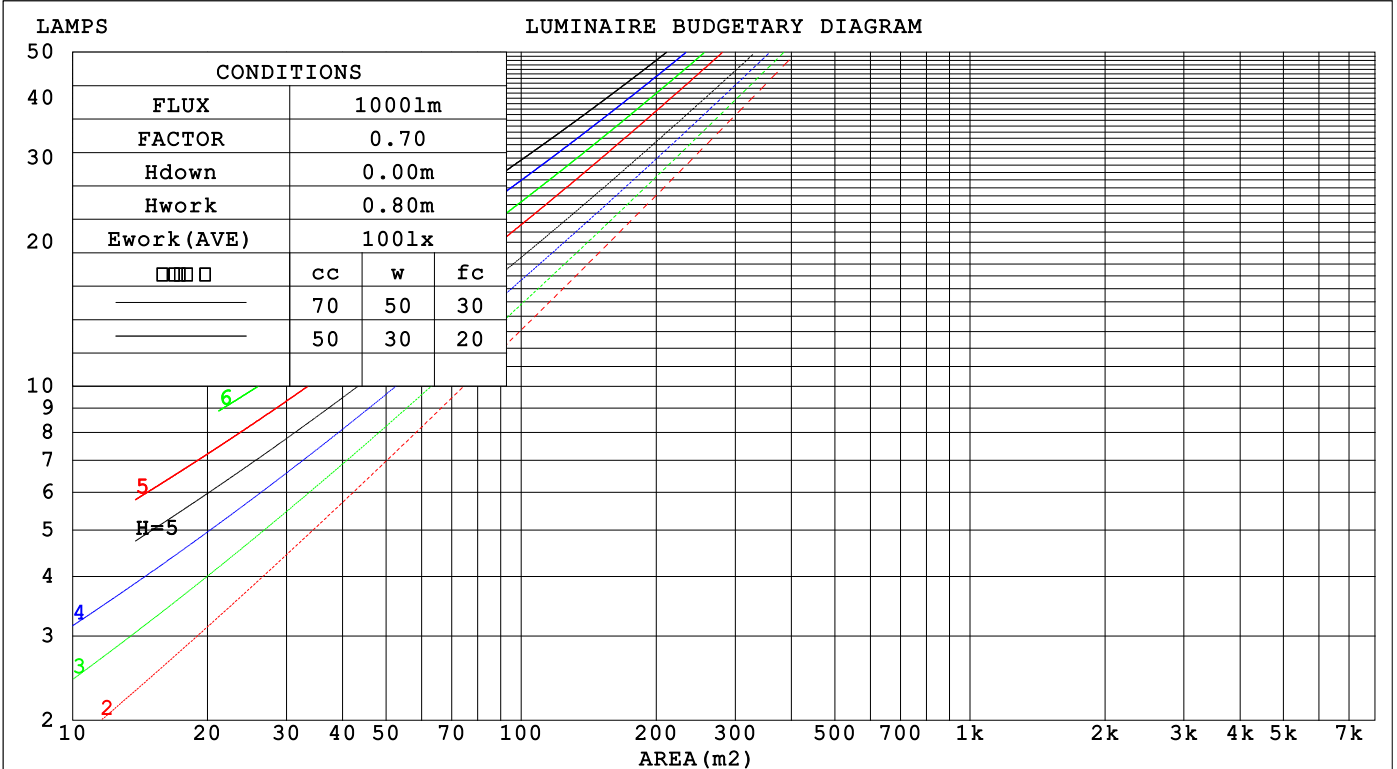

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:119.38V I:0.1701A P:19.982W PF:0.9841 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2580.33x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.242	.138	.044	.235	.134	.043	.222	.128	.041	.211	.121	.039	.200	.116	.037	
2.0	.234	.128	.039	.228	.126	.039	.217	.121	.037	.206	.116	.036	.197	.111	.035	
3.0	.222	.118	.035	.217	.116	.035	.207	.112	.034	.198	.108	.033	.189	.105	.032	
4.0	.209	.109	.032	.205	.107	.032	.196	.104	.031	.188	.101	.030	.181	.098	.030	
5.0	.197	.100	.029	.193	.099	.029	.185	.096	.028	.178	.094	.028	.172	.092	.028	
6.0	.186	.093	.027	.182	.092	.026	.175	.090	.026	.169	.088	.026	.163	.086	.025	
7.0	.175	.087	.025	.172	.086	.024	.166	.084	.024	.160	.082	.024	.155	.080	.024	
8.0	.165	.081	.023	.163	.080	.023	.157	.079	.022	.152	.077	.022	.147	.076	.022	
9.0	.157	.076	.021	.154	.075	.021	.149	.074	.021	.145	.072	.021	.140	.071	.021	
10.0	.149	.071	.020	.146	.071	.020	.142	.069	.020	.138	.068	.019	.134	.067	.019	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.176	.157	.140	.150	.135	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
3.0	.165	.132	.105	.141	.114	.091	.097	.079	.063	.056	.046	.037	.018	.015	.012	
4.0	.155	.114	.081	.133	.098	.070	.091	.068	.049	.053	.040	.029	.017	.013	.010	
5.0	.147	.100	.064	.126	.086	.056	.087	.060	.039	.050	.035	.023	.016	.011	.008	
6.0	.140	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006	
7.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005	
8.0	.126	.074	.036	.109	.064	.032	.075	.045	.023	.044	.026	.013	.014	.009	.004	
9.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.012	.014	.008	.004	
10.0	.115	.063	.027	.099	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.110	.058	.024	.095	.051	.021	.066	.036	.015	.038	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.38V I:0.1701A P:19.982W PF:0.9841 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2580.33x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.0	25.3	24.2	25.5	25.7	24.1	25.4	24.4	25.6	25.8
3H	24.2	25.4	24.5	25.6	25.8	24.3	25.5	24.6	25.7	26.0
4H	24.3	25.4	24.6	25.7	25.9	24.4	25.6	24.7	25.8	26.0
6H	24.4	25.4	24.7	25.7	26.0	24.5	25.6	24.8	25.8	26.1
8H	24.4	25.4	24.7	25.7	26.0	24.5	25.6	24.9	25.8	26.1
12H	24.4	25.4	24.8	25.7	26.0	24.5	25.5	24.9	25.8	26.1
4H 2H	24.1	25.2	24.4	25.4	25.7	24.2	25.3	24.5	25.6	25.8
3H	24.4	25.4	24.7	25.7	25.9	24.5	25.5	24.9	25.8	26.1
4H	24.6	25.5	25.0	25.8	26.1	24.7	25.6	25.1	25.9	26.2
6H	24.8	25.5	25.2	25.9	26.2	24.9	25.7	25.3	26.0	26.4
8H	24.8	25.6	25.2	25.9	26.3	25.0	25.7	25.4	26.0	26.4
12H	24.9	25.5	25.3	25.9	26.3	25.0	25.6	25.4	26.0	26.4
8H 4H	24.6	25.3	25.0	25.7	26.1	24.7	25.4	25.1	25.8	26.2
6H	24.9	25.5	25.3	25.9	26.3	25.0	25.6	25.4	26.0	26.4
8H	25.0	25.5	25.5	25.9	26.4	25.1	25.6	25.6	26.1	26.5
12H	25.1	25.5	25.6	26.0	26.4	25.2	25.6	25.6	26.1	26.5
12H 4H	24.6	25.2	25.0	25.6	26.0	24.7	25.4	25.1	25.7	26.1
6H	24.9	25.4	25.3	25.8	26.3	25.0	25.5	25.5	25.9	26.4
8H	25.0	25.5	25.5	25.9	26.4	25.1	25.6	25.6	26.0	26.5

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.8 / - 1.0	+ 0.7 / - 1.0
1.5H	+ 0.4 / - 0.4	+ 0.4 / - 0.4
2.0H	+ 1.7 / - 1.8	+ 1.7 / - 1.9

CIE Pub.117, 2580 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.3)  
 Area: 0.018 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-03	Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.38V I:0.1701A P:19.982W PF:0.9841 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2580.33x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	46
0.80	78	68	62	77	68	62	75	67	62	56
1.00	86	77	71	84	76	71	82	77	70	64
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	88	83	95	88	83	92	86	82	75
2.00	101	95	90	100	94	89	97	92	88	81
2.50	104	98	94	102	97	93	99	94	91	84
3.00	107	102	97	105	100	96	101	97	94	87
4.00	110	105	102	107	104	100	104	100	98	90
5.00	111	108	105	109	106	103	105	102	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.38V I:0.1701A P:19.982W PF:0.9841 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2580.33x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

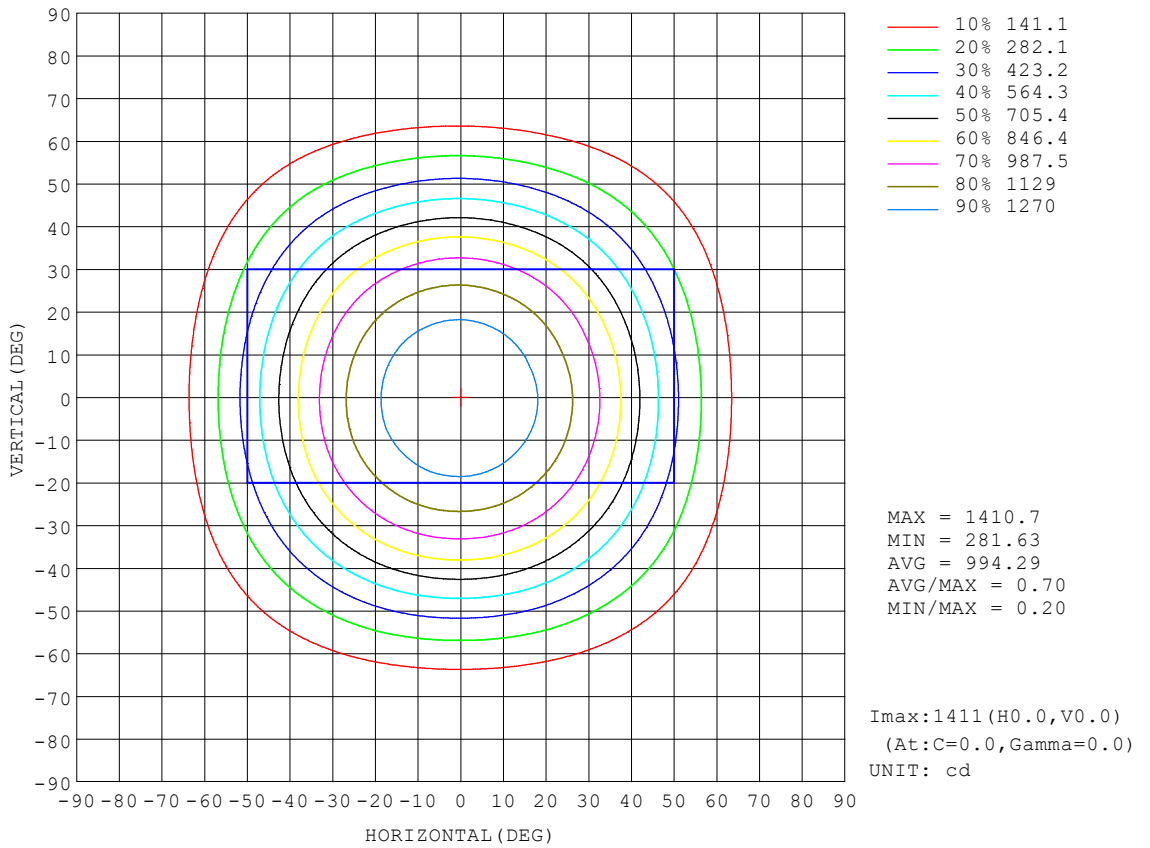

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03


Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.38V I:0.1701A P:19.982W PF:0.9841 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2580.33x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

Flux out:1771 lm

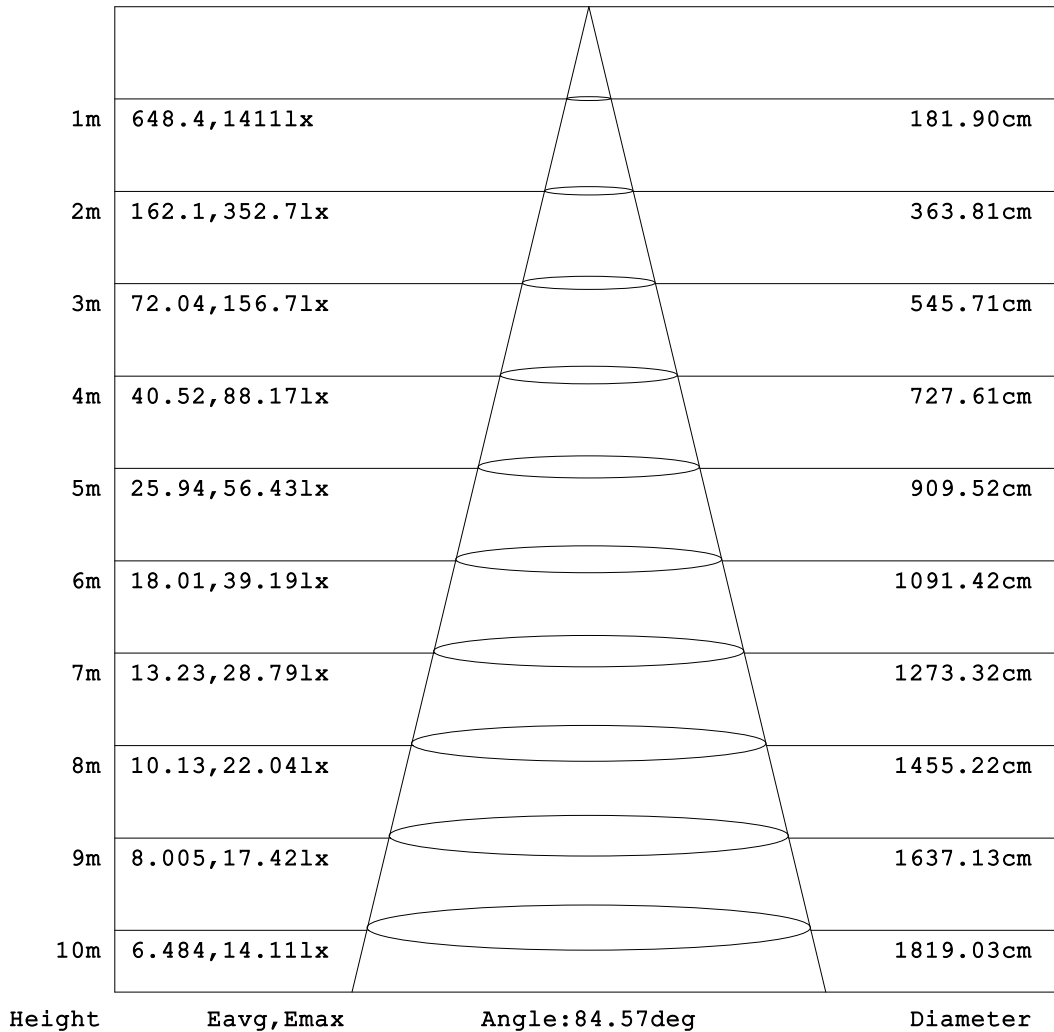


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.38V I:0.1701A P:19.982W PF:0.9841 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2580.33x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

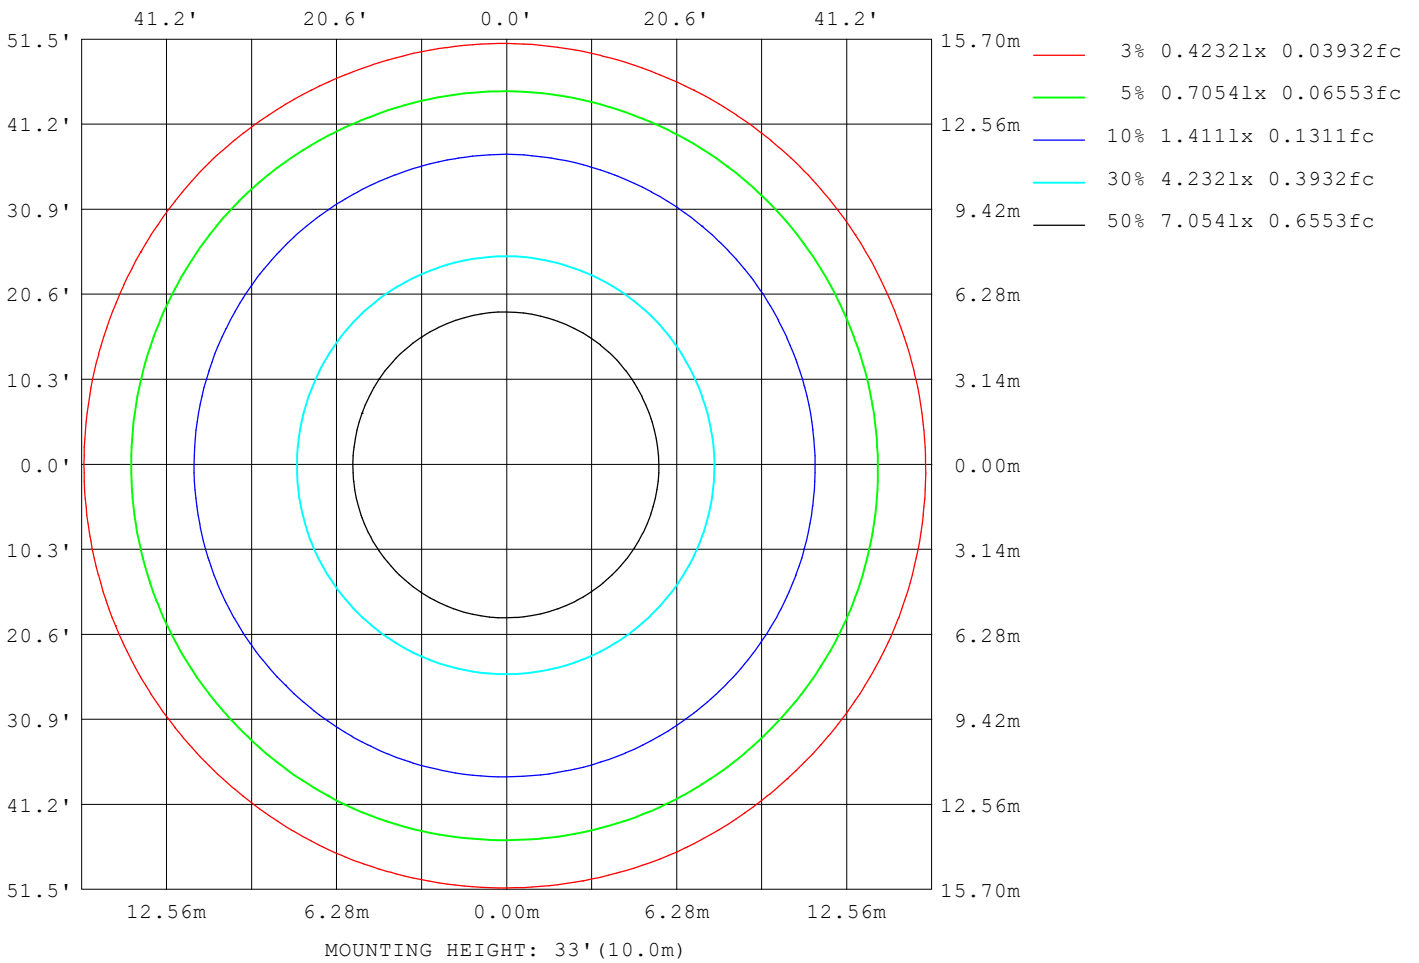

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.38V I:0.1701A P:19.982W PF:0.9841 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2580.33x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	15819
L_0~180 (75) av	11781
L_0~180 (85) av	9270
L_90~270 (65) av	15905
L_90~270 (75) av	11825
L_90~270 (85) av	7161
L_45 (65) av	15852
L_45 (75) av	11847
L_45 (85) av	7785

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

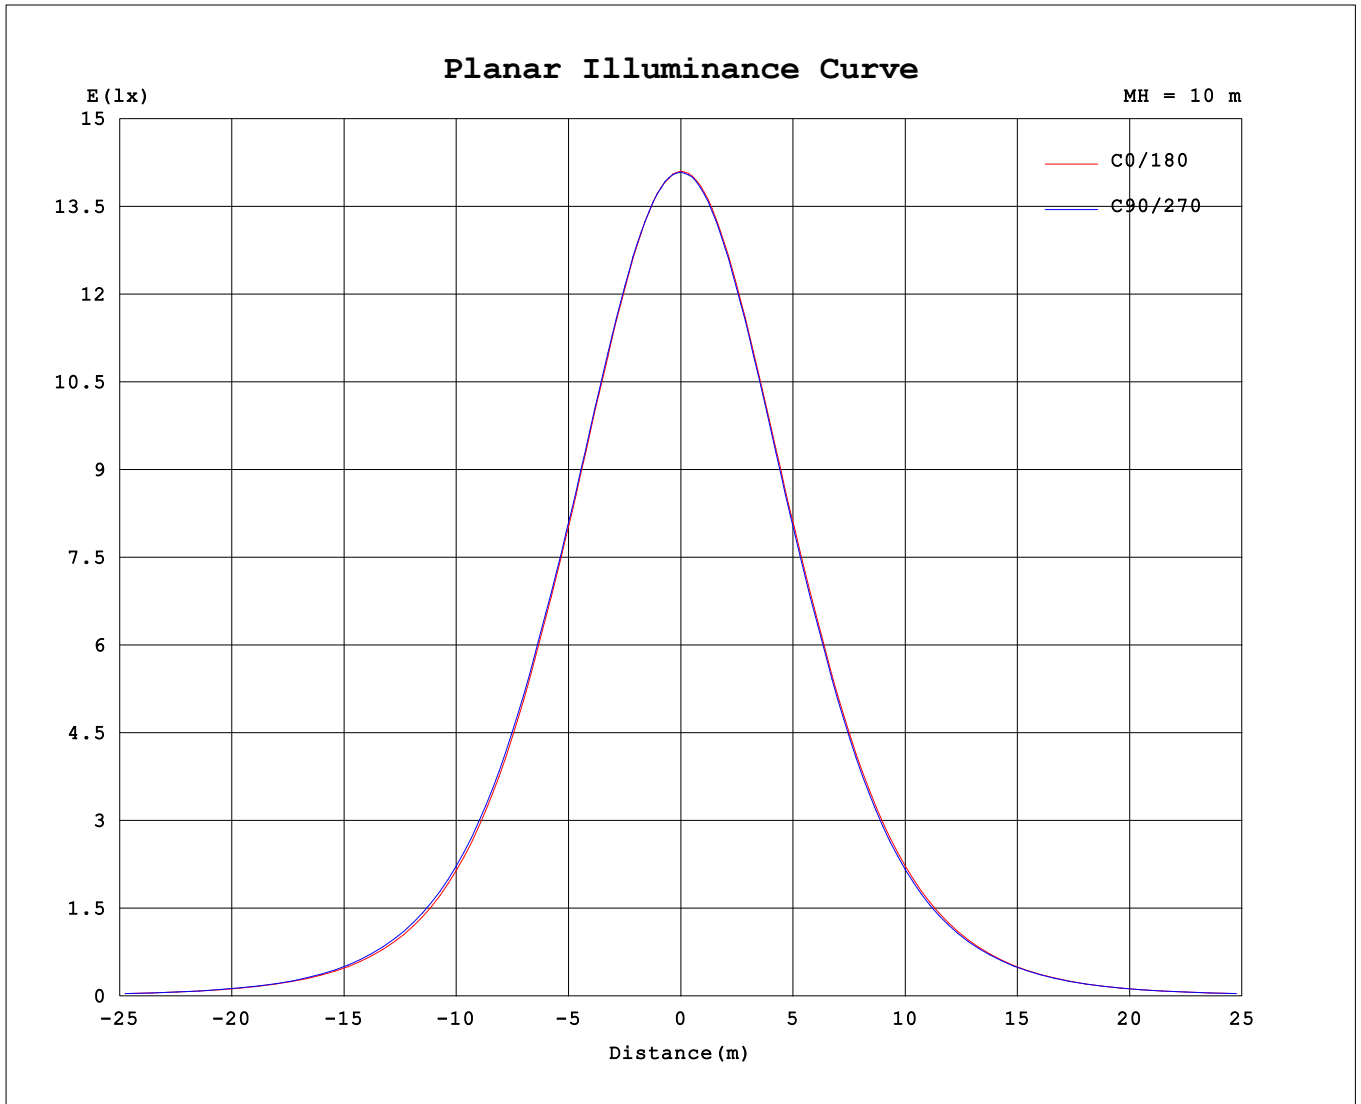

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

**LUMINOUS DISTRIBUTION INTENSITY DATA**

Test:U:119.38V I:0.1701A P:19.982W PF:0.9841 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2580.33x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	C (DEG)															
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5
0	1411	1410	1410	1408	1409	1408	1408	1407	1411	1410	1410	1408	1409	1408	1408	1407
5	1398	1399	1398	1398	1397	1398	1399	1399	1402	1401	1400	1398	1398	1397	1396	1395
10	1366	1366	1366	1367	1368	1370	1369	1370	1370	1370	1369	1368	1366	1363	1362	1361
15	1313	1313	1314	1316	1318	1318	1321	1323	1319	1318	1318	1315	1313	1309	1308	1307
20	1240	1242	1243	1246	1246	1250	1252	1254	1249	1248	1247	1243	1242	1238	1235	1234
25	1153	1155	1157	1159	1160	1164	1166	1168	1163	1162	1161	1156	1153	1150	1147	1145
30	1051	1054	1056	1060	1062	1066	1067	1068	1063	1059	1059	1054	1050	1046	1045	1042
35	921	927	930	936	938	941	941	942	936	932	931	925	922	918	916	913
40	769	775	778	786	788	792	792	793	787	782	779	774	771	766	762	760
45	607	614	619	628	630	634	632	634	630	624	621	615	613	606	604	601
50	453	461	466	474	474	478	476	476	474	471	469	461	460	453	450	447
55	316	323	325	331	332	336	332	331	330	330	331	323	322	316	313	310
60	203	206	206	210	210	212	210	209	208	209	211	208	205	200	199	199
65	119	120	120	122	122	123	122	122	121	121	122	121	120	118	118	119
70	74.5	74.5	74.2	74.7	74.8	75.2	75.2	75.4	75.6	75.2	75.2	74.9	75.0	74.8	74.7	74.5
75	54.5	54.4	54.5	55.0	54.9	55.3	55.3	55.4	55.3	55.1	55.5	55.3	55.3	55.3	55.4	55.2
80	34.2	34.1	34.1	34.9	34.5	35.1	35.4	35.2	34.9	34.8	31.1	34.7	34.4	34.5	35.6	35.4
85	14.2	13.9	12.1	12.2	11.2	12.2	13.8	15.0	14.9	14.1	9.16	11.8	11.3	11.8	13.8	15.1
90	0.69	0.66	0.66	0.63	0.61	0.58	0.64	0.62	1.10	1.19	1.12	1.16	1.15	1.18	1.16	1.16

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks: