
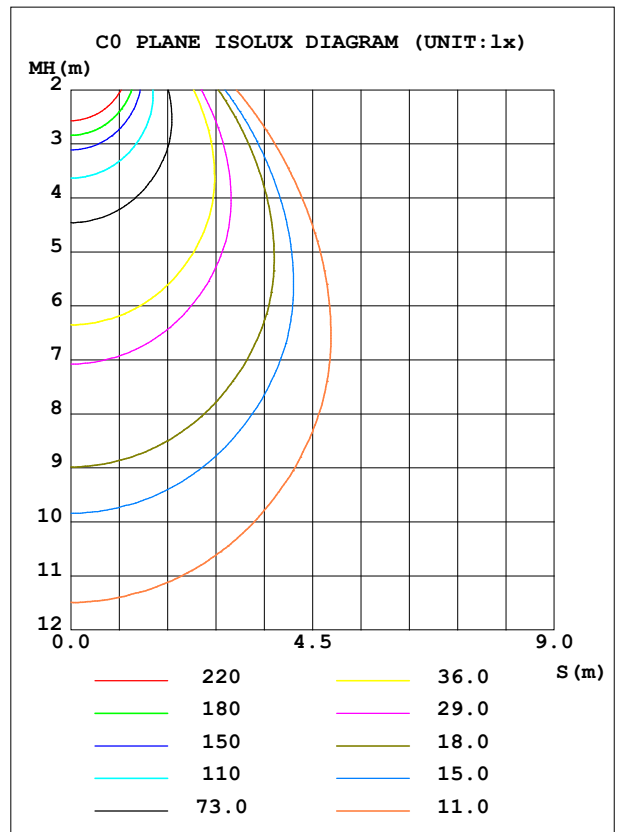


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.27V I:0.1716A P:20.139W PF:0.9843 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2650.34x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-6-30W-M-A5C5-HO	Imax (cd)	1453	S/MH (C0/180)	1.13
NOMINAL POWER (W)	22	LOR (%)	100.0	S/MH (C90/270)	1.13
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2650.3	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	2650.34	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

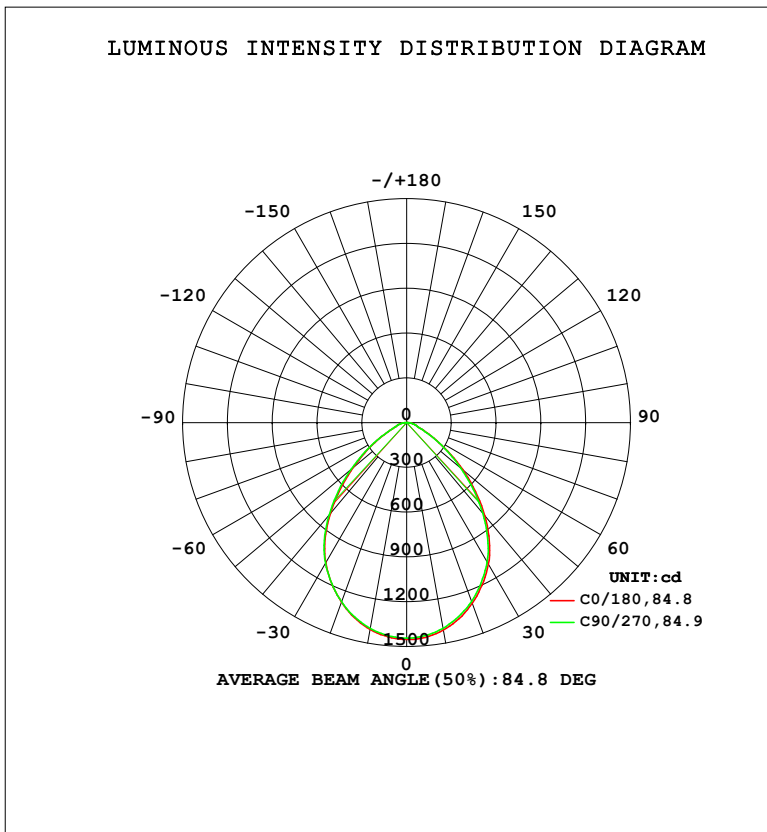

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1407	1402	1400	1402	1412	1405	1399	1394	0- 10	135.9	135.9	5.13,5.13
20	1278	1275	1277	1280	1288	1282	1273	1266	10- 20	379.5	515.4	19.4,19.4
30	1084	1084	1088	1092	1095	1088	1079	1071	20- 30	545.8	1061	40,40
40	795.7	800.3	809.6	812.7	814.2	805.3	794.2	784.1	30- 40	594.0	1655	62.5,62.5
50	467.3	478.5	485.9	486.0	490.0	483.5	473.7	462.6	40- 50	490.9	2146	81,81
60	208.0	210.3	214.4	214.3	213.3	216.5	209.6	202.9	50- 60	299.7	2446	92.3,92.3
70	77.17	76.67	77.00	77.44	78.41	77.88	77.37	76.92	60- 70	128.8	2575	97.1,97.1
80	35.42	35.21	35.64	36.44	36.17	32.06	35.46	36.78	70- 80	59.86	2634	99.4,99.4
90	0.7014	0.6752	0.6424	0.6424	1.147	1.160	1.173	1.187	80- 90	15.97	2650	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1921.3 lm

%lum = 72.5%

%lamp = 72.5%

Conical surface Flux(130deg): 2525.5 lm

%lum = 95.3%


%lamp = 95.3%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

<b>Test:U:119.27V I:0.1716A P:20.139W PF:0.9843 Freq:60.01Hz</b> <b>UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2650.34x1 lm</b>		
<b>NAME: DL254-6-30W-M-A5C5-HO</b>	<b>TYPE: 22W</b>	<b>WEIGHT:</b>
<b>SPEC.: 5000K</b>	<b>DIM.: 0.21</b>	<b>SERIAL No.: 1</b>
<b>MFR.: Lotus LED Lights</b>	<b>SUR.: 0.15</b>	<b>Shielding Angle:</b>

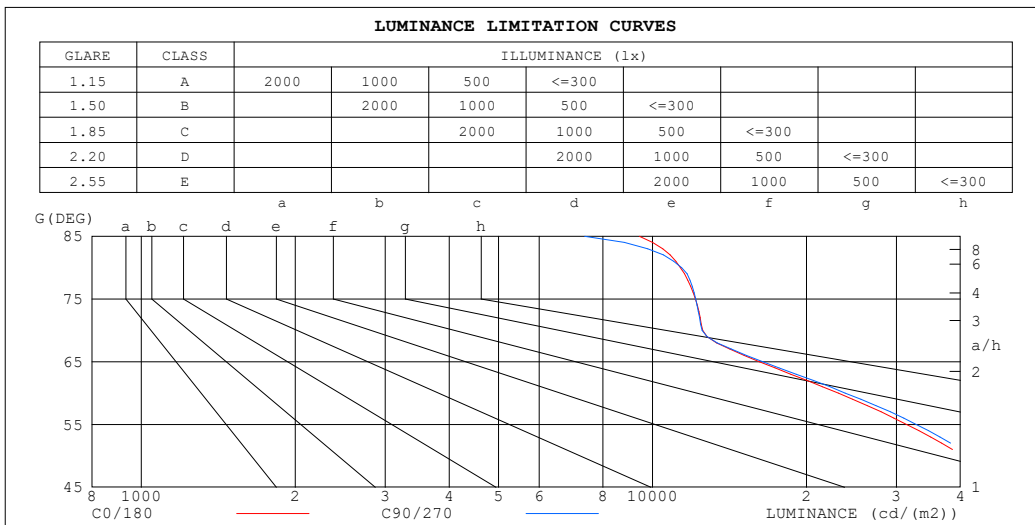

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9423	7363
80	11331	11402
75	12122	12143
70	12535	12508
65	16184	16432
60	23110	23827
55	31437	32814
50	40384	41998
45	49312	50716


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.27V I:0.1716A P:20.139W PF:0.9843 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:2650.34x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.99	.96	.97	.95	.93	.94	.92	.91	.89
2.0	.96	.91	.86	.95	.90	.85	.91	.87	.83	.88	.85	.82	.85	.82	.80	.78
3.0	.87	.80	.75	.85	.79	.74	.83	.77	.73	.80	.75	.72	.78	.74	.70	.69
4.0	.79	.71	.65	.77	.70	.65	.75	.69	.64	.73	.68	.63	.71	.66	.63	.61
5.0	.71	.64	.58	.70	.63	.58	.68	.62	.57	.66	.61	.57	.65	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.52	.63	.56	.51	.61	.55	.51	.60	.54	.50	.48
7.0	.60	.52	.47	.59	.52	.46	.58	.51	.46	.56	.50	.46	.55	.50	.46	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.43	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.39	.35	.33

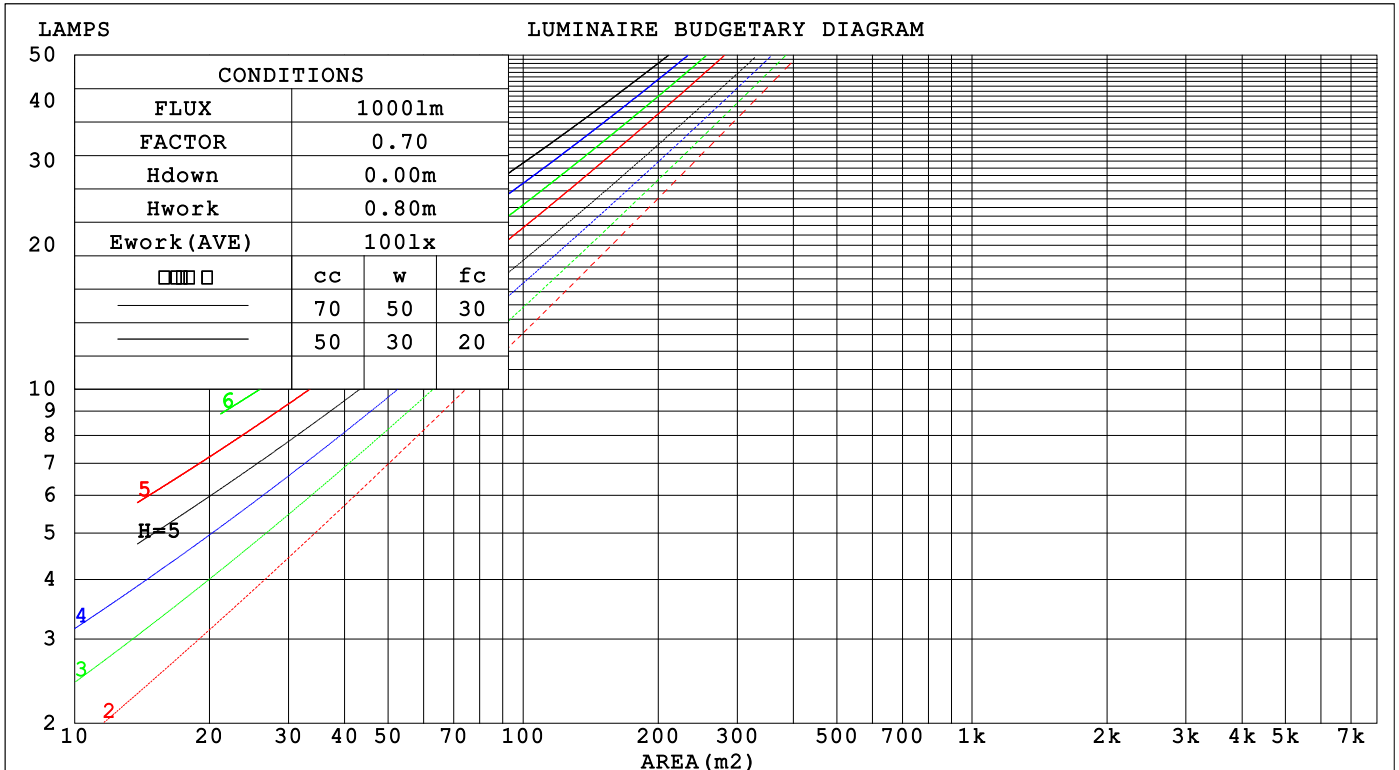

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:119.27V I:0.1716A P:20.139W PF:0.9843 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2650.34x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.242	.138	.044	.235	.134	.043	.223	.128	.041	.211	.121	.039	.200	.116	.037	
2.0	.234	.128	.039	.228	.126	.039	.217	.121	.037	.207	.116	.036	.197	.111	.035	
3.0	.222	.118	.035	.217	.116	.035	.207	.112	.034	.198	.108	.033	.189	.105	.032	
4.0	.209	.109	.032	.205	.107	.032	.196	.104	.031	.188	.101	.030	.181	.098	.030	
5.0	.197	.100	.029	.193	.099	.029	.185	.097	.028	.178	.094	.028	.172	.092	.028	
6.0	.186	.093	.027	.182	.092	.026	.175	.090	.026	.169	.088	.026	.163	.086	.025	
7.0	.175	.087	.025	.172	.086	.024	.166	.084	.024	.160	.082	.024	.155	.080	.024	
8.0	.165	.081	.023	.163	.080	.023	.157	.079	.022	.152	.077	.022	.147	.076	.022	
9.0	.157	.076	.021	.154	.075	.021	.149	.074	.021	.145	.072	.021	.140	.071	.021	
10.0	.149	.071	.020	.146	.071	.020	.142	.069	.020	.138	.068	.019	.134	.067	.019	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.176	.157	.140	.150	.135	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
3.0	.165	.132	.105	.141	.114	.091	.097	.079	.063	.056	.046	.037	.018	.015	.012	
4.0	.155	.114	.081	.133	.098	.070	.091	.068	.049	.053	.040	.029	.017	.013	.010	
5.0	.147	.100	.064	.126	.086	.056	.087	.060	.039	.050	.035	.023	.016	.011	.008	
6.0	.140	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006	
7.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005	
8.0	.126	.074	.036	.109	.064	.032	.075	.045	.022	.044	.026	.013	.014	.009	.004	
9.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.012	.014	.008	.004	
10.0	.115	.063	.027	.099	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.110	.058	.024	.095	.051	.021	.066	.036	.015	.038	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.27V I:0.1716A P:20.139W PF:0.9843 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2650.34x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.1	25.4	24.3	25.6	25.8	24.2	25.5	24.5	25.7	25.9
3H	24.3	25.5	24.6	25.7	25.9	24.4	25.6	24.7	25.8	26.0
4H	24.4	25.5	24.7	25.8	26.0	24.5	25.6	24.8	25.9	26.1
6H	24.5	25.6	24.8	25.8	26.1	24.6	25.7	24.9	25.9	26.2
8H	24.5	25.5	24.9	25.8	26.1	24.6	25.6	25.0	25.9	26.2
12H	24.5	25.5	24.9	25.8	26.1	24.6	25.6	25.0	25.9	26.2
4H 2H	24.2	25.3	24.5	25.5	25.8	24.3	25.4	24.6	25.6	25.9
3H	24.5	25.5	24.8	25.8	26.1	24.6	25.6	24.9	25.9	26.1
4H	24.7	25.6	25.1	25.9	26.2	24.8	25.7	25.2	26.0	26.3
6H	24.9	25.7	25.3	26.0	26.4	25.0	25.8	25.4	26.1	26.5
8H	25.0	25.7	25.4	26.0	26.4	25.0	25.8	25.4	26.1	26.5
12H	25.0	25.6	25.4	26.0	26.4	25.1	25.7	25.5	26.1	26.5
8H 4H	24.7	25.4	25.1	25.8	26.2	24.8	25.5	25.2	25.9	26.3
6H	25.0	25.6	25.4	26.0	26.4	25.1	25.7	25.5	26.1	26.5
8H	25.1	25.6	25.6	26.1	26.5	25.2	25.7	25.7	26.1	26.6
12H	25.2	25.7	25.7	26.1	26.6	25.3	25.7	25.7	26.1	26.6
12H 4H	24.7	25.4	25.1	25.7	26.1	24.8	25.4	25.2	25.8	26.2
6H	25.0	25.5	25.5	26.0	26.4	25.1	25.6	25.5	26.0	26.5
8H	25.2	25.6	25.6	26.0	26.5	25.2	25.7	25.7	26.1	26.6

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.8 / - 1.0	+ 0.8 / - 1.0
1.5H	+ 0.4 / - 0.4	+ 0.4 / - 0.4
2.0H	+ 1.7 / - 1.8	+ 1.7 / - 1.9

CIE Pub.117, 2650 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.4)  
 Area: 0.018 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-07-03	Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.27V I:0.1716A P:20.139W PF:0.9843 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2650.34x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	46
0.80	78	68	62	77	68	62	75	67	62	56
1.00	86	77	71	84	76	71	82	77	70	64
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	88	83	95	88	83	92	86	82	75
2.00	101	95	90	100	94	89	97	92	88	81
2.50	104	98	94	102	97	93	99	94	91	84
3.00	107	102	97	105	100	96	101	97	94	87
4.00	110	105	102	107	104	100	104	100	98	90
5.00	111	108	105	109	106	103	105	102	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.27V I:0.1716A P:20.139W PF:0.9843 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2650.34x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

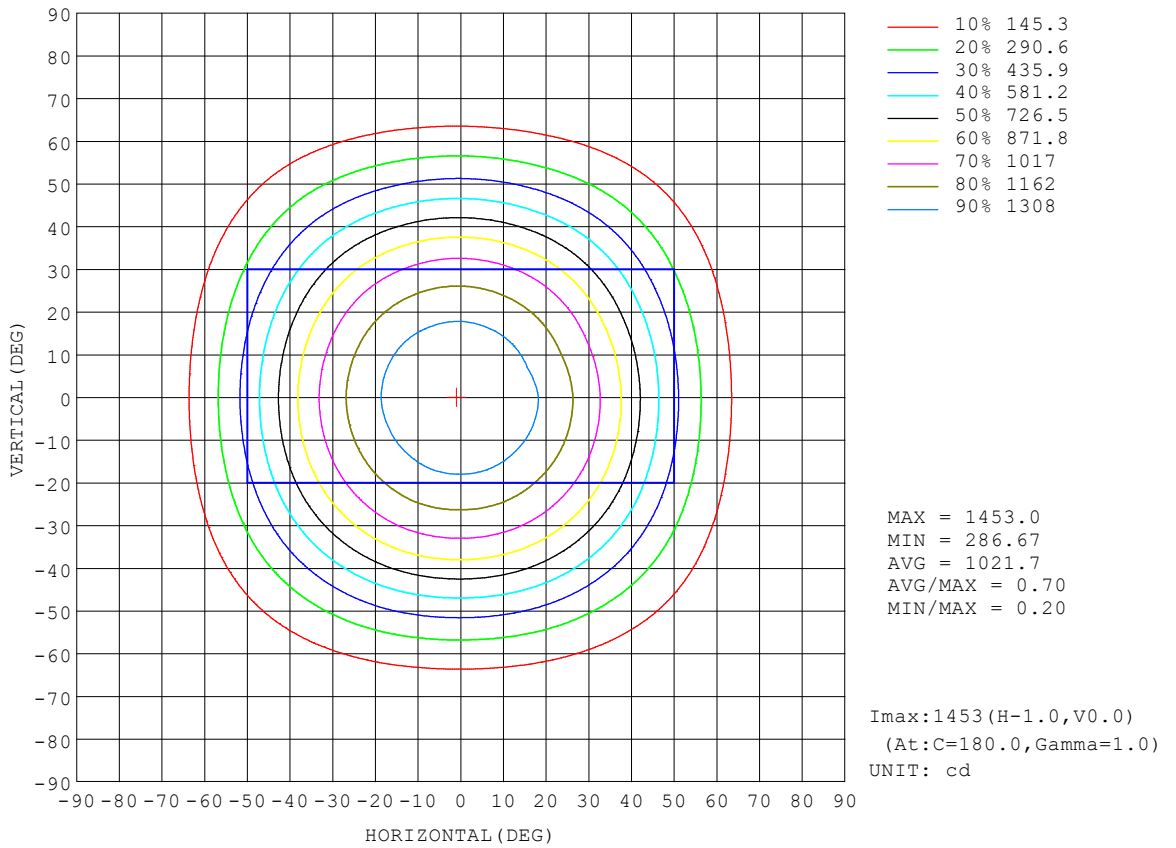


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.27V I:0.1716A P:20.139W PF:0.9843 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2650.34x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

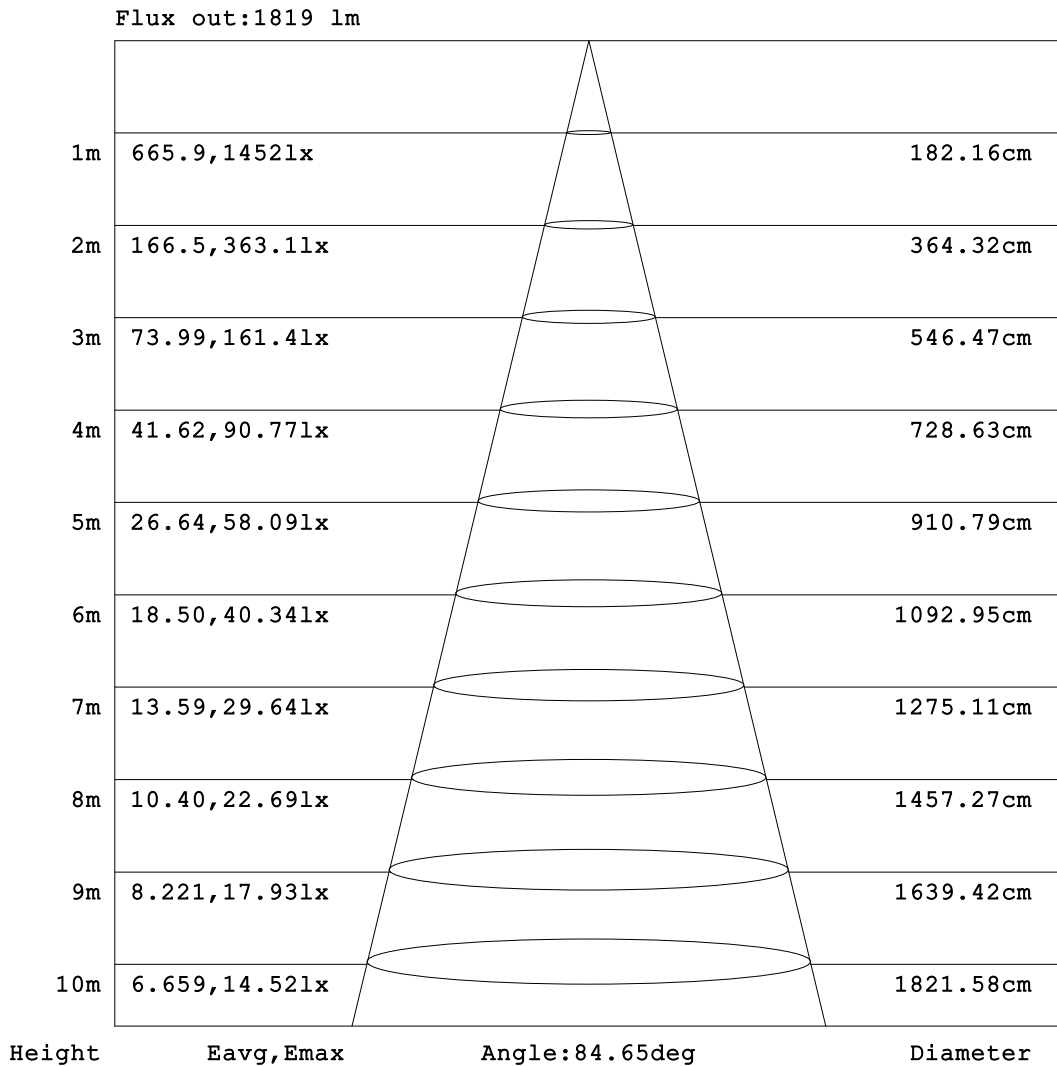


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.27V I:0.1716A P:20.139W PF:0.9843 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2650.34x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

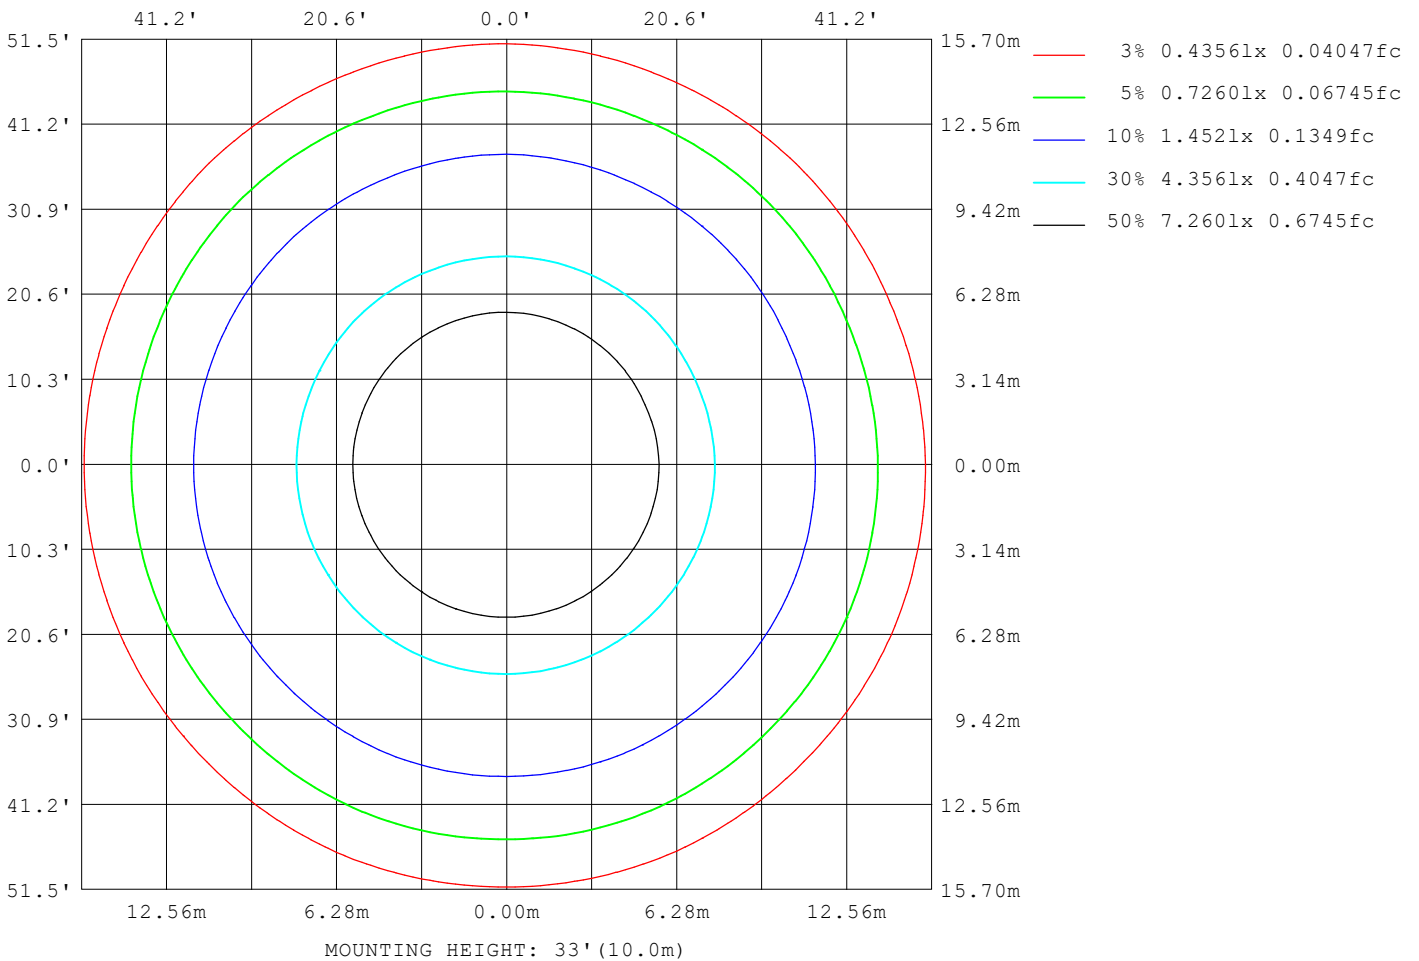

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.27V I:0.1716A P:20.139W PF:0.9843 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2650.34x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	16337
L_0~180 (75) av	12217
L_0~180 (85) av	9622
L_90~270 (65) av	16315
L_90~270 (75) av	12196
L_90~270 (85) av	7403
L_45 (65) av	16287
L_45 (75) av	12230
L_45 (85) av	8000

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

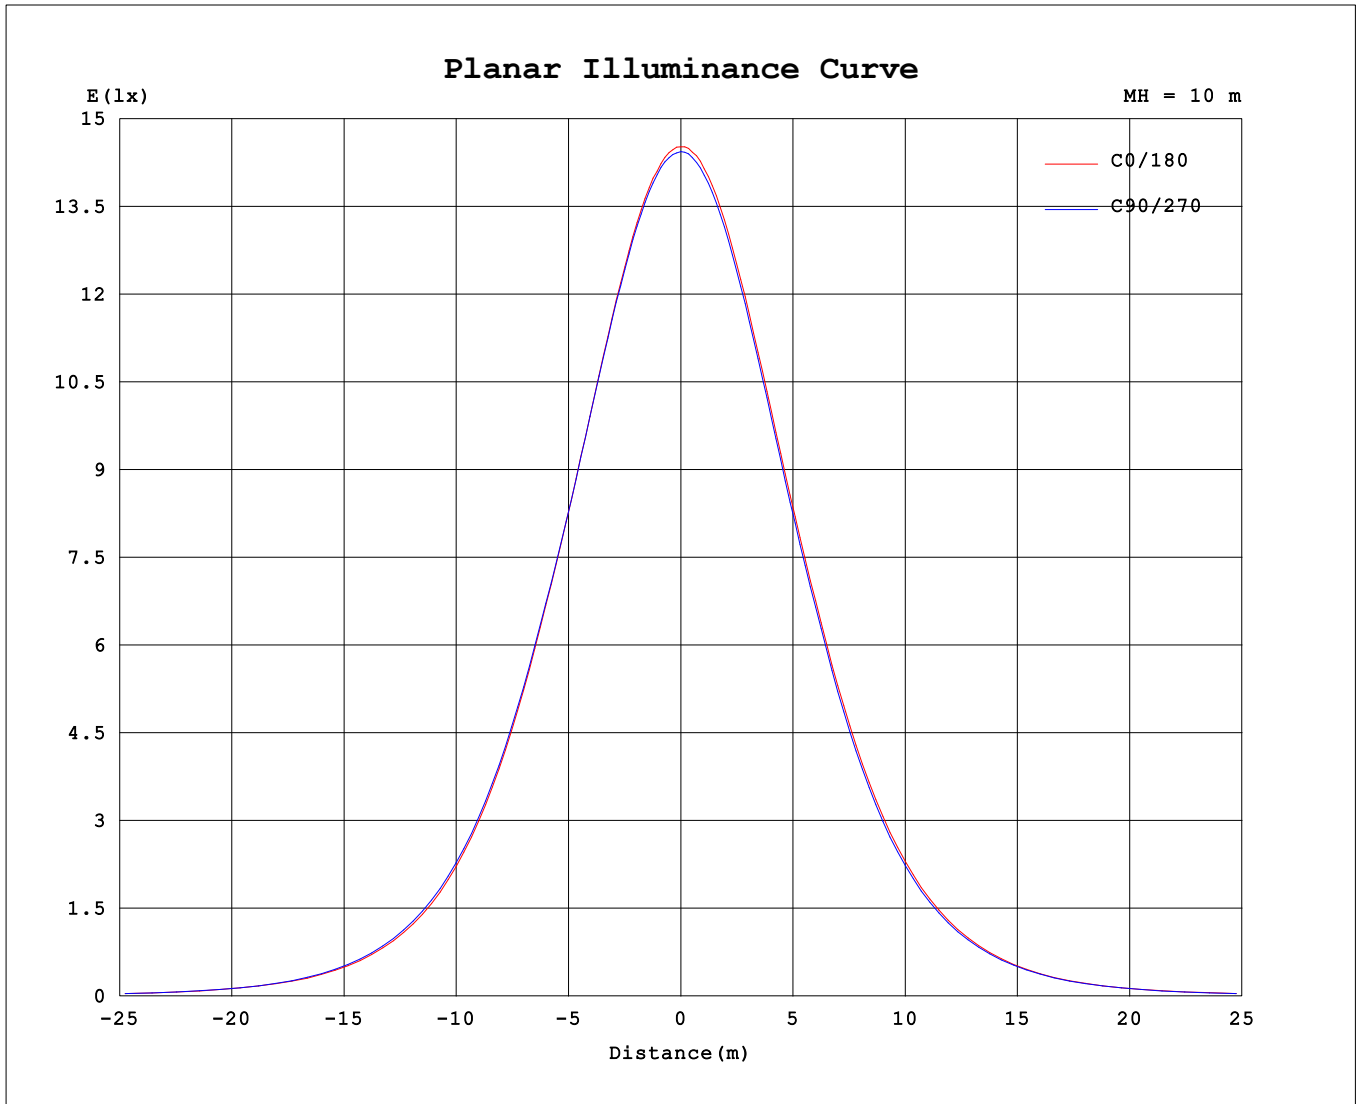

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-07-03

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.27V I:0.1716A P:20.139W PF:0.9843 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2650.34x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 5000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1452	1450	1447	1445	1444	1441	1440	1440	1452	1450	1447	1445	1444	1441	1440	1440			
5	1440	1438	1435	1434	1434	1432	1431	1432	1444	1438	1438	1434	1432	1429	1428	1426			
10	1407	1406	1402	1402	1400	1402	1402	1402	1412	1407	1405	1401	1399	1396	1394	1392			
15	1353	1351	1348	1349	1348	1350	1350	1352	1359	1355	1354	1348	1346	1341	1339	1336			
20	1278	1278	1275	1277	1277	1279	1280	1281	1288	1284	1282	1276	1273	1267	1266	1262			
25	1190	1188	1186	1189	1188	1192	1192	1194	1199	1194	1192	1186	1183	1176	1175	1172			
30	1084	1085	1084	1088	1088	1091	1092	1093	1095	1091	1088	1083	1079	1073	1071	1068			
35	953	957	956	960	962	965	964	966	966	960	958	952	947	943	940	937			
40	796	799	800	808	810	813	813	815	814	807	805	797	794	788	784	780			
45	628	633	637	646	646	650	648	652	652	645	642	634	632	624	622	617			
50	467	475	479	485	486	490	486	489	490	485	484	475	474	466	463	458			
55	325	332	332	339	339	343	338	338	340	338	340	332	330	323	320	317			
60	208	211	210	214	214	216	214	214	213	213	217	213	210	204	203	203			
65	123	124	123	125	125	126	125	125	125	124	125	124	123	121	122	122			
70	77.2	77.2	76.7	77.0	77.0	77.6	77.4	77.7	78.4	77.9	77.9	77.3	77.4	76.9	76.9	76.7			
75	56.5	56.3	56.3	56.7	56.6	57.0	56.9	57.2	57.4	57.0	57.4	57.1	57.1	57.0	57.2	56.7			
80	35.4	35.3	35.2	36.0	35.6	36.2	36.4	36.2	36.2	35.9	32.1	35.8	35.5	35.5	36.8	36.4			
85	14.8	14.4	12.4	12.6	11.6	12.7	14.2	15.4	15.4	14.5	9.24	12.2	11.7	12.1	14.3	15.5			
90	0.70	0.68	0.68	0.65	0.64	0.60	0.64	0.64	1.15	1.21	1.16	1.19	1.17	1.20	1.19	1.19			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-07-03

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks: