
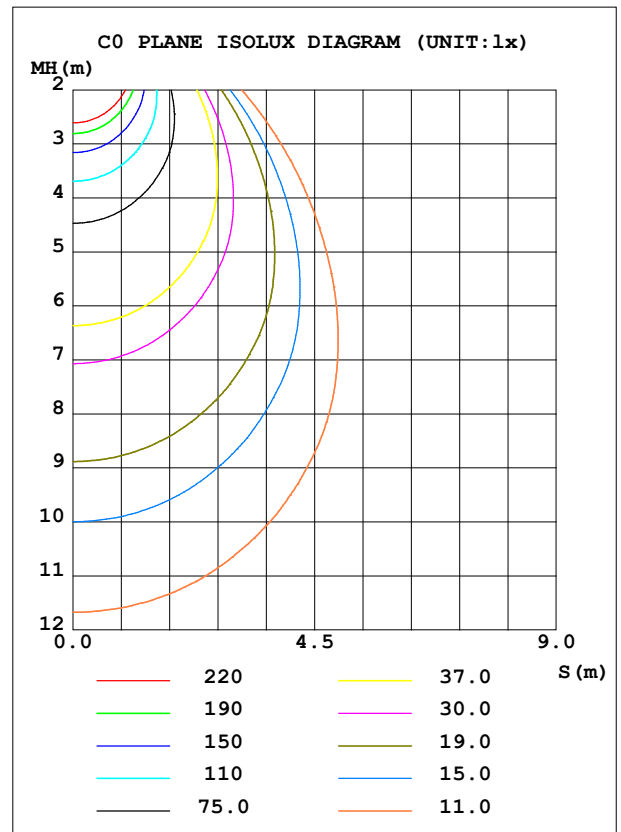


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.57V I:0.2000A P:23.666W PF:0.9896 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2750.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-6-30W-M-A5C5-HO	Imax (cd)	1502	S/MH (C0/180)	1.14
NOMINAL POWER (W)	26	LOR (%)	100.0	S/MH (C90/270)	1.14
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2750.9	<input type="checkbox"/> UP, DN (C0-180)	0.0,49.7
NOMINAL FLUX (lm)	2750.92	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0,50.3
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

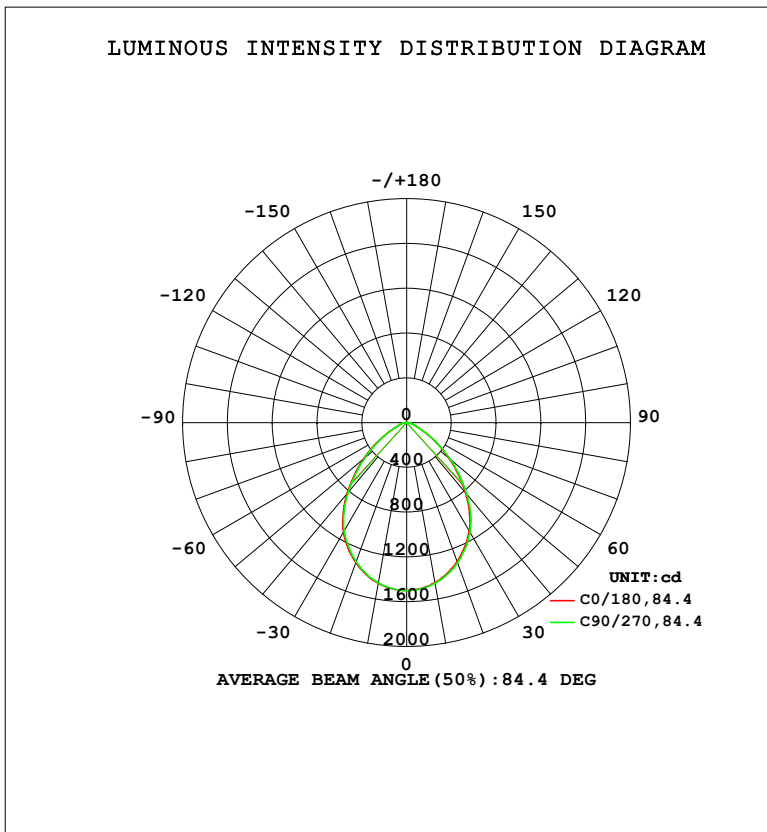

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1458	1456	1453	1454	1451	1456	1459	1459	0- 10	141.1	141.1	5.13,5.13
20	1331	1324	1322	1322	1320	1328	1332	1332	10- 20	394.3	535.4	19.5,19.5
30	1131	1122	1117	1119	1119	1127	1132	1132	20- 30	567.1	1102	40.1,40.1
40	829.5	817.9	812.9	815.2	818.0	833.4	837.2	836.2	30- 40	613.5	1716	62.4,62.4
50	500.5	488.1	483.9	483.8	492.3	507.8	507.9	503.9	40- 50	506.2	2222	80.8,80.8
60	224.1	221.7	215.2	217.7	226.1	233.6	232.6	225.8	50- 60	314.7	2537	92.2,92.2
70	78.30	77.80	78.20	79.26	80.27	81.13	80.79	79.74	60- 70	136.3	2673	97.2,97.2
80	35.11	36.23	36.29	37.24	37.58	37.96	36.64	36.62	70- 80	61.45	2735	99.4,99.4
90	0.6948	0.7276	0.6686	0.6883	1.239	1.186	1.193	1.186	80- 90	16.34	2751	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1989.9 lm

%lum = 72.3%

%lamp = 72.3%

Conical surface Flux(130deg): 2621.8 lm

%lum = 95.3%


%lamp = 95.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.57V I:0.2000A P:23.666W PF:0.9896 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2750.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

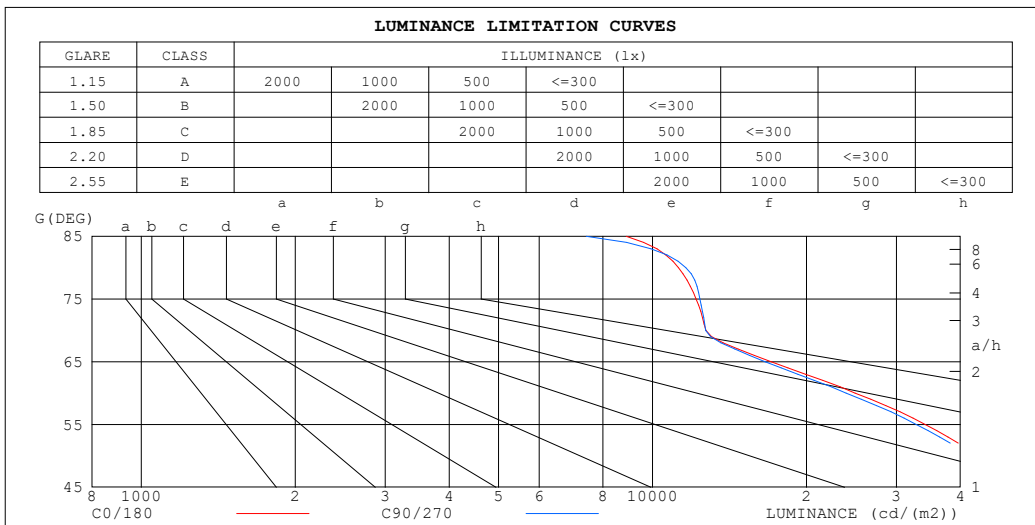

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8890	7417
80	11232	11611
75	12167	12378
70	12718	12702
65	17060	16600
60	24898	23914
55	34161	32827
50	43261	41827
45	51942	50564


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.57V I:0.2000A P:23.666W PF:0.9896 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:2750.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.99	.96	.97	.95	.93	.94	.92	.91	.89
2.0	.96	.91	.86	.95	.90	.85	.91	.87	.83	.88	.85	.82	.85	.82	.80	.78
3.0	.87	.80	.75	.85	.79	.74	.83	.77	.73	.80	.75	.72	.77	.74	.70	.69
4.0	.79	.71	.65	.77	.70	.65	.75	.69	.64	.73	.68	.63	.71	.66	.63	.61
5.0	.71	.64	.58	.70	.63	.58	.68	.62	.57	.66	.61	.56	.65	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.51	.63	.56	.51	.61	.55	.51	.59	.54	.50	.48
7.0	.60	.52	.47	.59	.52	.46	.58	.51	.46	.56	.50	.46	.55	.50	.45	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.43	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.39	.35	.33

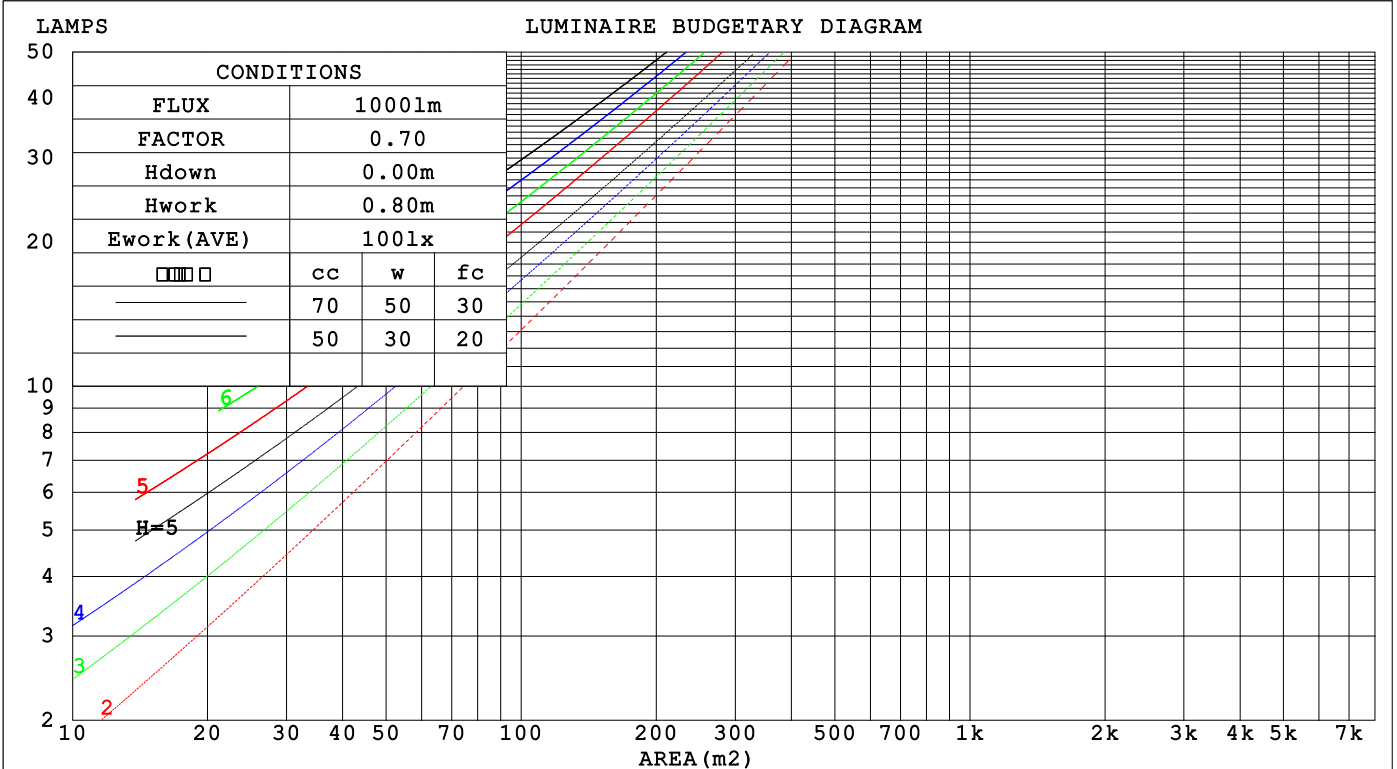

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.57V I:0.2000A P:23.666W PF:0.9896 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2750.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.242	.138	.044	.236	.134	.043	.223	.128	.041	.211	.122	.039	.200	.116	.037	
2.0	.234	.128	.039	.228	.126	.039	.217	.121	.037	.207	.116	.036	.197	.112	.035	
3.0	.222	.118	.035	.217	.116	.035	.207	.112	.034	.198	.108	.033	.190	.105	.032	
4.0	.209	.109	.032	.205	.107	.032	.196	.104	.031	.188	.101	.030	.181	.098	.030	
5.0	.197	.100	.029	.193	.099	.029	.185	.097	.028	.178	.094	.028	.172	.092	.028	
6.0	.186	.093	.027	.182	.092	.026	.175	.090	.026	.169	.088	.026	.163	.086	.026	
7.0	.175	.087	.025	.172	.086	.024	.166	.084	.024	.160	.082	.024	.155	.081	.024	
8.0	.166	.081	.023	.163	.080	.023	.157	.079	.022	.152	.077	.022	.147	.076	.022	
9.0	.157	.076	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021	.140	.071	.021	
10.0	.149	.071	.020	.146	.071	.020	.142	.070	.020	.138	.068	.019	.134	.067	.019	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.176	.157	.140	.150	.135	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
3.0	.165	.132	.105	.141	.114	.091	.097	.079	.063	.056	.046	.037	.018	.015	.012	
4.0	.155	.114	.081	.133	.098	.070	.091	.068	.049	.053	.040	.029	.017	.013	.010	
5.0	.147	.100	.064	.126	.086	.056	.087	.060	.039	.050	.035	.023	.016	.011	.008	
6.0	.140	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006	
7.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005	
8.0	.126	.074	.036	.109	.064	.032	.075	.045	.022	.044	.026	.013	.014	.009	.004	
9.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.012	.014	.008	.004	
10.0	.115	.063	.027	.099	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.110	.058	.024	.095	.051	.021	.066	.036	.015	.038	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.57V I:0.2000A P:23.666W PF:0.9896 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2750.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.3	25.6	24.6	25.8	26.0	24.2	25.5	24.4	25.7	25.8
3H	24.5	25.7	24.8	25.9	26.1	24.4	25.6	24.7	25.8	26.0
4H	24.6	25.7	24.9	26.0	26.2	24.5	25.6	24.8	25.8	26.1
6H	24.7	25.7	25.0	26.0	26.3	24.6	25.6	24.9	25.9	26.2
8H	24.7	25.7	25.0	26.0	26.3	24.6	25.6	24.9	25.9	26.2
12H	24.7	25.7	25.0	25.9	26.2	24.6	25.6	24.9	25.8	26.1
4H 2H	24.4	25.5	24.7	25.7	26.0	24.3	25.4	24.6	25.6	25.9
3H	24.7	25.7	25.0	25.9	26.2	24.6	25.6	24.9	25.8	26.1
4H	24.9	25.8	25.2	26.1	26.4	24.8	25.7	25.1	26.0	26.3
6H	25.0	25.8	25.4	26.2	26.5	25.0	25.7	25.4	26.1	26.4
8H	25.1	25.8	25.5	26.2	26.6	25.0	25.7	25.4	26.1	26.5
12H	25.1	25.8	25.5	26.2	26.6	25.0	25.7	25.5	26.1	26.5
8H 4H	24.9	25.6	25.3	26.0	26.3	24.8	25.5	25.2	25.9	26.3
6H	25.1	25.7	25.6	26.1	26.6	25.1	25.7	25.5	26.1	26.5
8H	25.3	25.8	25.7	26.2	26.6	25.2	25.7	25.6	26.1	26.6
12H	25.3	25.8	25.8	26.2	26.7	25.2	25.7	25.7	26.1	26.6
12H 4H	24.9	25.5	25.3	25.9	26.3	24.8	25.4	25.2	25.8	26.2
6H	25.1	25.7	25.6	26.1	26.5	25.1	25.6	25.5	26.0	26.5
8H	25.3	25.7	25.7	26.2	26.6	25.2	25.7	25.7	26.1	26.6

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 1.0	+ 0.8 / - 1.0
1.5H	+ 0.4 / - 0.4	+ 0.4 / - 0.4
2.0H	+ 1.7 / - 1.9	+ 1.6 / - 1.8

CIE Pub.117, 2751 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.5)
 Area: 0.018 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-06-30	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.57V I:0.2000A P:23.666W PF:0.9896 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2750.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	46
0.80	78	68	62	77	68	62	75	67	62	56
1.00	85	77	71	84	76	71	82	77	70	64
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	88	83	95	88	83	92	86	81	75
2.00	101	95	90	100	94	89	97	92	88	81
2.50	104	98	94	102	97	93	99	94	91	84
3.00	107	102	97	105	100	96	101	97	94	87
4.00	110	105	102	107	104	100	104	100	98	90
5.00	111	108	105	109	106	103	105	102	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.57V I:0.2000A P:23.666W PF:0.9896 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2750.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

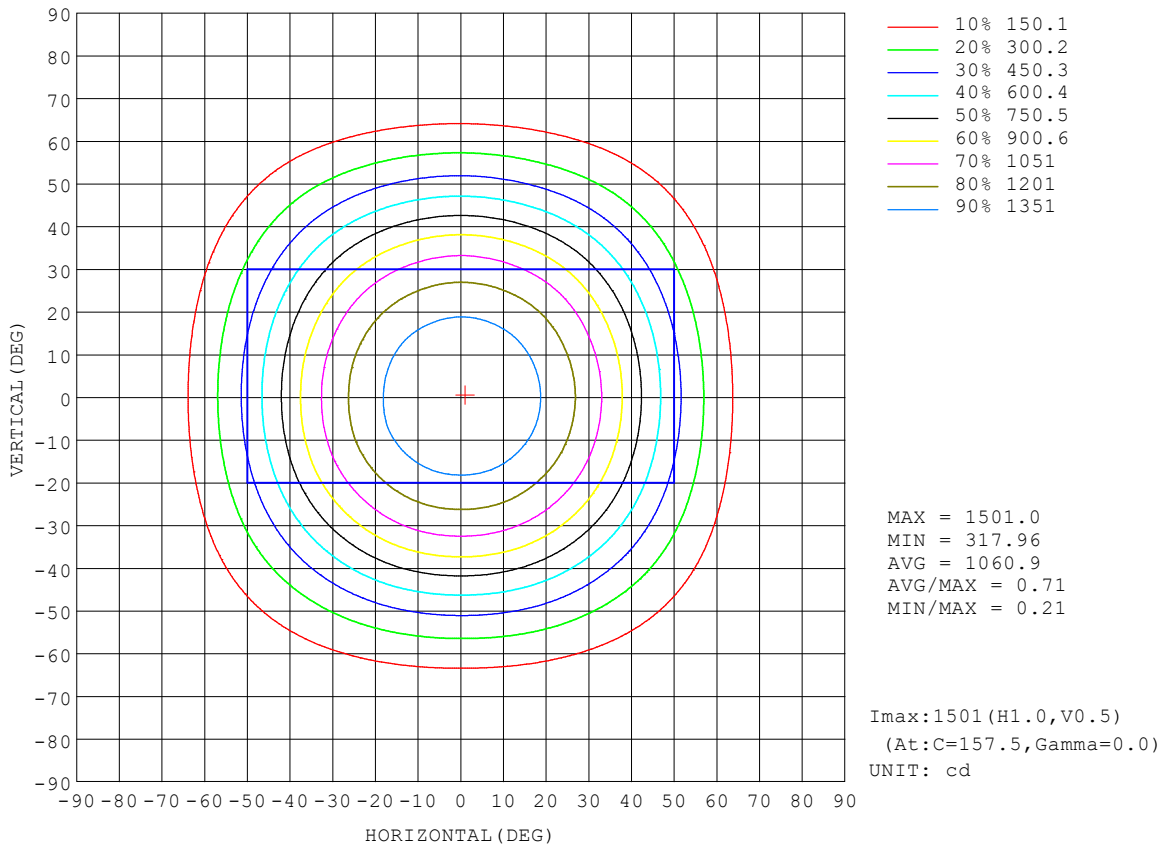


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.57V I:0.2000A P:23.666W PF:0.9896 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2750.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

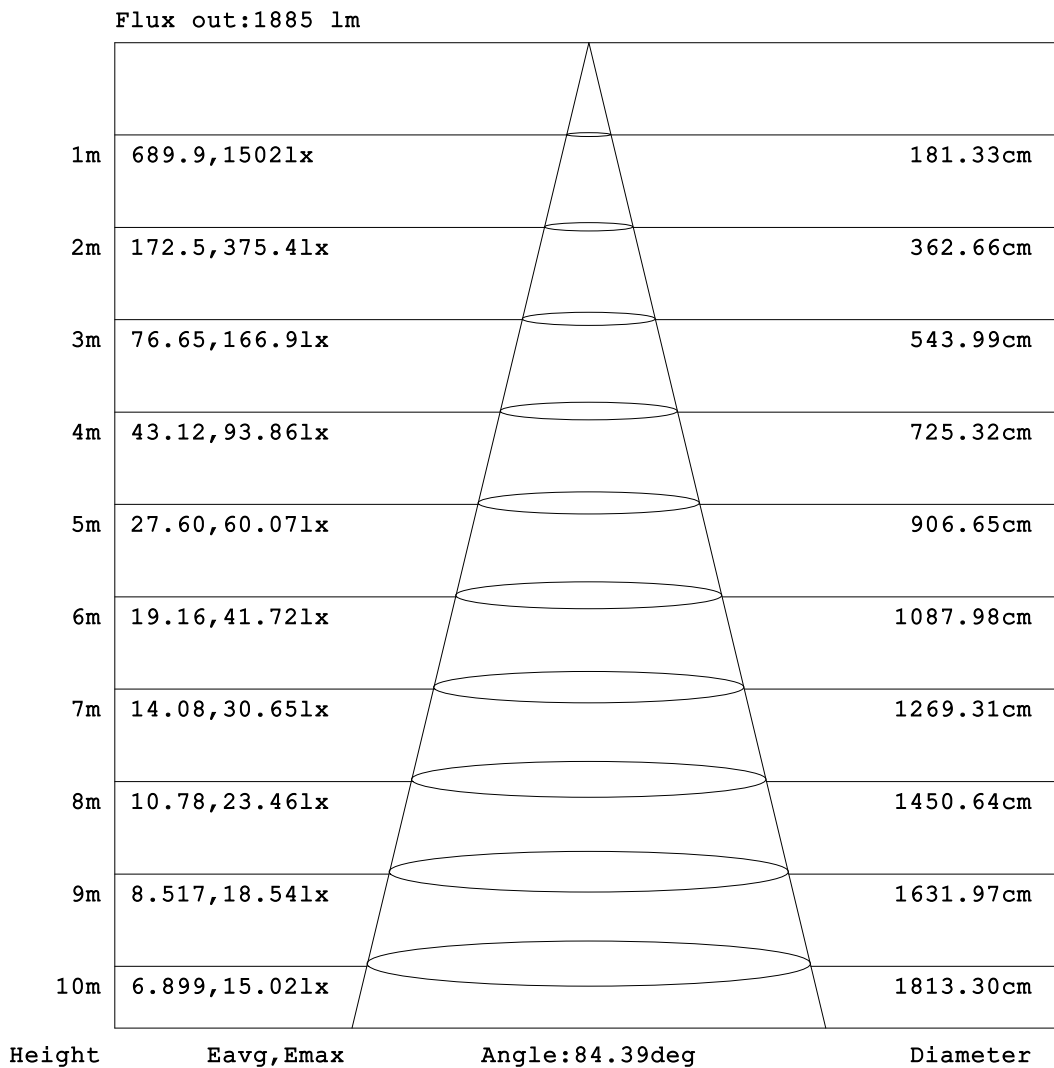


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.57V I:0.2000A P:23.666W PF:0.9896 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2750.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

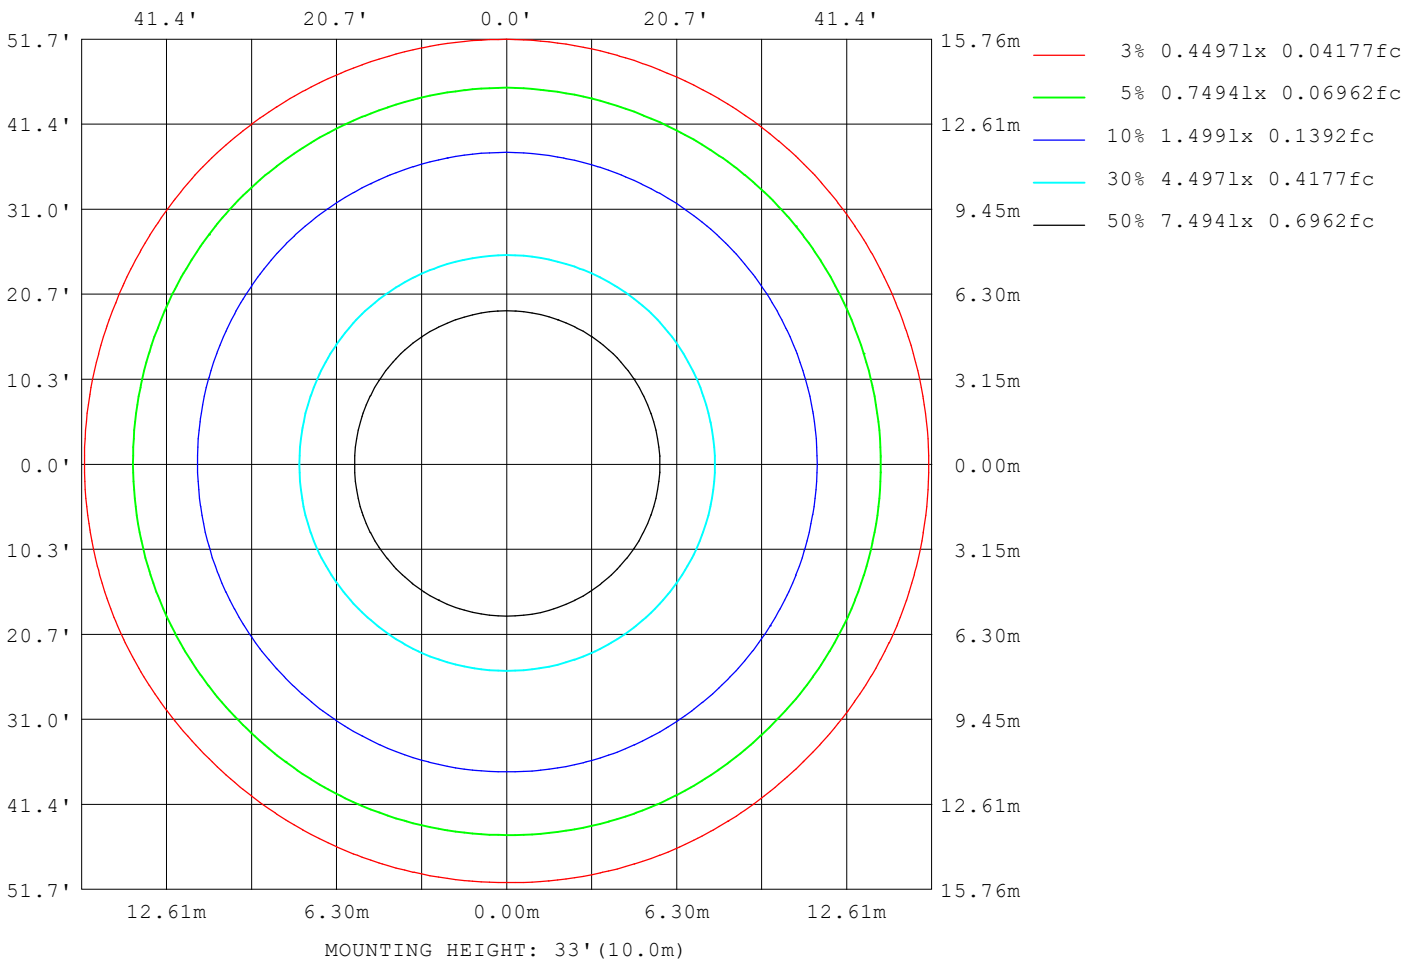

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.57V I:0.2000A P:23.666W PF:0.9896 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2750.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	17256
L_0~180 (75) av	12418
L_0~180 (85) av	9697
L_90~270 (65) av	17223
L_90~270 (75) av	12549
L_90~270 (85) av	7469
L_45 (65) av	17308
L_45 (75) av	12557
L_45 (85) av	8673

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

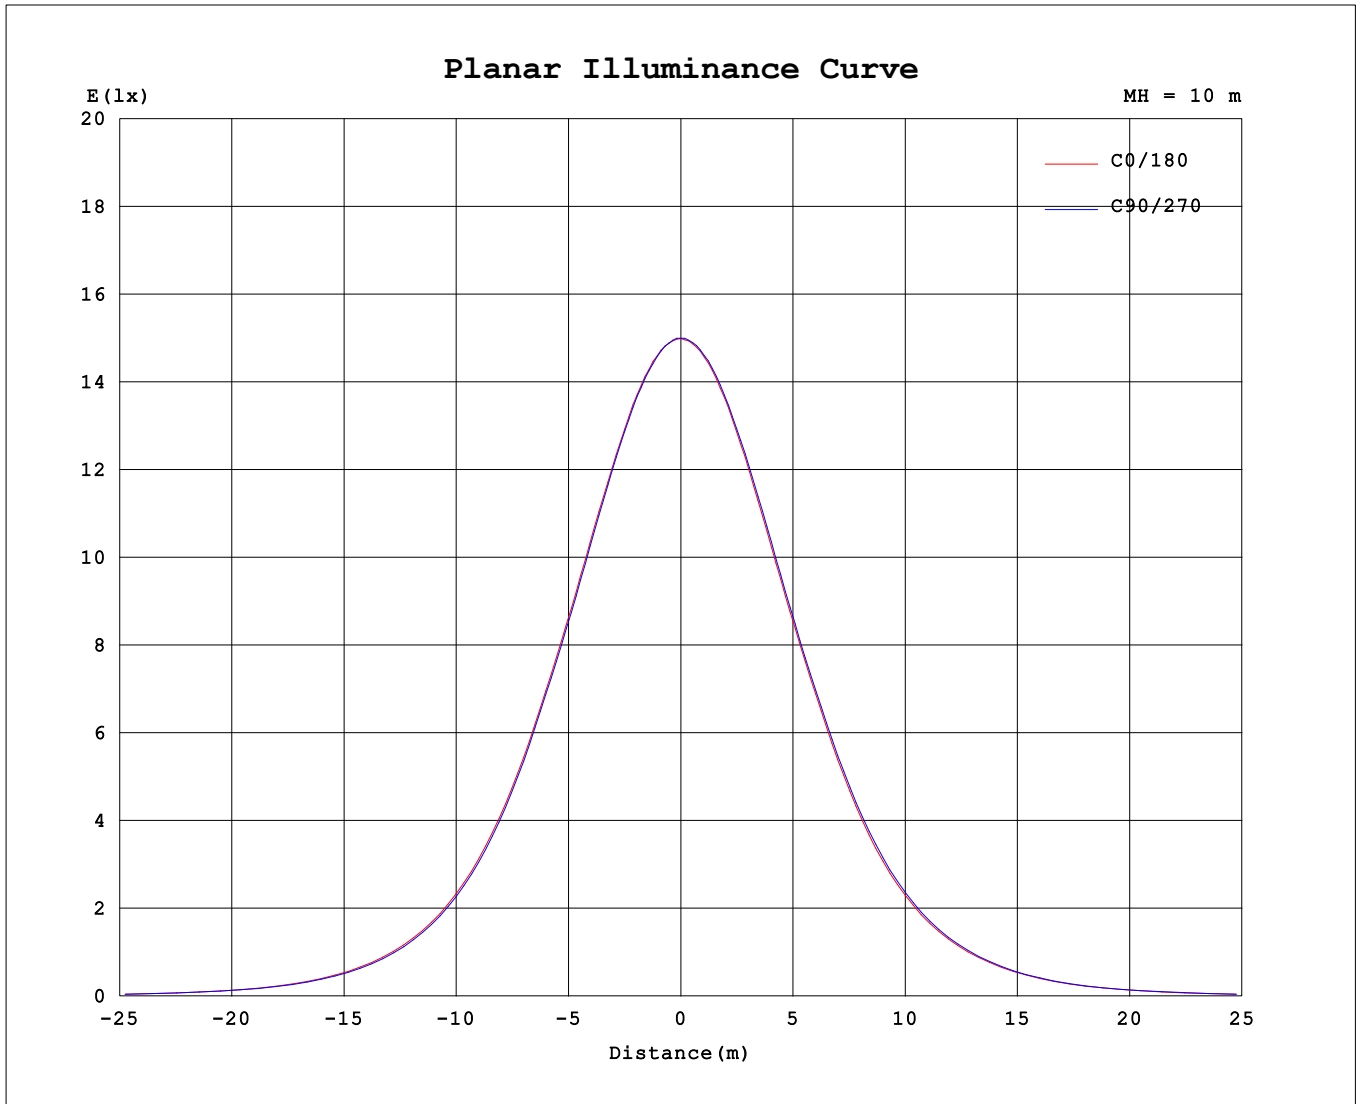

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 9.680m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.57V I:0.2000A P:23.666W PF:0.9896 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2750.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1499	1499	1500	1501	1500	1499	1500	1502	1499	1499	1500	1501	1500	1499	1500	1502			
5	1490	1489	1489	1489	1488	1488	1488	1491	1487	1488	1490	1489	1490	1490	1490	1491			
10	1458	1457	1456	1455	1453	1454	1454	1457	1451	1455	1456	1457	1459	1459	1459	1458			
15	1404	1403	1400	1399	1398	1398	1399	1401	1395	1398	1403	1403	1405	1405	1406	1403			
20	1331	1330	1324	1324	1322	1323	1322	1326	1320	1323	1328	1329	1332	1330	1332	1329			
25	1239	1237	1232	1231	1226	1229	1230	1233	1226	1230	1234	1237	1241	1239	1241	1238			
30	1131	1129	1122	1121	1117	1120	1119	1124	1119	1122	1127	1130	1132	1131	1132	1129			
35	991	987	980	980	976	979	979	986	980	984	991	993	998	993	995	990			
40	830	824	818	816	813	816	815	822	818	824	833	833	837	835	836	830			
45	661	657	649	648	644	646	645	650	651	659	668	668	670	667	668	664			
50	501	496	488	488	484	485	484	489	492	500	508	507	508	502	504	501			
55	353	352	344	344	339	340	339	347	351	354	362	361	361	354	354	351			
60	224	226	222	220	215	217	218	225	226	227	234	232	233	227	226	222			
65	130	131	129	128	126	129	130	132	133	134	136	135	136	133	132	129			
70	78.3	78.2	77.8	78.2	78.2	79.1	79.3	80.0	80.3	80.5	81.1	80.7	80.8	80.1	79.7	78.9			
75	56.7	57.2	57.1	57.5	57.7	58.4	58.6	58.7	59.0	59.6	59.8	59.3	59.3	58.9	58.6	57.3			
80	35.1	35.7	36.2	36.5	36.3	37.3	37.2	37.3	37.6	38.1	38.0	36.3	36.6	36.3	36.6	35.7			
85	13.9	14.4	13.8	12.6	11.6	13.2	13.6	15.6	16.5	16.1	14.3	10.9	11.8	12.1	12.7	13.7			
90	0.69	0.69	0.73	0.68	0.67	0.65	0.69	0.70	1.24	1.27	1.19	1.20	1.19	1.21	1.19	1.21			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks: