
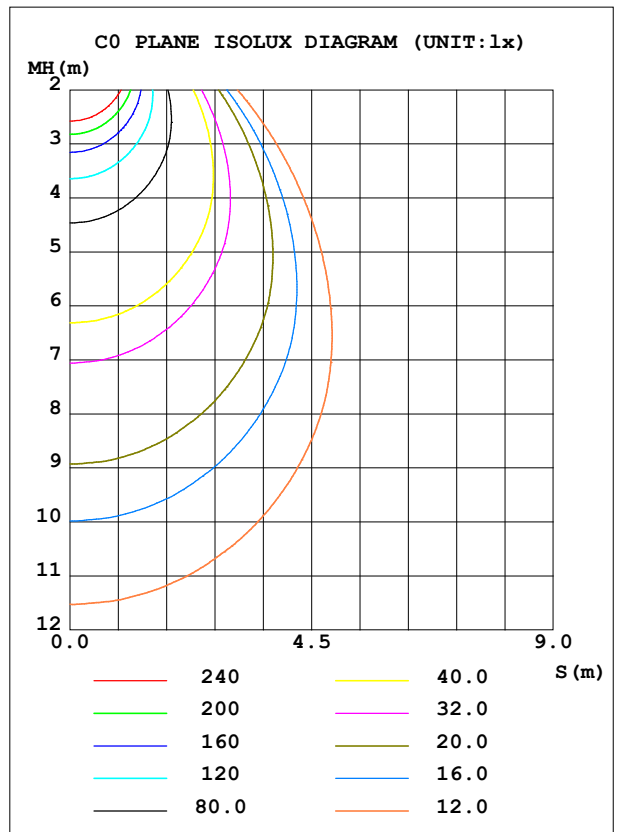


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.54V I:0.1995A P:23.587W PF:0.9893 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2919.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-6-30W-M-A5C5-HO	Imax (cd)	1594	S/MH (C0/180)	1.14
NOMINAL POWER (W)	26	LOR (%)	100.0	S/MH (C90/270)	1.14
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2919.3	<input type="checkbox"/> UP, DN (C0-180)	0.0,49.7
NOMINAL FLUX (lm)	2919.25	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0,50.3
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

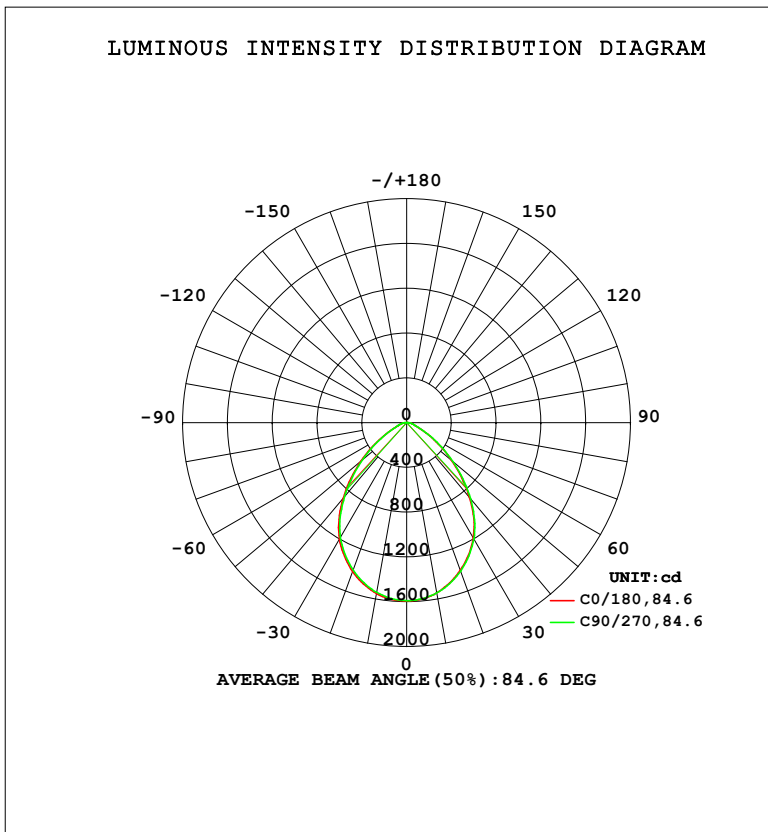

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-29

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1550	1544	1540	1539	1544	1544	1544	1544	0- 10	149.6	149.6	5.12,5.12
20	1414	1406	1399	1401	1403	1409	1412	1410	10- 20	418.0	567.6	19.4,19.4
30	1202	1192	1185	1186	1190	1197	1200	1198	20- 30	601.4	1169	40,40
40	883.8	869.2	863.3	866.7	874.5	886.0	890.1	888.2	30- 40	651.7	1821	62.4,62.4
50	531.7	518.2	512.7	512.6	524.8	539.9	539.5	533.3	40- 50	538.3	2359	80.8,80.8
60	236.7	233.6	226.7	229.7	239.5	247.1	244.9	237.5	50- 60	332.9	2692	92.2,92.2
70	83.58	82.99	83.38	84.50	85.87	86.62	86.07	84.78	60- 70	144.4	2836	97.2,97.2
80	37.49	38.61	38.71	39.66	40.22	40.51	39.10	38.96	70- 80	65.52	2902	99.4,99.4
90	0.7604	0.7735	0.7276	0.7407	1.328	1.265	1.278	1.265	80- 90	17.42	2919	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2112.2 lm

%lum = 72.4%

%lamp = 72.4%

Conical surface Flux(130deg): 2781.6 lm

%lum = 95.3%


%lamp = 95.3%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-29

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:119.54V I:0.1995A P:23.587W PF:0.9893 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2919.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

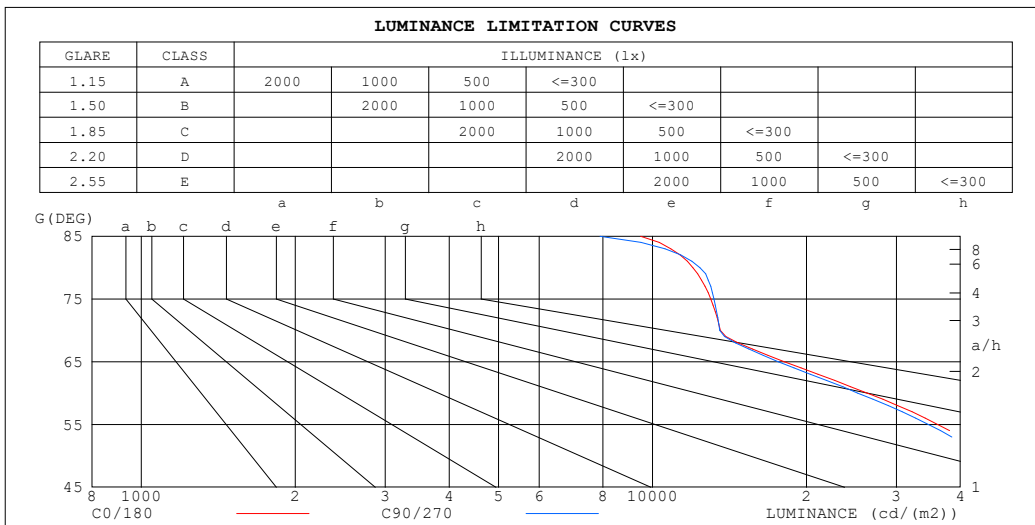

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9483	7890
80	11993	12383
75	13006	13182
70	13576	13543
65	18111	17628
60	26299	25186
55	36141	34661
50	45956	44310
45	55356	53752


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-29

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.54V I:0.1995A P:23.587W PF:0.9893 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:2919.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.99	.96	.97	.95	.93	.94	.92	.91	.89
2.0	.96	.91	.86	.95	.90	.85	.91	.87	.83	.88	.85	.82	.85	.82	.80	.78
3.0	.87	.80	.75	.85	.79	.74	.83	.77	.73	.80	.75	.72	.77	.74	.70	.69
4.0	.79	.71	.65	.77	.70	.65	.75	.69	.64	.73	.68	.63	.71	.66	.63	.61
5.0	.71	.64	.58	.70	.63	.58	.68	.62	.57	.66	.61	.56	.65	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.51	.63	.56	.51	.61	.55	.51	.59	.54	.50	.48
7.0	.60	.52	.47	.59	.52	.46	.58	.51	.46	.56	.50	.46	.55	.50	.45	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.43	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.39	.35	.33

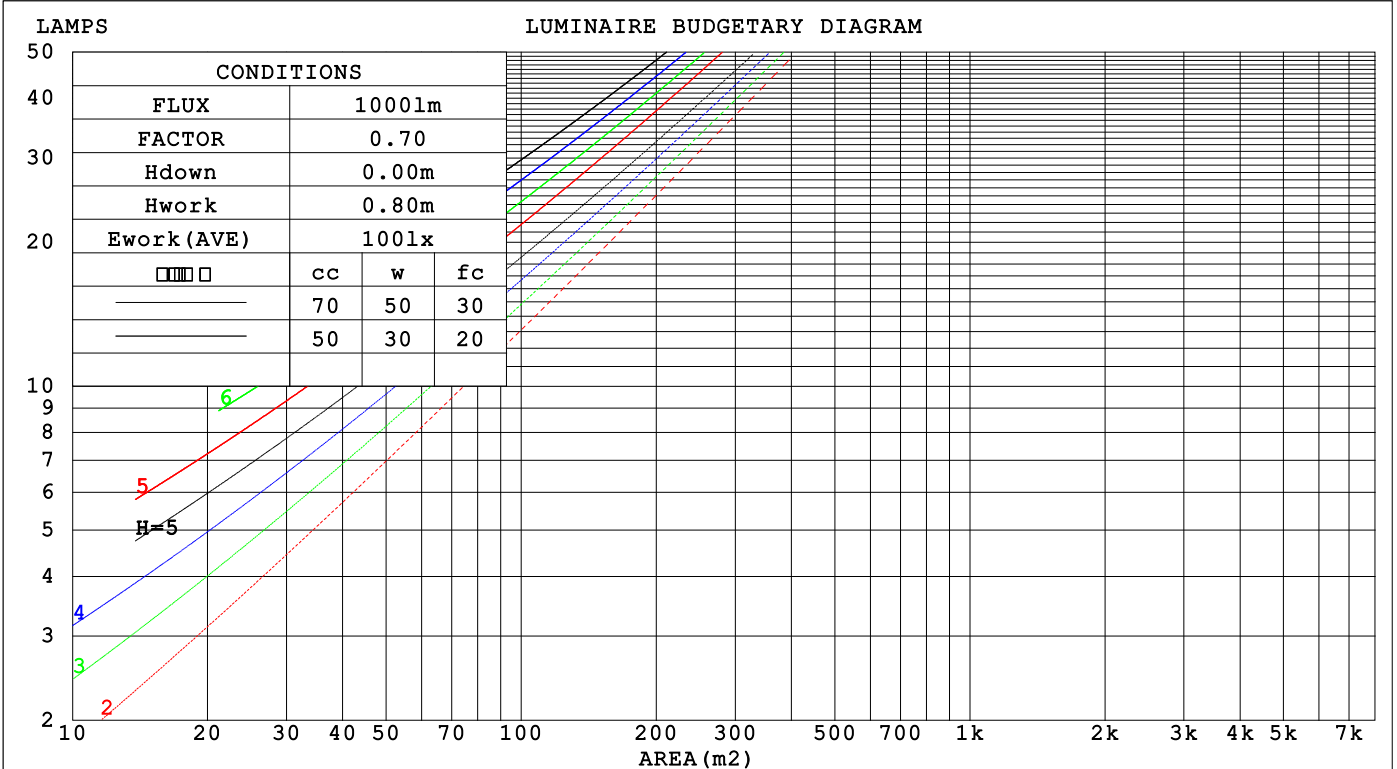

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-29

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:119.54V I:0.1995A P:23.587W PF:0.9893 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2919.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.242	.138	.044	.236	.134	.043	.223	.128	.041	.211	.122	.039	.200	.116	.037	
2.0	.234	.128	.039	.228	.126	.039	.217	.121	.037	.207	.116	.036	.197	.112	.035	
3.0	.222	.118	.035	.217	.116	.035	.207	.112	.034	.198	.109	.033	.190	.105	.032	
4.0	.209	.109	.032	.205	.107	.032	.196	.104	.031	.188	.101	.030	.181	.098	.030	
5.0	.197	.100	.029	.193	.099	.029	.185	.097	.028	.178	.094	.028	.172	.092	.028	
6.0	.186	.093	.027	.182	.092	.026	.175	.090	.026	.169	.088	.026	.163	.086	.026	
7.0	.175	.087	.025	.172	.086	.024	.166	.084	.024	.160	.082	.024	.155	.081	.024	
8.0	.166	.081	.023	.163	.080	.023	.157	.079	.022	.152	.077	.022	.147	.076	.022	
9.0	.157	.076	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021	.140	.071	.021	
10.0	.149	.071	.020	.146	.071	.020	.142	.070	.020	.138	.068	.019	.134	.067	.019	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.176	.157	.140	.150	.135	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
3.0	.165	.132	.105	.141	.114	.091	.097	.079	.063	.056	.046	.037	.018	.015	.012	
4.0	.155	.114	.081	.133	.098	.070	.091	.068	.049	.053	.040	.029	.017	.013	.010	
5.0	.147	.100	.064	.126	.086	.056	.087	.060	.039	.050	.035	.023	.016	.011	.008	
6.0	.140	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006	
7.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005	
8.0	.127	.074	.036	.109	.064	.032	.075	.045	.022	.044	.026	.013	.014	.009	.004	
9.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.012	.014	.008	.004	
10.0	.115	.063	.027	.099	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.110	.058	.024	.095	.051	.021	.066	.036	.015	.038	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-29

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.54V I:0.1995A P:23.587W PF:0.9893 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2919.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.5	25.8	24.8	26.0	26.2	24.4	25.7	24.6	25.8	26.0
3H	24.7	25.9	25.0	26.1	26.3	24.6	25.8	24.9	26.0	26.2
4H	24.8	25.9	25.1	26.2	26.4	24.7	25.8	25.0	26.0	26.3
6H	24.9	25.9	25.2	26.2	26.5	24.8	25.8	25.1	26.1	26.4
8H	24.9	25.9	25.2	26.2	26.5	24.8	25.8	25.1	26.1	26.4
12H	24.9	25.9	25.2	26.2	26.4	24.8	25.8	25.1	26.0	26.3
4H 2H	24.6	25.7	24.9	25.9	26.2	24.5	25.6	24.8	25.8	26.1
3H	24.9	25.9	25.2	26.1	26.4	24.8	25.8	25.1	26.0	26.3
4H	25.1	26.0	25.4	26.3	26.6	25.0	25.9	25.3	26.2	26.5
6H	25.2	26.0	25.6	26.4	26.7	25.2	25.9	25.6	26.3	26.6
8H	25.3	26.0	25.7	26.4	26.8	25.2	25.9	25.6	26.3	26.7
12H	25.3	26.0	25.7	26.4	26.8	25.2	25.9	25.7	26.3	26.7
8H 4H	25.1	25.8	25.5	26.2	26.5	25.0	25.7	25.4	26.1	26.5
6H	25.4	25.9	25.8	26.3	26.8	25.3	25.9	25.7	26.3	26.7
8H	25.5	26.0	25.9	26.4	26.8	25.4	25.9	25.8	26.3	26.8
12H	25.5	26.0	26.0	26.4	26.9	25.4	25.9	25.9	26.3	26.8
12H 4H	25.1	25.7	25.5	26.1	26.5	25.0	25.6	25.4	26.0	26.4
6H	25.4	25.9	25.8	26.3	26.7	25.3	25.8	25.7	26.2	26.7
8H	25.5	25.9	26.0	26.4	26.8	25.4	25.9	25.9	26.3	26.8

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 1.0	+ 0.8 / - 1.0
1.5H	+ 0.4 / - 0.4	+ 0.4 / - 0.4
2.0H	+ 1.7 / - 1.9	+ 1.7 / - 1.8

CIE Pub.117, 2919 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.7)  
 Area: 0.018 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-06-29	Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.54V I:0.1995A P:23.587W PF:0.9893 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2919.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	46
0.80	78	68	62	77	68	62	75	67	62	56
1.00	85	77	71	84	76	71	82	77	70	64
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	88	83	95	88	83	92	86	81	75
2.00	101	95	90	100	94	89	97	92	88	81
2.50	104	98	94	102	97	93	99	94	91	84
3.00	107	102	97	105	100	96	101	97	94	87
4.00	110	105	102	107	104	100	104	100	98	90
5.00	111	108	105	109	106	103	105	102	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-29

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.54V I:0.1995A P:23.587W PF:0.9893 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2919.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

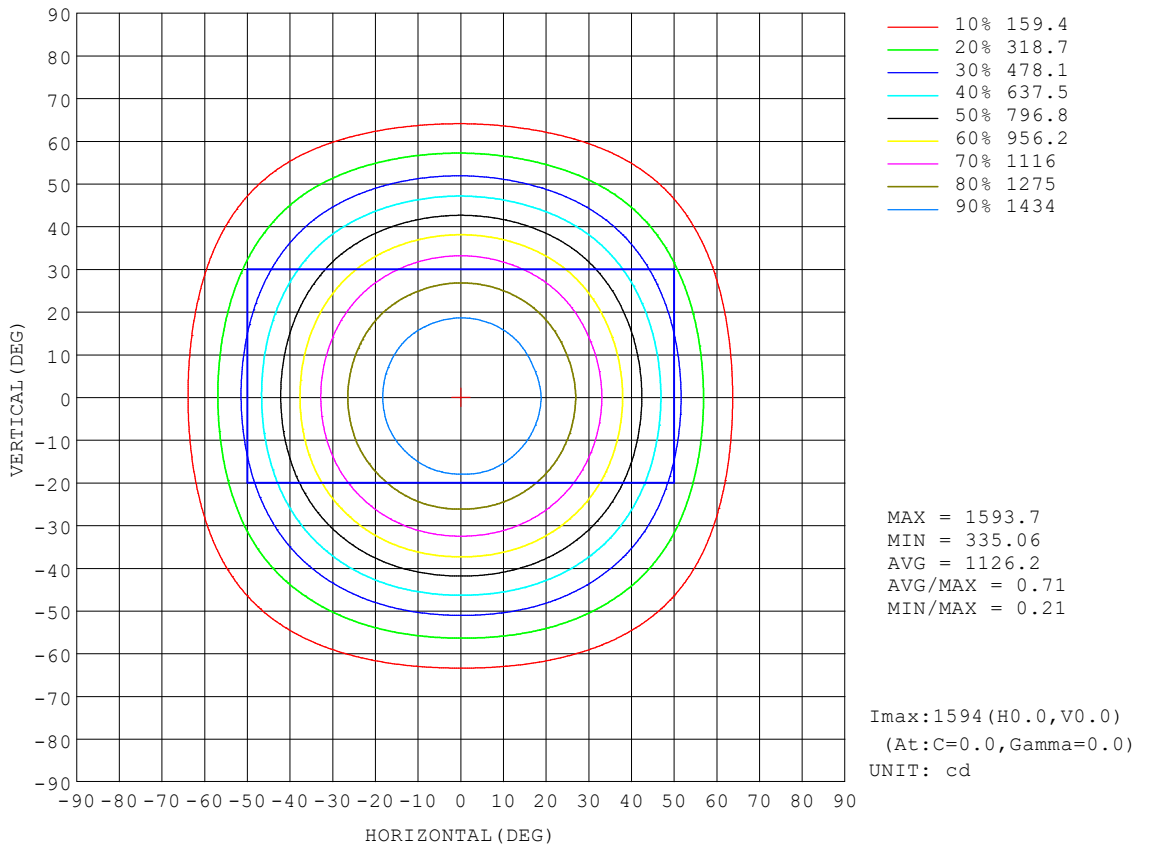


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-29

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.54V I:0.1995A P:23.587W PF:0.9893 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2919.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

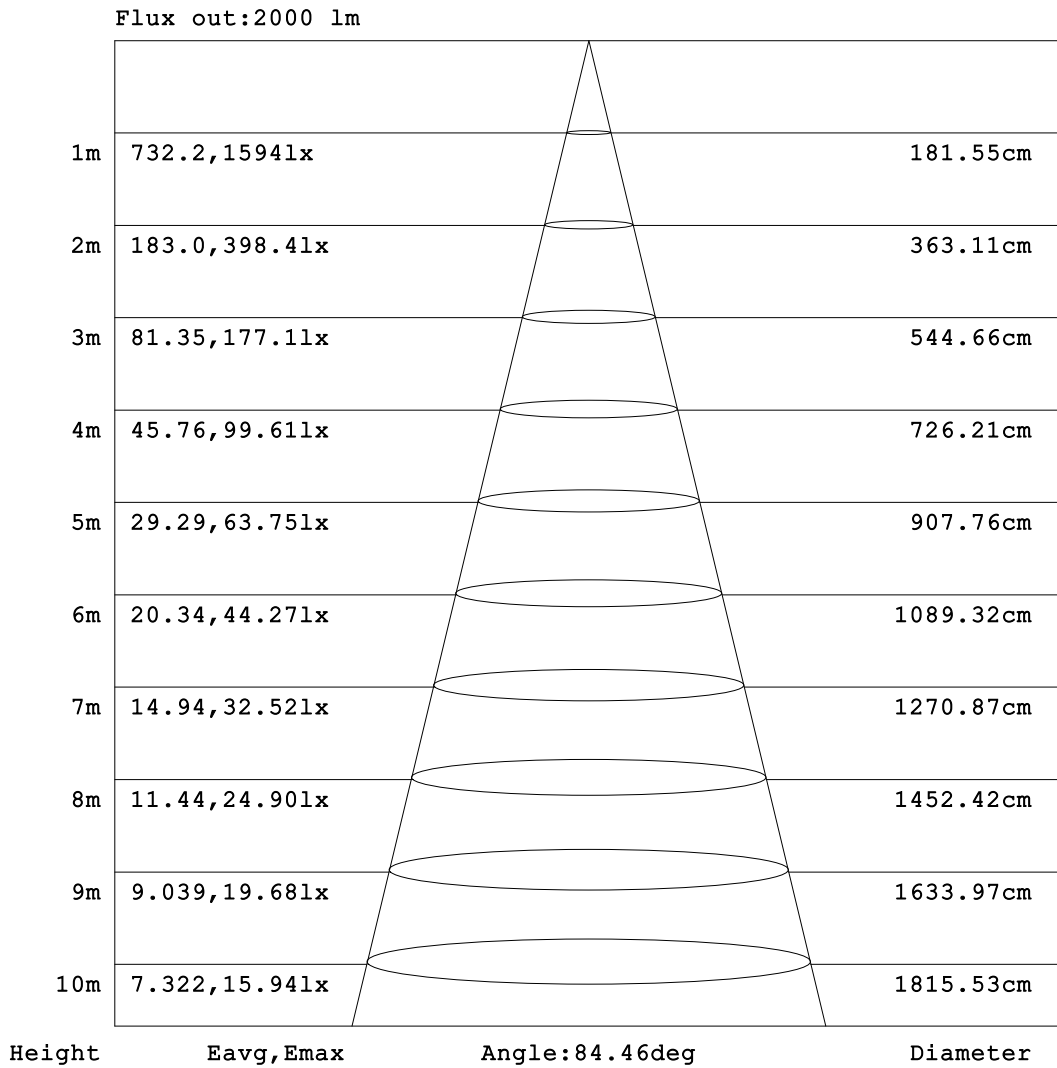


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-06-29

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.54V I:0.1995A P:23.587W PF:0.9893 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2919.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

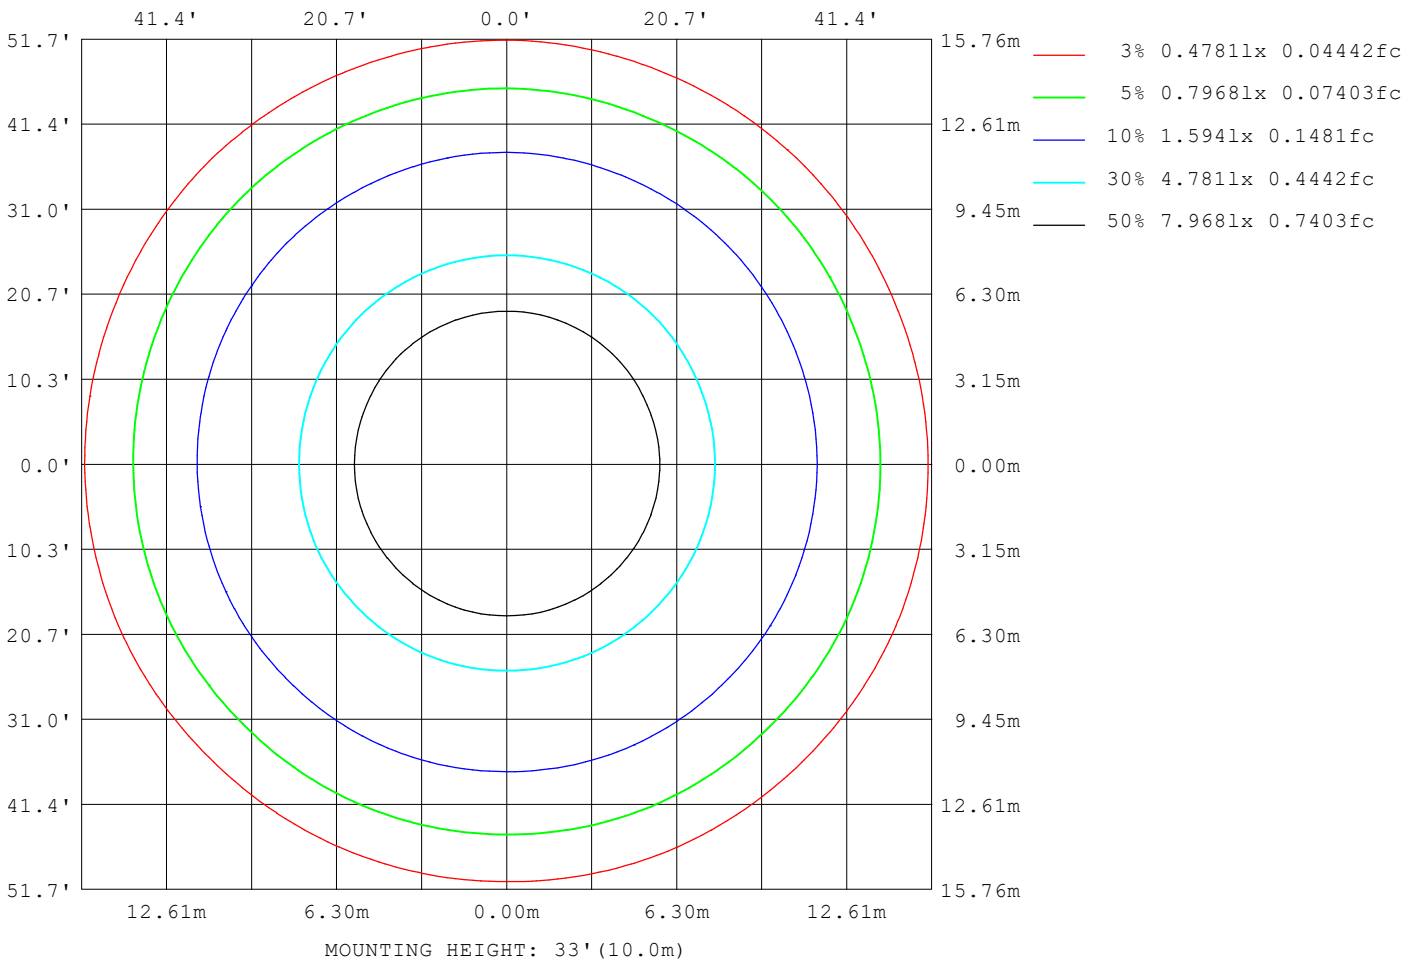

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-29

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.54V I:0.1995A P:23.587W PF:0.9893 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2919.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	18345
L_0~180 (75) av	13277
L_0~180 (85) av	10372
L_90~270 (65) av	18265
L_90~270 (75) av	13380
L_90~270 (85) av	7946
L_45 (65) av	18355
L_45 (75) av	13383
L_45 (85) av	9236

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:DAMIN  
 Test Date:2023-06-29

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

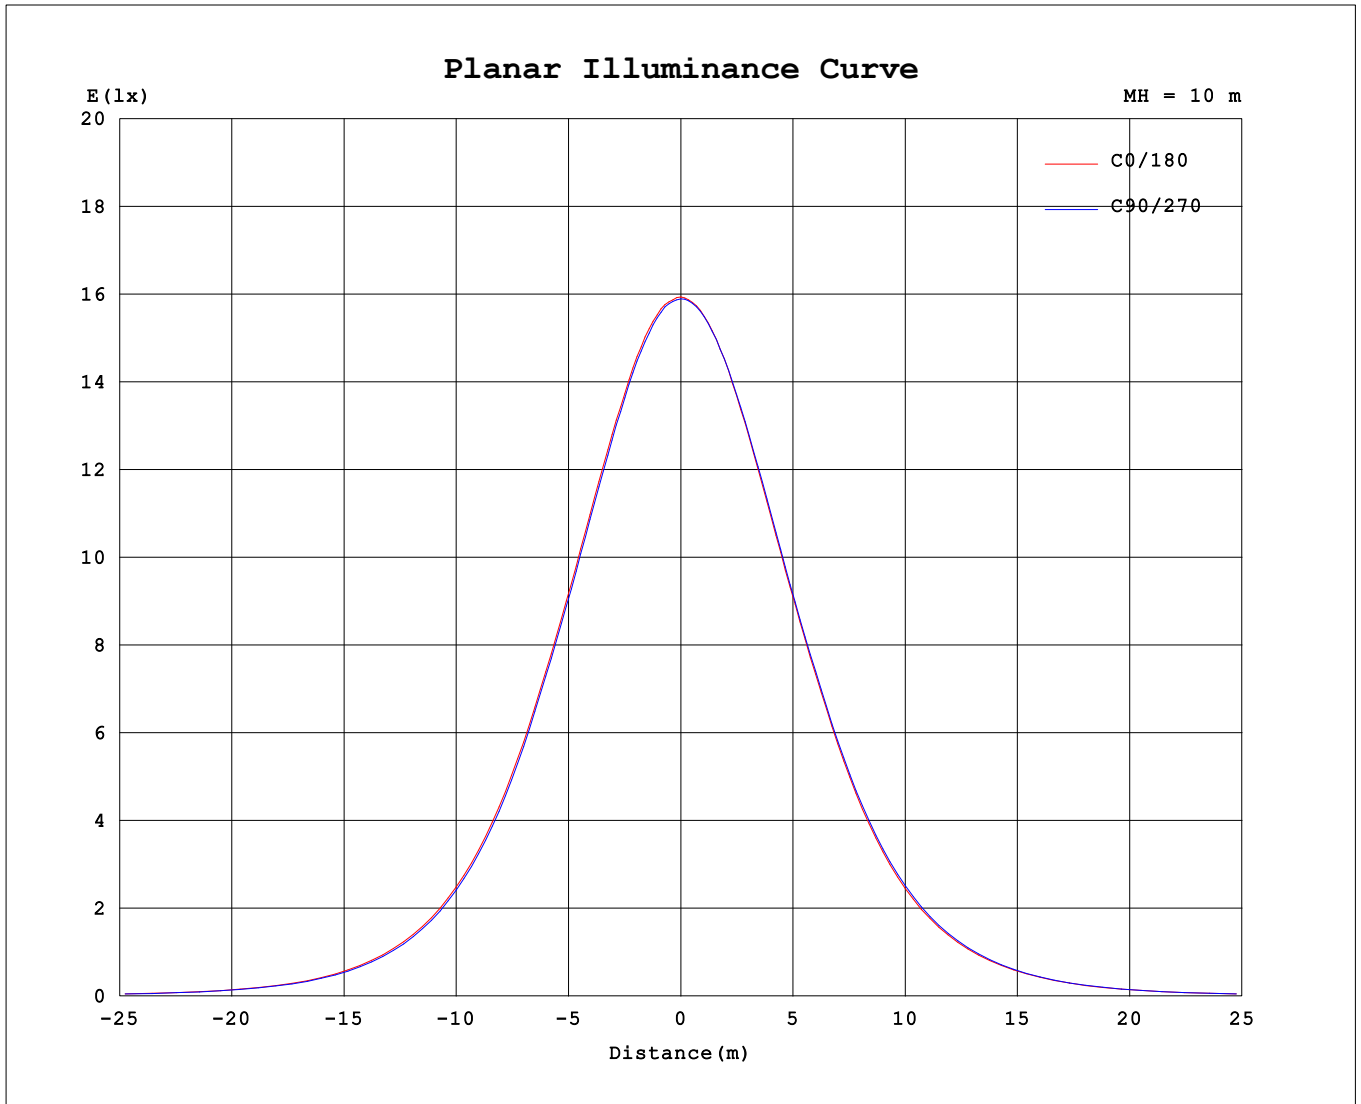

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-06-29

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.54V I:0.1995A P:23.587W PF:0.9893 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2919.25x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 3500K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1594	1593	1593	1591	1589	1587	1588	1590	1594	1593	1593	1591	1589	1587	1588	1590			
5	1585	1581	1581	1578	1577	1575	1575	1577	1581	1580	1580	1580	1579	1577	1577	1577			
10	1550	1547	1544	1542	1540	1540	1539	1541	1544	1543	1544	1544	1544	1545	1544	1543			
15	1491	1490	1485	1484	1479	1481	1481	1482	1484	1485	1487	1487	1489	1487	1489	1484			
20	1414	1411	1406	1404	1399	1401	1401	1403	1403	1406	1409	1409	1412	1410	1410	1406			
25	1317	1313	1306	1304	1301	1303	1302	1305	1305	1306	1311	1311	1315	1313	1313	1309			
30	1202	1198	1192	1189	1185	1188	1186	1190	1190	1192	1197	1198	1200	1199	1198	1194			
35	1055	1049	1041	1041	1036	1039	1040	1046	1046	1049	1053	1055	1059	1056	1055	1049			
40	884	879	869	868	863	866	867	873	874	878	886	887	890	888	888	881			
45	705	698	691	690	684	687	686	691	695	703	712	711	713	709	709	704			
50	532	527	518	518	513	514	513	519	525	533	540	539	540	533	533	530			
55	373	371	363	363	358	359	358	366	372	376	383	382	382	374	373	369			
60	237	238	234	232	227	229	230	237	240	241	247	245	245	239	237	233			
65	138	138	137	136	134	136	138	140	141	143	145	144	144	141	139	137			
70	83.6	83.4	83.0	83.3	83.4	84.3	84.5	85.1	85.9	86.1	86.6	86.2	86.1	85.4	84.8	83.9			
75	60.6	61.0	60.8	61.4	61.4	62.2	62.4	62.5	63.1	63.8	63.8	63.3	63.3	62.8	62.4	60.9			
80	37.5	38.1	38.6	38.9	38.7	39.7	39.7	39.7	40.2	40.8	40.5	38.7	39.1	38.8	39.0	38.0			
85	14.9	15.4	14.7	13.4	12.4	14.0	14.6	16.6	17.7	17.3	15.2	11.7	12.6	12.9	13.5	14.6			
90	0.76	0.74	0.77	0.73	0.73	0.71	0.74	0.74	1.33	1.37	1.27	1.29	1.28	1.30	1.27	1.30			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-29

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks: