
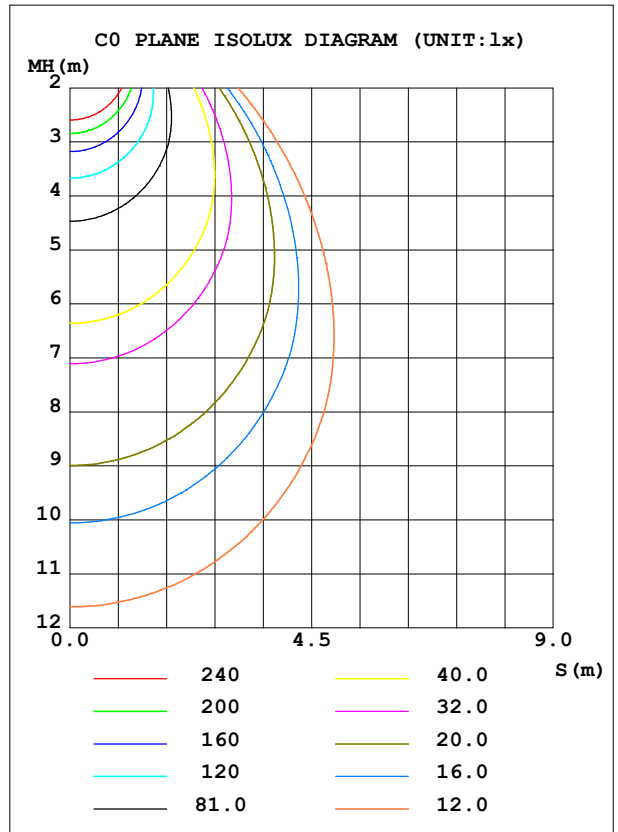


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.55V I:0.1993A P:23.566W PF:0.9892 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2965.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-6-30W-M-A5C5-HO	Imax (cd)	1617	S/MH (C0/180)	1.14
NOMINAL POWER (W)	26	LOR (%)	100.0	S/MH (C90/270)	1.14
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2965.9	<input type="checkbox"/> UP, DN (C0-180)	0.0,49.7
NOMINAL FLUX (lm)	2965.92	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0,50.3
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

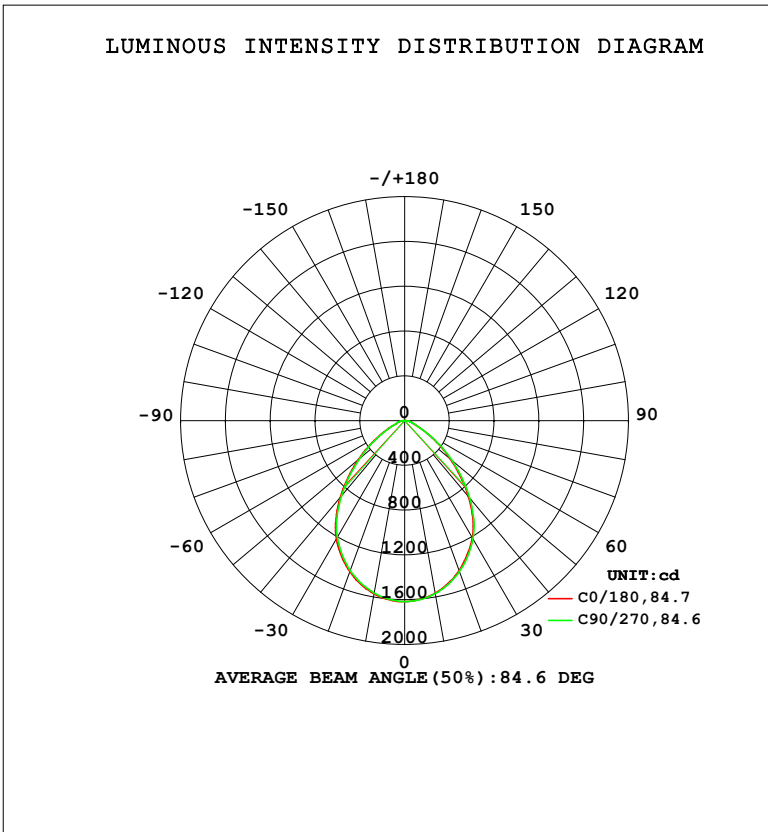

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum,lamp
10	1572	1567	1564	1563	1566	1569	1569	1568	0- 10	151.9	151.9	5.12,5.12
20	1436	1427	1424	1423	1424	1430	1434	1432	10- 20	424.5	576.3	19.4,19.4
30	1220	1210	1205	1206	1208	1216	1220	1218	20- 30	610.8	1187	40,40
40	897.8	884.0	877.8	881.5	888.4	900.1	905.4	902.8	30- 40	662.5	1850	62.4,62.4
50	539.5	526.3	520.8	520.7	532.9	549.2	549.0	542.3	40- 50	547.4	2397	80.8,80.8
60	239.6	236.1	230.0	232.5	242.2	250.7	248.5	240.7	50- 60	337.7	2735	92.2,92.2
70	85.02	84.36	85.03	86.06	87.43	88.19	87.78	86.46	60- 70	146.6	2881	97.2,97.2
80	38.16	39.28	39.41	40.39	40.87	41.28	39.81	39.69	70- 80	66.75	2948	99.4,99.4
90	0.7670	0.7932	0.7473	0.7604	1.341	1.285	1.291	1.291	80- 90	17.74	2966	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2146.1 lm

%lum = 72.4%

%lamp = 72.4%

Conical surface Flux(130deg): 2825.8 lm

%lum = 95.3%


%lamp = 95.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.55V I:0.1993A P:23.566W PF:0.9892 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2965.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

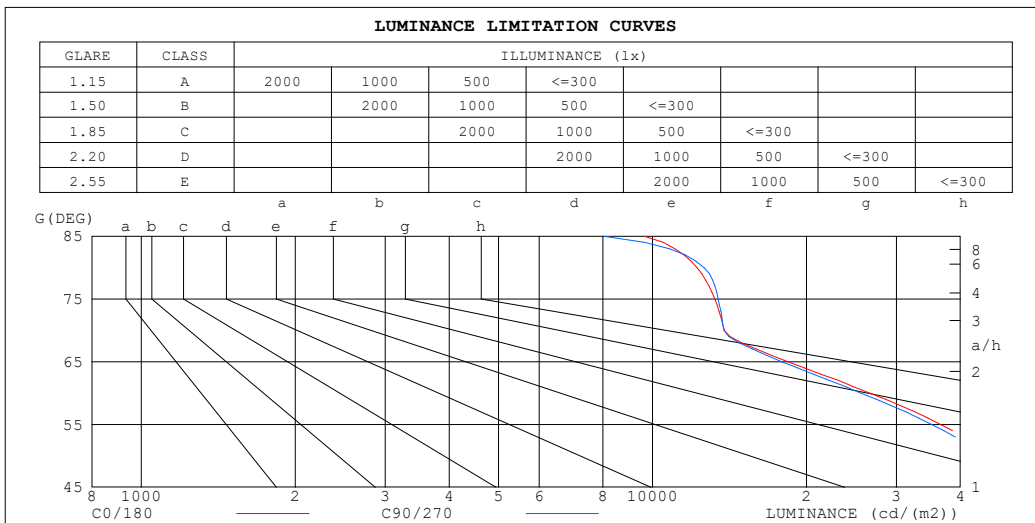

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9647	8043
80	12209	12609
75	13240	13431
70	13810	13811
65	18394	17898
60	26627	25551
55	36610	35162
50	46626	45011
45	56165	54683


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.55V I:0.1993A P:23.566W PF:0.9892 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:2965.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.99	.96	.97	.95	.93	.94	.92	.91	.89
2.0	.96	.91	.86	.95	.90	.85	.91	.87	.83	.88	.85	.82	.85	.82	.80	.78
3.0	.87	.80	.75	.85	.79	.74	.83	.77	.73	.80	.75	.72	.77	.74	.70	.69
4.0	.79	.71	.65	.77	.70	.65	.75	.69	.64	.73	.68	.63	.71	.66	.63	.61
5.0	.71	.64	.58	.70	.63	.58	.68	.62	.57	.66	.61	.56	.65	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.51	.63	.56	.51	.61	.55	.51	.59	.54	.50	.48
7.0	.60	.52	.47	.59	.52	.46	.58	.51	.46	.56	.50	.46	.55	.50	.45	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.43	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.39	.35	.33

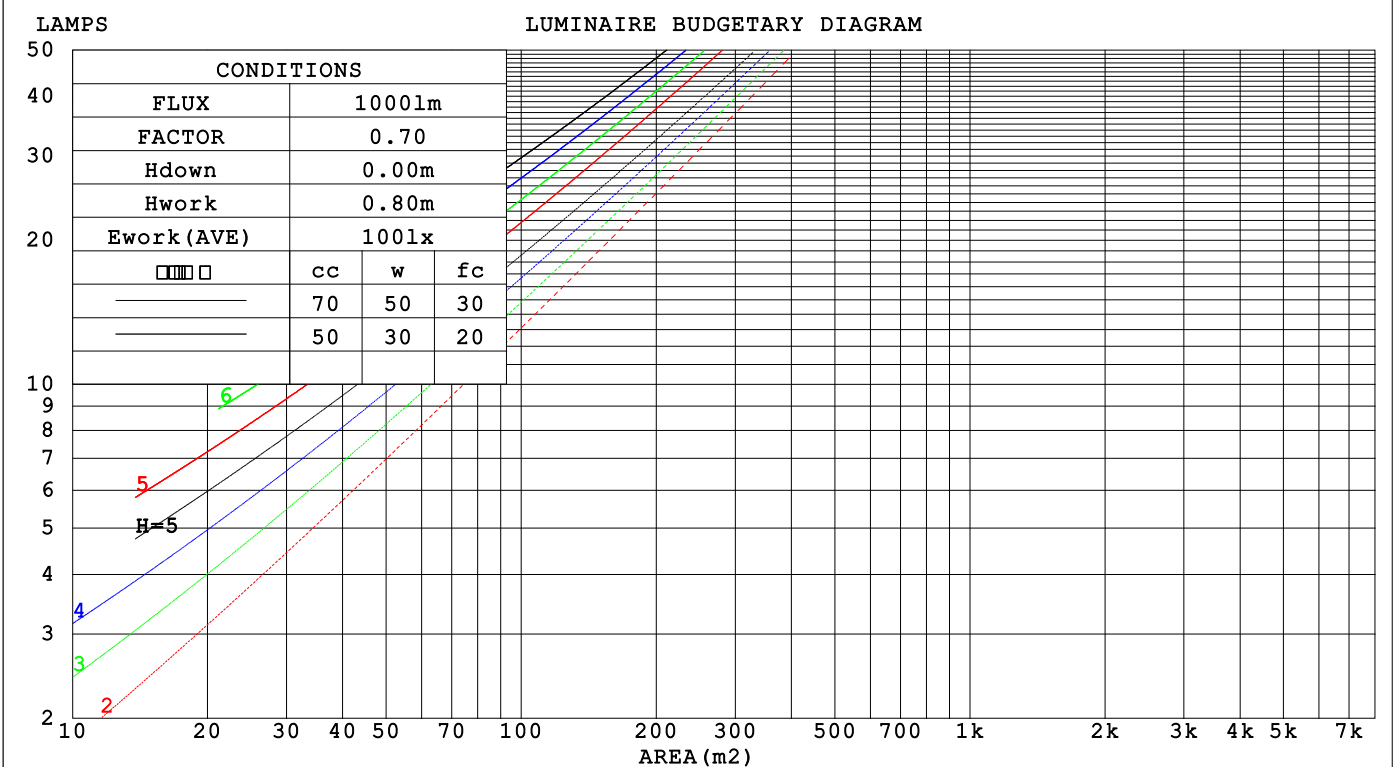

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.55V I:0.1993A P:23.566W PF:0.9892 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2965.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.243 .138 .044	.236 .134 .043	.223 .128 .041	.211 .122 .039	.200 .116 .037	
2.0	.234 .128 .039	.228 .126 .039	.217 .121 .037	.207 .116 .036	.197 .112 .035	
3.0	.222 .118 .035	.217 .116 .035	.207 .112 .034	.198 .109 .033	.190 .105 .032	
4.0	.209 .109 .032	.205 .107 .032	.196 .104 .031	.188 .101 .030	.181 .098 .030	
5.0	.197 .100 .029	.193 .099 .029	.186 .097 .028	.178 .094 .028	.172 .092 .028	
6.0	.186 .093 .027	.182 .092 .026	.175 .090 .026	.169 .088 .026	.163 .086 .026	
7.0	.175 .087 .025	.172 .086 .024	.166 .084 .024	.160 .082 .024	.155 .081 .024	
8.0	.166 .081 .023	.163 .080 .023	.157 .079 .022	.152 .077 .022	.147 .076 .022	
9.0	.157 .076 .021	.154 .075 .021	.149 .074 .021	.145 .073 .021	.140 .071 .021	
10.0	.149 .071 .020	.146 .071 .020	.142 .070 .020	.138 .068 .019	.134 .067 .019	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.176 .157 .140	.150 .135 .120	.103 .093 .083	.059 .054 .048	.019 .017 .016	
2.0	.165 .132 .105	.141 .114 .091	.097 .079 .063	.056 .046 .037	.018 .015 .012	
3.0	.155 .114 .081	.133 .098 .070	.091 .068 .049	.053 .040 .029	.017 .013 .010	
4.0	.147 .100 .064	.126 .086 .056	.087 .060 .039	.050 .035 .023	.016 .011 .008	
5.0	.140 .089 .052	.120 .077 .045	.083 .054 .032	.048 .032 .019	.015 .010 .006	
6.0	.133 .081 .043	.114 .070 .038	.079 .049 .027	.046 .029 .016	.015 .009 .005	
7.0	.127 .074 .036	.109 .064 .032	.075 .045 .022	.044 .026 .013	.014 .009 .004	
8.0	.121 .068 .031	.104 .059 .027	.072 .041 .019	.042 .024 .012	.014 .008 .004	
9.0	.115 .063 .027	.099 .054 .024	.069 .038 .017	.040 .023 .010	.013 .007 .003	
10.0	.110 .058 .024	.095 .051 .021	.066 .036 .015	.038 .021 .009	.012 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.55V I:0.1993A P:23.566W PF:0.9892 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2965.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.5	25.8	24.8	26.0	26.2	24.4	25.7	24.7	25.9	26.1
3H	24.8	25.9	25.0	26.2	26.4	24.6	25.8	24.9	26.0	26.3
4H	24.9	26.0	25.2	26.2	26.5	24.7	25.9	25.0	26.1	26.3
6H	24.9	26.0	25.2	26.2	26.5	24.8	25.9	25.2	26.1	26.4
8H	24.9	26.0	25.3	26.2	26.5	24.9	25.9	25.2	26.1	26.4
12H	24.9	25.9	25.3	26.2	26.5	24.8	25.8	25.2	26.1	26.4
4H 2H	24.6	25.7	24.9	26.0	26.2	24.5	25.6	24.8	25.9	26.1
3H	24.9	25.9	25.3	26.2	26.5	24.8	25.8	25.2	26.1	26.4
4H	25.1	26.0	25.5	26.3	26.6	25.0	25.9	25.4	26.2	26.5
6H	25.3	26.1	25.7	26.4	26.8	25.2	26.0	25.6	26.3	26.7
8H	25.4	26.1	25.8	26.4	26.8	25.3	26.0	25.7	26.4	26.7
12H	25.4	26.0	25.8	26.4	26.8	25.3	26.0	25.7	26.3	26.7
8H 4H	25.1	25.9	25.5	26.2	26.6	25.1	25.8	25.5	26.1	26.5
6H	25.4	26.0	25.8	26.4	26.8	25.3	25.9	25.8	26.3	26.8
8H	25.5	26.0	26.0	26.5	26.9	25.5	26.0	25.9	26.4	26.8
12H	25.6	26.0	26.1	26.5	26.9	25.5	26.0	26.0	26.4	26.9
12H 4H	25.1	25.8	25.5	26.2	26.6	25.0	25.7	25.5	26.1	26.5
6H	25.4	25.9	25.9	26.3	26.8	25.3	25.9	25.8	26.3	26.7
8H	25.5	26.0	26.0	26.4	26.9	25.5	25.9	26.0	26.4	26.8

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 1.0	+ 0.8 / - 1.0
1.5H	+ 0.4 / - 0.4	+ 0.4 / - 0.4
2.0H	+ 1.7 / - 1.9	+ 1.7 / - 1.8

CIE Pub.117, 2966 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.8)
 Area: 0.018 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-06-29	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.55V I:0.1993A P:23.566W PF:0.9892 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2965.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	46
0.80	78	68	62	77	68	62	75	67	62	56
1.00	85	77	71	84	76	71	82	77	70	64
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	88	83	95	88	83	92	86	81	75
2.00	101	95	90	100	94	89	97	92	88	81
2.50	104	98	94	102	97	93	99	94	91	84
3.00	107	102	97	105	100	96	101	97	94	87
4.00	110	105	102	107	104	100	104	100	98	90
5.00	111	108	105	109	106	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.55V I:0.1993A P:23.566W PF:0.9892 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2965.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

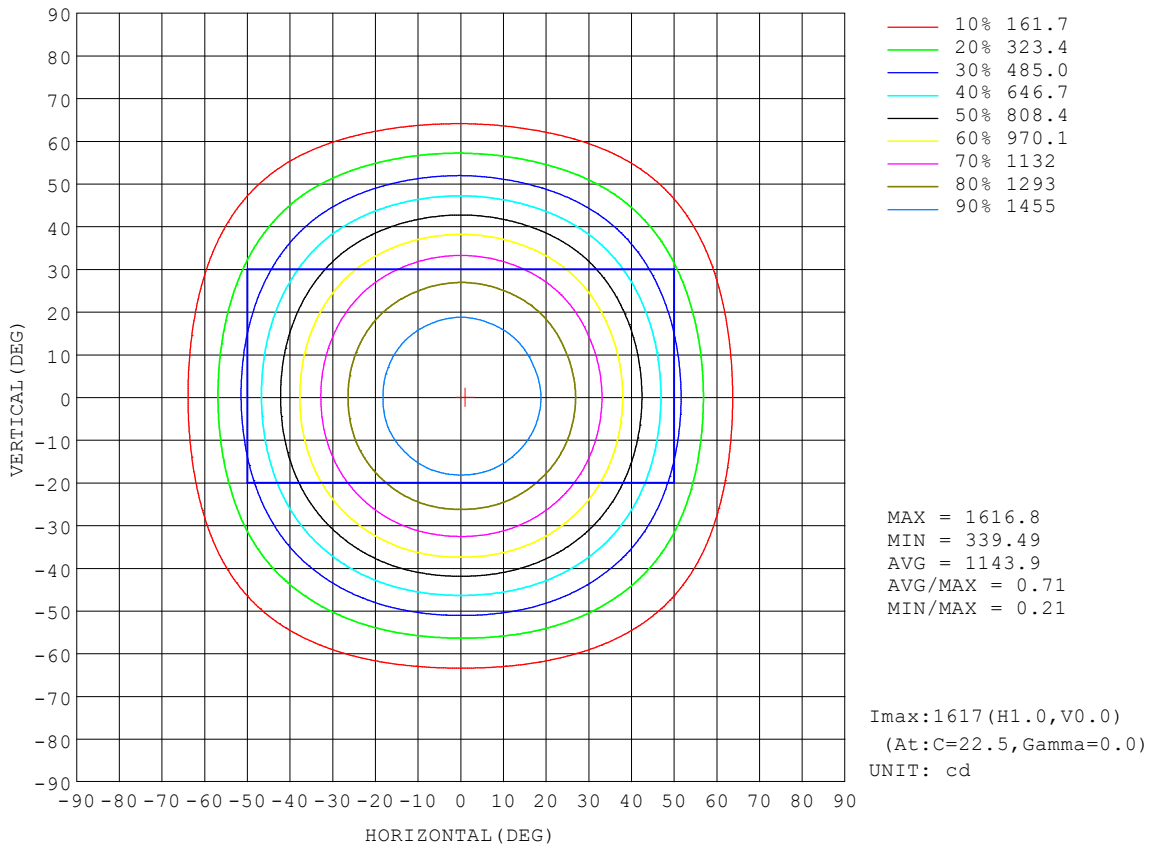


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.55V I:0.1993A P:23.566W PF:0.9892 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2965.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

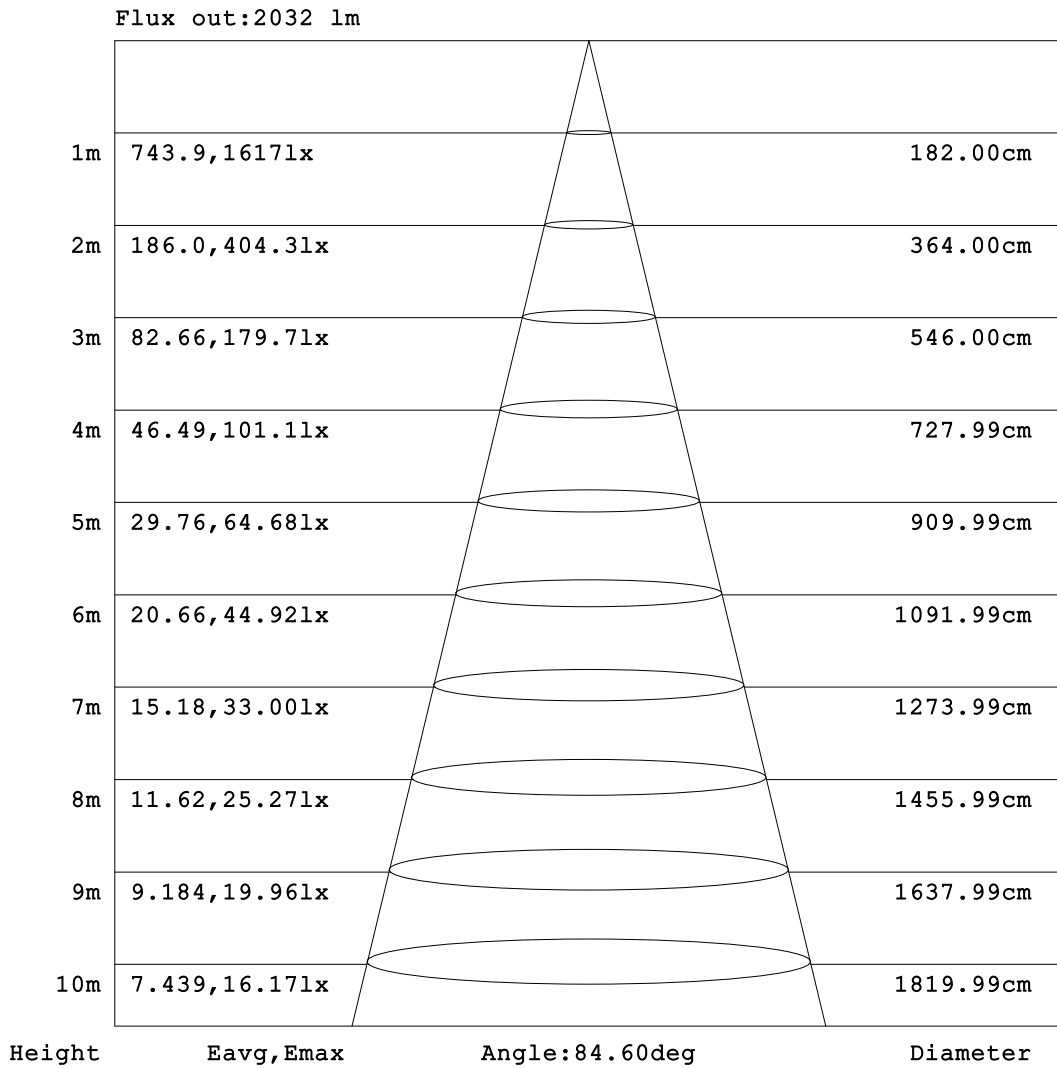


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.55V I:0.1993A P:23.566W PF:0.9892 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2965.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

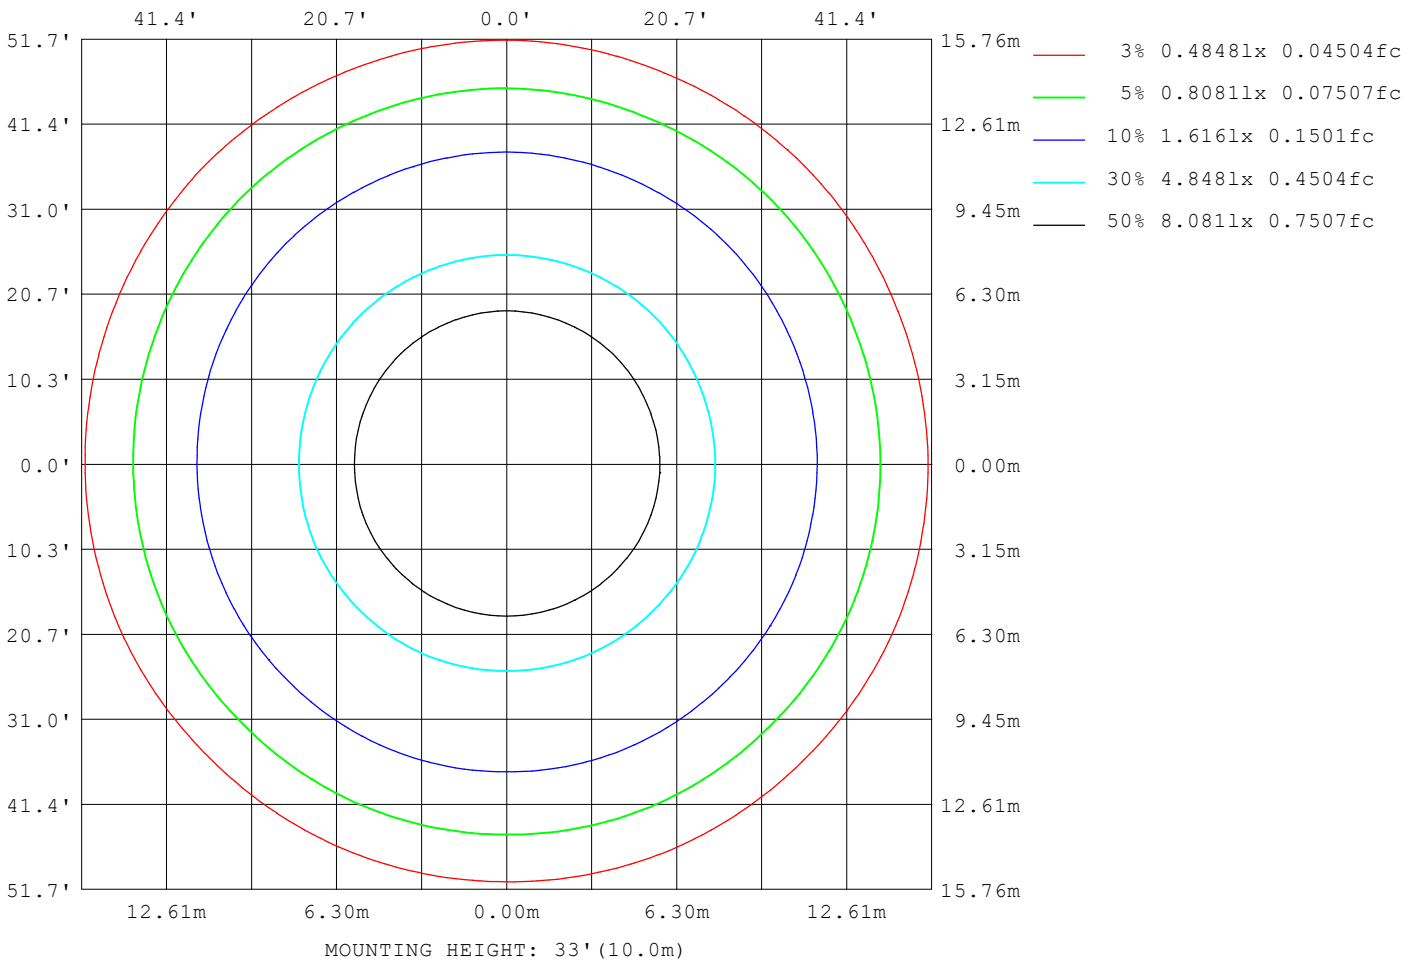

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.55V I:0.1993A P:23.566W PF:0.9892 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2965.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	18610
L_0~180 (75) av	13514
L_0~180 (85) av	10534
L_90~270 (65) av	18550
L_90~270 (75) av	13625
L_90~270 (85) av	8095
L_45 (65) av	18646
L_45 (75) av	13638
L_45 (85) av	9415

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

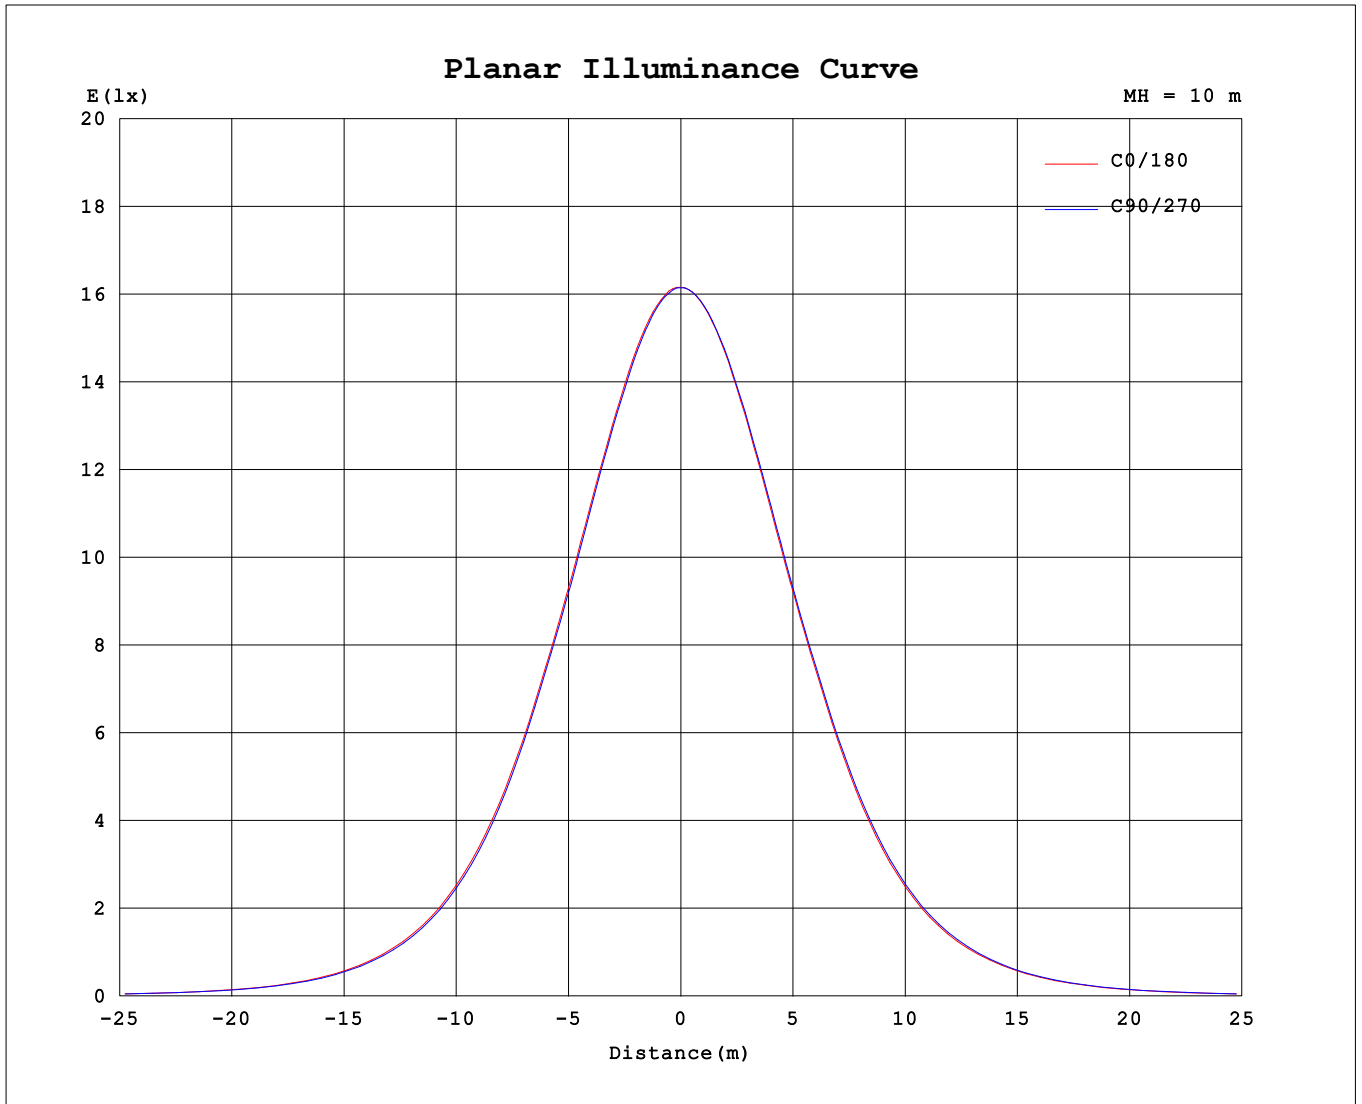

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 9.680m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.55V I:0.1993A P:23.566W PF:0.9892 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2965.92x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1616	1617	1615	1615	1615	1614	1614	1614	1616	1617	1615	1615	1615	1614	1614	1614			
5	1605	1606	1603	1602	1602	1602	1600	1601	1603	1603	1602	1604	1604	1603	1605	1602			
10	1572	1570	1567	1566	1564	1565	1563	1565	1566	1567	1569	1569	1569	1570	1568	1567			
15	1514	1511	1509	1507	1504	1505	1505	1507	1505	1507	1509	1510	1513	1511	1510	1511			
20	1436	1432	1427	1426	1424	1424	1423	1427	1424	1426	1430	1431	1434	1431	1432	1429			
25	1337	1332	1326	1326	1322	1324	1322	1327	1324	1326	1330	1331	1335	1333	1334	1330			
30	1220	1217	1210	1207	1205	1206	1206	1210	1208	1211	1216	1218	1220	1218	1218	1214			
35	1071	1066	1058	1057	1055	1057	1057	1063	1062	1066	1071	1072	1076	1073	1074	1066			
40	898	891	884	883	878	883	882	889	888	893	900	902	905	903	903	897			
45	715	710	702	701	696	700	698	705	707	715	723	723	724	721	722	716			
50	539	534	526	526	521	523	521	528	533	541	549	548	549	542	542	539			
55	378	376	368	369	363	364	363	372	377	381	389	387	388	379	379	375			
60	240	241	236	235	230	232	233	240	242	244	251	249	248	242	241	236			
65	140	141	139	138	136	139	140	142	143	145	147	146	146	143	142	139			
70	85.0	84.8	84.4	84.9	85.0	85.9	86.1	86.8	87.4	87.7	88.2	87.7	87.8	86.8	86.5	85.5			
75	61.7	62.2	61.9	62.5	62.6	63.5	63.6	63.8	64.2	64.8	65.1	64.5	64.4	63.9	63.6	62.1			
80	38.2	38.7	39.3	39.7	39.4	40.5	40.4	40.4	40.9	41.5	41.3	39.4	39.8	39.4	39.7	38.7			
85	15.1	15.6	14.9	13.7	12.6	14.3	14.8	16.9	17.9	17.6	15.6	11.9	12.8	13.1	13.8	14.9			
90	0.77	0.75	0.79	0.75	0.75	0.71	0.76	0.77	1.34	1.39	1.28	1.32	1.29	1.31	1.29	1.31			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks: