
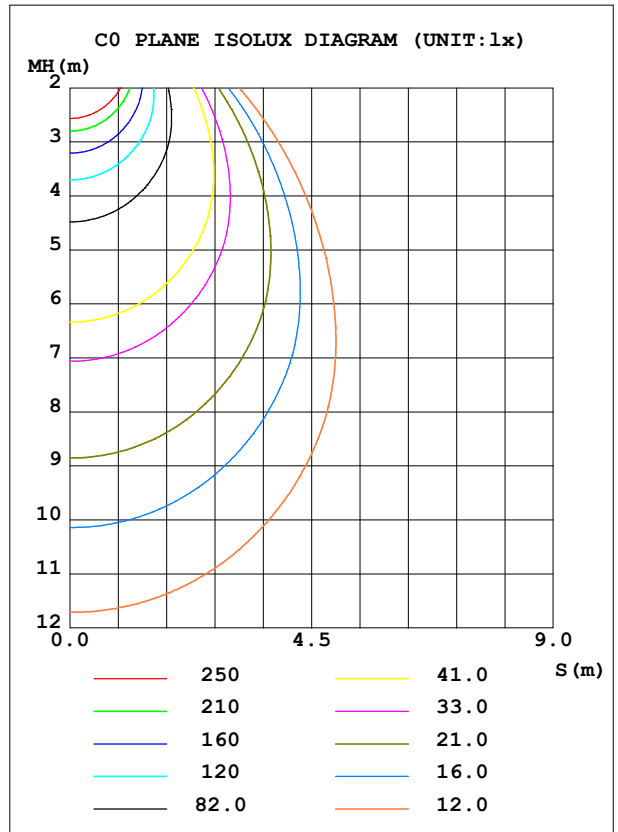


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.59V I:0.2349A P:27.799W PF:0.9897 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3008.8x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-6-30W-M-A5C5-HO	Imax (cd)	1645	S/MH (C0/180)	1.14
NOMINAL POWER (W)	30	LOR (%)	100.0	S/MH (C90/270)	1.14
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3008.8	<input type="checkbox"/> UP, DN (C0-180)	0.0,49.7
NOMINAL FLUX (lm)	3008.8	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0,50.3
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

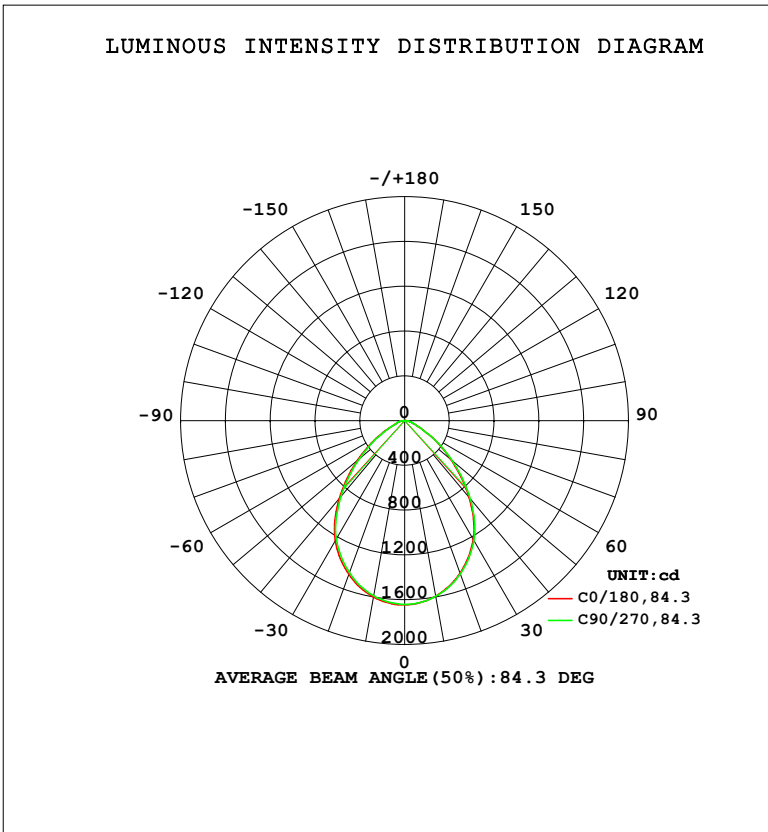

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum,lamp
10	1601	1594	1589	1589	1593	1595	1595	1594	0- 10	154.4	154.4	5.13,5.13
20	1461	1451	1445	1446	1448	1454	1457	1454	10- 20	431.5	585.9	19.5,19.5
30	1240	1228	1222	1223	1227	1235	1238	1236	20- 30	620.4	1206	40.1,40.1
40	909.0	893.9	886.7	889.1	895.4	909.5	912.9	911.1	30- 40	670.5	1877	62.4,62.4
50	548.9	534.2	529.1	528.2	539.6	555.3	554.9	549.1	40- 50	552.8	2430	80.7,80.7
60	247.4	243.7	236.5	239.6	249.1	257.1	255.0	246.9	50- 60	345.0	2775	92.2,92.2
70	85.53	84.89	85.36	86.47	87.76	88.52	87.89	86.62	60- 70	149.3	2924	97.2,97.2
80	38.48	39.59	39.74	40.72	41.21	41.16	40.00	39.89	70- 80	67.04	2991	99.4,99.4
90	0.7866	0.8063	0.7604	0.7670	1.363	1.304	1.318	1.311	80- 90	17.92	3009	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2175.9 lm

%lum = 72.3%

%lamp = 72.3%

Conical surface Flux(130deg): 2867.7 lm

%lum = 95.3%


%lamp = 95.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.59V I:0.2349A P:27.799W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3008.8x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

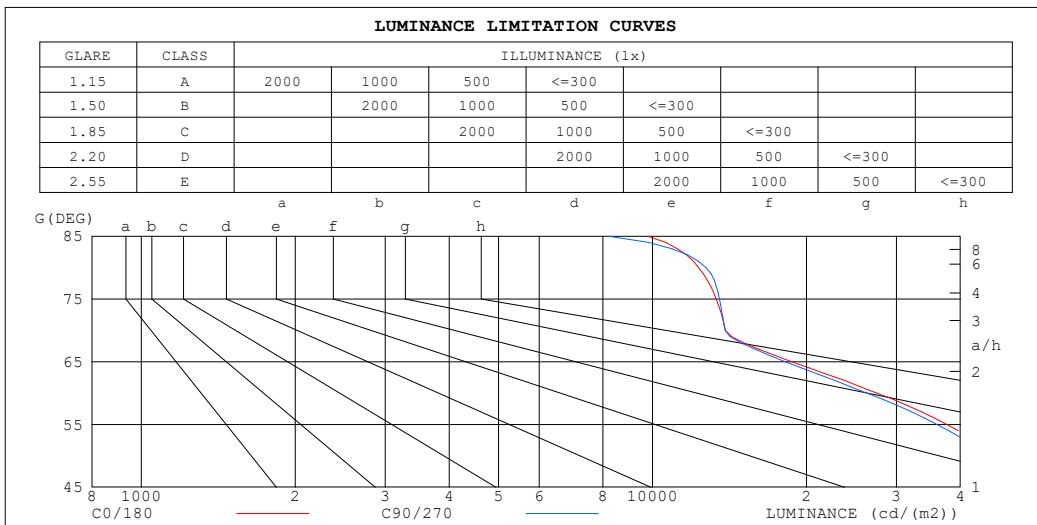

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9797	8223
80	12312	12716
75	13316	13509
70	13893	13865
65	18729	18184
60	27493	26281
55	37653	36013
50	47438	45728
45	56893	55207


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.59V I:0.2349A P:27.799W PF:0.9897 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:3008.8x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.99	.96	.97	.95	.93	.94	.92	.91	.89
2.0	.96	.91	.86	.95	.90	.85	.91	.87	.83	.88	.85	.82	.85	.82	.80	.78
3.0	.87	.80	.75	.85	.79	.74	.83	.77	.73	.80	.75	.72	.77	.74	.70	.69
4.0	.79	.71	.65	.77	.70	.65	.75	.69	.64	.73	.68	.63	.71	.66	.63	.61
5.0	.71	.64	.58	.70	.63	.58	.68	.62	.57	.66	.61	.56	.65	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.51	.63	.56	.51	.61	.55	.51	.59	.54	.50	.48
7.0	.60	.52	.47	.59	.52	.46	.58	.51	.46	.56	.50	.46	.55	.50	.45	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.43	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.39	.35	.33

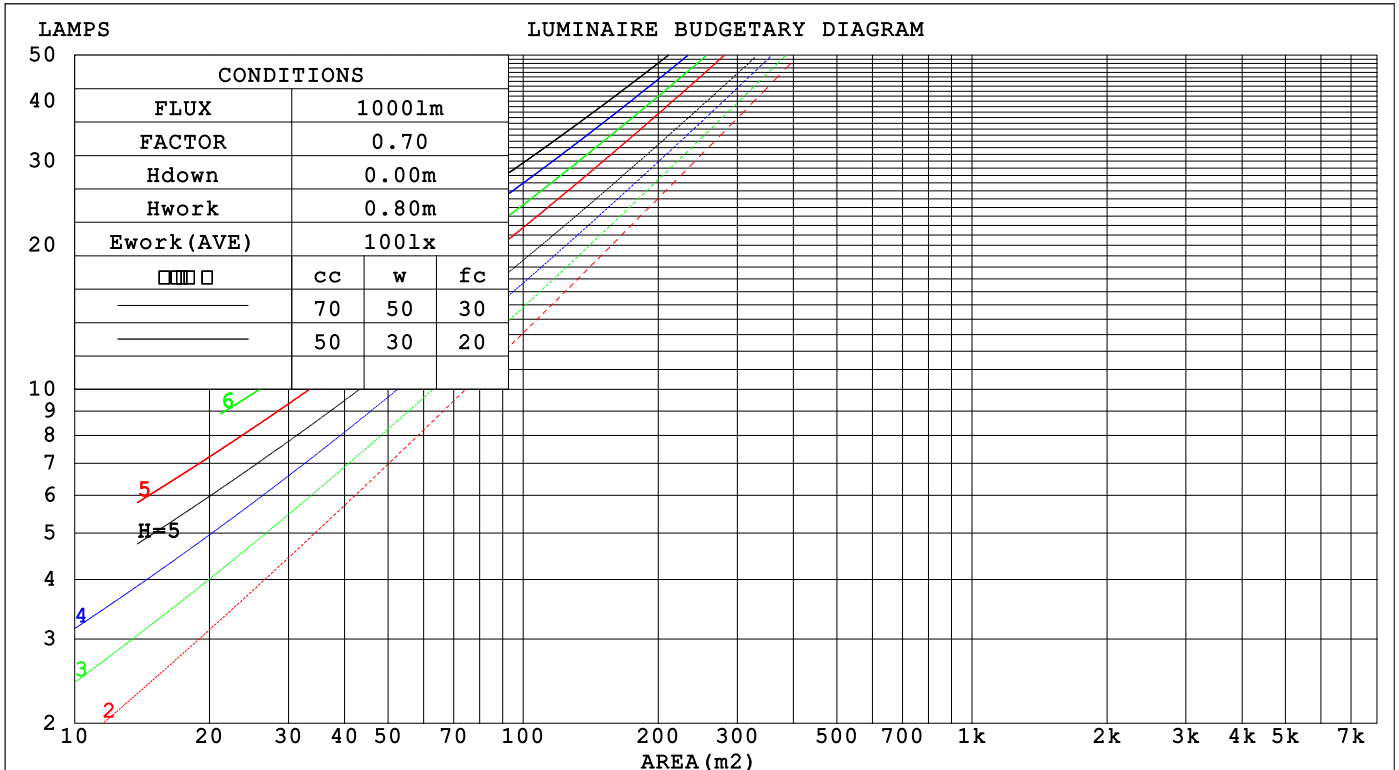

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.59V I:0.2349A P:27.799W PF:0.9897 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3008.8x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients(WEC)			
0.0						
1.0	.242 .138 .044	.236 .134 .043	.223 .128 .041	.211 .122 .039	.200 .116 .037	
2.0	.234 .128 .039	.228 .126 .039	.217 .121 .037	.207 .116 .036	.197 .112 .035	
3.0	.222 .118 .035	.217 .116 .035	.207 .112 .034	.198 .108 .033	.190 .105 .032	
4.0	.209 .109 .032	.205 .107 .032	.196 .104 .031	.188 .101 .030	.181 .098 .030	
5.0	.197 .100 .029	.193 .099 .029	.185 .097 .028	.178 .094 .028	.172 .092 .028	
6.0	.186 .093 .027	.182 .092 .026	.175 .090 .026	.169 .088 .026	.163 .086 .026	
7.0	.175 .087 .025	.172 .086 .024	.166 .084 .024	.160 .082 .024	.155 .081 .024	
8.0	.166 .081 .023	.163 .080 .023	.157 .079 .022	.152 .077 .022	.147 .076 .022	
9.0	.157 .076 .021	.154 .075 .021	.149 .074 .021	.145 .073 .021	.140 .071 .021	
10.0	.149 .071 .020	.146 .071 .020	.142 .070 .020	.138 .068 .019	.134 .067 .019	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients(CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.176 .157 .140	.150 .135 .120	.103 .093 .083	.059 .054 .048	.019 .017 .016	
2.0	.165 .132 .105	.141 .114 .091	.097 .079 .063	.056 .046 .037	.018 .015 .012	
3.0	.155 .114 .081	.133 .098 .070	.091 .068 .049	.053 .040 .029	.017 .013 .010	
4.0	.147 .100 .064	.126 .086 .056	.087 .060 .039	.050 .035 .023	.016 .011 .008	
5.0	.140 .089 .052	.120 .077 .045	.083 .054 .032	.048 .032 .019	.015 .010 .006	
6.0	.133 .081 .043	.114 .070 .038	.079 .049 .027	.046 .029 .016	.015 .009 .005	
7.0	.126 .074 .036	.109 .064 .032	.075 .045 .022	.044 .026 .013	.014 .009 .004	
8.0	.121 .068 .031	.104 .059 .027	.072 .041 .019	.042 .024 .012	.014 .008 .004	
9.0	.115 .063 .027	.099 .054 .024	.069 .038 .017	.040 .023 .010	.013 .007 .003	
10.0	.110 .058 .024	.095 .051 .021	.066 .036 .015	.038 .021 .009	.012 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.59V I:0.2349A P:27.799W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3008.8x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.6	25.9	24.9	26.1	26.3	24.5	25.8	24.7	26.0	26.2
3H	24.8	26.0	25.1	26.2	26.5	24.7	25.9	25.0	26.1	26.3
4H	24.9	26.1	25.2	26.3	26.5	24.8	25.9	25.1	26.2	26.4
6H	25.0	26.1	25.3	26.3	26.6	24.9	25.9	25.2	26.2	26.5
8H	25.0	26.0	25.3	26.3	26.6	24.9	25.9	25.2	26.2	26.5
12H	25.0	26.0	25.4	26.3	26.6	24.9	25.9	25.2	26.2	26.4
4H 2H	24.7	25.8	25.0	26.1	26.3	24.6	25.7	24.9	25.9	26.2
3H	25.0	26.0	25.4	26.3	26.6	24.9	25.9	25.2	26.2	26.4
4H	25.2	26.1	25.6	26.4	26.7	25.1	26.0	25.5	26.3	26.6
6H	25.4	26.1	25.7	26.5	26.8	25.3	26.1	25.7	26.4	26.7
8H	25.4	26.1	25.8	26.5	26.9	25.3	26.1	25.7	26.4	26.8
12H	25.4	26.1	25.9	26.5	26.9	25.4	26.0	25.8	26.4	26.8
8H 4H	25.2	25.9	25.6	26.3	26.7	25.1	25.8	25.5	26.2	26.6
6H	25.5	26.1	25.9	26.5	26.9	25.4	26.0	25.8	26.4	26.8
8H	25.6	26.1	26.0	26.5	27.0	25.5	26.0	26.0	26.4	26.9
12H	25.6	26.1	26.1	26.5	27.0	25.6	26.0	26.0	26.4	26.9
12H 4H	25.2	25.8	25.6	26.2	26.6	25.1	25.7	25.5	26.1	26.5
6H	25.5	26.0	25.9	26.4	26.9	25.4	25.9	25.8	26.3	26.8
8H	25.6	26.0	26.1	26.5	27.0	25.5	26.0	26.0	26.4	26.9

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 1.0	+ 0.7 / - 1.0
1.5H	+ 0.4 / - 0.5	+ 0.4 / - 0.4
2.0H	+ 1.6 / - 1.9	+ 1.6 / - 1.8

CIE Pub.117, 3009 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.8)
 Area: 0.018 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.59V I:0.2349A P:27.799W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3008.8x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	46
0.80	78	68	62	77	68	62	75	67	62	56
1.00	85	77	71	84	76	71	82	77	70	64
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	88	83	95	88	83	92	86	81	75
2.00	101	95	90	100	94	89	97	92	88	81
2.50	104	98	94	102	97	93	99	94	91	84
3.00	107	102	97	105	100	96	101	97	94	87
4.00	110	105	102	107	104	100	104	100	98	90
5.00	111	108	105	109	106	103	105	102	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.59V I:0.2349A P:27.799W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3008.8x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

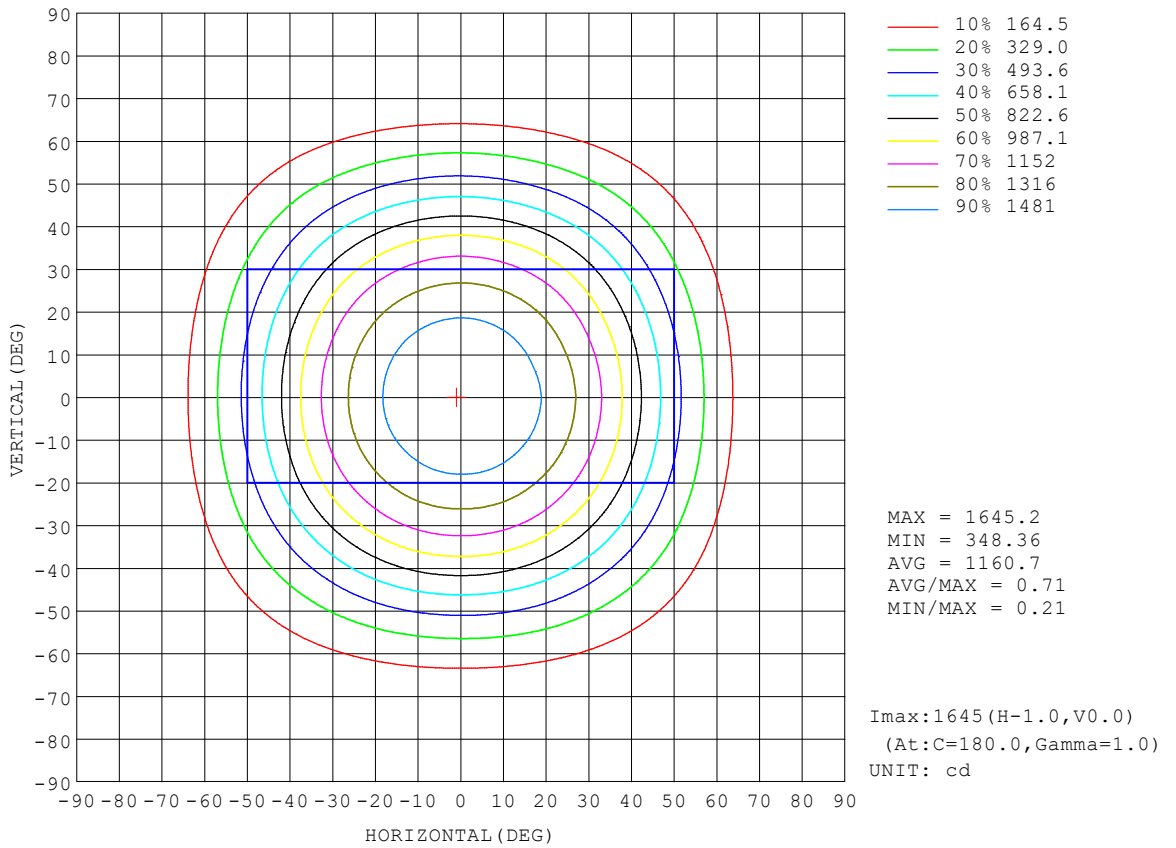


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.59V I:0.2349A P:27.799W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3008.8x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

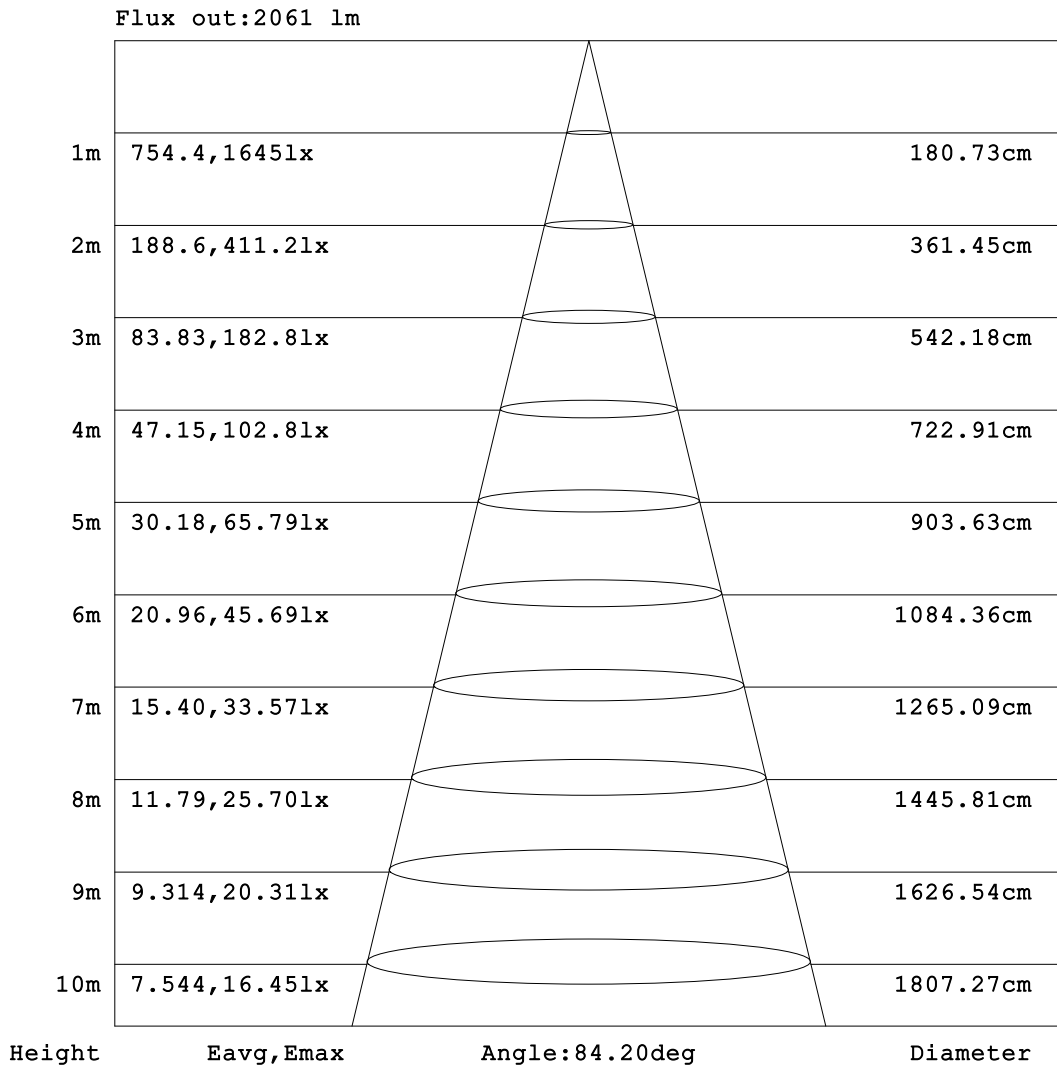


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.59V I:0.2349A P:27.799W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3008.8x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

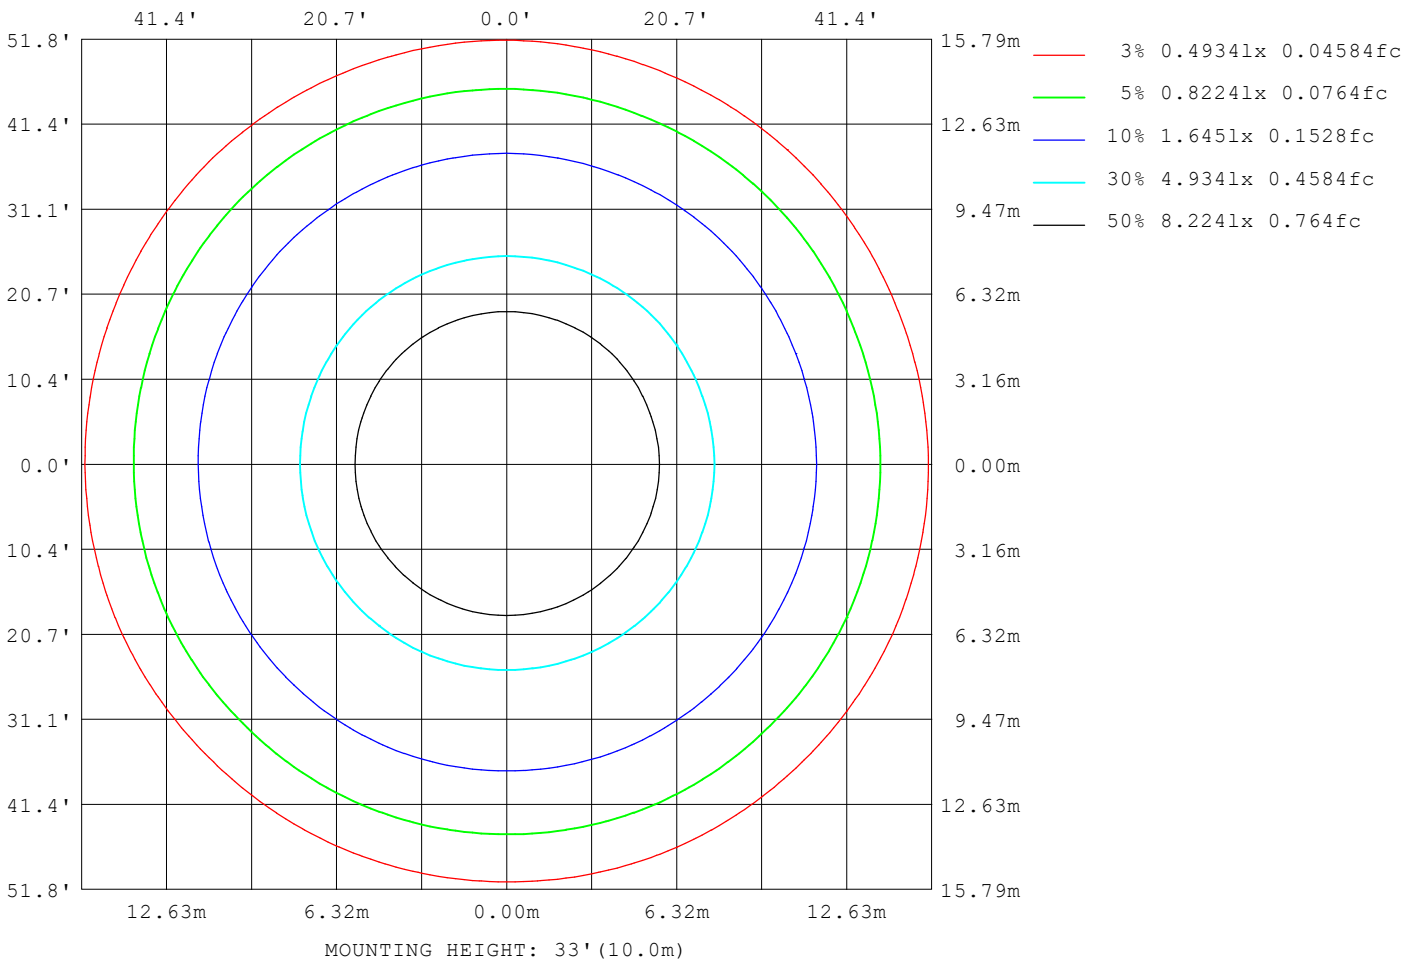

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.59V I:0.2349A P:27.799W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3008.8x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	18931
L_0~180 (75) av	13589
L_0~180 (85) av	10686
L_90~270 (65) av	18843
L_90~270 (75) av	13685
L_90~270 (85) av	8229
L_45 (65) av	18946
L_45 (75) av	13691
L_45 (85) av	9550

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

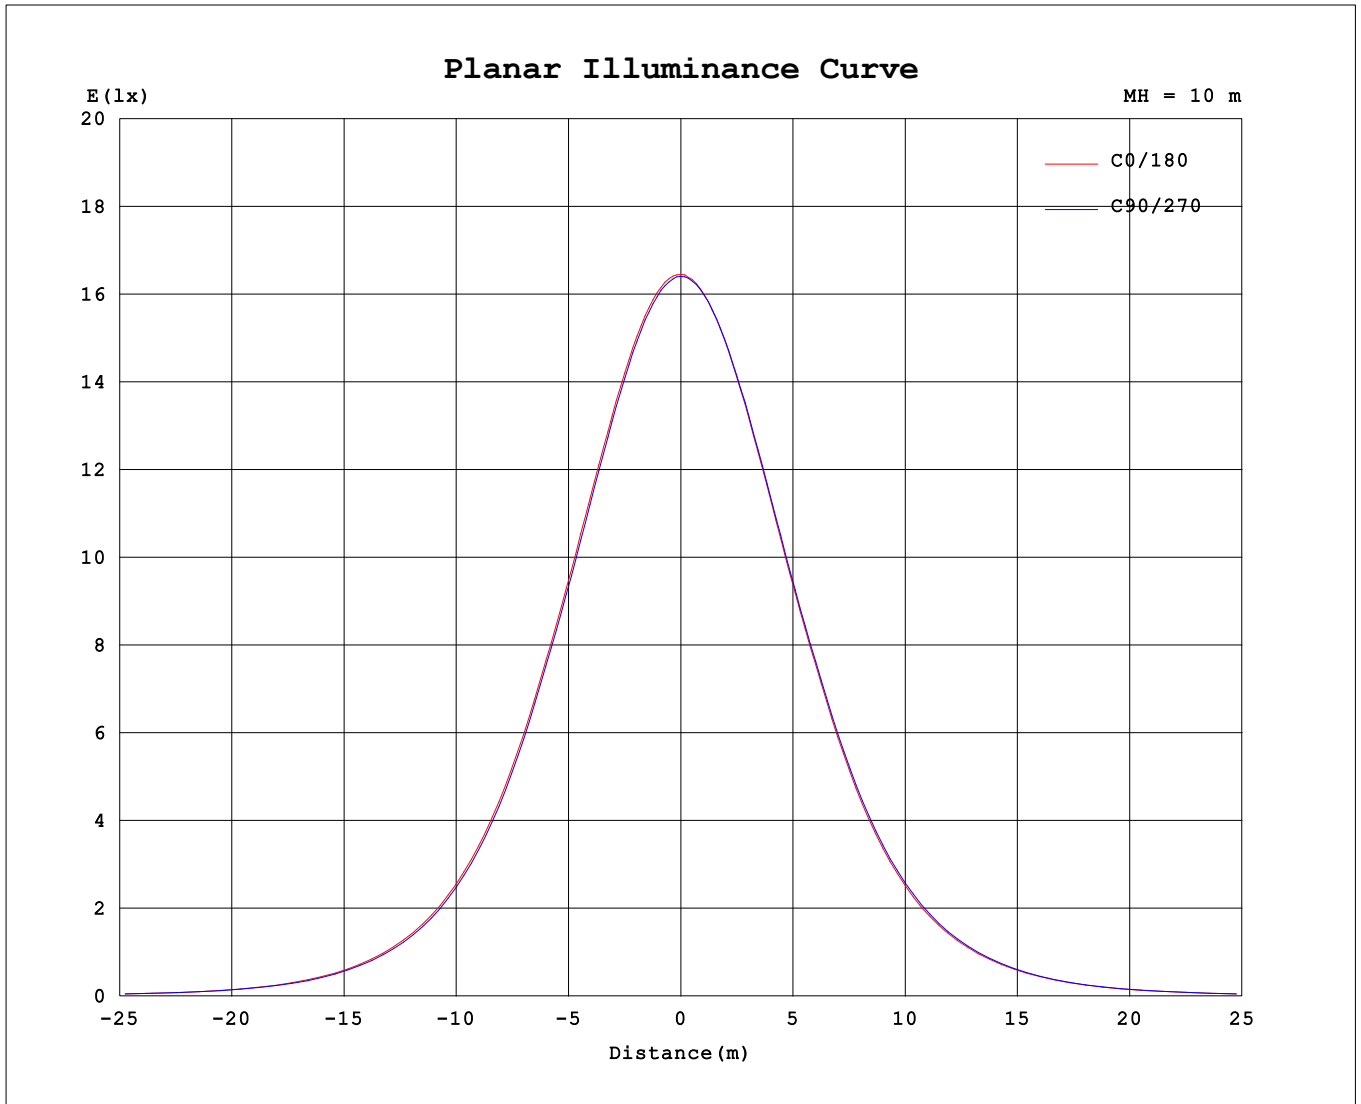

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.59V I:0.2349A P:27.799W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3008.8x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 2700K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1645	1644	1643	1642	1641	1640	1639	1639	1645	1644	1643	1642	1641	1640	1639	1639			
5	1635	1633	1631	1629	1628	1627	1627	1627	1630	1632	1630	1631	1629	1629	1629	1628			
10	1601	1597	1594	1592	1589	1589	1589	1590	1593	1593	1595	1595	1595	1594	1594	1593			
15	1542	1539	1534	1531	1529	1529	1528	1531	1532	1532	1535	1536	1536	1537	1535	1534			
20	1461	1457	1451	1449	1445	1447	1446	1448	1448	1451	1454	1454	1457	1455	1454	1453			
25	1360	1355	1348	1346	1342	1342	1343	1345	1346	1348	1353	1354	1356	1354	1354	1351			
30	1240	1236	1228	1225	1222	1223	1223	1227	1227	1230	1235	1236	1238	1236	1236	1231			
35	1087	1081	1073	1070	1066	1069	1069	1075	1075	1078	1083	1086	1090	1087	1086	1080			
40	909	902	894	891	887	889	889	895	895	901	909	911	913	911	911	904			
45	724	717	710	707	703	705	704	709	713	721	730	731	730	727	728	723			
50	549	543	534	533	529	530	528	534	540	548	555	556	555	549	549	546			
55	389	386	377	377	372	372	372	380	385	390	396	395	396	388	387	384			
60	247	249	244	241	237	239	240	246	249	251	257	255	255	250	247	244			
65	142	143	141	140	138	141	142	145	146	147	149	149	148	145	143	141			
70	85.5	85.3	84.9	85.2	85.4	86.1	86.5	87.1	87.8	88.1	88.5	88.1	87.9	87.2	86.6	85.7			
75	62.0	62.5	62.3	62.7	62.9	63.7	63.9	64.0	64.6	65.2	65.2	64.8	64.6	64.2	63.7	62.4			
80	38.5	39.0	39.6	39.9	39.7	40.7	40.7	40.6	41.2	41.8	41.2	39.6	40.0	39.7	39.9	38.9			
85	15.4	15.8	15.2	13.8	12.9	14.5	15.1	17.2	18.2	17.9	15.7	12.2	12.9	13.4	13.9	15.1			
90	0.79	0.77	0.81	0.76	0.76	0.73	0.77	0.79	1.36	1.40	1.30	1.33	1.32	1.34	1.31	1.32			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks: