
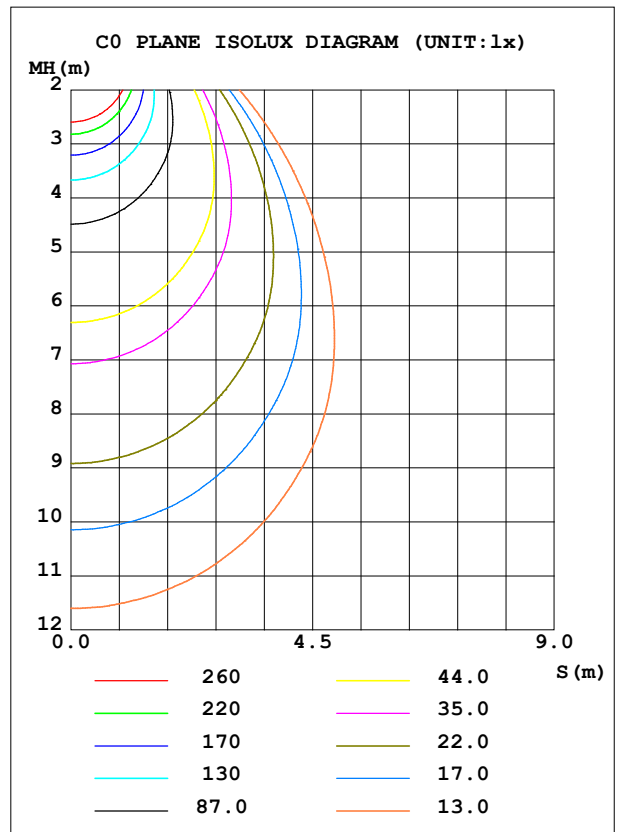


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.59V I:0.2371A P:28.061W PF:0.9897 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3202.37x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-6-30W-M-A5C5-HO	Imax (cd)	1749	S/MH (C0/180)	1.14
NOMINAL POWER (W)	30	LOR (%)	100.0	S/MH (C90/270)	1.14
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3202.4	<input type="checkbox"/> UP, DN (C0-180)	0.0,49.7
NOMINAL FLUX (lm)	3202.37	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0,50.3
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.15

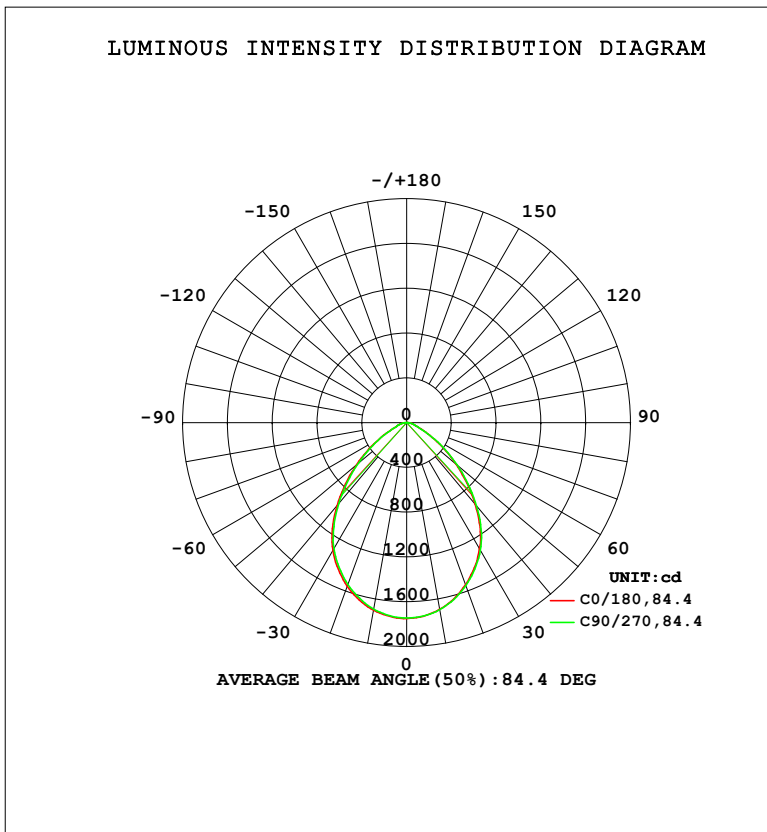

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum,lamp
10	1701	1695	1692	1691	1693	1696	1697	1696	0- 10	164.2	164.2	5.13,5.13
20	1554	1544	1538	1539	1540	1547	1549	1547	10- 20	459.0	623.2	19.5,19.5
30	1319	1307	1300	1302	1303	1314	1318	1315	20- 30	660.1	1283	40.1,40.1
40	967.7	952.8	946.0	948.8	954.0	969.7	973.3	973.1	30- 40	714.2	1997	62.4,62.4
50	584.2	569.2	562.8	562.5	574.8	591.2	591.1	585.1	40- 50	589.3	2587	80.8,80.8
60	261.8	258.5	251.2	254.1	263.8	272.0	270.3	261.7	50- 60	366.3	2953	92.2,92.2
70	91.33	90.64	91.23	92.47	93.64	94.48	93.93	92.56	60- 70	158.6	3112	97.2,97.2
80	40.98	42.21	42.40	43.42	43.90	44.21	42.62	42.53	70- 80	71.55	3183	99.4,99.4
90	0.8325	0.8587	0.7997	0.8259	1.455	1.390	1.403	1.396	80- 90	19.04	3202	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2316.5 lm

%lum = 72.3%

%lamp = 72.3%

Conical surface Flux(130deg): 3052 lm

%lum = 95.3%


%lamp = 95.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.59V I:0.2371A P:28.061W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3202.37x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

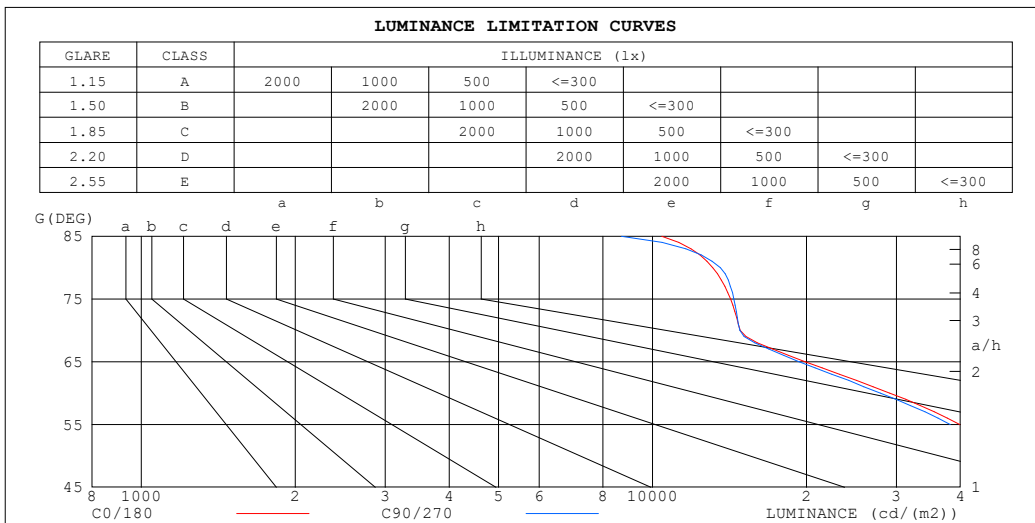

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	10421	8691
80	13110	13564
75	14211	14423
70	14835	14818
65	19901	19350
60	29089	27909
55	39914	38245
50	50495	48645
45	60644	58838


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.59V I:0.2371A P:28.061W PF:0.9897 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:3202.37x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.99	.96	.97	.95	.93	.94	.92	.91	.89
2.0	.96	.91	.86	.95	.90	.85	.91	.87	.83	.88	.85	.82	.85	.82	.80	.78
3.0	.87	.80	.75	.85	.79	.74	.83	.77	.73	.80	.75	.72	.77	.74	.70	.69
4.0	.79	.71	.65	.77	.70	.65	.75	.69	.64	.73	.68	.63	.71	.66	.63	.61
5.0	.71	.64	.58	.70	.63	.58	.68	.62	.57	.66	.61	.56	.65	.60	.56	.54
6.0	.65	.57	.52	.64	.57	.51	.63	.56	.51	.61	.55	.51	.59	.54	.50	.48
7.0	.60	.52	.47	.59	.52	.46	.58	.51	.46	.56	.50	.46	.55	.50	.45	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.43	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.39	.35	.33

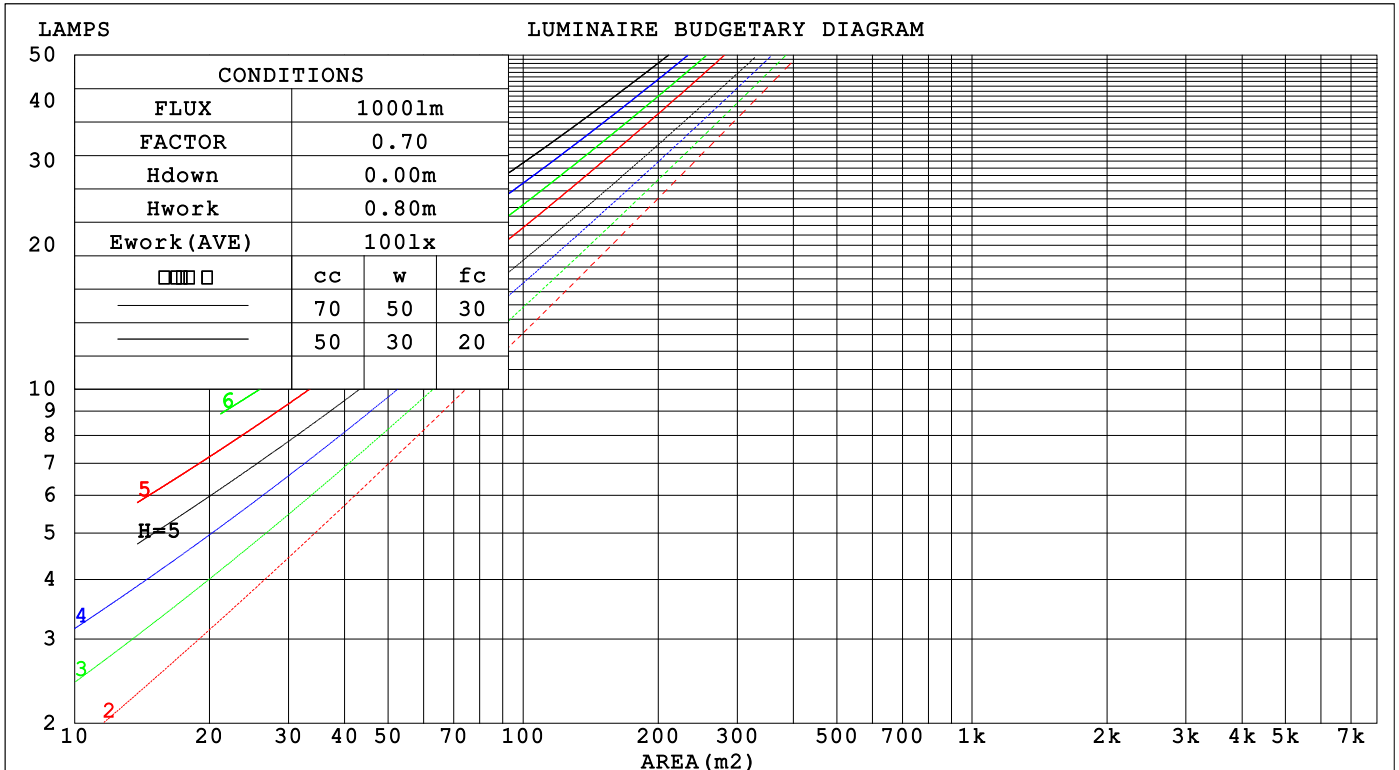

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.59V I:0.2371A P:28.061W PF:0.9897 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3202.37x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.242	.138	.044	.236	.134	.043	.223	.128	.041	.211	.122	.039	.200	.116	.037	
2.0	.234	.128	.039	.228	.126	.039	.217	.121	.037	.207	.116	.036	.197	.112	.035	
3.0	.222	.118	.035	.217	.116	.035	.207	.112	.034	.198	.108	.033	.190	.105	.032	
4.0	.209	.109	.032	.205	.107	.032	.196	.104	.031	.188	.101	.030	.181	.098	.030	
5.0	.197	.100	.029	.193	.099	.029	.185	.097	.028	.178	.094	.028	.172	.092	.028	
6.0	.186	.093	.027	.182	.092	.026	.175	.090	.026	.169	.088	.026	.163	.086	.026	
7.0	.175	.087	.025	.172	.086	.024	.166	.084	.024	.160	.082	.024	.155	.081	.024	
8.0	.166	.081	.023	.163	.080	.023	.157	.079	.022	.152	.077	.022	.147	.076	.022	
9.0	.157	.076	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021	.140	.071	.021	
10.0	.149	.071	.020	.146	.071	.020	.142	.070	.020	.138	.068	.019	.134	.067	.019	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.176	.157	.140	.150	.135	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
3.0	.165	.132	.105	.141	.114	.091	.097	.079	.063	.056	.046	.037	.018	.015	.012	
4.0	.155	.114	.081	.133	.098	.070	.091	.068	.049	.053	.040	.029	.017	.013	.010	
5.0	.147	.100	.064	.126	.086	.056	.087	.060	.039	.050	.035	.023	.016	.011	.008	
6.0	.140	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006	
7.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005	
8.0	.127	.074	.036	.109	.064	.032	.075	.045	.022	.044	.026	.013	.014	.009	.004	
9.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.012	.014	.008	.004	
10.0	.115	.063	.027	.099	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.110	.058	.024	.095	.051	.021	.066	.036	.015	.038	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.59V I:0.2371A P:28.061W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3202.37x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.8	26.1	25.1	26.3	26.5	24.7	26.0	24.9	26.2	26.4
3H	25.0	26.2	25.3	26.5	26.7	24.9	26.1	25.2	26.3	26.5
4H	25.1	26.3	25.4	26.5	26.7	25.0	26.1	25.3	26.4	26.6
6H	25.2	26.3	25.5	26.5	26.8	25.1	26.2	25.4	26.4	26.7
8H	25.2	26.2	25.6	26.5	26.8	25.1	26.1	25.5	26.4	26.7
12H	25.2	26.2	25.6	26.5	26.8	25.1	26.1	25.5	26.4	26.7
4H 2H	24.9	26.0	25.2	26.3	26.5	24.8	25.9	25.1	26.2	26.4
3H	25.2	26.2	25.6	26.5	26.8	25.1	26.1	25.5	26.4	26.7
4H	25.4	26.3	25.8	26.6	26.9	25.3	26.2	25.7	26.5	26.8
6H	25.6	26.4	26.0	26.7	27.0	25.5	26.3	25.9	26.6	27.0
8H	25.6	26.3	26.0	26.7	27.1	25.6	26.3	26.0	26.6	27.0
12H	25.7	26.3	26.1	26.7	27.1	25.6	26.2	26.0	26.6	27.0
8H 4H	25.4	26.1	25.8	26.5	26.9	25.3	26.0	25.7	26.4	26.8
6H	25.7	26.3	26.1	26.7	27.1	25.6	26.2	26.0	26.6	27.0
8H	25.8	26.3	26.2	26.7	27.2	25.7	26.2	26.2	26.7	27.1
12H	25.9	26.3	26.3	26.7	27.2	25.8	26.2	26.2	26.7	27.1
12H 4H	25.4	26.1	25.8	26.4	26.8	25.3	26.0	25.7	26.3	26.7
6H	25.7	26.2	26.1	26.6	27.1	25.6	26.1	26.1	26.6	27.0
8H	25.8	26.3	26.3	26.7	27.2	25.7	26.2	26.2	26.6	27.1

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 1.0	+ 0.8 / - 1.0
1.5H	+ 0.4 / - 0.4	+ 0.4 / - 0.4
2.0H	+ 1.7 / - 1.9	+ 1.6 / - 1.8

CIE Pub.117, 3202 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.0)
 Area: 0.018 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-06-30	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.59V I:0.2371A P:28.061W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3202.37x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	58	52	67	58	52	66	57	52	46
0.80	78	68	62	77	68	62	75	67	62	56
1.00	85	77	71	84	76	71	82	77	70	64
1.25	92	84	78	91	83	78	88	82	77	71
1.50	96	88	83	95	88	83	92	86	81	75
2.00	101	95	90	100	94	89	97	92	88	81
2.50	104	98	94	102	97	93	99	94	91	84
3.00	107	102	97	105	100	96	101	97	94	87
4.00	110	105	102	107	104	100	104	100	98	90
5.00	111	108	105	109	106	103	105	102	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.59V I:0.2371A P:28.061W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3202.37x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

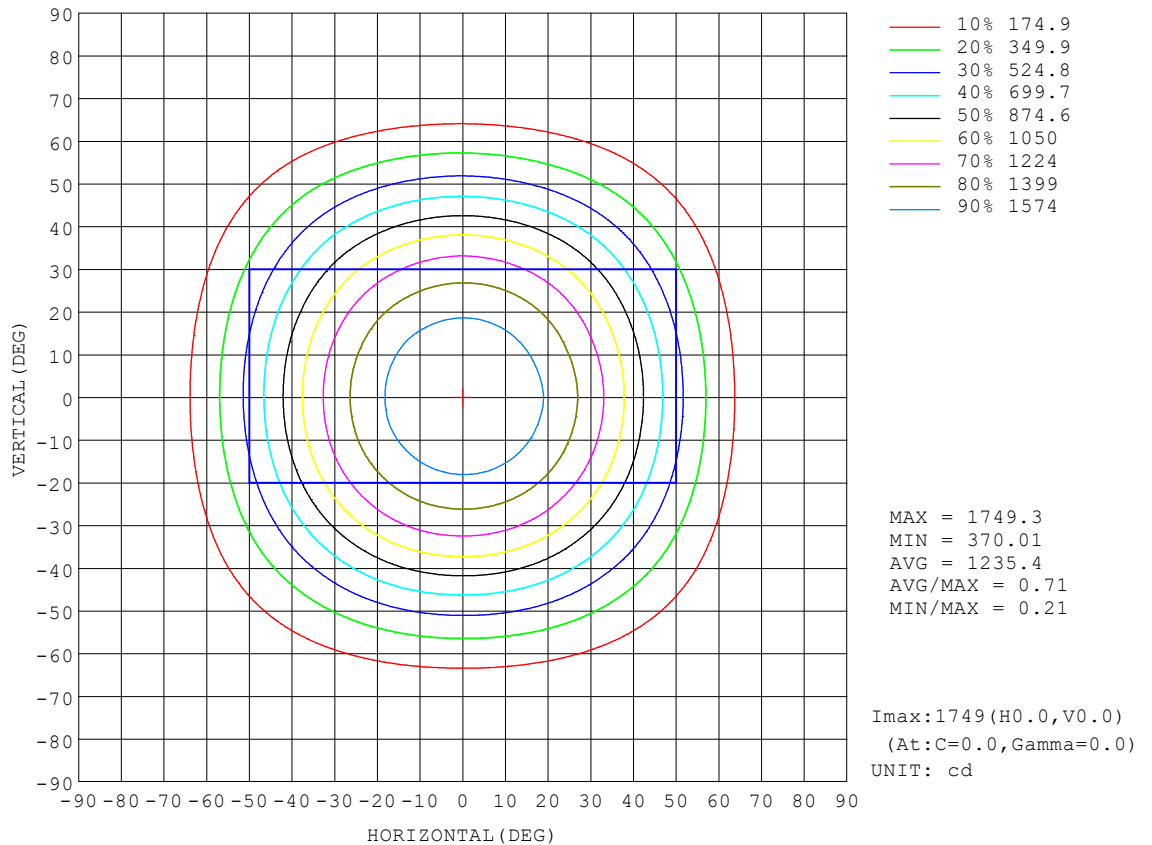


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.59V I:0.2371A P:28.061W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3202.37x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

Flux out:2194 lm

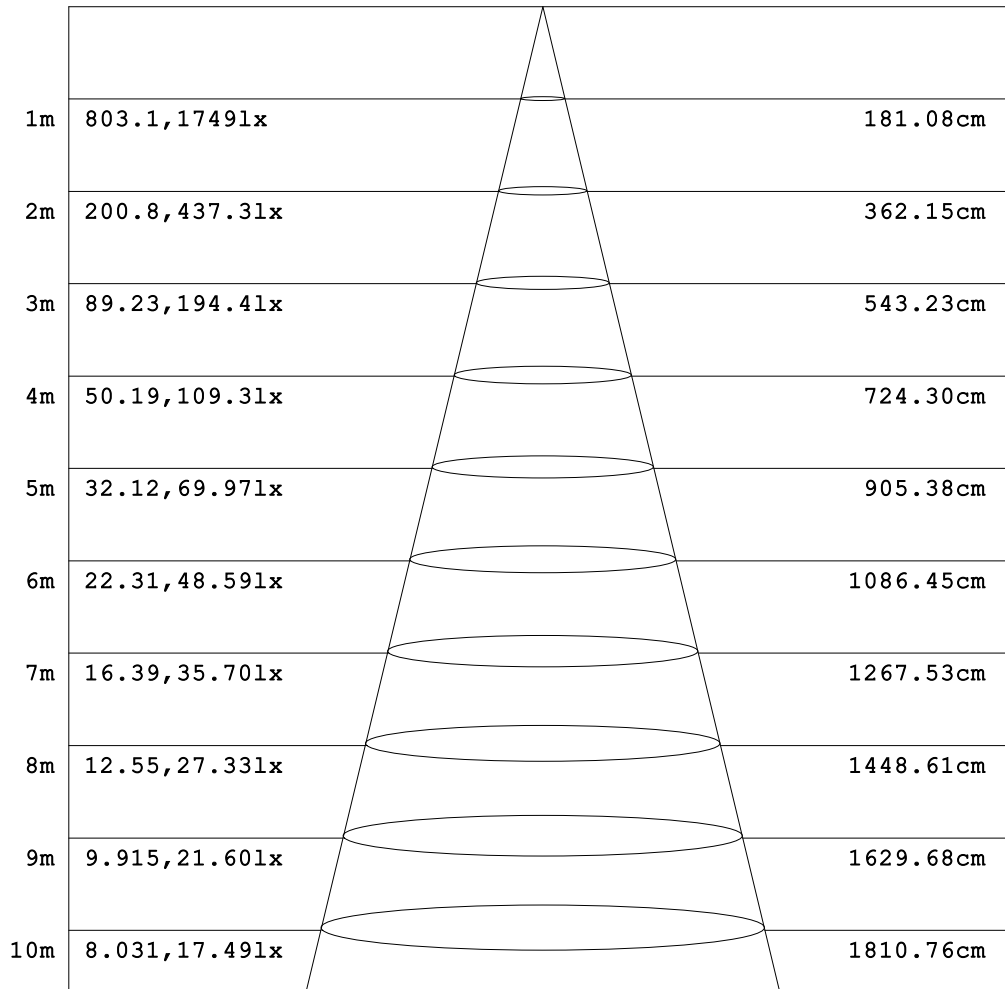

Angle:84.31deg

Height

Eavg, Emax

Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.59V I:0.2371A P:28.061W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3202.37x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

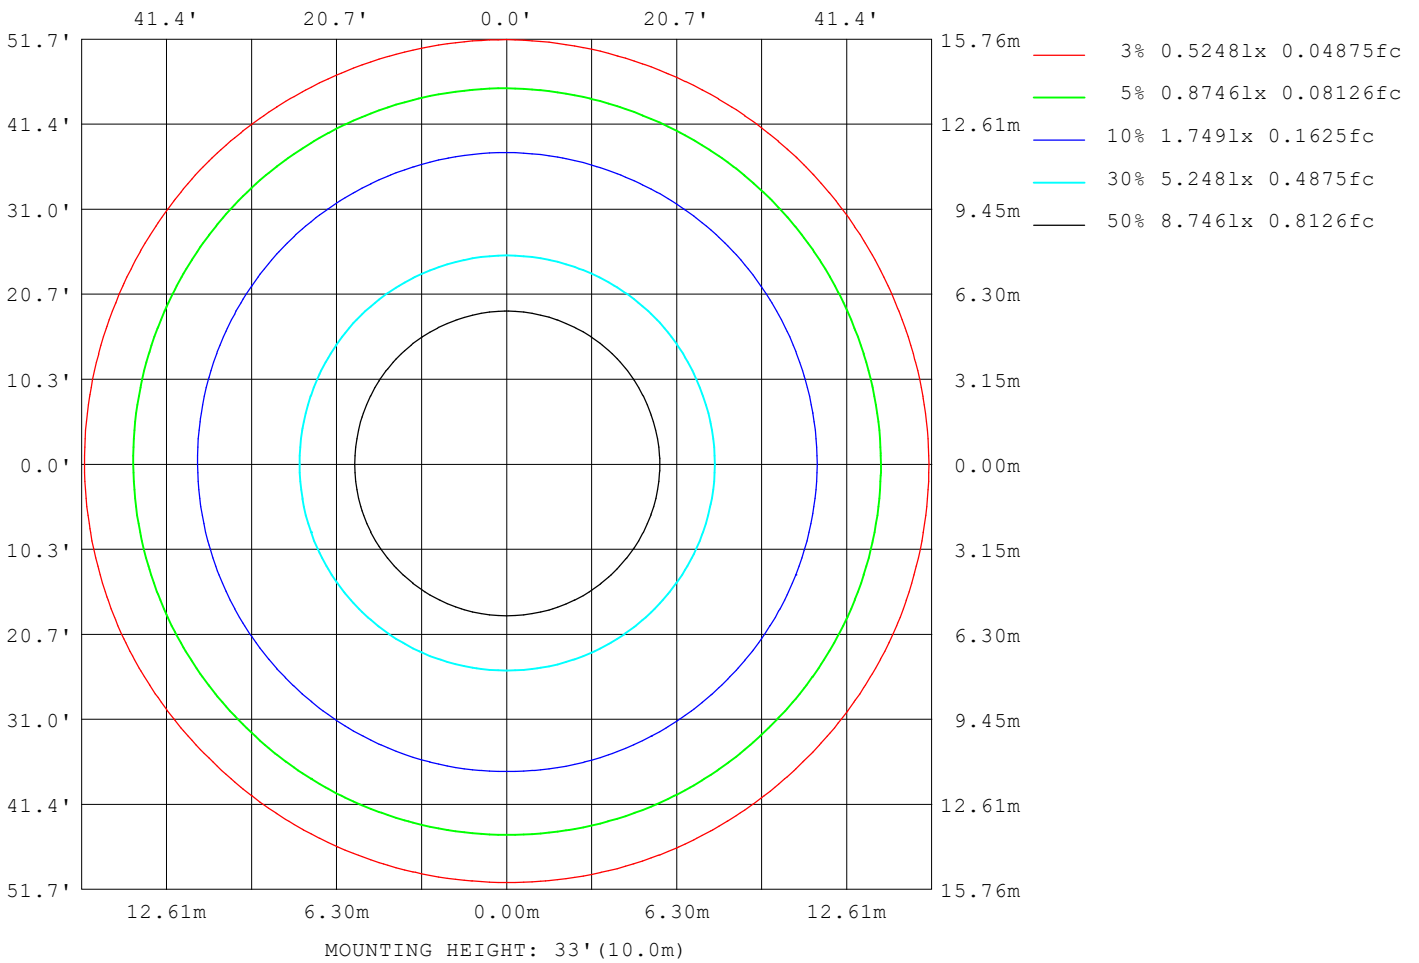

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.59V I:0.2371A P:28.061W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3202.37x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	20123
L_0~180 (75) av	14498
L_0~180 (85) av	11348
L_90~270 (65) av	20035
L_90~270 (75) av	14613
L_90~270 (85) av	8681
L_45 (65) av	20150
L_45 (75) av	14609
L_45 (85) av	10122

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

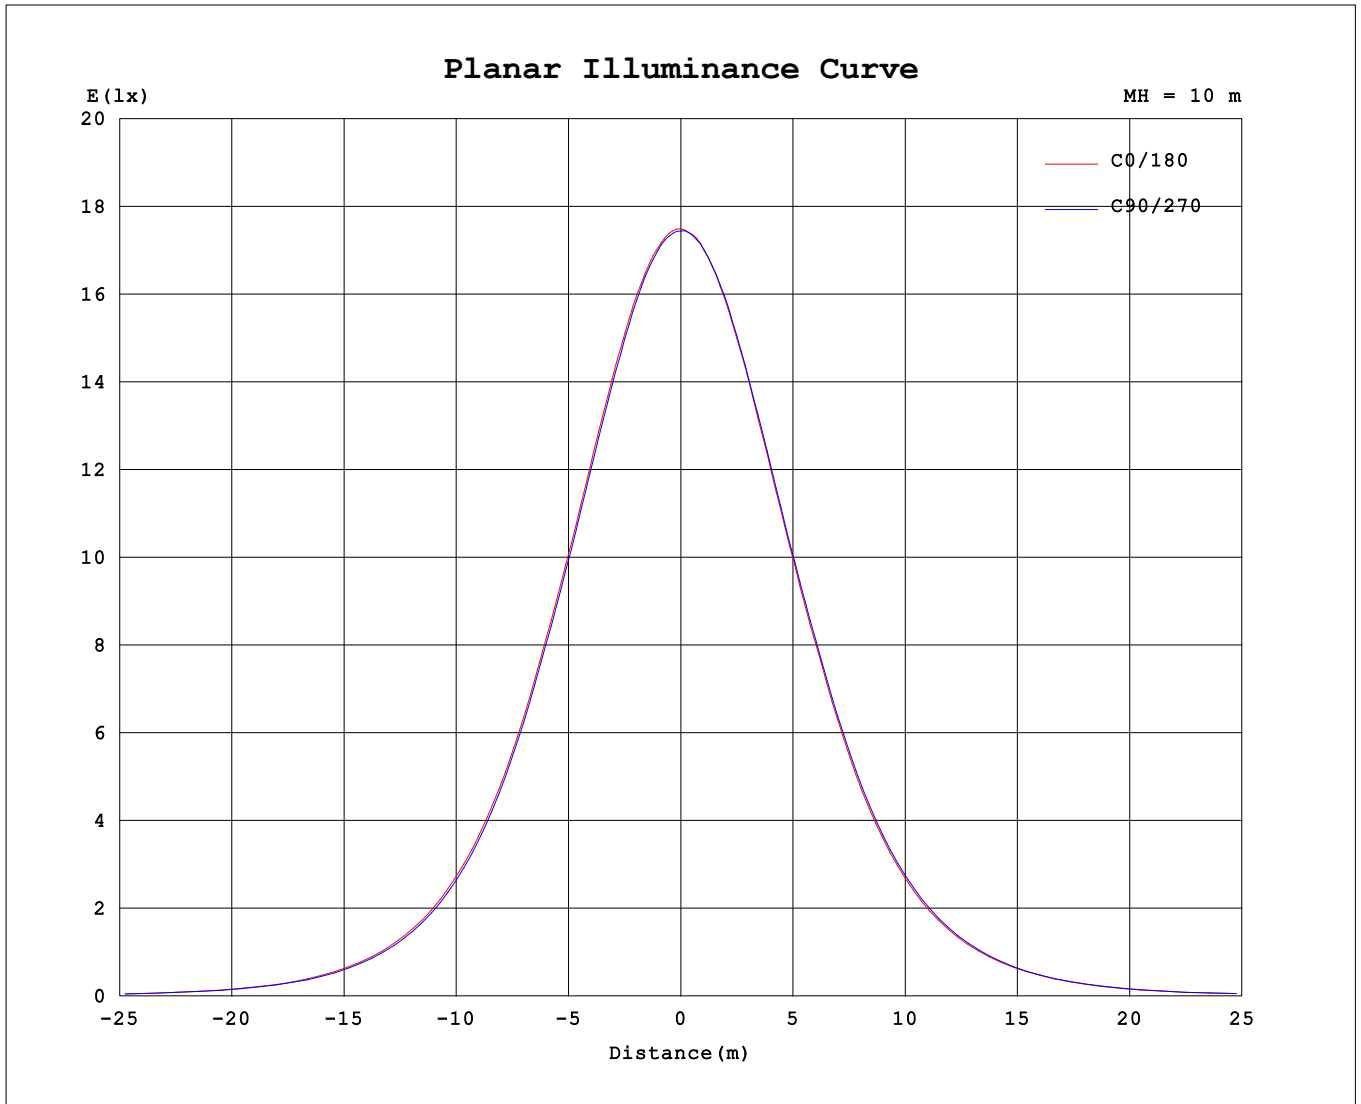

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.59V I:0.2371A P:28.061W PF:0.9897 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3202.37x1 lm		
NAME: DL254-6-30W-M-A5C5-HO	TYPE: 30W	WEIGHT:
SPEC.: 3000K	DIM.: 0.21	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.15	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1749	1747	1746	1745	1745	1744	1744	1745	1749	1747	1746	1745	1745	1744	1744	1745			
5	1737	1735	1734	1732	1732	1731	1730	1732	1736	1734	1733	1735	1735	1730	1732	1732			
10	1701	1700	1695	1691	1692	1691	1691	1692	1693	1695	1696	1696	1697	1695	1696	1695			
15	1639	1637	1630	1628	1624	1625	1627	1629	1631	1631	1633	1633	1635	1634	1632	1632			
20	1554	1550	1544	1541	1538	1538	1539	1541	1540	1542	1547	1545	1549	1548	1547	1548			
25	1445	1443	1435	1432	1427	1429	1428	1433	1432	1433	1438	1440	1442	1441	1442	1438			
30	1319	1315	1307	1304	1300	1300	1302	1305	1303	1309	1314	1314	1318	1314	1315	1313			
35	1157	1150	1142	1140	1136	1138	1139	1144	1146	1147	1155	1157	1160	1157	1156	1151			
40	968	962	953	948	946	948	949	955	954	961	970	971	973	972	973	965			
45	772	765	757	754	749	751	751	756	760	769	779	778	779	776	775	772			
50	584	578	569	568	563	564	562	568	575	583	591	592	591	585	585	582			
55	412	410	400	400	395	395	394	403	409	414	420	421	419	412	411	408			
60	262	263	259	256	251	252	254	261	264	265	272	270	270	265	262	258			
65	151	152	150	149	147	150	151	154	155	156	159	158	158	154	153	151			
70	91.3	91.0	90.6	91.0	91.2	92.0	92.5	93.0	93.6	94.0	94.5	94.0	93.9	93.2	92.6	91.8			
75	66.2	66.7	66.4	67.0	67.2	67.9	68.1	68.3	68.9	69.6	69.6	69.2	69.0	68.5	68.0	66.6			
80	41.0	41.6	42.2	42.5	42.4	43.3	43.4	43.3	43.9	44.5	44.2	42.3	42.6	42.4	42.5	41.5			
85	16.3	16.8	16.1	14.6	13.6	15.2	16.0	18.2	19.3	18.9	16.7	12.8	13.6	14.1	14.8	16.0			
90	0.83	0.82	0.86	0.82	0.80	0.78	0.83	0.83	1.46	1.50	1.39	1.40	1.40	1.42	1.40	1.42			

C Range: 0 - 360DEG C Interval: 22.5DEG Test Speed: HIGH Temperature:25.3°C Operators:DAMIN Test Date:2023-06-30	□ Range: 0 - 90DEG □ Interval: 1.0DEG Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461 Humidity:65.0% Test Distance:9.680m [K=1.0000] Remarks:
---	--