
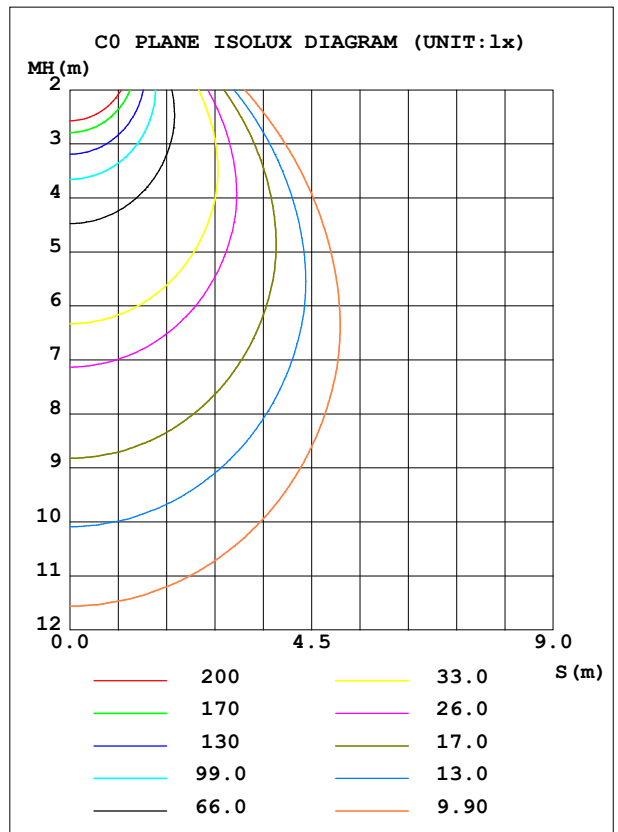


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.56V I:0.1773A P:20.990W PF:0.9904 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2611.53x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3500K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-8-35W-M-A5C5-HO	Imax (cd)	1323	S/MH (C0/180)	1.15
NOMINAL POWER (W)	22	LOR (%)	100.0	S/MH (C90/270)	1.15
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2611.5	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.3
NOMINAL FLUX (lm)	2611.53	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.7
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.25

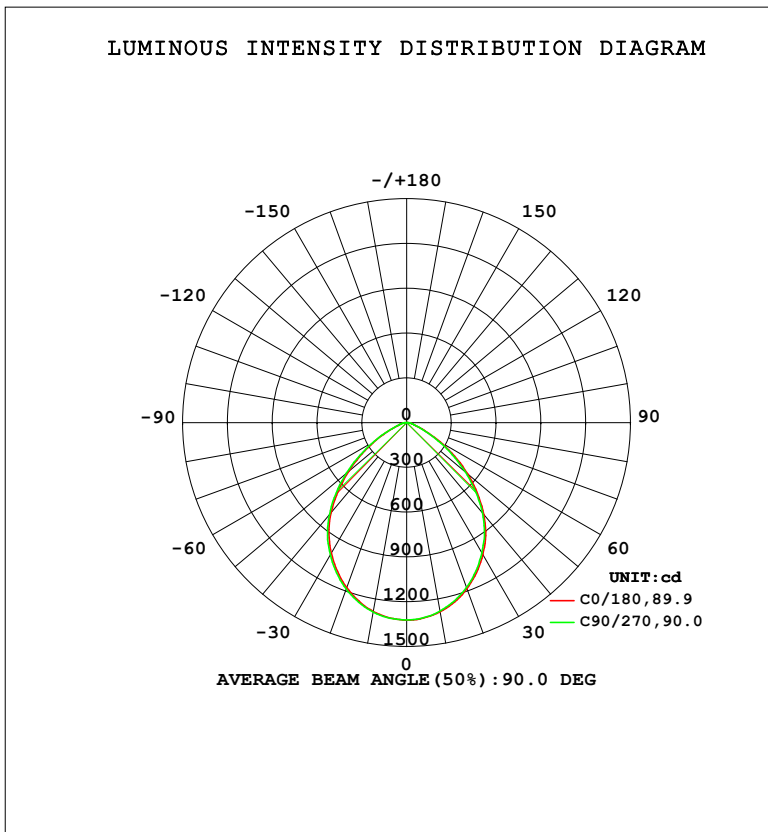

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1285	1287	1289	1290	1287	1286	1283	1280	0- 10	124.5	124.5	4.77,4.77
20	1176	1179	1186	1190	1184	1182	1174	1167	10- 20	349.3	473.7	18.1,18.1
30	1010	1014	1023	1031	1022	1018	1009	1001	20- 30	507.7	981.5	37.6,37.6
40	787.8	793.0	806.0	815.0	805.4	800.3	790.9	780.5	30- 40	570.9	1552	59.4,59.4
50	505.7	514.6	526.5	537.5	531.8	523.5	512.3	502.4	40- 50	508.2	2061	78.9,78.9
60	239.2	244.3	251.7	258.2	260.4	255.9	244.4	234.4	50- 60	339.1	2400	91.9,91.9
70	71.55	71.70	73.95	76.49	77.06	77.45	73.73	71.32	60- 70	146.6	2546	97.5,97.5
80	29.28	29.64	30.35	31.39	31.19	31.40	30.51	30.40	70- 80	50.68	2597	99.4,99.4
90	0.7211	0.7080	0.6686	0.6817	1.262	1.219	1.219	1.246	80- 90	14.62	2612	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1822.3 lm

%lum = 69.8%

%lamp = 69.8%

Conical surface Flux(130deg): 2493.2 lm

%lum = 95.5%


%lamp = 95.5%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.56V I:0.1773A P:20.990W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2611.53x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3500K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

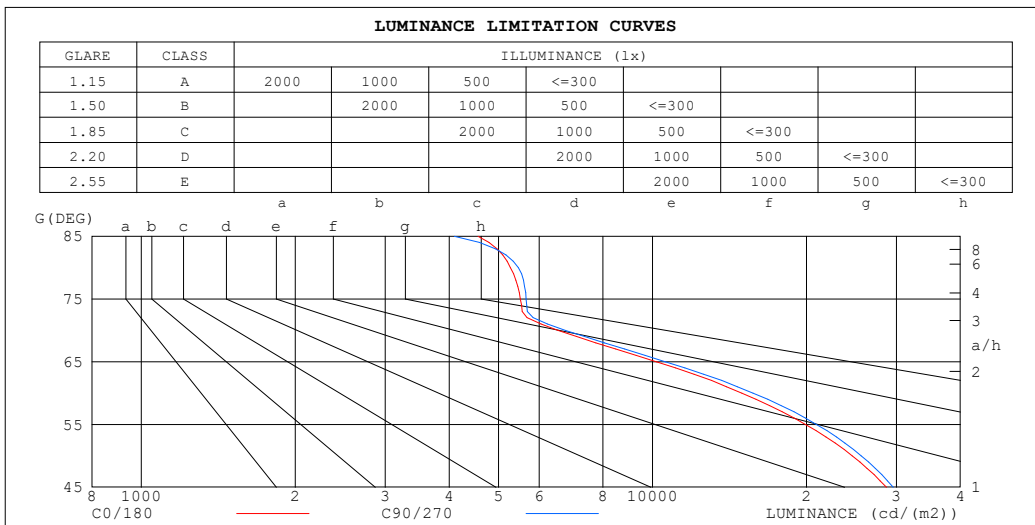

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4556	4094
80	5269	5462
75	5511	5660
70	6538	6757
65	10167	10586
60	14951	15734
55	19929	20926
50	24585	25597
45	28682	29577


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.56V I:0.1773A P:20.990W PF:0.9904 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2611.53x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3500K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.86	.94	.89	.85	.91	.86	.83	.88	.84	.81	.85	.82	.79	.77
3.0	.86	.79	.74	.85	.78	.73	.82	.76	.72	.79	.75	.71	.77	.73	.70	.68
4.0	.78	.70	.64	.76	.69	.64	.74	.68	.63	.72	.67	.62	.70	.65	.61	.59
5.0	.70	.62	.57	.69	.62	.56	.67	.61	.56	.65	.60	.55	.64	.59	.55	.53
6.0	.64	.56	.50	.63	.56	.50	.61	.55	.50	.60	.54	.49	.58	.53	.49	.47
7.0	.59	.51	.45	.58	.50	.45	.56	.50	.45	.55	.49	.44	.54	.48	.44	.42
8.0	.54	.46	.41	.53	.46	.41	.52	.45	.40	.51	.45	.40	.50	.44	.40	.38
9.0	.50	.42	.37	.49	.42	.37	.48	.41	.37	.47	.41	.37	.46	.40	.36	.35
10.0	.46	.39	.34	.46	.38	.34	.45	.38	.34	.44	.38	.33	.43	.37	.33	.32

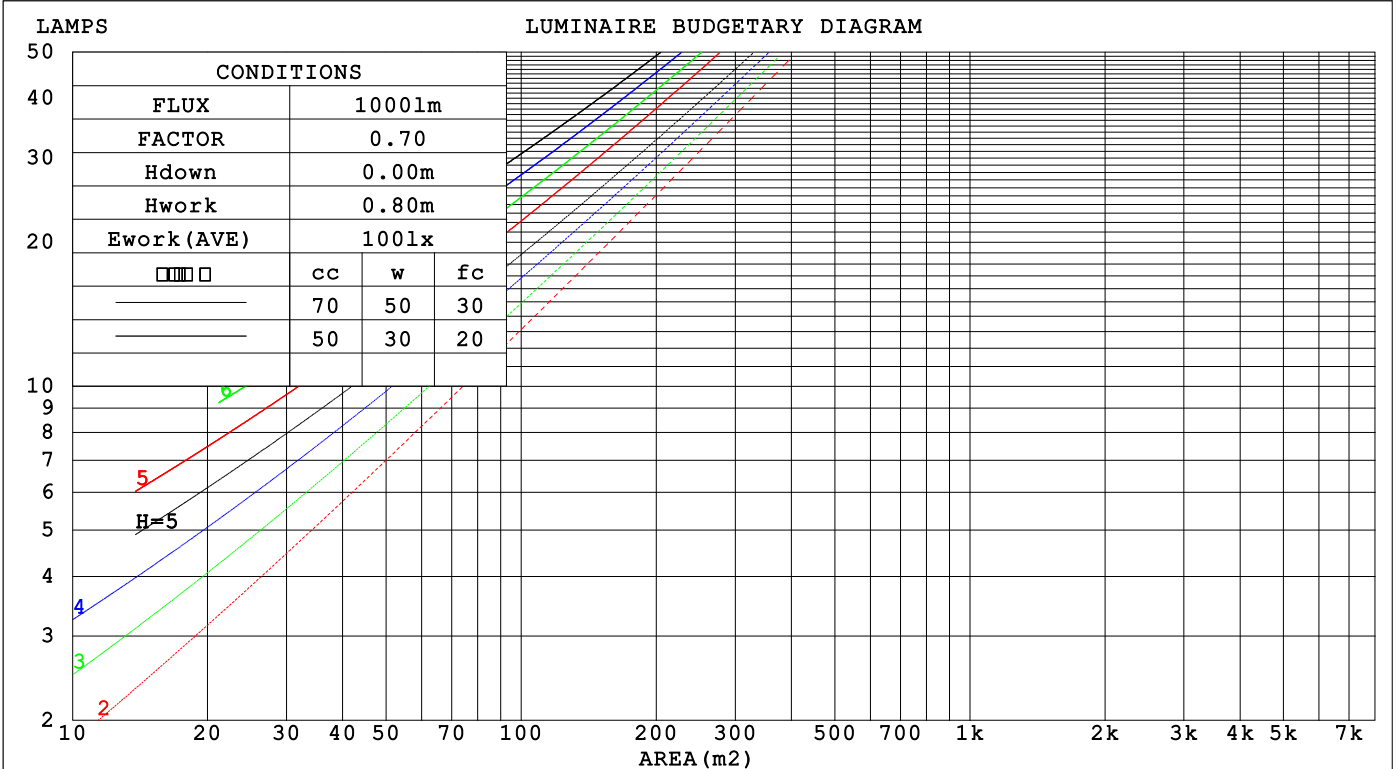

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.56V I:0.1773A P:20.990W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2611.53x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3500K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.246 .140 .044	.239 .136 .043	.226 .130 .041	.214 .123 .040	.203 .118 .038	
2.0	.238 .131 .040	.232 .128 .039	.221 .123 .038	.211 .118 .037	.201 .114 .036	
3.0	.226 .120 .036	.221 .118 .036	.211 .115 .035	.202 .111 .034	.194 .107 .033	
4.0	.214 .111 .033	.209 .109 .032	.200 .106 .032	.192 .103 .031	.185 .100 .031	
5.0	.201 .102 .030	.197 .101 .029	.189 .099 .029	.182 .096 .029	.176 .094 .028	
6.0	.189 .095 .027	.186 .094 .027	.179 .092 .027	.173 .090 .026	.167 .088 .026	
7.0	.179 .088 .025	.175 .087 .025	.169 .086 .025	.163 .084 .024	.158 .082 .024	
8.0	.169 .082 .023	.166 .082 .023	.160 .080 .023	.155 .079 .023	.150 .077 .022	
9.0	.159 .077 .022	.157 .076 .021	.152 .075 .021	.147 .074 .021	.143 .073 .021	
10.0	.151 .072 .020	.149 .072 .020	.144 .071 .020	.140 .070 .020	.136 .068 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.176 .157 .139	.150 .134 .120	.103 .093 .083	.059 .054 .048	.019 .017 .016	
2.0	.165 .132 .104	.141 .114 .090	.097 .079 .063	.056 .046 .037	.018 .015 .012	
3.0	.156 .114 .080	.134 .098 .070	.092 .068 .049	.053 .040 .029	.017 .013 .009	
4.0	.148 .100 .064	.127 .087 .055	.087 .060 .039	.051 .035 .023	.016 .012 .008	
5.0	.141 .089 .052	.121 .077 .045	.083 .054 .032	.048 .032 .019	.016 .010 .006	
6.0	.134 .081 .043	.115 .070 .037	.079 .049 .026	.046 .029 .016	.015 .009 .005	
7.0	.128 .074 .036	.110 .064 .031	.076 .045 .022	.044 .026 .013	.014 .009 .004	
8.0	.122 .068 .031	.105 .059 .027	.073 .041 .019	.042 .024 .011	.014 .008 .004	
9.0	.116 .063 .027	.100 .055 .023	.069 .038 .017	.040 .023 .010	.013 .007 .003	
10.0	.111 .059 .024	.096 .051 .021	.067 .036 .015	.039 .021 .009	.013 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.56V I:0.1773A P:20.990W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2611.53x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3500K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.6	24.0	22.9	24.1	24.3	22.8	24.1	23.0	24.3	24.5
3H	22.8	24.0	23.1	24.2	24.5	23.0	24.2	23.2	24.4	24.6
4H	22.8	24.0	23.1	24.2	24.5	23.0	24.1	23.3	24.4	24.6
6H	22.8	23.9	23.2	24.2	24.4	23.0	24.1	23.3	24.3	24.6
8H	22.8	23.9	23.2	24.1	24.4	23.0	24.0	23.3	24.3	24.6
12H	22.8	23.8	23.2	24.1	24.4	23.0	24.0	23.3	24.3	24.6
4H 2H	22.7	23.9	23.0	24.1	24.4	22.9	24.0	23.2	24.3	24.5
3H	23.0	24.0	23.3	24.3	24.6	23.1	24.1	23.5	24.4	24.7
4H	23.1	24.0	23.4	24.3	24.6	23.2	24.1	23.6	24.4	24.7
6H	23.2	23.9	23.5	24.3	24.6	23.3	24.1	23.7	24.4	24.8
8H	23.2	23.9	23.6	24.3	24.7	23.3	24.1	23.7	24.4	24.8
12H	23.2	23.9	23.6	24.2	24.6	23.3	24.0	23.8	24.4	24.8
8H 4H	23.0	23.8	23.4	24.1	24.5	23.2	23.9	23.6	24.3	24.6
6H	23.2	23.8	23.6	24.2	24.6	23.3	23.9	23.8	24.3	24.8
8H	23.3	23.8	23.7	24.2	24.7	23.4	23.9	23.9	24.3	24.8
12H	23.3	23.8	23.8	24.2	24.7	23.4	23.9	23.9	24.3	24.8
12H 4H	23.0	23.7	23.4	24.1	24.5	23.1	23.8	23.6	24.2	24.6
6H	23.2	23.7	23.6	24.1	24.6	23.3	23.8	23.8	24.3	24.7
8H	23.3	23.7	23.7	24.2	24.6	23.4	23.9	23.9	24.3	24.8

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 1.0	+ 0.7 / - 0.9
1.5H	+ 0.4 / - 0.4	+ 0.4 / - 0.5
2.0H	+ 1.5 / - 1.9	+ 1.5 / - 2.0

CIE Pub.117, 2612 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.3)
 Area: 0.032 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-06-28	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.56V I:0.1773A P:20.990W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2611.53x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3500K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	66	56	49	65	55	49	64	55	49	44
0.80	76	66	60	75	66	60	73	65	59	53
1.00	84	75	69	83	74	69	81	75	68	62
1.25	91	82	77	89	82	76	87	80	75	69
1.50	95	87	82	94	86	81	91	85	80	74
2.00	101	94	89	99	93	88	96	91	87	80
2.50	104	98	93	102	96	92	98	94	90	83
3.00	106	101	97	104	100	96	101	97	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.56V I:0.1773A P:20.990W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2611.53x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3500K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

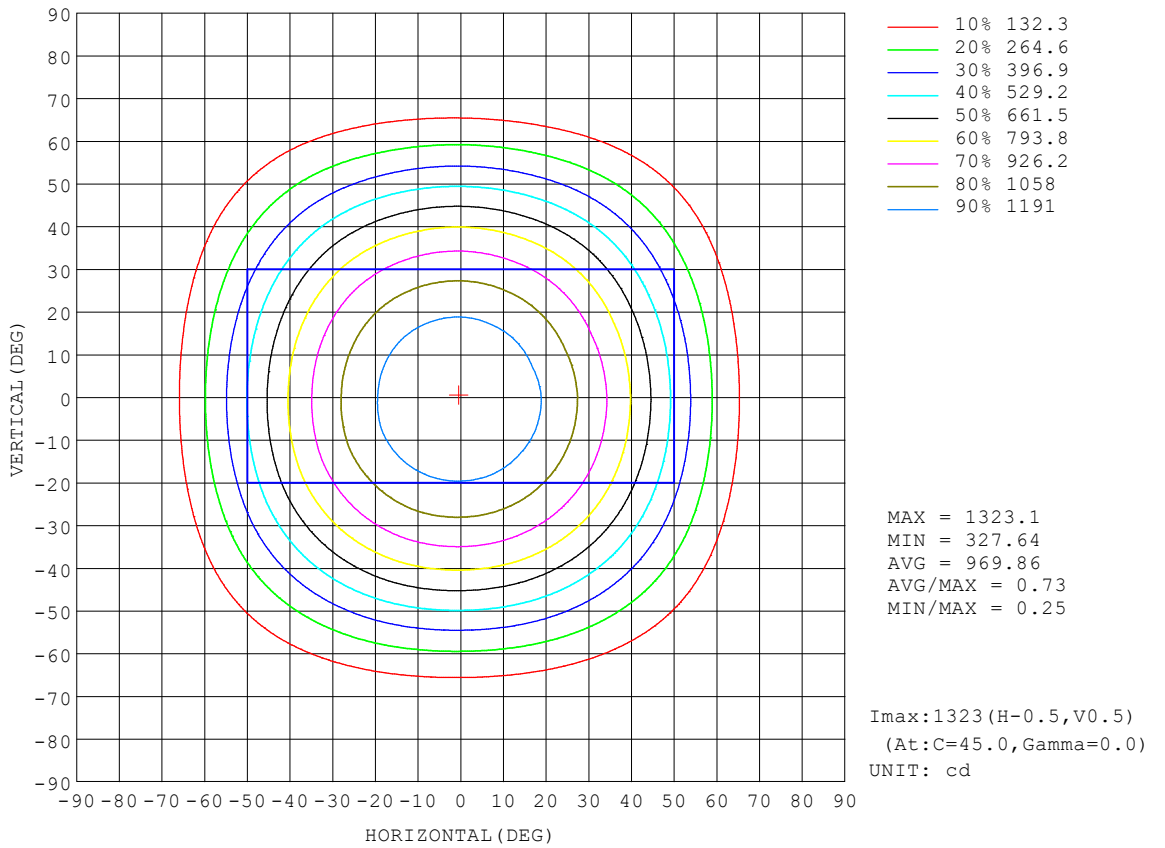


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.56V I:0.1773A P:20.990W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2611.53x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3500K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

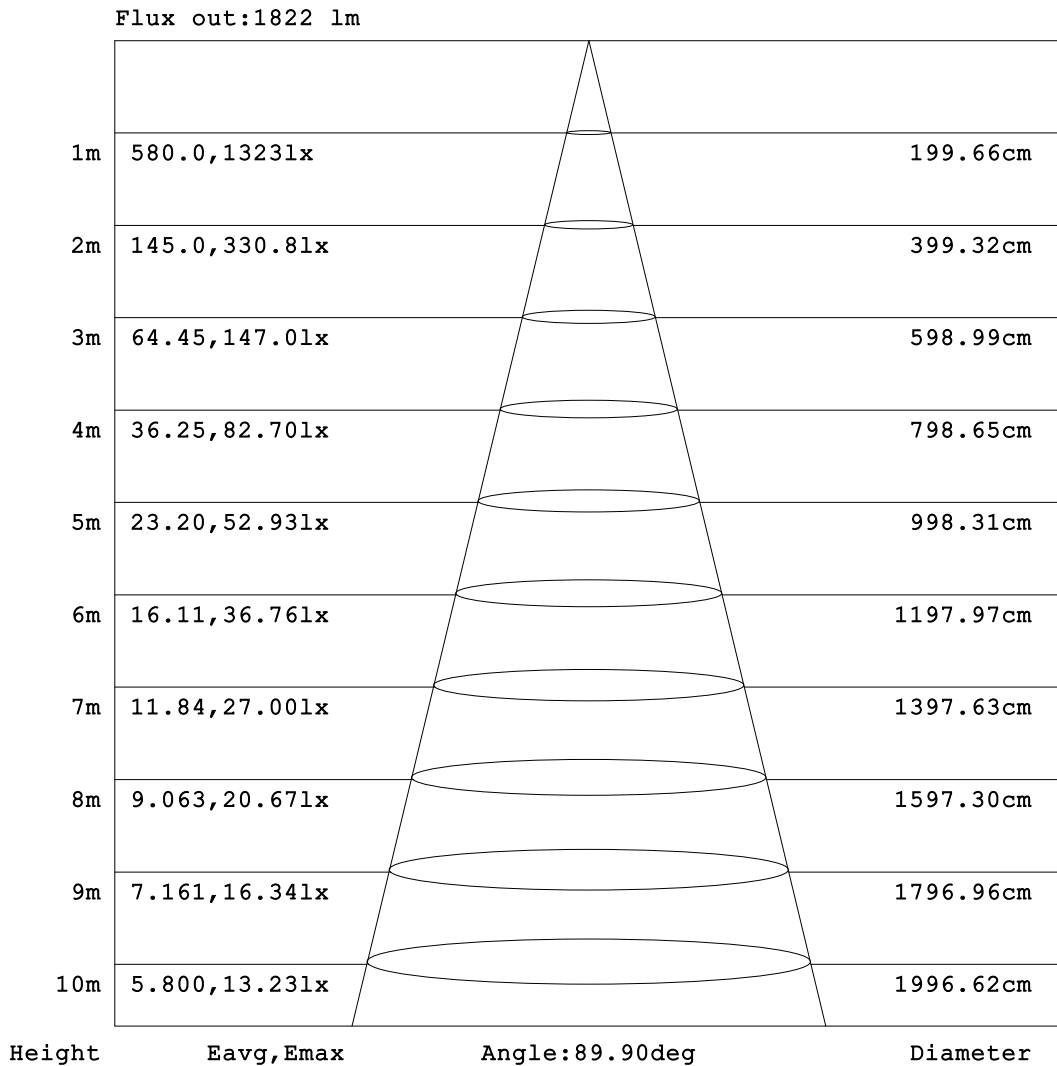


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.56V I:0.1773A P:20.990W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2611.53x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3500K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

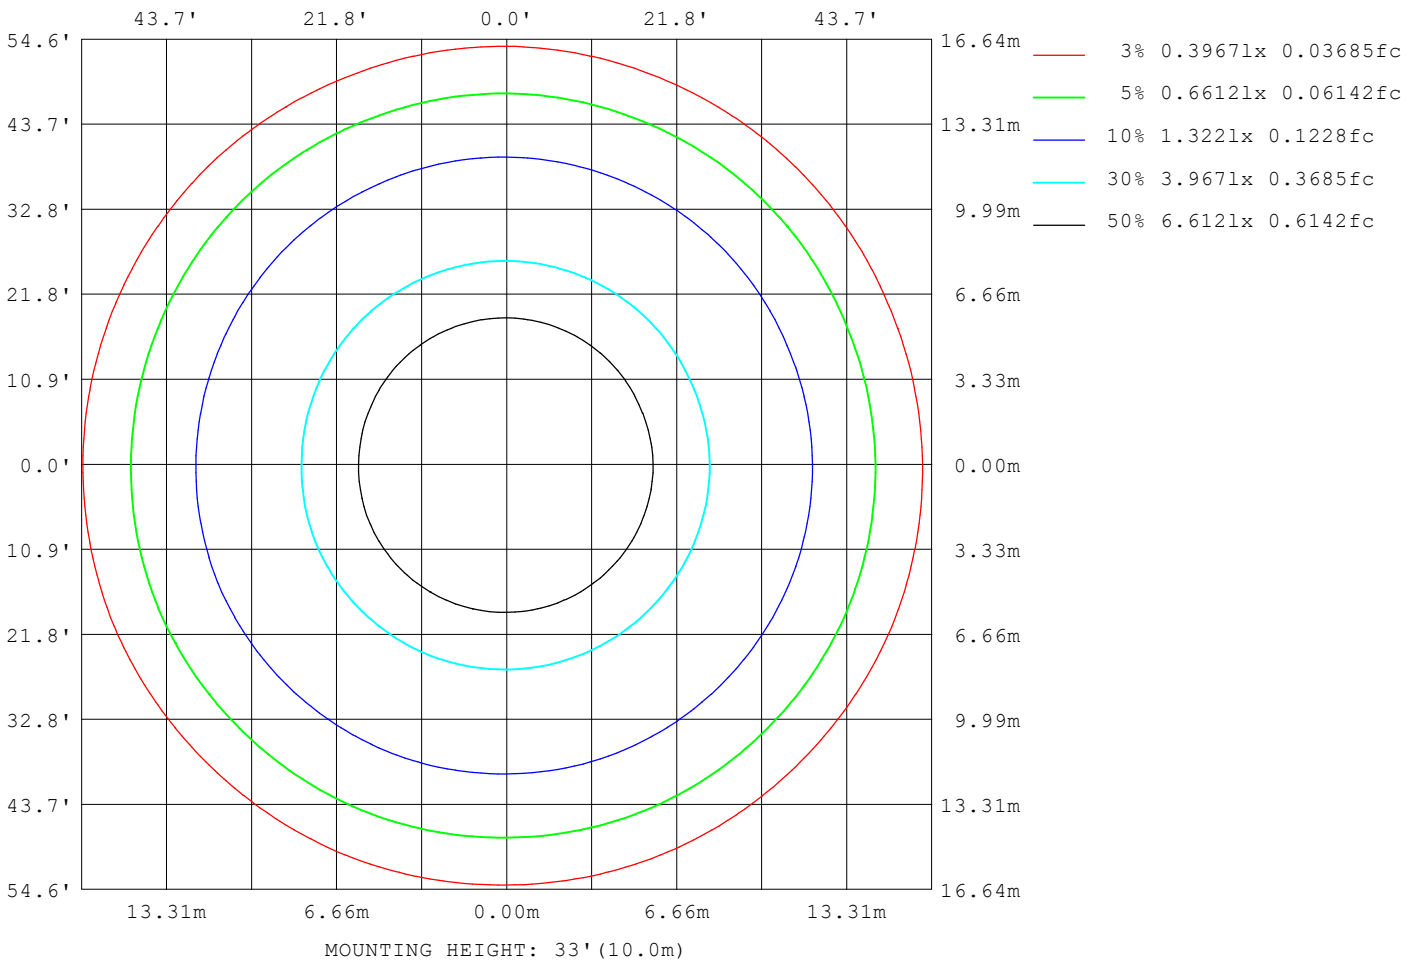

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.56V I:0.1773A P:20.990W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2611.53x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3500K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10580
L_0~180 (75) av	5629
L_0~180 (85) av	4890
L_90~270 (65) av	10436
L_90~270 (75) av	5658
L_90~270 (85) av	4213
L_45 (65) av	10525
L_45 (75) av	5659
L_45 (85) av	4650

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

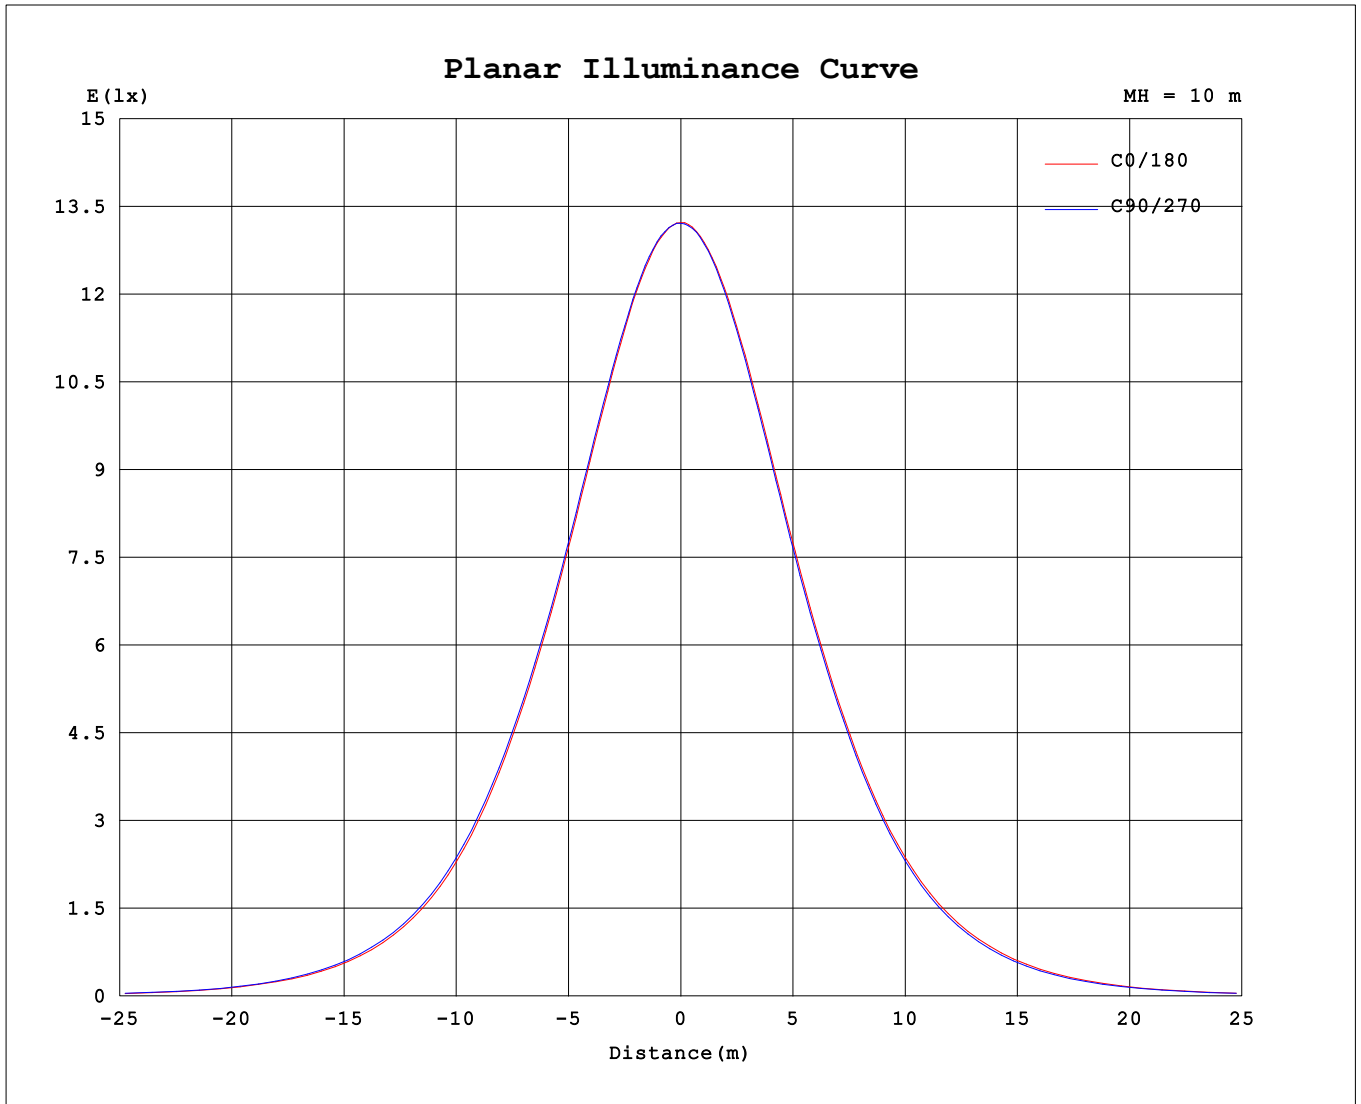

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.56V I:0.1773A P:20.990W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2611.53x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 3500K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

Table--1

UNIT: cd

<input type="checkbox"/> (DEG) \ C (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1322	1322	1323	1322	1322	1322	1321	1320	1322	1322	1323	1322	1322	1322	1321	1320			
5	1312	1313	1313	1314	1315	1315	1317	1315	1314	1314	1314	1312	1311	1312	1309	1308			
10	1285	1286	1287	1287	1289	1290	1290	1290	1287	1287	1286	1283	1283	1280	1280	1278			
15	1238	1240	1241	1244	1246	1248	1250	1249	1244	1244	1242	1240	1237	1233	1231	1228			
20	1176	1178	1179	1183	1186	1189	1190	1191	1184	1182	1182	1178	1174	1170	1167	1166			
25	1099	1101	1103	1107	1111	1115	1117	1119	1109	1107	1106	1101	1098	1092	1090	1088			
30	1010	1012	1014	1019	1023	1029	1031	1031	1022	1019	1018	1013	1009	1003	1001	999			
35	910	913	915	921	926	931	933	933	924	922	920	913	910	903	902	899			
40	788	790	793	800	806	812	815	816	805	803	800	794	791	783	780	778			
45	649	652	656	665	669	678	680	682	671	667	665	659	654	647	644	640			
50	506	511	515	523	527	534	538	541	532	526	523	517	512	505	502	498			
55	366	373	375	382	384	391	393	399	393	387	385	376	374	366	363	359			
60	239	244	244	250	252	257	258	262	260	258	256	247	244	237	234	233			
65	137	138	138	141	143	147	148	149	149	149	149	144	139	134	134	134			
70	71.6	71.9	71.7	73.0	73.9	75.9	76.5	77.5	77.1	77.1	77.5	75.4	73.7	71.6	71.3	71.0			
75	45.6	45.9	46.1	46.6	46.9	47.4	47.6	47.8	47.6	47.6	47.7	47.2	46.8	46.3	46.0	45.8			
80	29.3	29.4	29.6	30.3	30.4	31.0	31.4	31.2	31.2	31.3	31.4	31.0	30.5	30.1	30.4	29.7			
85	12.7	12.7	11.8	11.9	11.4	12.3	13.6	14.2	14.6	14.5	13.5	12.7	12.1	12.0	13.0	13.1			
90	0.72	0.69	0.71	0.68	0.67	0.64	0.68	0.70	1.26	1.28	1.22	1.25	1.22	1.26	1.25	1.24			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-28
 Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks: