
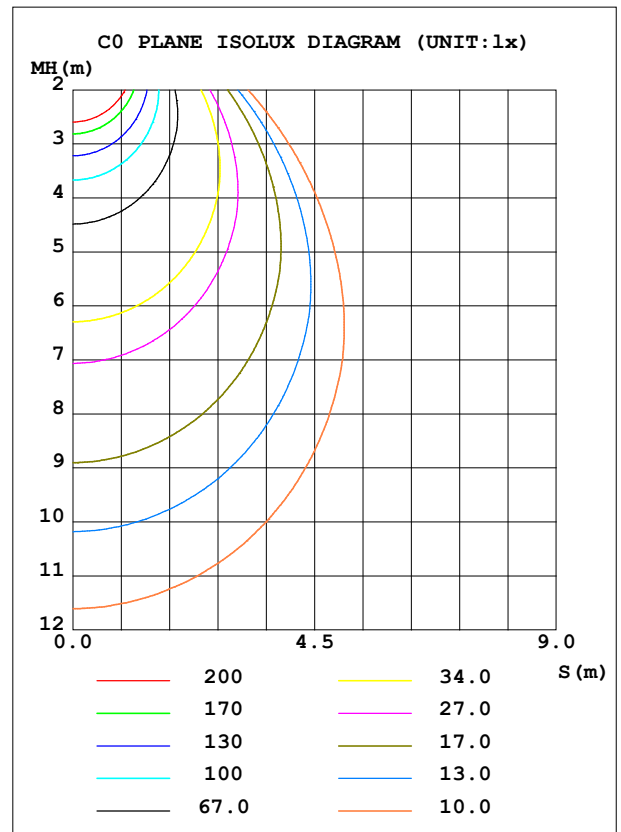


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.55V I:0.1772A P:20.978W PF:0.9904 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2661.26x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-8-35W-M-A5C5-HO	Imax (cd)	1347	S/MH (C0/180)	1.15
NOMINAL POWER (W)	22	LOR (%)	100.0	S/MH (C90/270)	1.15
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2661.3	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.3
NOMINAL FLUX (lm)	2661.26	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.7
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.25

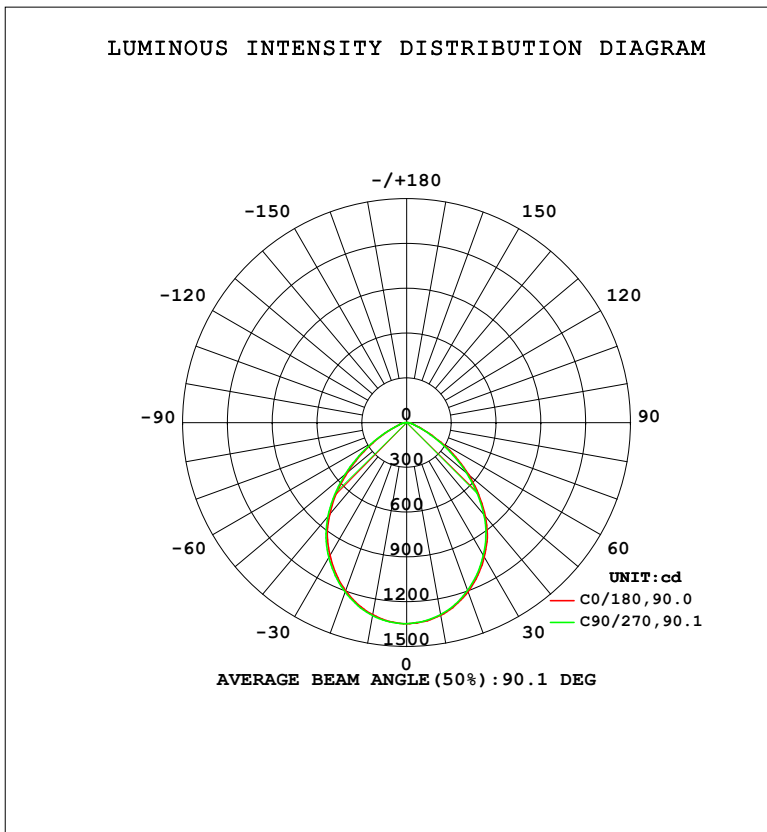

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1307	1309	1313	1314	1311	1310	1306	1301	0- 10	126.7	126.7	4.76,4.76
20	1198	1201	1207	1211	1204	1203	1195	1189	10- 20	355.6	482.3	18.1,18.1
30	1029	1033	1043	1048	1041	1036	1028	1019	20- 30	517.0	999.3	37.6,37.6
40	802.9	808.3	820.9	830.7	820.7	816.5	806.0	797.0	30- 40	581.7	1581	59.4,59.4
50	516.0	525.4	538.0	548.2	542.8	534.4	523.6	513.6	40- 50	518.6	2100	78.9,78.9
60	243.5	248.9	255.9	262.2	265.1	260.4	248.9	239.1	50- 60	345.8	2445	91.9,91.9
70	72.94	73.16	75.45	77.98	78.70	79.09	75.32	72.87	60- 70	149.1	2595	97.5,97.5
80	29.91	30.29	31.02	31.98	31.90	32.13	31.22	31.09	70- 80	51.79	2646	99.4,99.4
90	0.7211	0.7342	0.6883	0.6948	1.275	1.259	1.252	1.272	80- 90	14.94	2661	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1856.4 lm

%lum = 69.8%

%lamp = 69.8%

Conical surface Flux(130deg): 2540.6 lm

%lum = 95.5%


%lamp = 95.5%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.55V I:0.1772A P:20.978W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2661.26x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

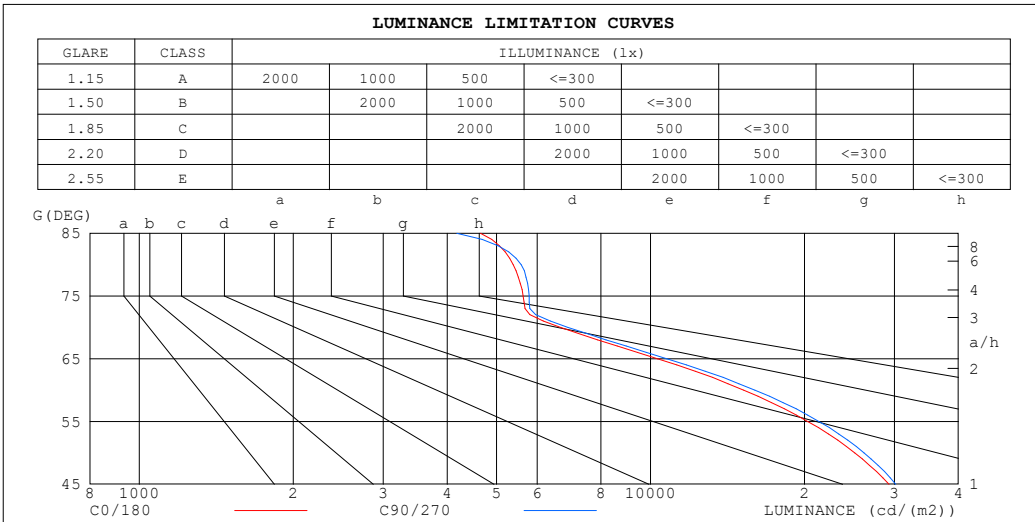

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4649	4181
80	5383	5583
75	5633	5786
70	6664	6894
65	10315	10757
60	15221	15996
55	20298	21335
50	25087	26155
45	29283	30188


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.55V I:0.1772A P:20.978W PF:0.9904 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:2661.26x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.86	.94	.89	.85	.91	.86	.83	.88	.84	.81	.85	.82	.79	.77
3.0	.86	.79	.74	.85	.78	.73	.82	.76	.72	.79	.75	.71	.77	.73	.70	.68
4.0	.78	.70	.64	.76	.69	.64	.74	.68	.63	.72	.66	.62	.70	.65	.61	.59
5.0	.70	.62	.57	.69	.62	.56	.67	.61	.56	.65	.60	.55	.64	.59	.55	.53
6.0	.64	.56	.50	.63	.56	.50	.61	.55	.50	.60	.54	.49	.58	.53	.49	.47
7.0	.59	.51	.45	.58	.50	.45	.56	.50	.45	.55	.49	.44	.54	.48	.44	.42
8.0	.54	.46	.41	.53	.46	.41	.52	.45	.40	.51	.45	.40	.50	.44	.40	.38
9.0	.50	.42	.37	.49	.42	.37	.48	.41	.37	.47	.41	.37	.46	.40	.36	.35
10.0	.46	.39	.34	.45	.38	.34	.45	.38	.34	.44	.38	.33	.43	.37	.33	.32

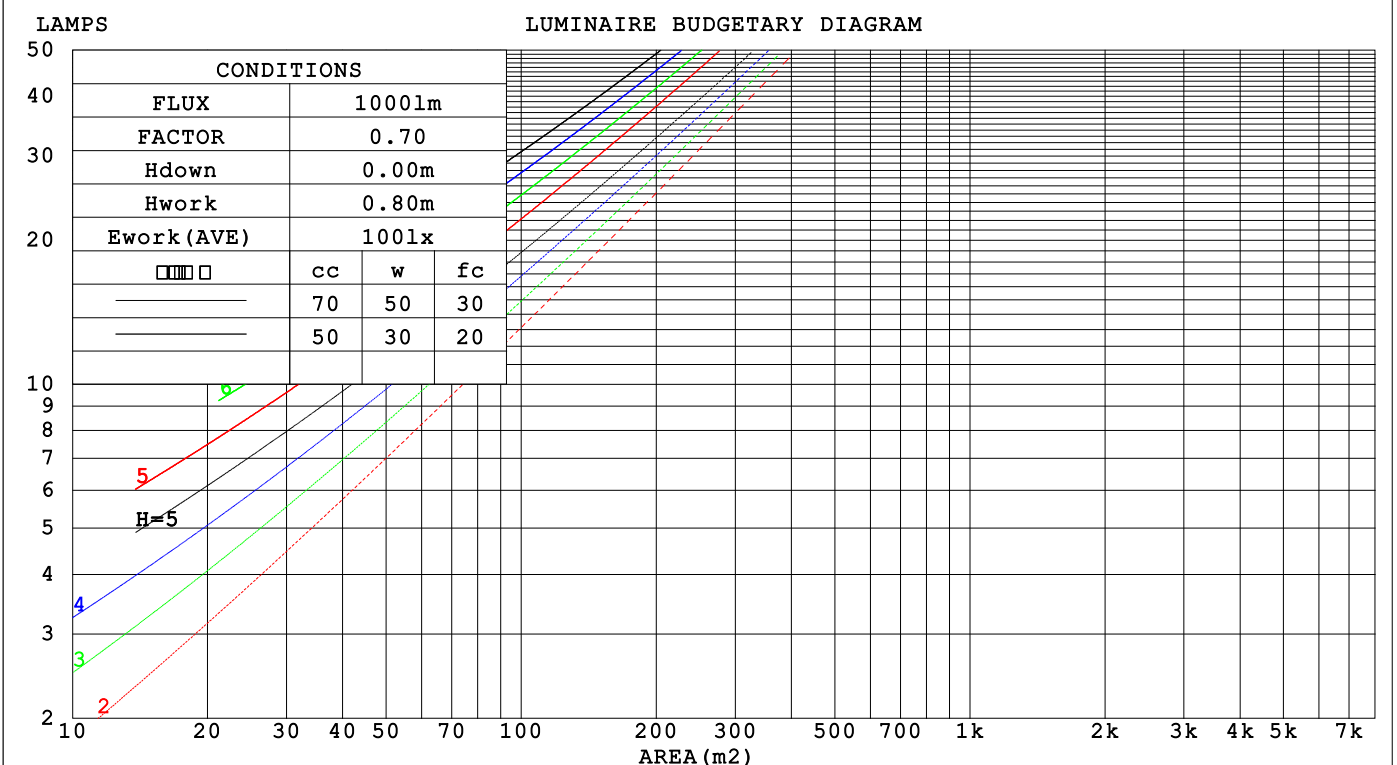

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.55V I:0.1772A P:20.978W PF:0.9904 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2661.26x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.246 .140 .044	.239 .136 .043	.226 .130 .041	.214 .123 .040	.203 .118 .038	
2.0	.238 .131 .040	.232 .128 .039	.221 .123 .038	.211 .118 .037	.201 .114 .036	
3.0	.226 .121 .036	.221 .118 .036	.211 .115 .035	.202 .111 .034	.194 .107 .033	
4.0	.214 .111 .033	.209 .109 .032	.200 .106 .032	.192 .103 .031	.185 .100 .031	
5.0	.201 .103 .030	.197 .101 .029	.189 .099 .029	.182 .096 .029	.176 .094 .028	
6.0	.189 .095 .027	.186 .094 .027	.179 .092 .027	.173 .090 .026	.167 .088 .026	
7.0	.179 .088 .025	.175 .087 .025	.169 .086 .025	.164 .084 .024	.158 .082 .024	
8.0	.169 .082 .023	.166 .082 .023	.160 .080 .023	.155 .079 .023	.150 .077 .022	
9.0	.159 .077 .022	.157 .076 .021	.152 .075 .021	.147 .074 .021	.143 .073 .021	
10.0	.151 .072 .020	.149 .072 .020	.144 .071 .020	.140 .070 .020	.136 .068 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.176 .157 .139	.150 .134 .120	.103 .093 .083	.059 .054 .048	.019 .017 .016	
2.0	.165 .132 .104	.141 .114 .090	.097 .079 .063	.056 .046 .037	.018 .015 .012	
3.0	.156 .114 .080	.134 .098 .070	.092 .068 .049	.053 .040 .029	.017 .013 .009	
4.0	.148 .100 .064	.127 .087 .055	.087 .060 .039	.051 .035 .023	.016 .012 .008	
5.0	.141 .089 .052	.121 .077 .045	.083 .054 .032	.048 .032 .019	.016 .010 .006	
6.0	.134 .081 .043	.115 .070 .037	.079 .049 .026	.046 .029 .016	.015 .009 .005	
7.0	.128 .074 .036	.110 .064 .031	.076 .045 .022	.044 .026 .013	.014 .009 .004	
8.0	.122 .068 .031	.105 .059 .027	.073 .041 .019	.042 .024 .011	.014 .008 .004	
9.0	.116 .063 .027	.100 .055 .023	.069 .038 .017	.040 .023 .010	.013 .007 .003	
10.0	.111 .059 .024	.096 .051 .021	.067 .036 .015	.039 .021 .009	.013 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.55V I:0.1772A P:20.978W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2661.26x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.7	24.0	22.9	24.2	24.4	22.9	24.2	23.1	24.4	24.6
3H	22.9	24.1	23.2	24.3	24.5	23.0	24.2	23.3	24.5	24.7
4H	22.9	24.0	23.2	24.3	24.5	23.1	24.2	23.4	24.4	24.7
6H	22.9	24.0	23.2	24.2	24.5	23.1	24.1	23.4	24.4	24.7
8H	22.9	23.9	23.2	24.2	24.5	23.1	24.1	23.4	24.4	24.7
12H	22.9	23.9	23.2	24.2	24.5	23.1	24.0	23.4	24.3	24.6
4H 2H	22.8	24.0	23.1	24.2	24.4	23.0	24.1	23.3	24.3	24.6
3H	23.1	24.1	23.4	24.3	24.6	23.2	24.2	23.5	24.5	24.8
4H	23.1	24.0	23.5	24.4	24.7	23.3	24.2	23.6	24.5	24.8
6H	23.2	24.0	23.6	24.4	24.7	23.4	24.2	23.8	24.5	24.9
8H	23.3	24.0	23.7	24.3	24.7	23.4	24.1	23.8	24.5	24.9
12H	23.3	23.9	23.7	24.3	24.7	23.4	24.1	23.8	24.5	24.8
8H 4H	23.1	23.8	23.5	24.2	24.6	23.2	24.0	23.6	24.3	24.7
6H	23.3	23.9	23.7	24.3	24.7	23.4	24.0	23.8	24.4	24.8
8H	23.3	23.9	23.8	24.3	24.7	23.5	24.0	23.9	24.4	24.9
12H	23.4	23.8	23.9	24.3	24.7	23.5	24.0	24.0	24.4	24.9
12H 4H	23.1	23.7	23.5	24.1	24.5	23.2	23.9	23.6	24.3	24.7
6H	23.3	23.8	23.7	24.2	24.6	23.4	23.9	23.8	24.3	24.8
8H	23.3	23.8	23.8	24.2	24.7	23.5	23.9	23.9	24.4	24.8

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 1.0	+ 0.7 / - 0.9
1.5H	+ 0.4 / - 0.4	+ 0.4 / - 0.5
2.0H	+ 1.5 / - 2.0	+ 1.5 / - 2.0

CIE Pub.117, 2661 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.4)
 Area: 0.032 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-06-28	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.55V I:0.1772A P:20.978W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2661.26x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	66	56	49	65	55	49	64	55	49	43
0.80	76	66	60	75	66	60	73	65	59	53
1.00	84	75	69	83	74	69	81	75	68	62
1.25	91	82	77	89	82	76	87	80	75	69
1.50	95	87	82	94	86	81	91	85	80	74
2.00	101	94	89	99	93	88	96	91	87	80
2.50	104	98	93	102	96	92	98	94	90	83
3.00	106	101	97	104	100	96	101	97	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.55V I:0.1772A P:20.978W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2661.26x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

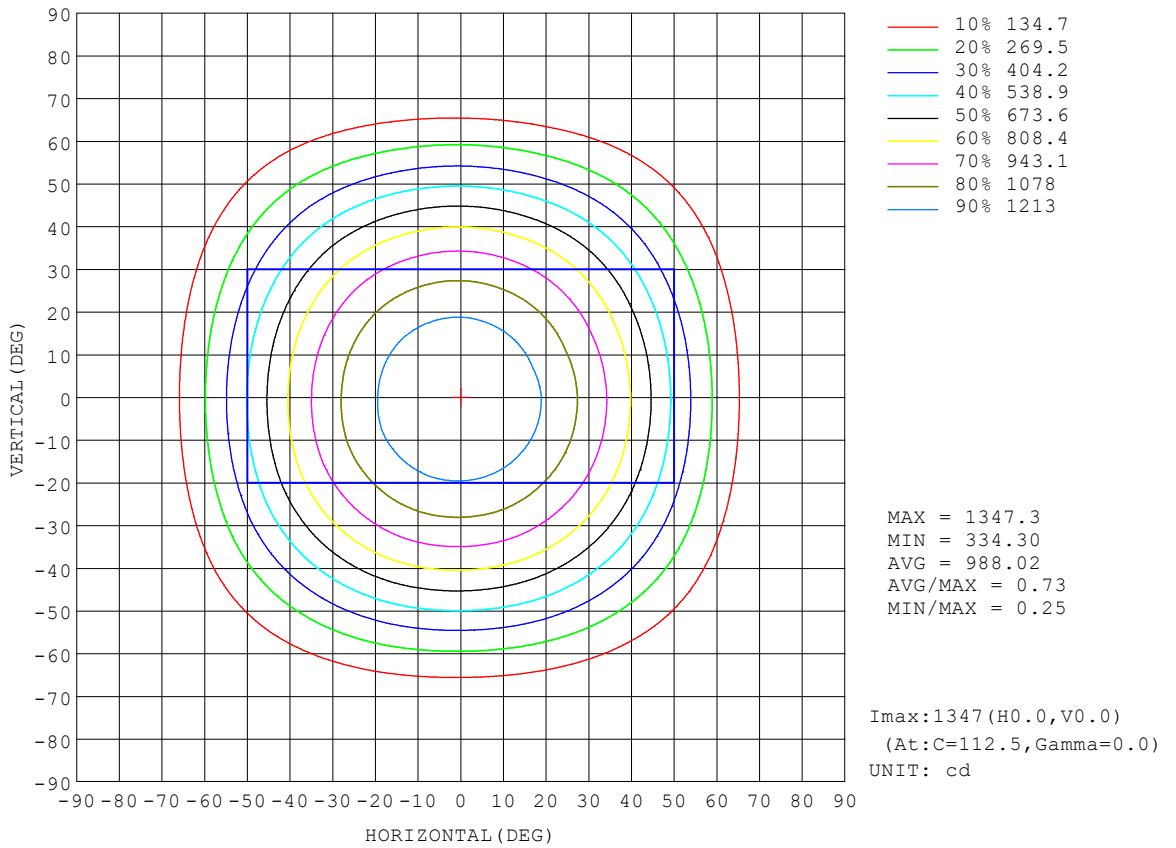


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.55V I:0.1772A P:20.978W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2661.26x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

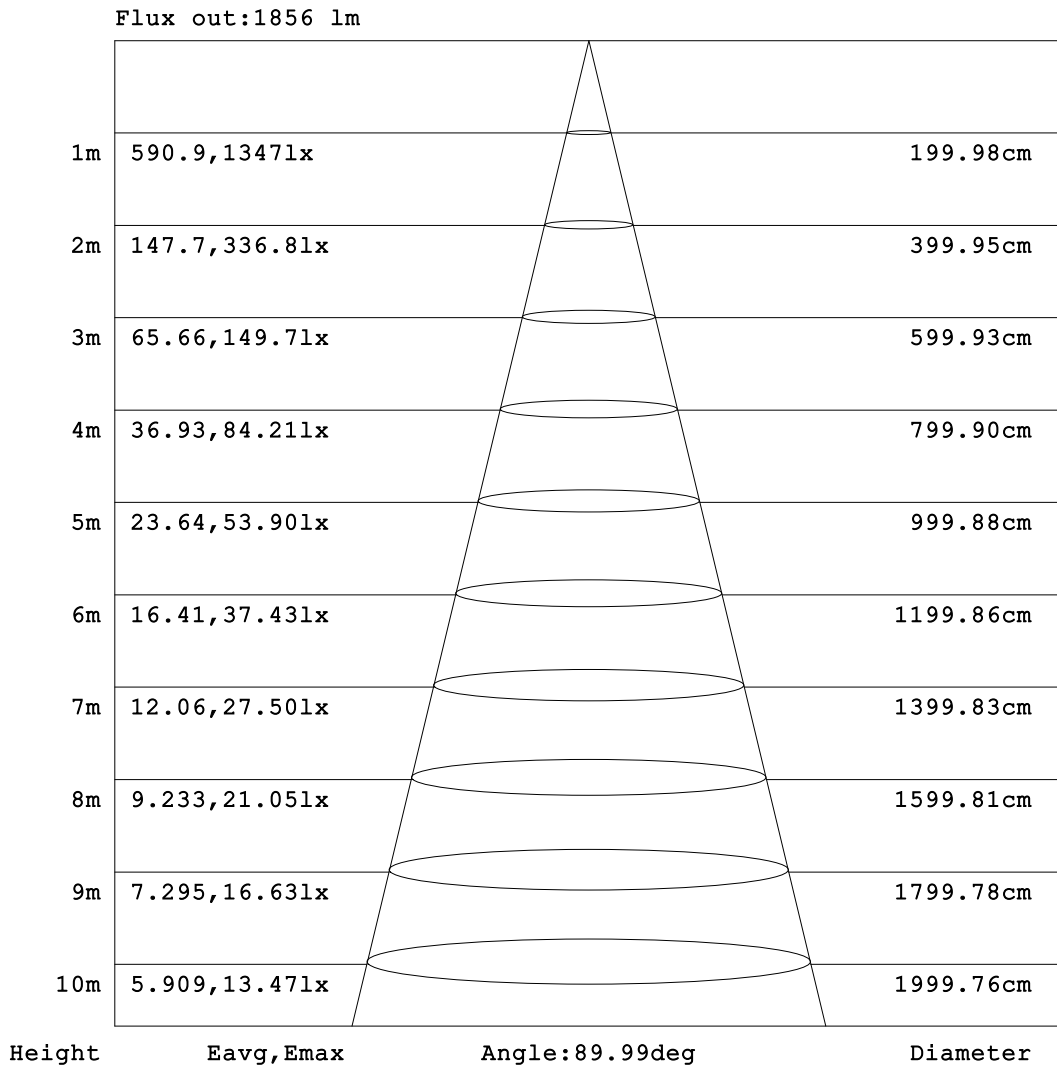


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.55V I:0.1772A P:20.978W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2661.26x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

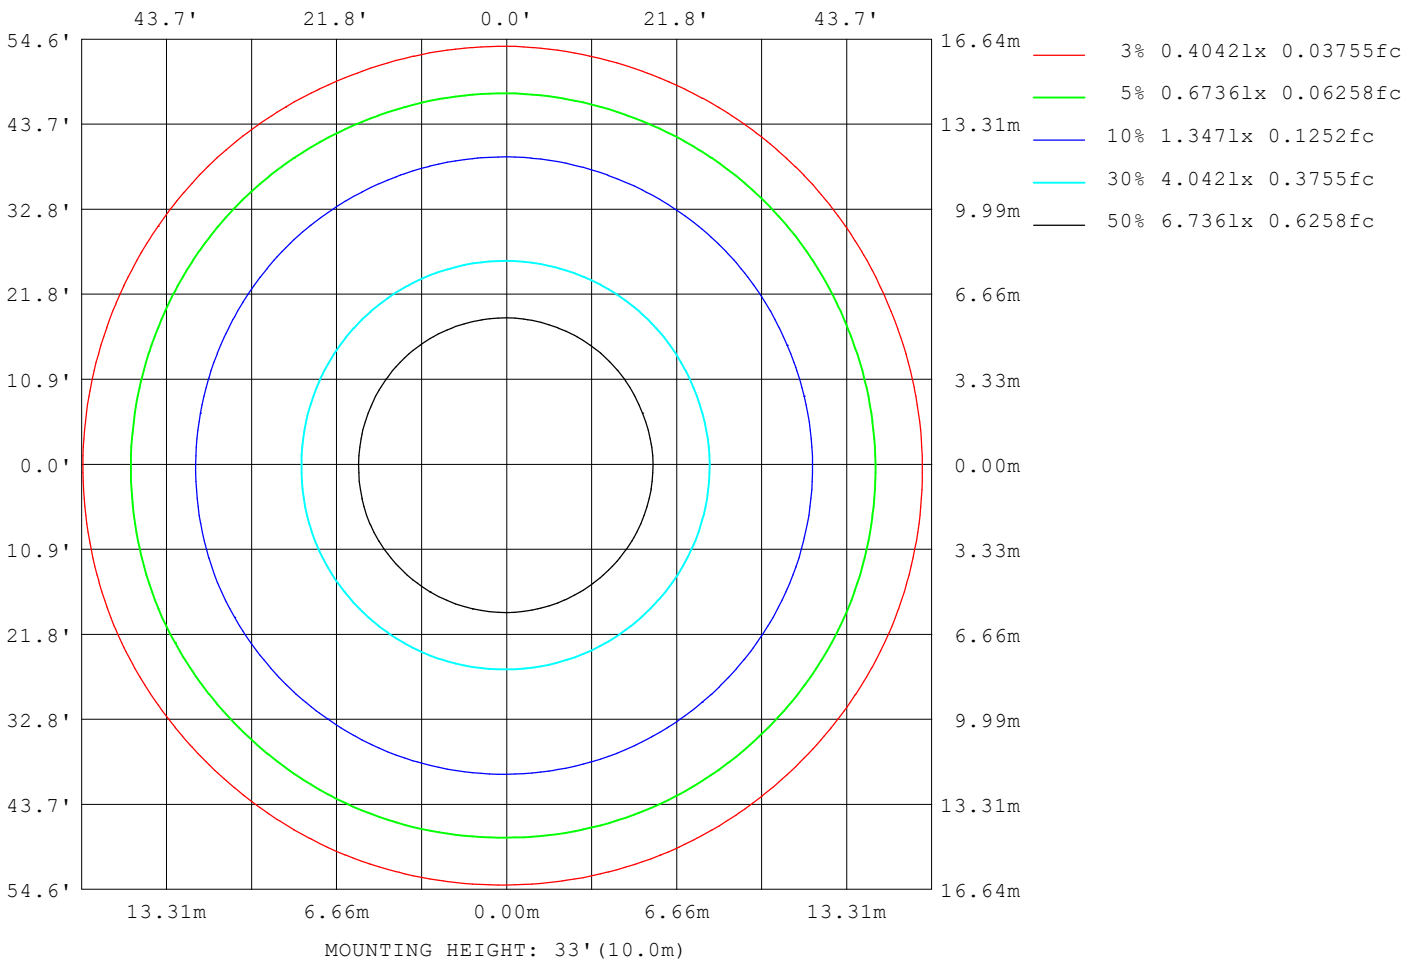

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.55V I:0.1772A P:20.978W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2661.26x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10745
L_0~180 (75) av	5751
L_0~180 (85) av	4995
L_90~270 (65) av	10603
L_90~270 (75) av	5786
L_90~270 (85) av	4307
L_45 (65) av	10690
L_45 (75) av	5788
L_45 (85) av	4748

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

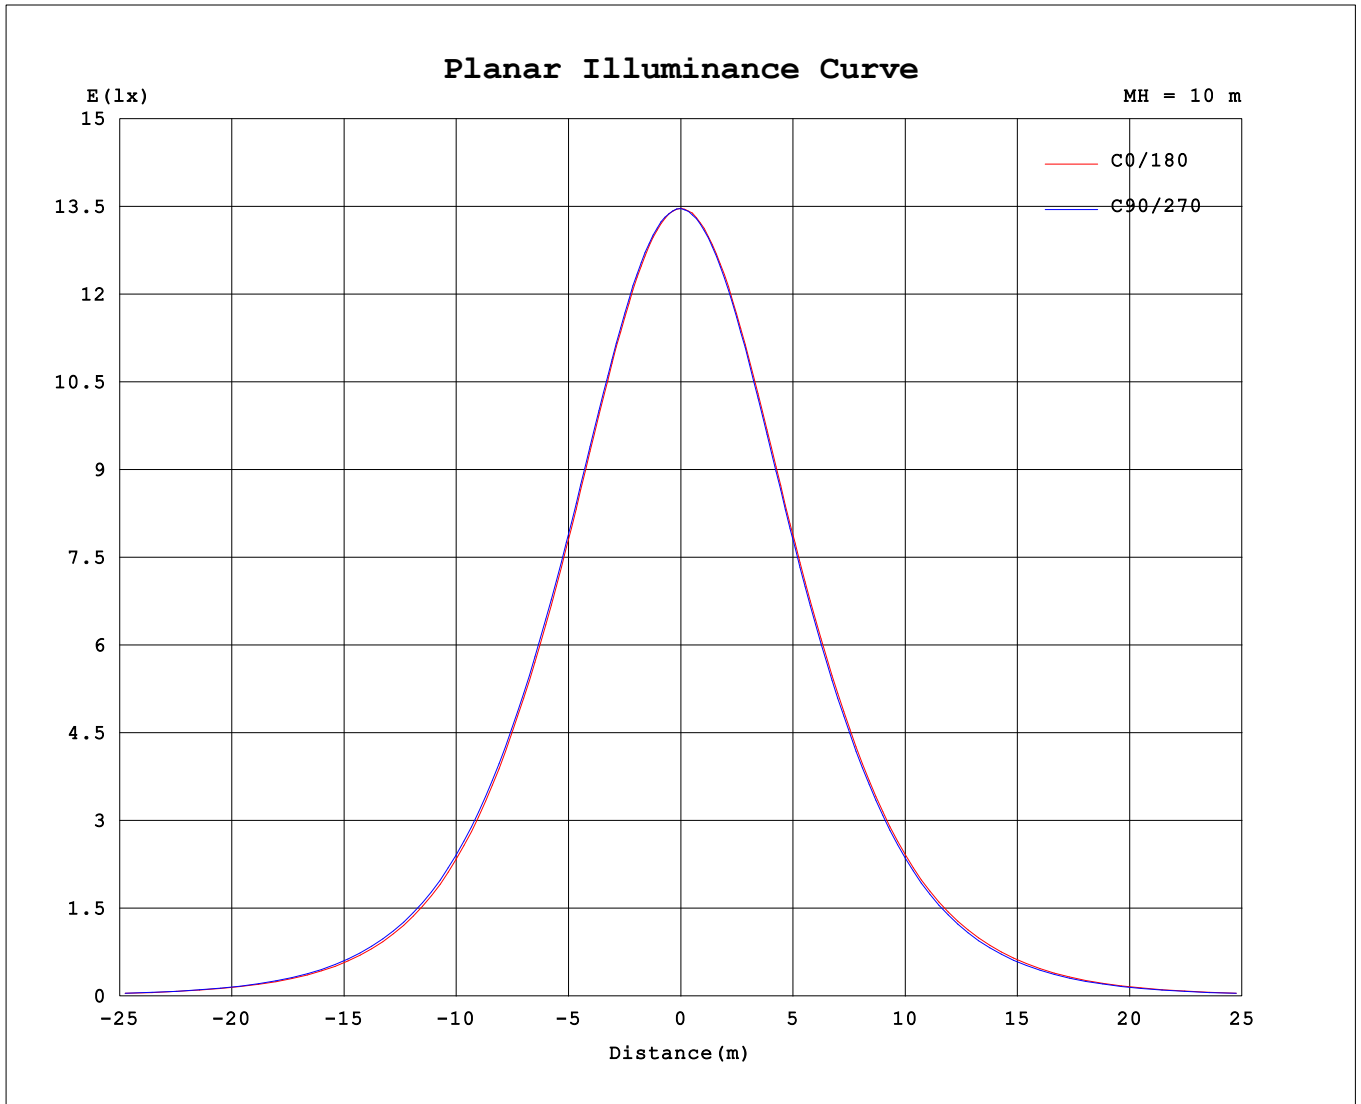

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.55V I:0.1772A P:20.978W PF:0.9904 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2661.26x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 22W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1347	1347	1346	1346	1346	1347	1345	1344	1347	1347	1346	1346	1346	1347	1345	1344			
5	1336	1336	1337	1338	1339	1339	1339	1340	1337	1337	1338	1337	1335	1334	1334	1332			
10	1307	1309	1309	1311	1313	1315	1314	1315	1311	1311	1310	1308	1306	1303	1301	1299			
15	1260	1262	1263	1266	1268	1271	1272	1272	1266	1265	1265	1261	1259	1255	1254	1252			
20	1198	1200	1201	1204	1207	1210	1211	1212	1204	1203	1203	1198	1195	1192	1189	1188			
25	1119	1122	1124	1128	1131	1136	1136	1138	1128	1128	1127	1122	1119	1113	1110	1108			
30	1029	1032	1033	1039	1043	1047	1048	1051	1041	1038	1036	1032	1028	1022	1019	1018			
35	927	930	932	940	942	949	949	951	942	939	937	931	926	921	919	917			
40	803	807	808	816	821	829	831	831	821	818	816	809	806	799	797	793			
45	663	666	670	678	683	691	694	695	684	680	679	672	667	660	658	654			
50	516	522	525	534	538	546	548	553	543	536	534	527	524	516	514	509			
55	373	380	382	390	392	399	401	407	401	395	392	385	381	373	371	366			
60	244	249	249	254	256	262	262	267	265	262	260	252	249	241	239	237			
65	140	141	140	144	145	150	150	152	151	151	151	146	141	136	136	136			
70	72.9	73.5	73.2	74.6	75.4	77.5	78.0	79.1	78.7	78.4	79.1	76.9	75.3	73.1	72.9	72.4			
75	46.7	47.0	47.2	47.7	47.9	48.5	48.6	48.9	48.6	48.6	48.8	48.3	47.9	47.3	47.1	46.8			
80	29.9	30.1	30.3	31.0	31.0	31.7	32.0	31.9	31.9	31.9	32.1	31.6	31.2	30.8	31.1	30.4			
85	13.0	13.0	12.0	12.1	11.7	12.5	13.8	14.5	14.9	14.7	13.8	12.9	12.4	12.2	13.4	13.3			
90	0.72	0.72	0.73	0.69	0.69	0.66	0.69	0.71	1.27	1.30	1.26	1.27	1.25	1.28	1.27	1.28			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks: