
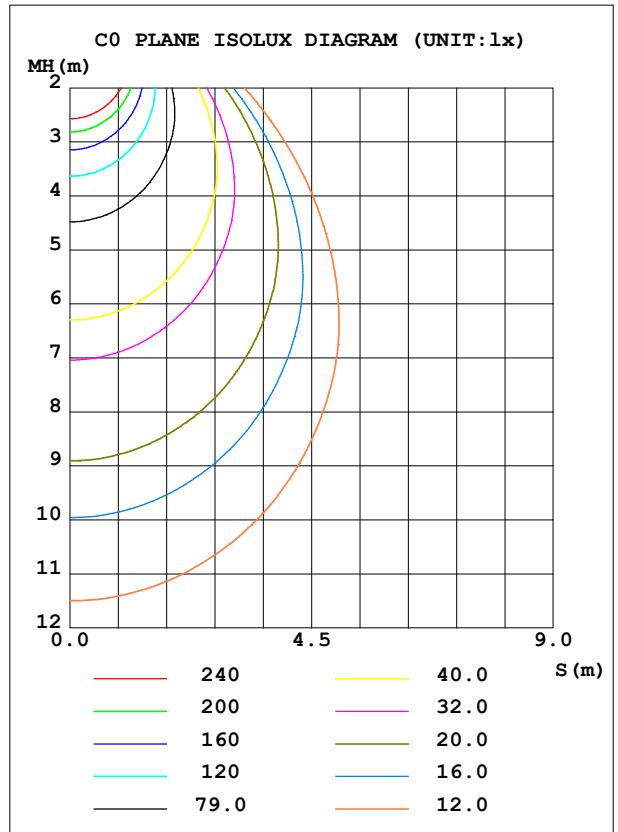


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.50V I:0.2111A P:25.039W PF:0.9927 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3132.9x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-8-35W-M-A5C5-HO	Imax (cd)	1586	S/MH (C0/180)	1.15
NOMINAL POWER (W)	26	LOR (%)	100.0	S/MH (C90/270)	1.15
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3132.9	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.3
NOMINAL FLUX (lm)	3132.9	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.7
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.25

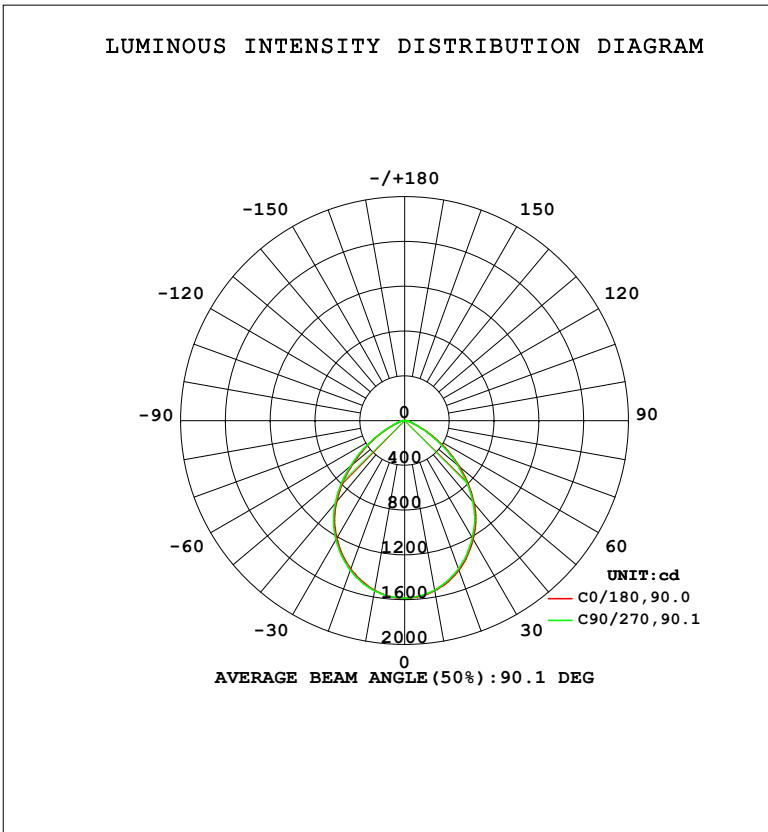

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1540	1542	1545	1547	1543	1541	1538	1533	0- 10	149.2	149.2	4.76,4.76
20	1411	1413	1420	1426	1420	1416	1409	1399	10- 20	418.7	567.9	18.1,18.1
30	1212	1215	1227	1234	1225	1220	1210	1200	20- 30	608.6	1176	37.6,37.6
40	946.6	951.8	967.4	977.5	966.4	961.0	948.1	936.3	30- 40	684.9	1861	59.4,59.4
50	608.6	619.2	633.3	645.8	638.3	628.4	615.7	603.8	40- 50	610.5	2472	78.9,78.9
60	287.5	293.3	301.4	308.9	311.3	306.4	292.7	281.3	50- 60	407.1	2879	91.9,91.9
70	86.16	86.26	88.89	91.76	92.40	92.98	88.49	85.69	60- 70	175.4	3054	97.5,97.5
80	35.38	35.72	36.58	37.71	37.47	37.77	36.68	36.61	70- 80	60.97	3115	99.4,99.4
90	0.8784	0.8784	0.8325	0.8325	1.508	1.488	1.495	1.501	80- 90	17.61	3133	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2185.5 lm

%lum = 69.8%

%lamp = 69.8%

Conical surface Flux(130deg): 2990.8 lm

%lum = 95.5%


%lamp = 95.5%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.50V I:0.2111A P:25.039W PF:0.9927 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3132.9x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

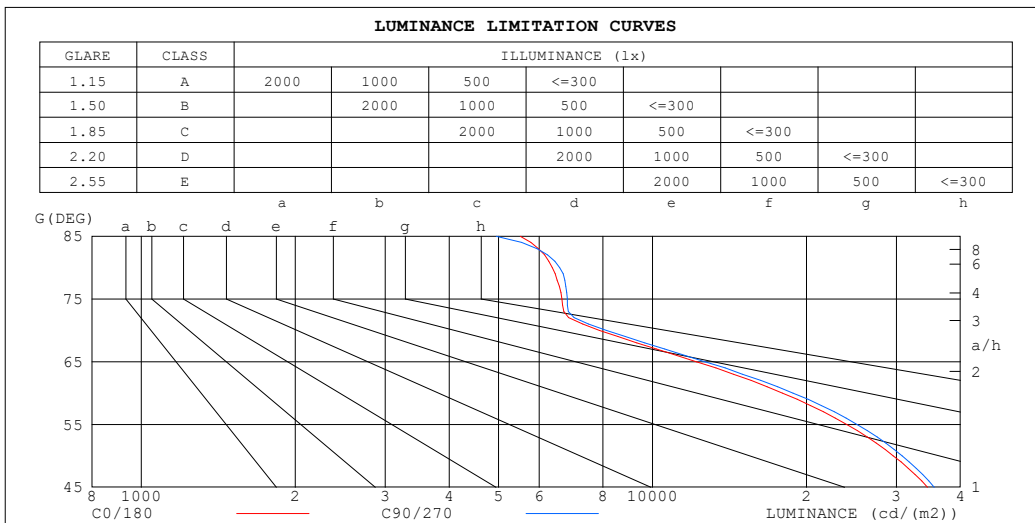

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5510	4945
80	6367	6584
75	6647	6809
70	7872	8122
65	12185	12670
60	17966	18839
55	23983	25137
50	29586	30788
45	34518	35574


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.50V I:0.2111A P:25.039W PF:0.9927 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:3132.9x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.86	.94	.89	.85	.91	.86	.83	.88	.84	.81	.85	.82	.79	.77
3.0	.86	.79	.74	.85	.78	.73	.82	.76	.72	.79	.75	.71	.77	.73	.70	.68
4.0	.78	.70	.64	.76	.69	.64	.74	.68	.63	.72	.66	.62	.70	.65	.61	.59
5.0	.70	.62	.57	.69	.62	.56	.67	.61	.56	.65	.60	.55	.64	.59	.55	.53
6.0	.64	.56	.50	.63	.56	.50	.61	.55	.50	.60	.54	.49	.58	.53	.49	.47
7.0	.59	.51	.45	.58	.50	.45	.56	.50	.45	.55	.49	.44	.54	.48	.44	.42
8.0	.54	.46	.41	.53	.46	.41	.52	.45	.40	.51	.45	.40	.50	.44	.40	.38
9.0	.50	.42	.37	.49	.42	.37	.48	.41	.37	.47	.41	.37	.46	.40	.36	.35
10.0	.46	.39	.34	.45	.38	.34	.45	.38	.34	.44	.38	.33	.43	.37	.33	.32

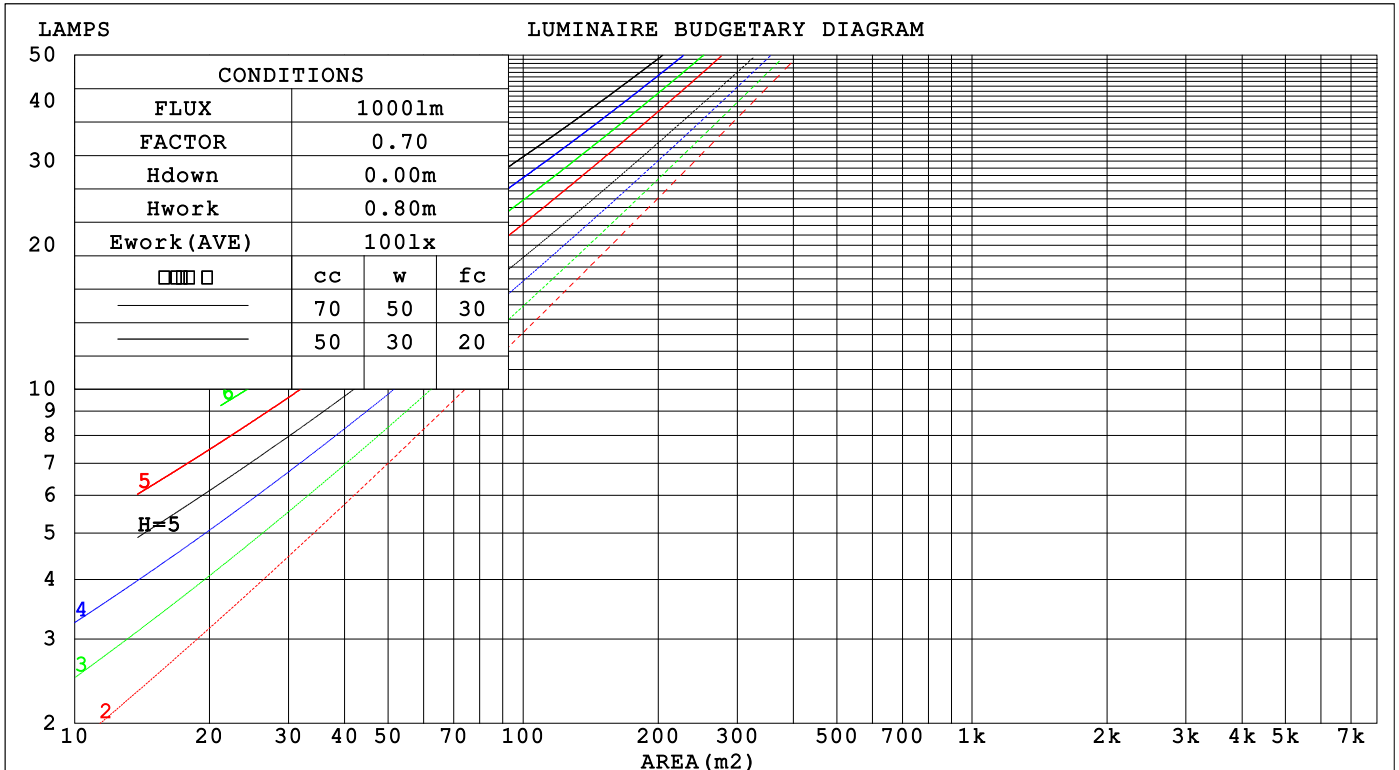

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.50V I:0.2111A P:25.039W PF:0.9927 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3132.9x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.246	.140	.044	.239	.136	.043	.226	.130	.041	.214	.123	.040	.203	.118	.038	
2.0	.238	.131	.040	.232	.128	.039	.221	.123	.038	.211	.118	.037	.201	.114	.036	
3.0	.226	.121	.036	.221	.118	.036	.211	.115	.035	.202	.111	.034	.194	.107	.033	
4.0	.214	.111	.033	.209	.109	.032	.200	.106	.032	.192	.103	.031	.185	.100	.031	
5.0	.201	.103	.030	.197	.101	.029	.189	.099	.029	.182	.096	.029	.176	.094	.028	
6.0	.189	.095	.027	.186	.094	.027	.179	.092	.027	.173	.090	.026	.167	.088	.026	
7.0	.179	.088	.025	.175	.087	.025	.169	.086	.025	.164	.084	.024	.158	.082	.024	
8.0	.169	.082	.023	.166	.082	.023	.160	.080	.023	.155	.079	.023	.150	.077	.022	
9.0	.159	.077	.022	.157	.076	.021	.152	.075	.021	.147	.074	.021	.143	.073	.021	
10.0	.151	.072	.020	.149	.072	.020	.144	.071	.020	.140	.070	.020	.136	.068	.020	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.176	.157	.139	.150	.134	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016	
3.0	.165	.132	.104	.141	.114	.090	.097	.079	.063	.056	.046	.037	.018	.015	.012	
4.0	.156	.114	.080	.134	.098	.070	.092	.068	.049	.053	.040	.029	.017	.013	.009	
5.0	.148	.100	.064	.127	.087	.055	.087	.060	.039	.051	.035	.023	.016	.012	.008	
6.0	.141	.089	.052	.121	.077	.045	.083	.054	.032	.048	.032	.019	.016	.010	.006	
7.0	.134	.081	.043	.115	.070	.037	.079	.049	.026	.046	.029	.016	.015	.009	.005	
8.0	.128	.074	.036	.110	.064	.031	.076	.045	.022	.044	.026	.013	.014	.009	.004	
9.0	.122	.068	.031	.105	.059	.027	.073	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.063	.027	.100	.055	.023	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.50V I:0.2111A P:25.039W PF:0.9927 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3132.9x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.3	24.6	23.5	24.8	25.0	23.4	24.7	23.7	24.9	25.1
3H	23.4	24.7	23.7	24.9	25.1	23.6	24.8	23.9	25.0	25.3
4H	23.5	24.6	23.8	24.9	25.1	23.6	24.8	23.9	25.0	25.2
6H	23.5	24.6	23.8	24.8	25.1	23.6	24.7	24.0	25.0	25.2
8H	23.5	24.5	23.8	24.8	25.1	23.6	24.7	24.0	24.9	25.2
12H	23.5	24.5	23.8	24.7	25.0	23.6	24.6	24.0	24.9	25.2
4H 2H	23.4	24.5	23.7	24.8	25.0	23.5	24.7	23.8	24.9	25.2
3H	23.6	24.6	24.0	24.9	25.2	23.8	24.8	24.1	25.0	25.3
4H	23.7	24.6	24.1	24.9	25.2	23.8	24.7	24.2	25.1	25.4
6H	23.8	24.6	24.2	24.9	25.3	23.9	24.7	24.3	25.1	25.4
8H	23.8	24.6	24.2	24.9	25.3	24.0	24.7	24.4	25.1	25.4
12H	23.8	24.5	24.3	24.9	25.3	24.0	24.6	24.4	25.0	25.4
8H 4H	23.7	24.4	24.1	24.8	25.2	23.8	24.5	24.2	24.9	25.3
6H	23.8	24.4	24.3	24.8	25.3	24.0	24.6	24.4	25.0	25.4
8H	23.9	24.4	24.4	24.9	25.3	24.0	24.6	24.5	25.0	25.4
12H	24.0	24.4	24.4	24.8	25.3	24.1	24.5	24.5	25.0	25.4
12H 4H	23.7	24.3	24.1	24.7	25.1	23.8	24.4	24.2	24.8	25.2
6H	23.8	24.4	24.3	24.8	25.2	24.0	24.5	24.4	24.9	25.4
8H	23.9	24.4	24.4	24.8	25.3	24.0	24.5	24.5	24.9	25.4

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 1.0	+ 0.7 / - 0.9
1.5H	+ 0.4 / - 0.4	+ 0.4 / - 0.5
2.0H	+ 1.5 / - 2.0	+ 1.5 / - 2.0

CIE Pub.117, 3133 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.0)
 Area: 0.032 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-06-28	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.50V I:0.2111A P:25.039W PF:0.9927 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3132.9x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	66	56	49	65	55	49	64	55	49	43
0.80	76	66	60	75	66	60	73	65	59	53
1.00	84	75	69	83	74	69	81	75	68	62
1.25	91	82	77	89	82	76	87	80	75	69
1.50	95	87	82	94	86	81	91	85	80	74
2.00	101	94	89	99	93	88	96	91	87	80
2.50	104	98	93	102	96	92	98	94	90	83
3.00	106	101	97	104	100	96	101	97	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.50V I:0.2111A P:25.039W PF:0.9927 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3132.9x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

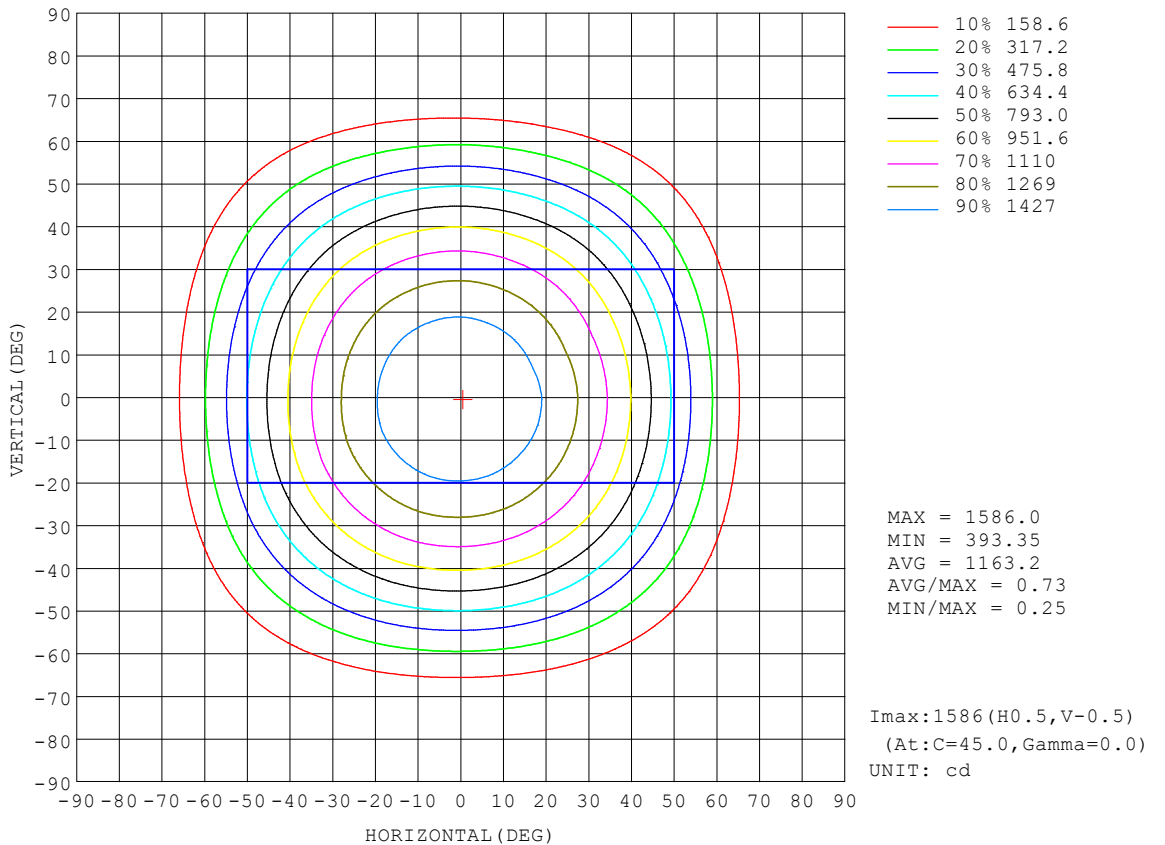


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.50V I:0.2111A P:25.039W PF:0.9927 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3132.9x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

Flux out:2246 lm

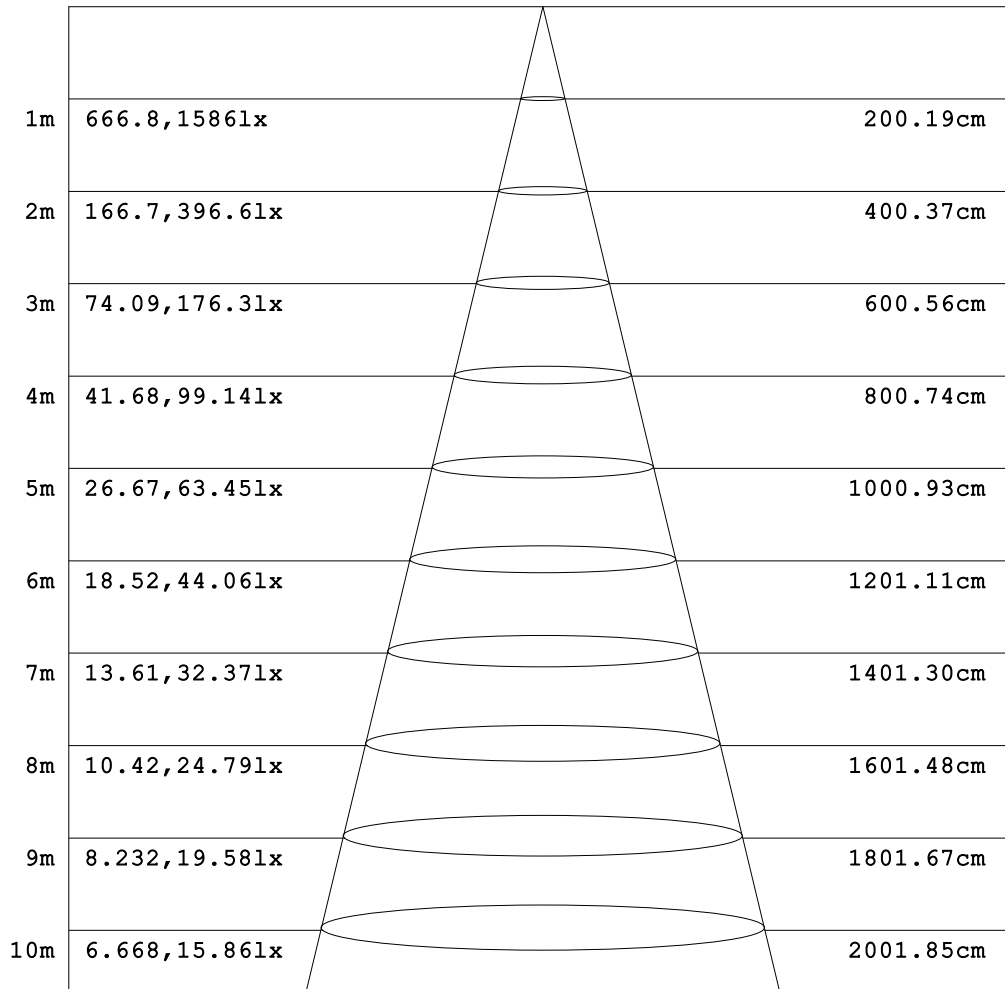

Angle:90.05deg

Height

Eavg, Emax

Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.50V I:0.2111A P:25.039W PF:0.9927 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3132.9x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

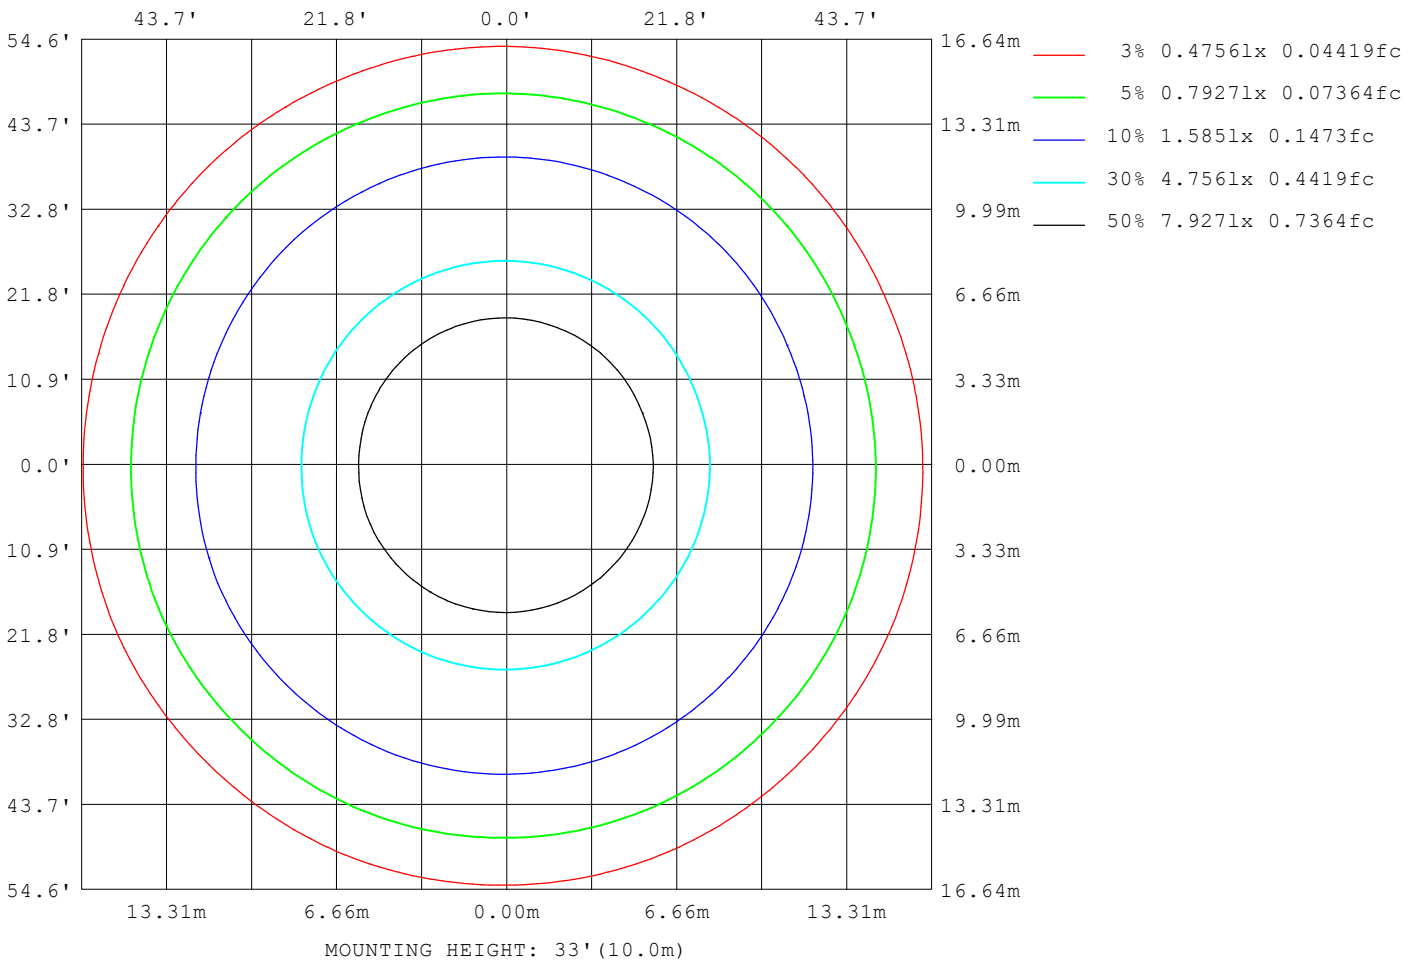

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.50V I:0.2111A P:25.039W PF:0.9927 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3132.9x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	12650
L_0~180 (75) av	6778
L_0~180 (85) av	5884
L_90~270 (65) av	12487
L_90~270 (75) av	6806
L_90~270 (85) av	5086
L_45 (65) av	12585
L_45 (75) av	6814
L_45 (85) av	5581

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

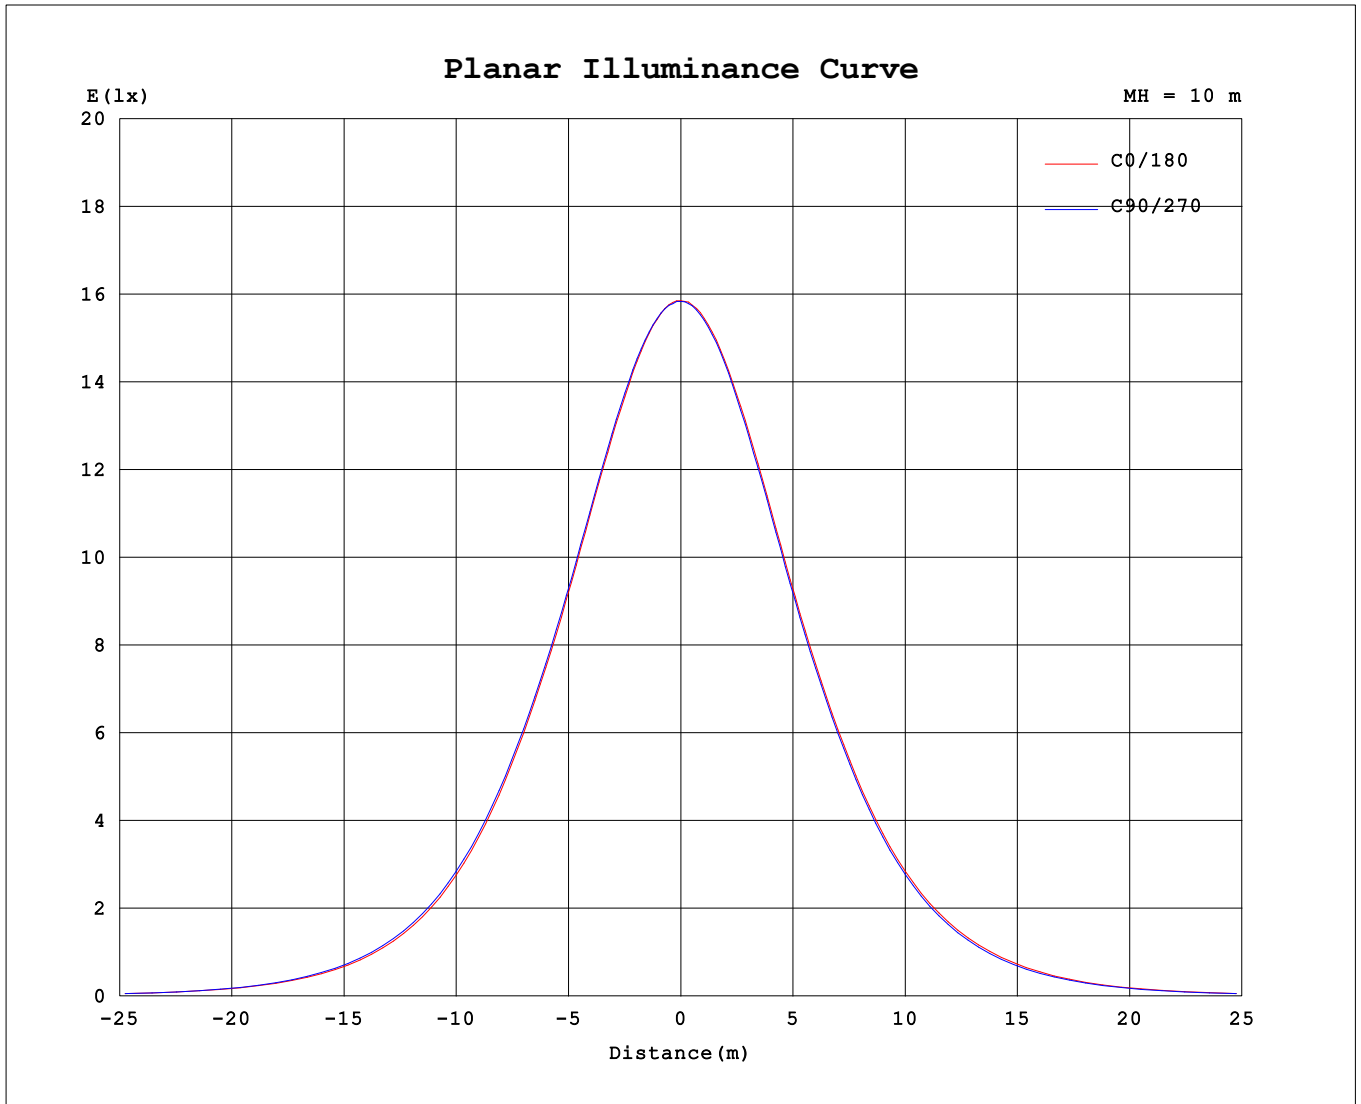

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-06-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.50V I:0.2111A P:25.039W PF:0.9927 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3132.9x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 26W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1585	1586	1586	1584	1584	1584	1583	1581	1585	1586	1586	1584	1584	1584	1583	1581			
5	1574	1574	1574	1573	1575	1576	1576	1574	1576	1575	1575	1572	1571	1570	1569	1569			
10	1540	1541	1542	1543	1545	1546	1547	1548	1543	1542	1541	1540	1538	1534	1533	1531			
15	1484	1487	1488	1490	1493	1495	1495	1498	1492	1491	1489	1484	1481	1478	1476	1474			
20	1411	1413	1413	1419	1420	1425	1426	1428	1420	1417	1416	1410	1409	1402	1399	1397			
25	1319	1322	1322	1327	1332	1337	1339	1339	1330	1326	1325	1320	1315	1310	1306	1304			
30	1212	1214	1215	1222	1227	1234	1234	1236	1225	1223	1220	1214	1210	1202	1200	1197			
35	1092	1095	1099	1105	1109	1116	1118	1120	1108	1105	1103	1097	1092	1084	1082	1079			
40	947	950	952	960	967	976	977	979	966	964	961	953	948	940	936	933			
45	781	785	789	799	805	814	817	819	806	802	799	790	785	778	774	769			
50	609	615	619	628	633	642	646	650	638	632	628	621	616	607	604	599			
55	440	447	451	457	461	469	472	478	472	465	461	453	448	439	436	431			
60	287	293	293	299	301	308	309	314	311	309	306	297	293	284	281	279			
65	165	166	166	169	171	176	177	179	177	178	178	172	166	160	160	161			
70	86.2	86.5	86.3	87.8	88.9	91.2	91.8	93.1	92.4	92.4	93.0	90.5	88.5	86.0	85.7	85.3			
75	55.1	55.3	55.6	56.1	56.4	57.1	57.3	57.5	57.2	57.2	57.5	56.8	56.3	55.7	55.4	55.1			
80	35.4	35.5	35.7	36.5	36.6	37.3	37.7	37.5	37.5	37.6	37.8	37.3	36.7	36.2	36.6	35.7			
85	15.4	15.3	14.2	14.3	13.8	14.8	16.2	17.0	17.5	17.3	16.2	15.3	14.6	14.4	15.7	15.7			
90	0.88	0.86	0.88	0.83	0.83	0.79	0.83	0.86	1.51	1.55	1.49	1.51	1.49	1.52	1.50	1.51			

C Range: 0 - 360DEG	□ Range: 0 - 90DEG
C Interval: 22.5DEG	□ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-06-28	Remarks: