
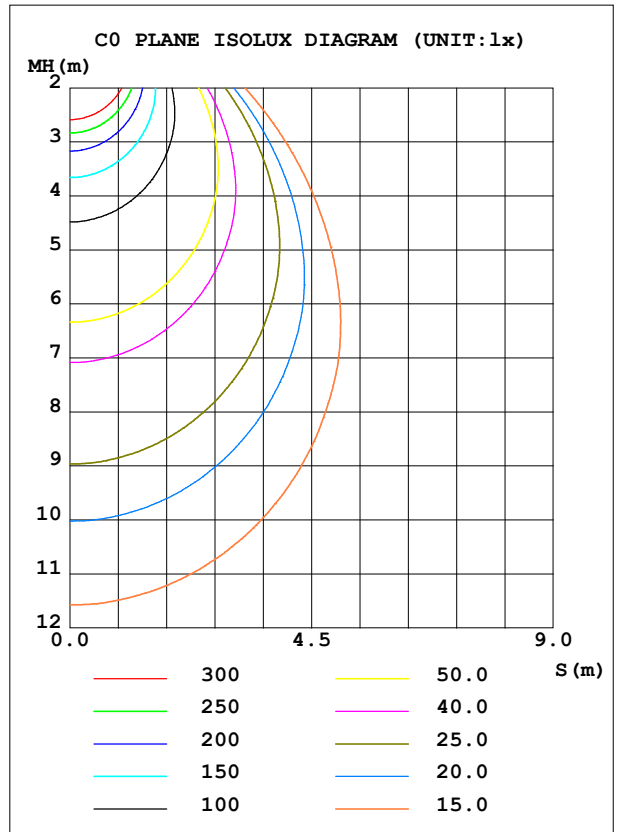


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.53V I:0.2763A P:32.619W PF:0.9875 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3967.22x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	DL254-8-35W-M-A5C5-HO	Imax (cd)	2010	S/MH (C0/180)	1.15
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	1.15
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3967.2	<input type="checkbox"/> UP, DN (C0-180)	0.0,50.3
NOMINAL FLUX (lm)	3967.22	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0,49.7
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.25

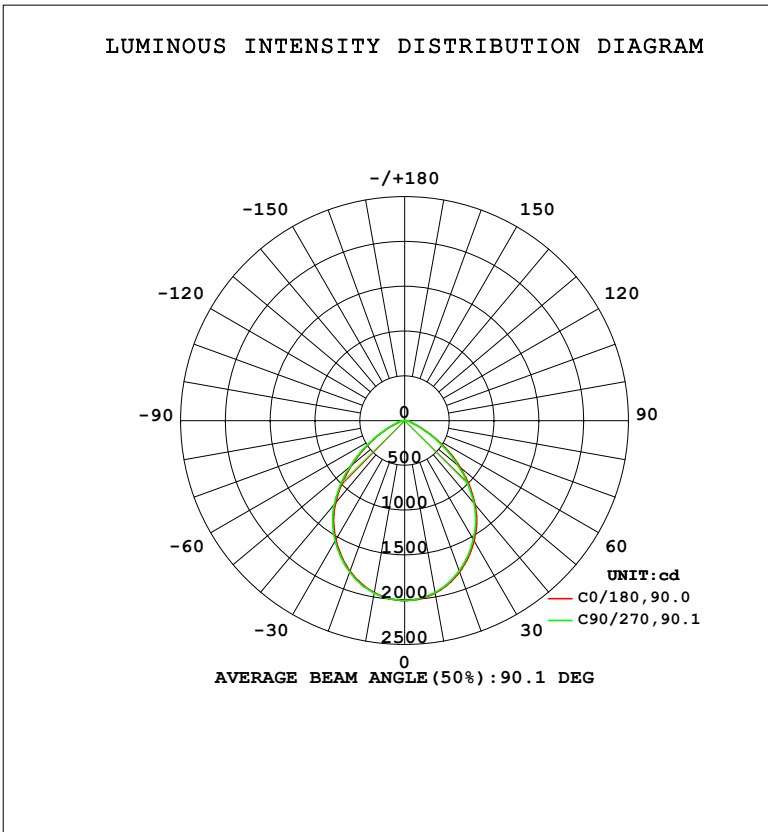

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1950	1953	1957	1958	1958	1953	1949	1942	0- 10	189.0	189.0	4.76,4.76
20	1786	1792	1800	1806	1797	1793	1783	1772	10- 20	530.4	719.3	18.1,18.1
30	1535	1540	1554	1563	1552	1545	1532	1519	20- 30	770.9	1490	37.6,37.6
40	1200	1207	1224	1237	1223	1217	1201	1186	30- 40	867.4	2358	59.4,59.4
50	771.0	784.0	801.5	818.0	808.1	795.7	778.4	763.7	40- 50	773.0	3131	78.9,78.9
60	363.5	371.0	381.2	391.3	394.2	388.0	370.4	355.4	50- 60	515.1	3646	91.9,91.9
70	109.1	109.1	112.5	116.3	116.8	117.6	112.0	108.4	60- 70	222.0	3868	97.5,97.5
80	44.77	45.20	46.32	47.75	47.44	47.83	46.51	46.28	70- 80	77.17	3945	99.4,99.4
90	1.134	1.127	1.062	1.075	1.940	1.914	1.921	1.934	80- 90	22.32	3967	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2768.3 lm

%lum = 69.8%

%lamp = 69.8%

Conical surface Flux(130deg): 3787.4 lm

%lum = 95.5%


%lamp = 95.5%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-06

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:119.53V I:0.2763A P:32.619W PF:0.9875 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3967.22x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

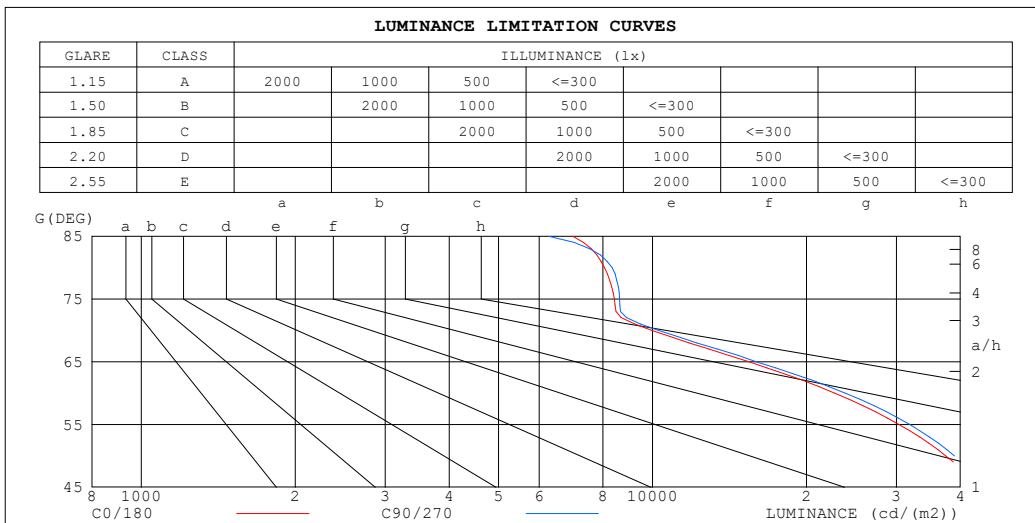

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6983	6270
80	8057	8335
75	8416	8619
70	9970	10280
65	15460	15951
60	22721	23827
55	30353	31854
50	37481	38968
45	43708	45043


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.53V I:0.2763A P:32.619W PF:0.9875 Freq:60.01Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:3967.22x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.96	.90	.86	.94	.89	.85	.91	.86	.83	.88	.84	.81	.85	.82	.79	.77
3.0	.86	.79	.74	.85	.78	.73	.82	.76	.72	.79	.75	.71	.77	.73	.70	.68
4.0	.78	.70	.64	.76	.69	.64	.74	.68	.63	.72	.67	.62	.70	.65	.61	.59
5.0	.70	.62	.57	.69	.62	.56	.67	.61	.56	.65	.60	.55	.64	.59	.55	.53
6.0	.64	.56	.50	.63	.56	.50	.61	.55	.50	.60	.54	.49	.58	.53	.49	.47
7.0	.59	.51	.45	.58	.50	.45	.56	.50	.45	.55	.49	.44	.54	.48	.44	.42
8.0	.54	.46	.41	.53	.46	.41	.52	.45	.40	.51	.45	.40	.50	.44	.40	.38
9.0	.50	.42	.37	.49	.42	.37	.48	.41	.37	.47	.41	.37	.46	.40	.36	.35
10.0	.46	.39	.34	.46	.38	.34	.45	.38	.34	.44	.38	.33	.43	.37	.33	.32

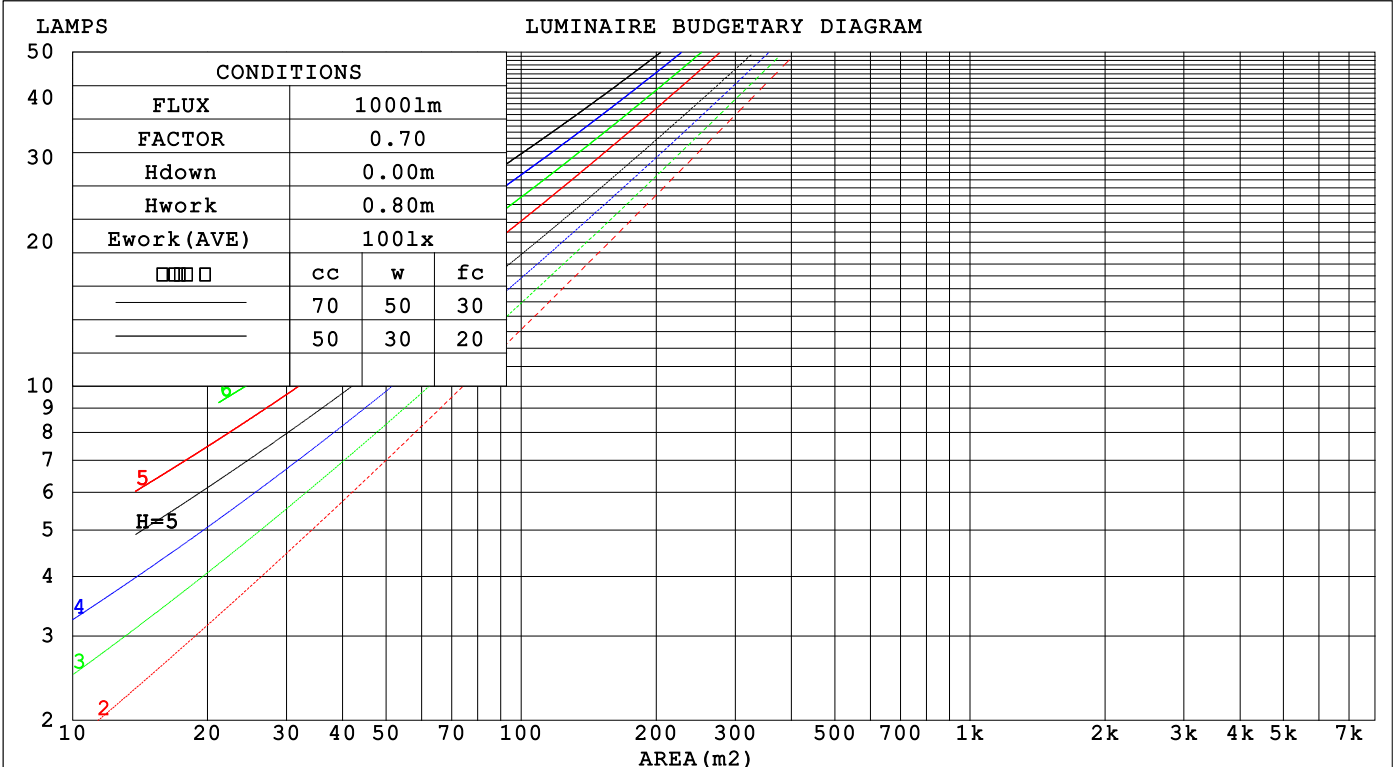

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-06

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:119.53V I:0.2763A P:32.619W PF:0.9875 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3967.22x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.246 .140 .044	.239 .136 .043	.226 .130 .041	.214 .123 .040	.203 .118 .038	
2.0	.238 .131 .040	.232 .128 .039	.221 .123 .038	.211 .118 .037	.201 .114 .036	
3.0	.226 .120 .036	.221 .118 .036	.211 .115 .035	.202 .111 .034	.194 .107 .033	
4.0	.214 .111 .033	.209 .109 .032	.200 .106 .032	.192 .103 .031	.185 .100 .031	
5.0	.201 .102 .030	.197 .101 .029	.189 .099 .029	.182 .096 .029	.176 .094 .028	
6.0	.189 .095 .027	.186 .094 .027	.179 .092 .027	.173 .090 .026	.167 .088 .026	
7.0	.179 .088 .025	.175 .087 .025	.169 .086 .025	.163 .084 .024	.158 .082 .024	
8.0	.169 .082 .023	.166 .082 .023	.160 .080 .023	.155 .079 .023	.150 .077 .022	
9.0	.159 .077 .022	.157 .076 .021	.152 .075 .021	.147 .074 .021	.143 .073 .021	
10.0	.151 .072 .020	.149 .072 .020	.144 .071 .020	.140 .070 .020	.136 .068 .020	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.176 .157 .139	.150 .134 .120	.103 .093 .083	.059 .054 .048	.019 .017 .016	
2.0	.165 .132 .104	.141 .114 .090	.097 .079 .063	.056 .046 .037	.018 .015 .012	
3.0	.156 .114 .080	.134 .098 .070	.092 .068 .049	.053 .040 .029	.017 .013 .009	
4.0	.148 .100 .064	.127 .087 .055	.087 .060 .039	.051 .035 .023	.016 .012 .008	
5.0	.141 .089 .052	.121 .077 .045	.083 .054 .032	.048 .032 .019	.016 .010 .006	
6.0	.134 .081 .043	.115 .070 .037	.079 .049 .026	.046 .029 .016	.015 .009 .005	
7.0	.128 .074 .036	.110 .064 .031	.076 .045 .022	.044 .026 .013	.014 .009 .004	
8.0	.122 .068 .031	.105 .059 .027	.073 .041 .019	.042 .024 .011	.014 .008 .004	
9.0	.116 .063 .027	.100 .055 .023	.069 .038 .017	.040 .023 .010	.013 .007 .003	
10.0	.111 .059 .024	.096 .051 .021	.067 .036 .015	.039 .021 .009	.013 .007 .003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.53V I:0.2763A P:32.619W PF:0.9875 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3967.22x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.1	25.4	24.3	25.6	25.8	24.2	25.6	24.5	25.7	25.9
3H	24.3	25.5	24.5	25.7	25.9	24.4	25.6	24.7	25.9	26.1
4H	24.3	25.4	24.6	25.7	25.9	24.4	25.6	24.7	25.8	26.1
6H	24.3	25.4	24.6	25.6	25.9	24.5	25.5	24.8	25.8	26.1
8H	24.3	25.3	24.6	25.6	25.9	24.5	25.5	24.8	25.8	26.0
12H	24.3	25.3	24.6	25.6	25.9	24.4	25.4	24.8	25.7	26.0
4H 2H	24.2	25.4	24.5	25.6	25.8	24.3	25.5	24.6	25.7	26.0
3H	24.5	25.4	24.8	25.7	26.0	24.6	25.6	24.9	25.9	26.2
4H	24.5	25.4	24.9	25.7	26.1	24.7	25.6	25.0	25.9	26.2
6H	24.6	25.4	25.0	25.7	26.1	24.8	25.5	25.1	25.9	26.2
8H	24.6	25.4	25.0	25.7	26.1	24.8	25.5	25.2	25.9	26.3
12H	24.7	25.3	25.1	25.7	26.1	24.8	25.5	25.2	25.8	26.2
8H 4H	24.5	25.2	24.9	25.6	26.0	24.6	25.4	25.0	25.7	26.1
6H	24.6	25.2	25.1	25.6	26.1	24.8	25.4	25.2	25.8	26.2
8H	24.7	25.2	25.2	25.7	26.1	24.9	25.4	25.3	25.8	26.2
12H	24.8	25.2	25.2	25.7	26.1	24.9	25.3	25.4	25.8	26.3
12H 4H	24.5	25.1	24.9	25.5	25.9	24.6	25.3	25.0	25.6	26.0
6H	24.6	25.2	25.1	25.6	26.0	24.8	25.3	25.2	25.7	26.2
8H	24.7	25.2	25.2	25.6	26.1	24.9	25.3	25.3	25.8	26.2

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 1.0	+ 0.7 / - 0.9
1.5H	+ 0.4 / - 0.4	+ 0.4 / - 0.5
2.0H	+ 1.5 / - 2.0	+ 1.5 / - 2.0

CIE Pub.117, 3967 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.8)  
 Area: 0.032 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 90DEG
C Interval: 22.5DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.461
Temperature:25.3°C	Humidity:65.0%
Operators:DAMIN	Test Distance:9.680m [K=1.0000]
Test Date:2023-06-06	Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.53V I:0.2763A P:32.619W PF:0.9875 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3967.22x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	66	56	49	65	55	49	64	55	49	43
0.80	76	66	60	75	66	60	73	65	59	53
1.00	84	75	69	83	74	69	81	75	68	62
1.25	91	82	77	89	82	76	87	80	75	69
1.50	95	87	82	94	86	81	91	85	80	74
2.00	101	94	89	99	93	88	96	91	87	80
2.50	104	98	93	102	96	92	98	94	90	83
3.00	106	101	97	104	100	96	101	97	93	86
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.53V I:0.2763A P:32.619W PF:0.9875 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3967.22x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

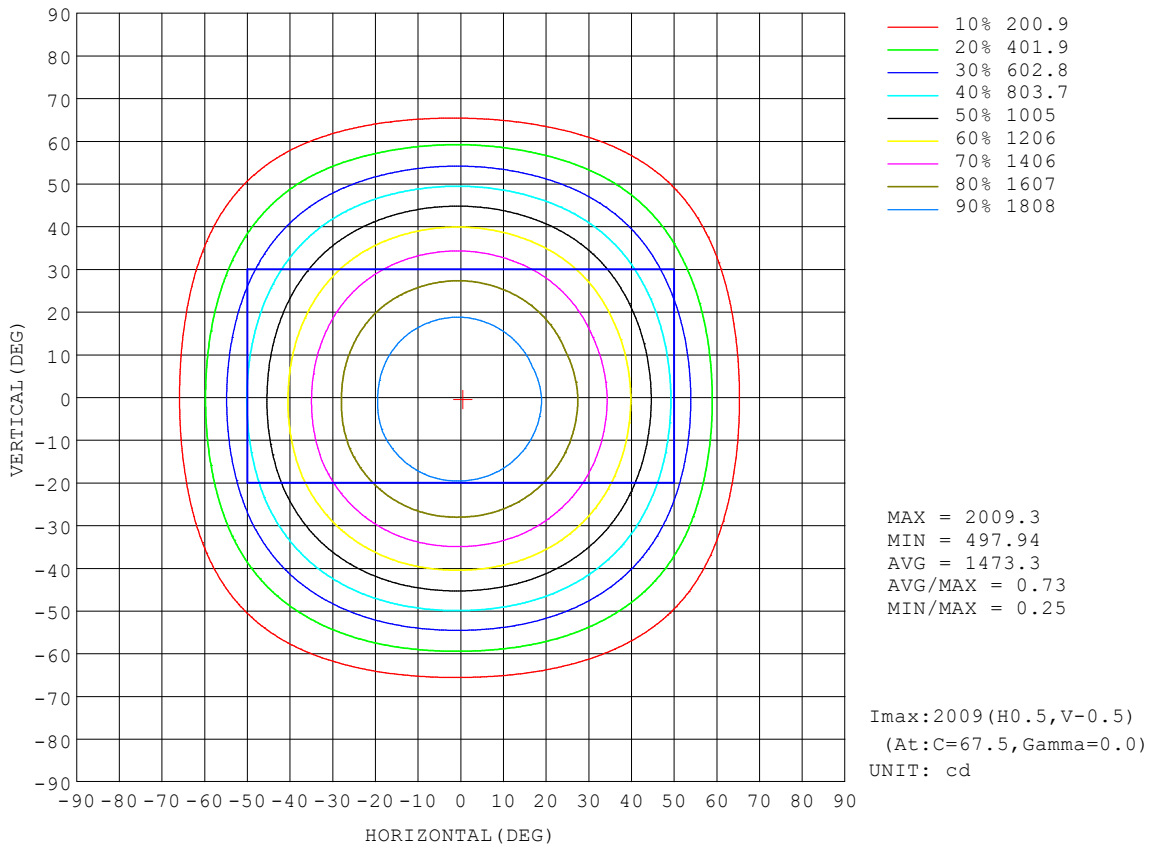

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-06


Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.53V I:0.2763A P:32.619W PF:0.9875 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3967.22x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

Flux out:2845 lm

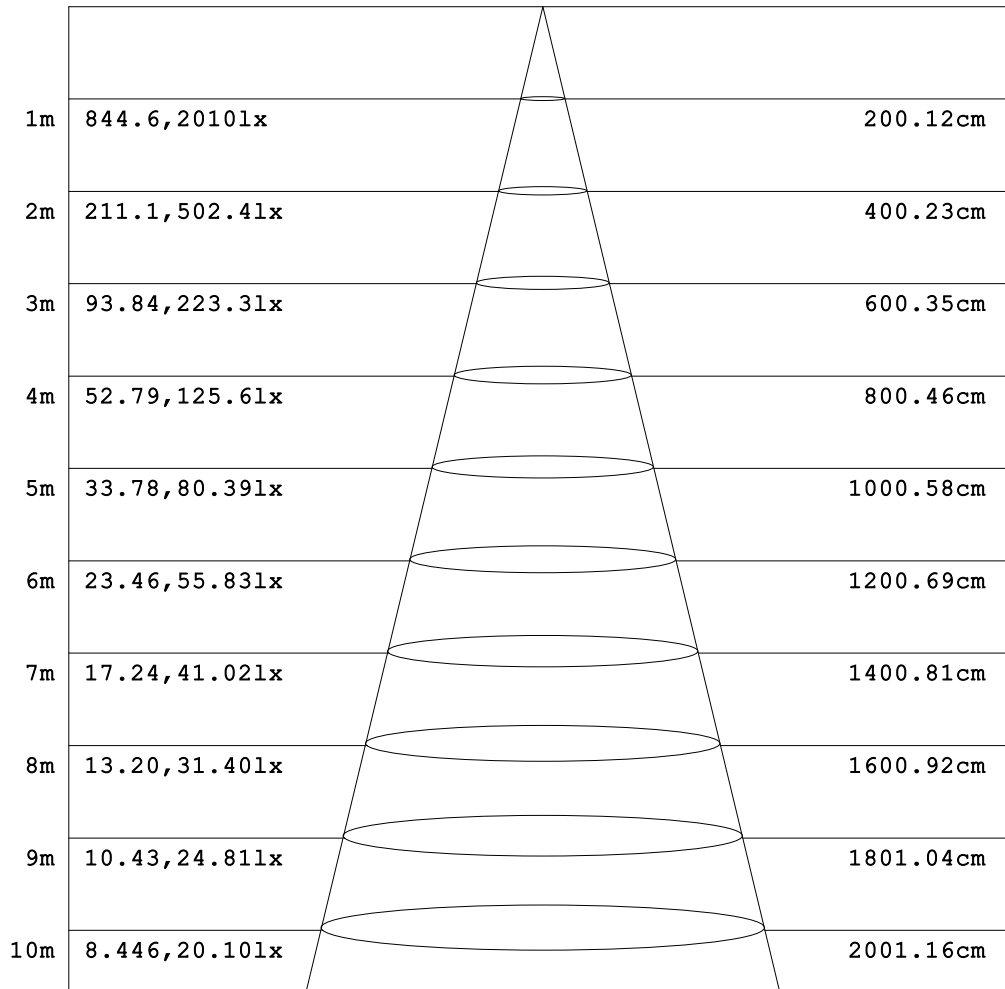

Angle:90.03deg

Height

Eavg, Emax

Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:DAMIN  
Test Date:2023-06-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:9.680m [K=1.0000]  
Remarks:

**ISOLUX DIAGRAM**

Test:U:119.53V I:0.2763A P:32.619W PF:0.9875 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3967.22x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

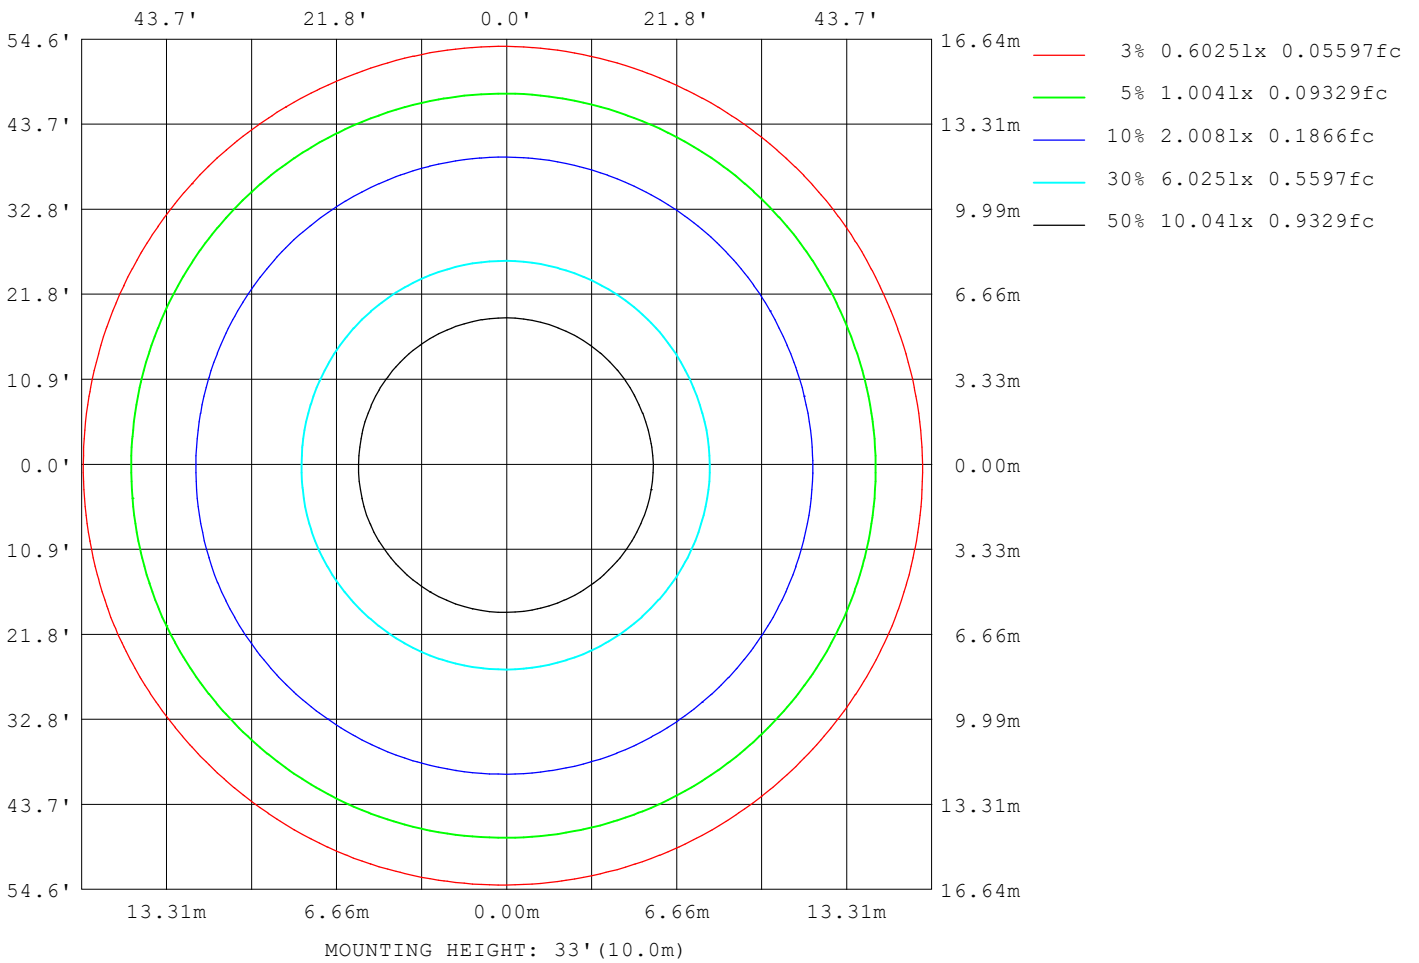

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.53V I:0.2763A P:32.619W PF:0.9875 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3967.22x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	16029
L_0~180 (75) av	8579
L_0~180 (85) av	7456
L_90~270 (65) av	15750
L_90~270 (75) av	8612
L_90~270 (85) av	6450
L_45 (65) av	15920
L_45 (75) av	8626
L_45 (85) av	7096

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-06-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:9.680m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

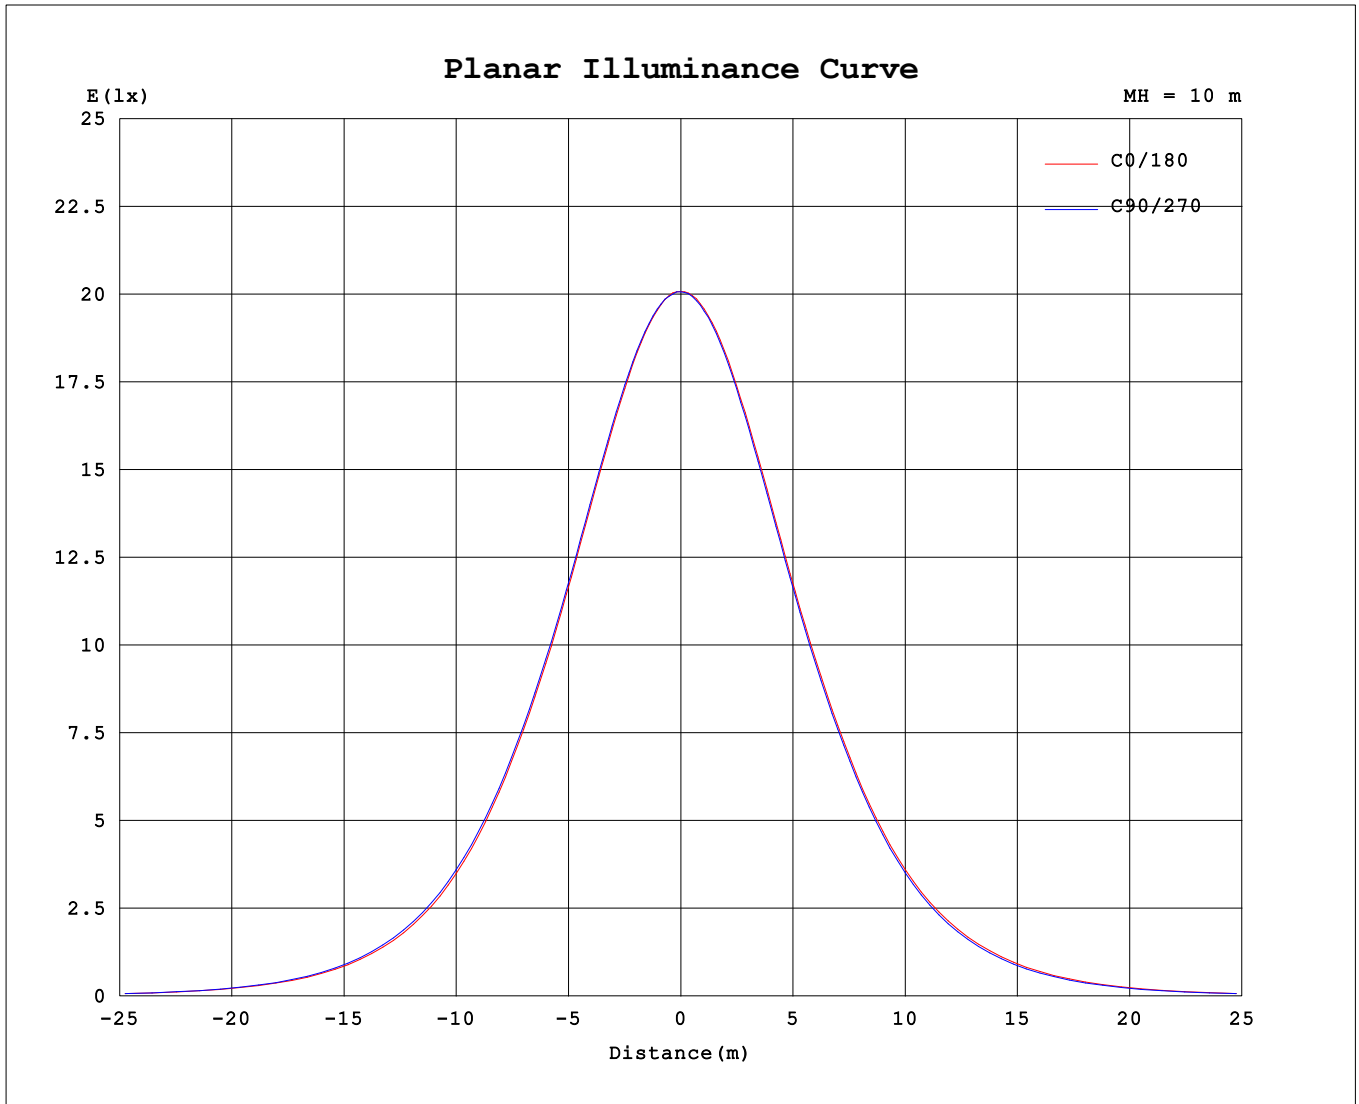

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-06-06

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 9.680m [K=1.0000]  
 Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.53V I:0.2763A P:32.619W PF:0.9875 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:3967.22x1 lm		
NAME: DL254-8-35W-M-A5C5-HO	TYPE: 35W	WEIGHT:
SPEC.: 4000K	DIM.: 0.26	SERIAL No.: 1
MFR.: Lotus LED Lights	SUR.: 0.20	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2008	2009	2009	2010	2007	2005	2005	2004	2008	2009	2009	2010	2007	2005	2005	2004			
5	1994	1994	1993	1996	1995	1998	1997	1996	1995	1995	1996	1994	1991	1988	1988	1986			
10	1950	1952	1953	1956	1957	1959	1958	1960	1958	1954	1953	1951	1949	1943	1942	1939			
15	1881	1883	1886	1888	1891	1894	1896	1897	1888	1888	1884	1882	1877	1872	1871	1867			
20	1786	1789	1792	1796	1800	1806	1806	1807	1797	1795	1793	1788	1783	1776	1772	1769			
25	1672	1673	1676	1682	1687	1693	1694	1697	1683	1681	1680	1673	1667	1659	1654	1653			
30	1535	1539	1540	1549	1554	1561	1563	1566	1552	1548	1545	1539	1532	1524	1519	1517			
35	1385	1388	1390	1400	1405	1414	1417	1419	1405	1399	1397	1390	1384	1373	1369	1365			
40	1200	1202	1207	1217	1224	1235	1237	1240	1223	1219	1217	1207	1201	1190	1186	1182			
45	989	993	999	1011	1019	1030	1034	1037	1021	1015	1012	1002	995	984	980	973			
50	771	777	784	795	802	813	818	822	808	801	796	787	778	769	764	758			
55	557	566	571	580	585	594	598	605	596	588	582	572	567	556	550	546			
60	364	371	371	379	381	391	391	398	394	391	388	375	370	359	355	353			
65	209	210	210	214	216	223	223	226	224	225	225	217	210	204	202	204			
70	109	110	109	111	113	115	116	118	117	117	118	115	112	109	108	108			
75	69.7	70.0	70.4	71.0	71.4	72.2	72.5	72.8	72.4	72.4	72.8	71.9	71.3	70.4	70.1	69.7			
80	44.8	44.9	45.2	46.2	46.3	47.2	47.8	47.6	47.4	47.6	47.8	47.3	46.5	45.9	46.3	45.2			
85	19.5	19.4	18.1	18.1	17.5	18.7	20.7	21.6	22.1	22.0	20.5	19.4	18.5	18.4	19.9	19.9			
90	1.13	1.11	1.13	1.08	1.06	1.03	1.08	1.13	1.94	1.98	1.91	1.93	1.92	1.95	1.93	1.94			

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:DAMIN  
Test Date:2023-06-06

□ Range: 0 - 90DEG  
□ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:9.680m [K=1.0000]  
Remarks: