
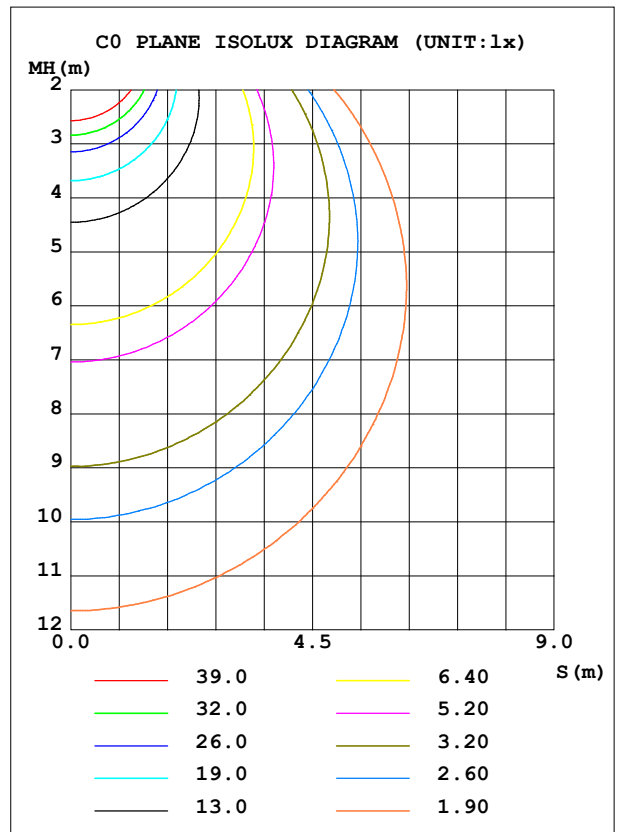


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.83V I:0.1152A P:13.605W PF:0.9852 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:994.573x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	257.9	S/MH (C0/180)	1.38
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	1.37
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	994.57	η UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	994.573	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.55

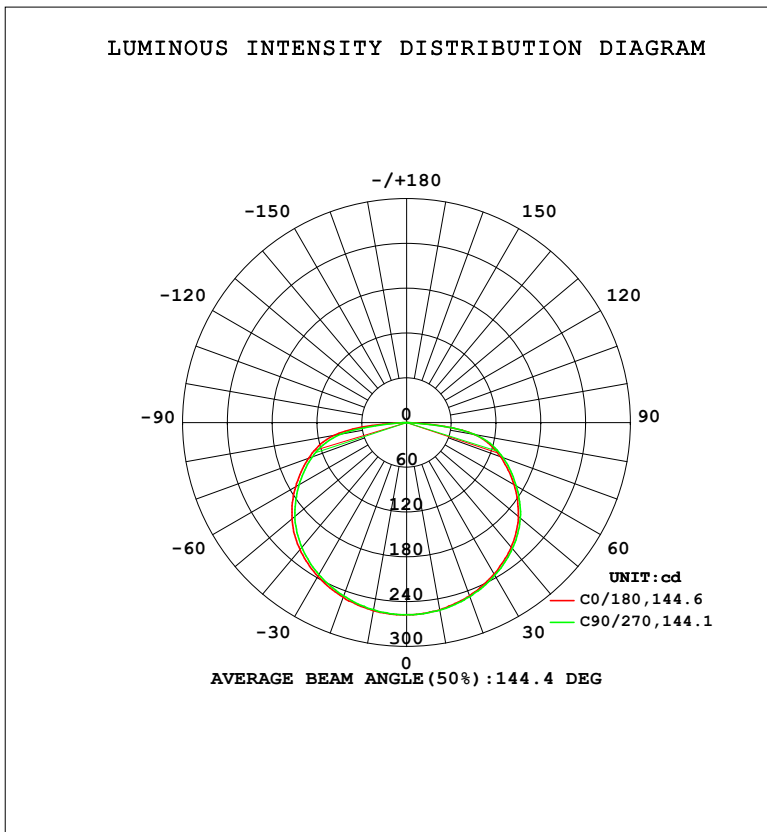

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	254.7	254.6	255.3	255.5	255.9	255.4	254.6	254.7	0- 10	24.47	24.47	2.46,2.46
20	246.9	246.8	248.1	248.7	248.9	248.5	247.2	246.8	10- 20	71.25	95.72	9.62,9.62
30	234.3	235.2	236.4	237.2	238.0	236.8	235.3	234.7	20- 30	111.9	207.6	20.9,20.9
40	218.2	218.9	220.6	221.5	222.1	221.2	218.7	217.9	30- 40	143.2	350.8	35.3,35.3
50	195.8	196.6	199.0	200.2	200.5	198.7	195.5	195.3	40- 50	161.9	512.7	51.5,51.5
60	166.3	167.3	169.8	171.2	171.6	169.6	166.3	165.5	50- 60	164.3	677.0	68.1,68.1
70	133.9	135.1	137.7	139.6	139.8	138.1	134.5	133.5	60- 70	151.3	828.3	83.3,83.3
80	92.21	88.30	92.96	98.71	98.81	92.48	88.51	91.91	70- 80	123.9	952.1	95.7,95.7
90	0.9276	0.7955	0.8267	1.006	0.5936	0.4781	0.5074	0.6034	80- 90	42.44	994.6	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.83V I:0.1152A P:13.605W PF:0.9852 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:994.573x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

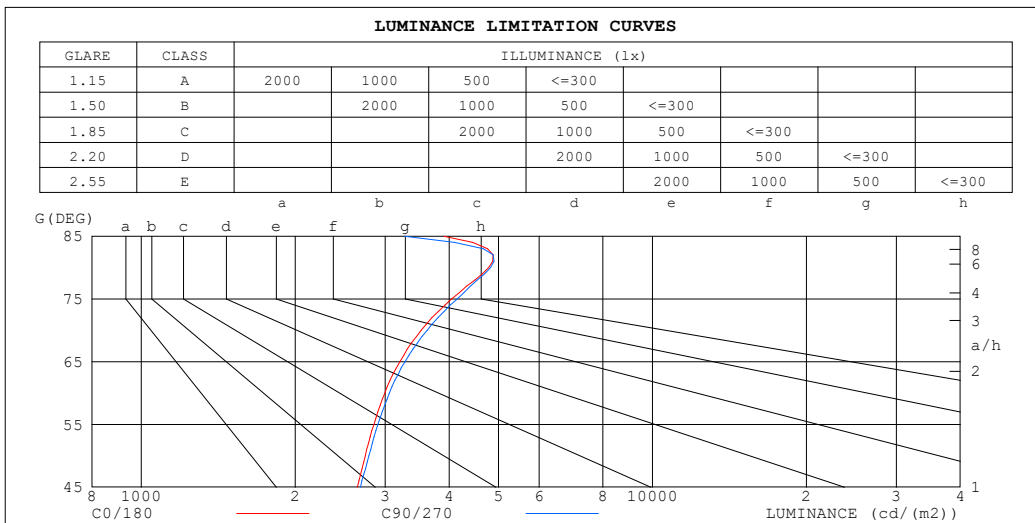

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3911	3276
80	4782	4820
75	4045	4147
70	3526	3626
65	3204	3281
60	2996	3058
55	2850	2903
50	2743	2788
45	2646	2683


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.83V I:0.1152A P:13.605W PF:0.9852 Freq:59.98Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:994.573x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.01	.95	.91	.98	.94	.89	.94	.90	.86	.90	.87	.84	.86	.84	.81	.79
2.0	.86	.78	.71	.84	.76	.70	.80	.74	.68	.77	.71	.67	.73	.69	.65	.63
3.0	.74	.65	.57	.72	.64	.57	.69	.62	.56	.66	.60	.55	.64	.58	.54	.51
4.0	.65	.55	.47	.63	.54	.47	.61	.53	.46	.58	.51	.46	.56	.50	.45	.43
5.0	.57	.47	.40	.56	.47	.40	.54	.46	.39	.52	.45	.39	.50	.44	.38	.36
6.0	.51	.42	.35	.50	.41	.34	.48	.40	.34	.47	.39	.34	.45	.38	.33	.31
7.0	.46	.37	.30	.45	.36	.30	.44	.36	.30	.42	.35	.30	.41	.34	.29	.27
8.0	.42	.33	.27	.41	.33	.27	.40	.32	.26	.39	.31	.26	.37	.31	.26	.24
9.0	.38	.30	.24	.38	.29	.24	.37	.29	.24	.35	.28	.23	.34	.28	.23	.21
10.0	.35	.27	.21	.35	.27	.21	.34	.26	.21	.33	.26	.21	.32	.26	.21	.19

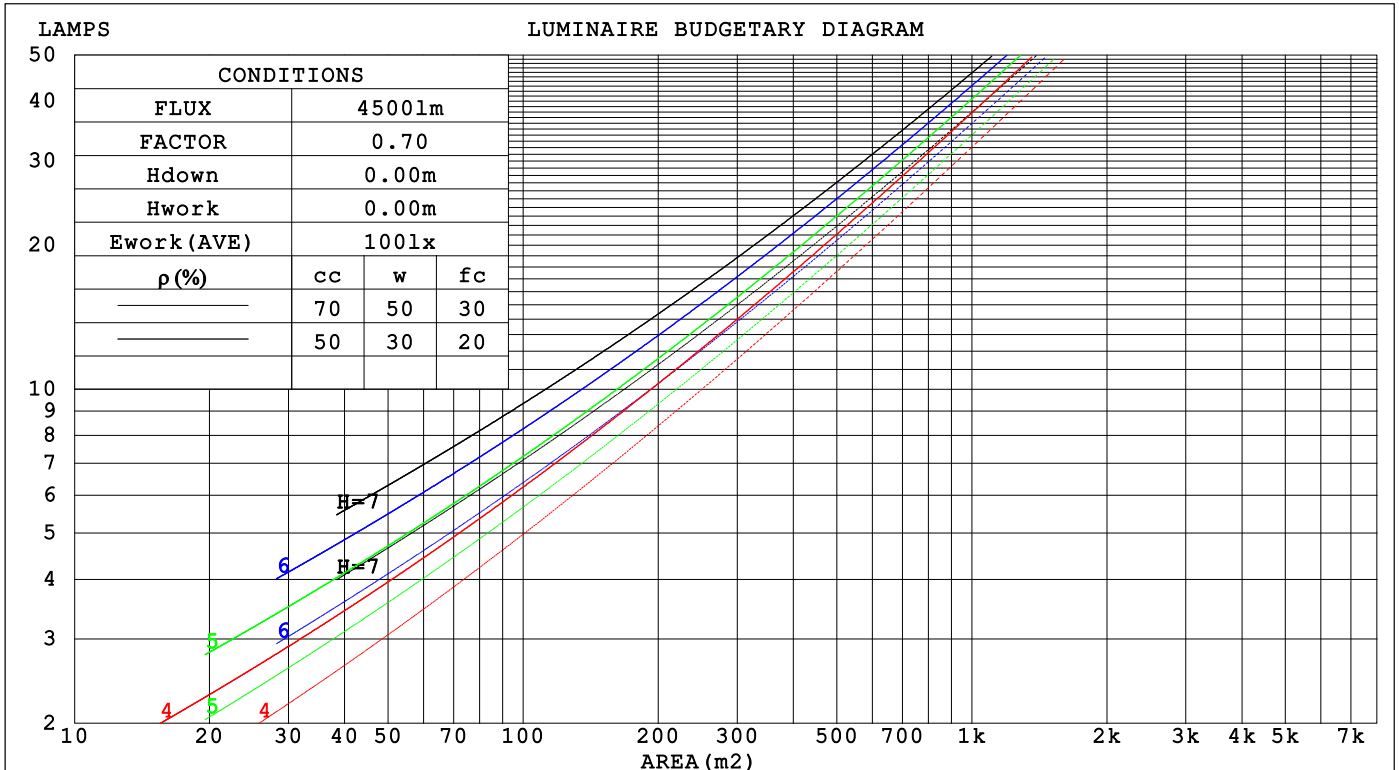

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.83V I:0.1152A P:13.605W PF:0.9852 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:994.573x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.372	.212	.067	.365	.208	.066	.351	.202	.064	.339	.196	.063	.327	.190	.061	
2.0	.337	.185	.057	.331	.182	.056	.319	.177	.055	.308	.173	.054	.297	.168	.053	
3.0	.304	.162	.049	.299	.160	.048	.288	.156	.047	.278	.152	.047	.269	.149	.046	
4.0	.276	.143	.042	.271	.142	.042	.261	.138	.041	.252	.135	.041	.244	.133	.040	
5.0	.251	.128	.037	.247	.127	.037	.238	.124	.037	.230	.122	.036	.223	.119	.036	
6.0	.230	.116	.033	.226	.114	.033	.219	.112	.033	.212	.110	.032	.205	.108	.032	
7.0	.213	.105	.030	.209	.104	.030	.202	.102	.029	.196	.100	.029	.190	.099	.029	
8.0	.197	.096	.027	.194	.095	.027	.188	.094	.027	.182	.092	.027	.177	.091	.026	
9.0	.184	.089	.025	.181	.088	.025	.175	.087	.025	.170	.085	.024	.166	.084	.024	
10.0	.172	.082	.023	.169	.082	.023	.164	.081	.023	.160	.079	.023	.155	.078	.022	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.185	.156	.129	.158	.134	.111	.108	.092	.077	.062	.053	.045	.020	.017	.014	
2.0	.178	.132	.092	.153	.113	.080	.105	.078	.056	.060	.046	.033	.019	.015	.011	
3.0	.171	.115	.069	.147	.099	.060	.101	.069	.042	.058	.040	.025	.019	.013	.008	
4.0	.163	.102	.054	.140	.088	.047	.096	.061	.033	.056	.036	.020	.018	.012	.006	
5.0	.156	.091	.044	.134	.079	.038	.092	.055	.027	.053	.032	.016	.017	.011	.005	
6.0	.148	.083	.037	.127	.072	.032	.088	.050	.023	.051	.030	.013	.016	.010	.004	
7.0	.141	.076	.031	.121	.066	.027	.084	.046	.019	.049	.027	.012	.016	.009	.004	
8.0	.134	.071	.027	.115	.061	.024	.080	.043	.017	.046	.025	.010	.015	.008	.003	
9.0	.127	.066	.024	.110	.057	.021	.076	.040	.015	.044	.024	.009	.014	.008	.003	
10.0	.121	.061	.022	.104	.053	.019	.072	.037	.013	.042	.022	.008	.014	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.83V I:0.1152A P:13.605W PF:0.9852 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:994.573x1 lm										
NAME: DS-LED-6-S15W-5CCTWH					TYPE:			WEIGHT:		
SPEC.: 3000K 90					DIM.:			SERIAL No.:		
MFR.: Light by Lotus					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.7	18.4	17.0	18.6	18.8	16.8	18.5	17.1	18.7	18.9
3H	19.1	20.6	19.4	20.9	21.1	19.2	20.7	19.5	21.0	21.2
4H	20.3	21.8	20.6	22.0	22.3	20.4	21.9	20.7	22.1	22.4
6H	21.5	22.9	21.8	23.2	23.4	21.6	23.0	21.9	23.2	23.5
8H	22.0	23.3	22.3	23.6	23.9	22.0	23.4	22.4	23.7	24.0
12H	22.2	23.5	22.6	23.8	24.2	22.2	23.6	22.6	23.9	24.2
4H 2H	17.6	19.1	17.9	19.3	19.6	17.6	19.1	17.9	19.4	19.6
3H	20.1	21.4	20.5	21.7	22.1	20.2	21.5	20.6	21.8	22.1
4H	21.5	22.7	21.9	23.0	23.4	21.6	22.8	22.0	23.1	23.5
6H	22.9	24.0	23.3	24.3	24.7	22.9	24.0	23.3	24.4	24.7
8H	23.4	24.4	23.9	24.8	25.2	23.5	24.5	23.9	24.8	25.2
12H	23.7	24.7	24.2	25.1	25.5	23.7	24.6	24.1	25.0	25.4
8H 4H	22.1	23.1	22.5	23.5	23.8	22.1	23.1	22.5	23.5	23.9
6H	23.6	24.5	24.1	24.9	25.3	23.7	24.5	24.1	24.9	25.4
8H	24.3	25.1	24.8	25.5	26.0	24.3	25.1	24.8	25.5	26.0
12H	24.7	25.4	25.2	25.8	26.3	24.6	25.3	25.1	25.7	26.2
12H 4H	22.2	23.1	22.6	23.5	23.9	22.2	23.2	22.6	23.5	24.0
6H	23.8	24.6	24.3	25.0	25.5	23.8	24.6	24.3	25.0	25.5
8H	24.5	25.2	25.0	25.6	26.1	24.5	25.2	25.0	25.6	26.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 994.6 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.0)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.83V I:0.1152A P:13.605W PF:0.9852 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:994.573x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	53	40	33	52	40	33	51	39	32	25
0.80	62	49	41	61	49	41	59	48	41	33
1.00	70	58	50	69	57	49	67	59	49	41
1.25	78	66	58	76	65	57	73	63	56	48
1.50	83	71	63	81	71	63	78	69	62	53
2.00	90	80	73	88	79	72	85	77	70	62
2.50	95	86	79	93	84	78	89	82	76	67
3.00	99	90	84	96	89	83	92	86	81	71
4.00	103	96	91	101	95	89	96	91	87	77
5.00	106	100	95	104	98	94	99	95	91	81
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.83V I:0.1152A P:13.605W PF:0.9852 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:994.573x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

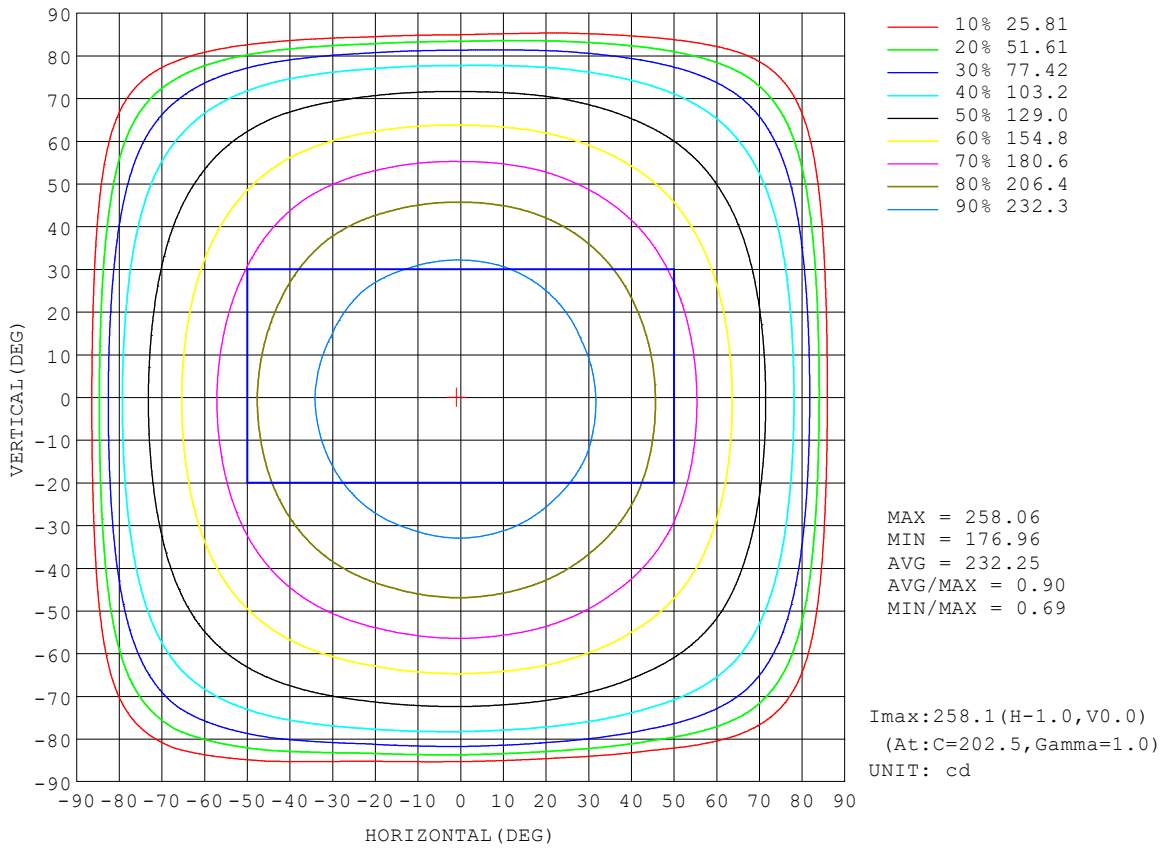


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.83V I:0.1152A P:13.605W PF:0.9852 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:994.573x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

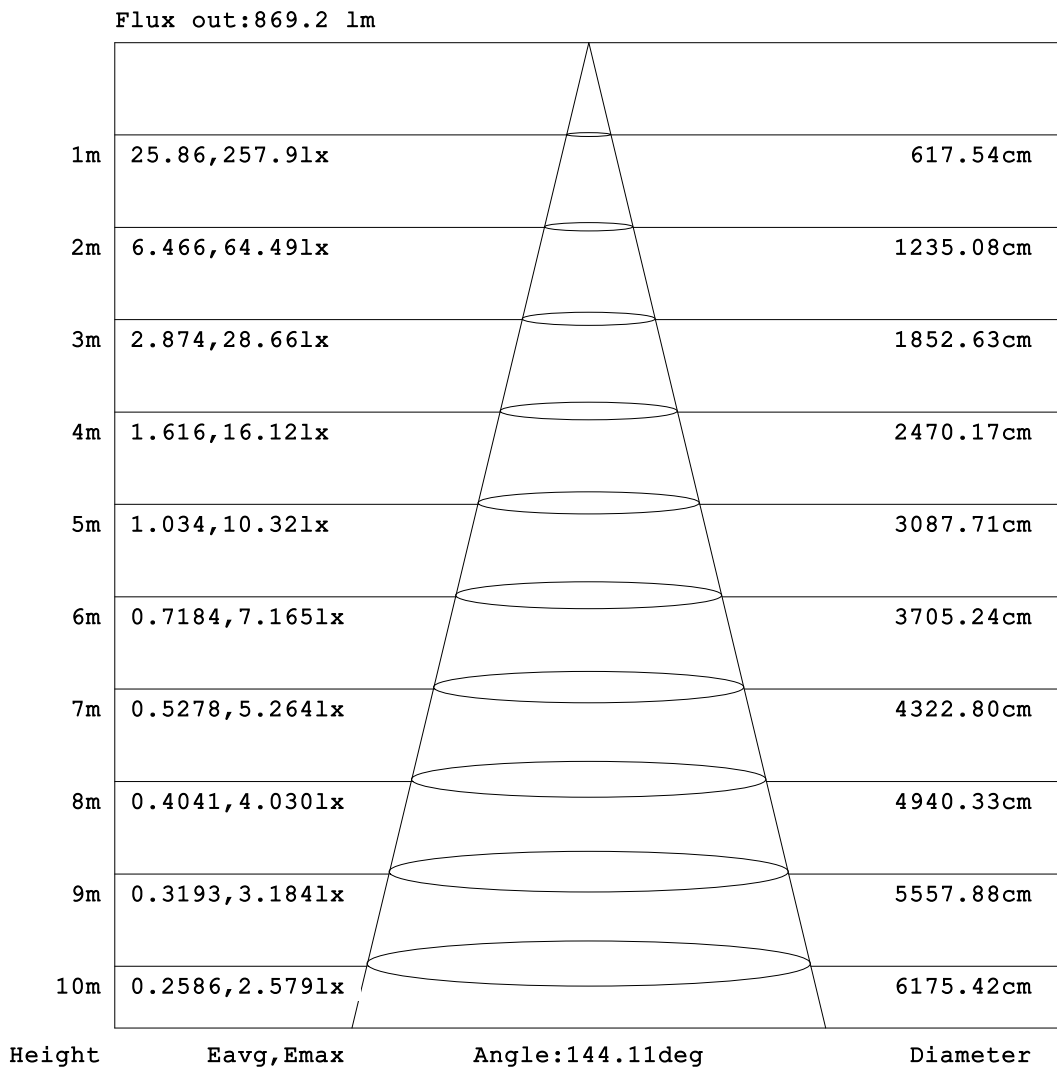


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.83V I:0.1152A P:13.605W PF:0.9852 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:994.573x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

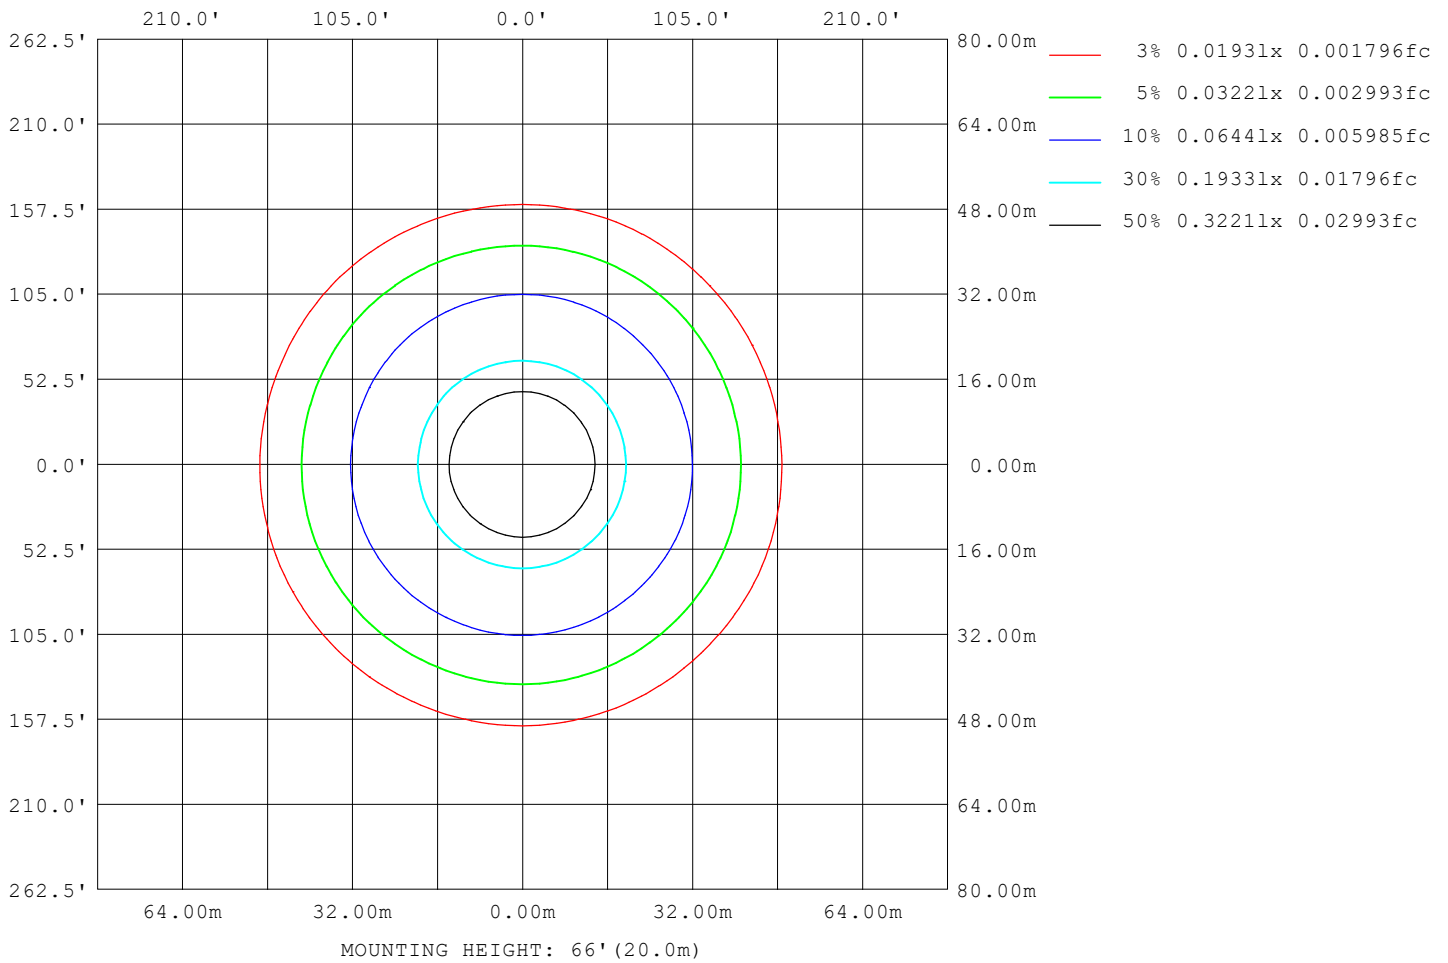

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.83V I:0.1152A P:13.605W PF:0.9852 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:994.573x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3262
L_0~180 (75) av	4149
L_0~180 (85) av	4371
L_90~270 (65) av	3243
L_90~270 (75) av	4090
L_90~270 (85) av	2870
L_45 (65) av	3251
L_45 (75) av	4113
L_45 (85) av	3608

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

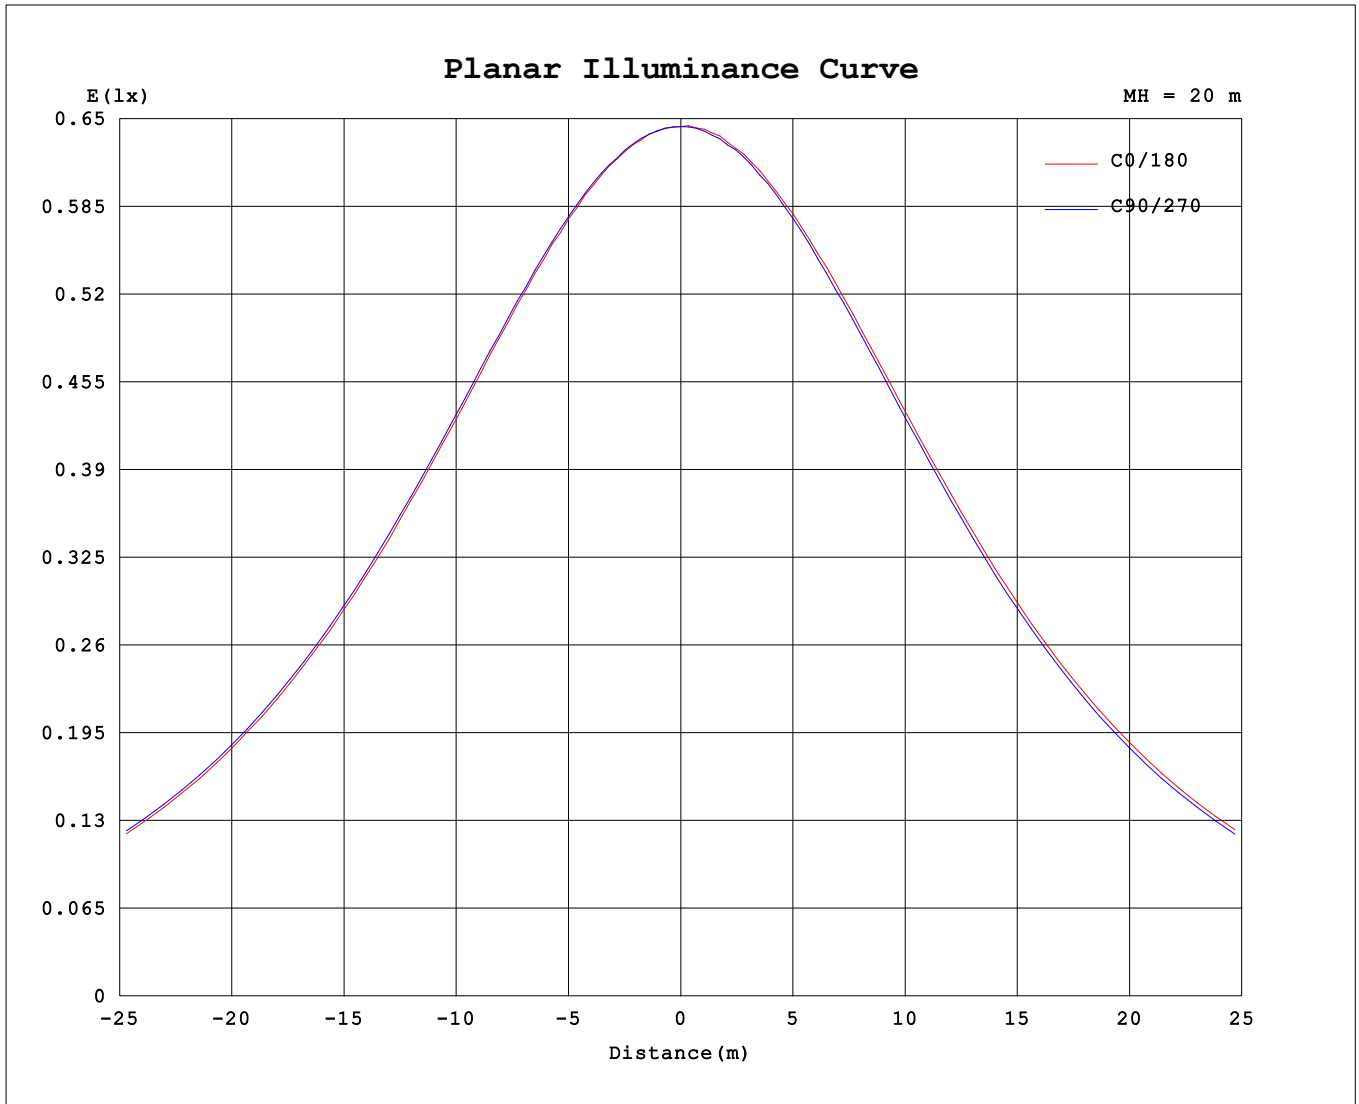

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.83V I:0.1152A P:13.605W PF:0.9852 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:994.573x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

Table--1 UNIT: cd

γ (DEG)	C (DEG)																		
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	258	258	258	258	258	258	258	258	258	258	258	258	258	258	258	258			
5	257	257	257	257	257	257	257	257	258	258	257	257	257	257	257	257			
10	255	255	255	255	255	255	255	255	256	255	255	255	255	255	255	254			
15	251	252	252	252	252	252	253	253	253	253	253	252	252	252	251	251			
20	247	247	247	247	248	248	249	249	249	248	248	248	247	247	247	246			
25	241	242	242	242	243	243	243	244	244	243	243	242	242	242	241	241			
30	234	235	235	236	236	237	237	238	238	237	237	236	235	235	235	234			
35	227	228	228	228	229	229	230	231	230	229	230	228	227	228	227	226			
40	218	219	219	220	221	221	222	222	222	221	221	219	219	219	218	218			
45	208	209	209	210	211	211	212	213	213	211	211	209	208	209	208	207			
50	196	197	197	198	199	199	200	201	201	199	199	196	196	196	195	195			
55	182	183	182	184	185	185	186	187	187	185	185	182	181	182	181	181			
60	166	168	167	169	170	170	171	172	172	170	170	167	166	166	165	165			
65	150	152	151	153	154	154	156	156	156	154	154	152	151	151	150	149			
70	134	136	135	137	138	138	140	140	140	138	138	136	135	135	133	133			
75	116	118	116	117	119	120	122	123	122	120	119	116	116	117	116	115			
80	92.2	91.9	88.3	90.1	93.0	94.1	98.7	100	98.8	94.3	92.5	89.0	88.5	92.6	91.9	91.8			
85	37.8	32.7	22.8	24.3	31.7	33.6	49.4	54.8	46.8	35.1	28.1	21.6	23.9	35.7	39.5	40.3			
90	0.93	0.84	0.80	0.79	0.83	0.84	1.01	1.20	0.59	0.50	0.48	0.48	0.51	0.53	0.60	0.59			

C Range: 0 - 360DEG γ Range: 0 - 90DEG
 C Interval: 22.5DEG γ Interval: 1.0DEG
 Test Speed: HIGH Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Temperature:25.3℃ Humidity:65.0%
 Operators: Test Distance:3.090m [K=1.0000]
 Test Date:2022-12-28 Remarks: