
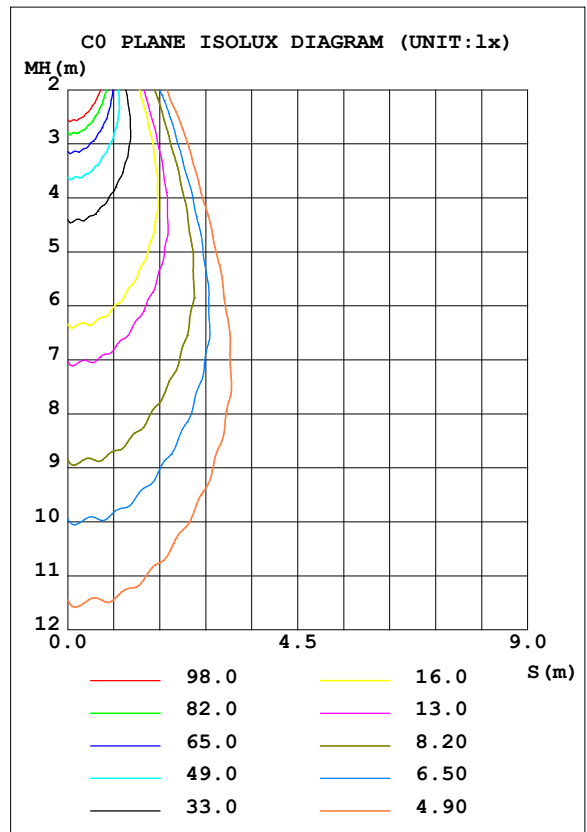


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:23.927V I:0.2799A P:6.6956W PF:0.9998 Freq:0Hz Lamp Flux:451.587x1 lm		
NAME: LED-1-S6W-30K	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.: ADS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 67.45 lm/W			
MODEL	LED-1-S6W-30K	I <sub>max</sub> (cd)	653.4	S/MH (C0/180)	0.68
NOMINAL POWER (W)	6W	LOR (%)	100.0	S/MH (C90/270)	0.73
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	451.59	η UP, DN (C0-180)	0.0, 50.3
NOMINAL FLUX (lm)	451.587	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	24	η down (%)	100.0	CIBSE SHR MAX	0.70

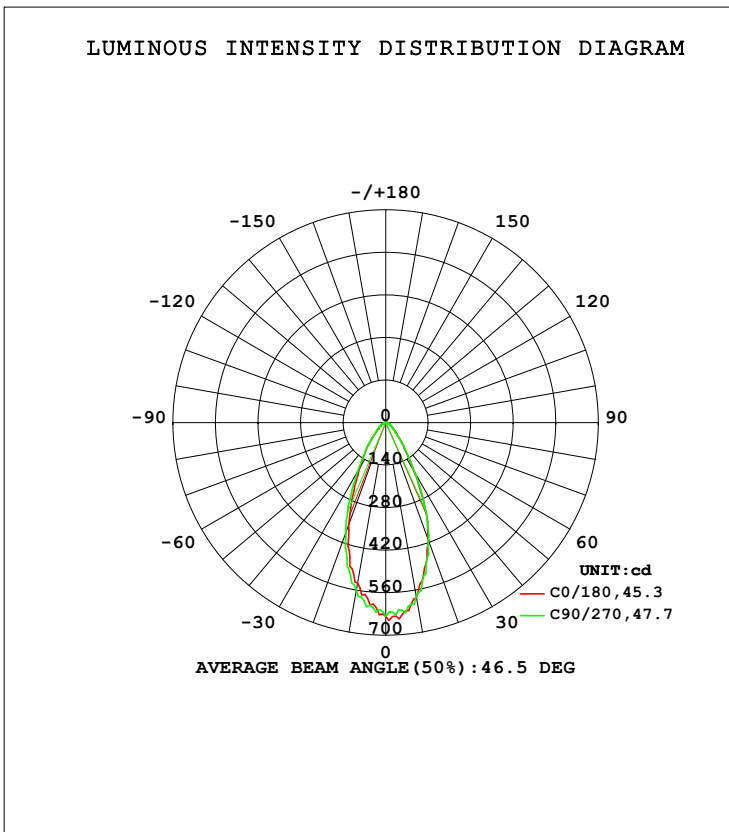

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2020-06-10

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	583.9	578.2	580.5	566.8	535.8	549.8	557.7	589.6	0- 10	57.41	57.41	12.7,12.7
20	412.5	369.6	409.5	352.8	359.9	348.8	384.0	388.6	10- 20	133.4	190.8	42.2,42.2
30	190.5	153.7	198.5	123.1	172.1	116.5	186.8	165.7	20- 30	118.6	309.4	68.5,68.5
40	75.76	58.34	75.79	52.86	76.33	51.22	79.82	59.67	30- 40	63.43	372.8	82.6,82.6
50	34.63	29.71	32.25	31.32	34.32	33.61	36.36	31.63	40- 50	34.71	407.5	90.2,90.2
60	19.07	15.88	18.47	18.36	21.28	20.94	21.06	18.06	50- 60	23.06	430.6	95.3,95.3
70	8.431	8.162	8.623	9.008	9.289	9.518	9.478	8.877	60- 70	13.37	443.9	98.3,98.3
80	3.062	2.928	3.085	3.449	3.590	3.821	3.609	3.398	70- 80	6.376	450.3	99.7,99.7
90	0	0.0027	0.0026	0	0.0103	0.0094	0.0119	0.0115	80- 90	1.269	451.6	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-06-10

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:23.927V I:0.2799A P:6.6956W PF:0.9998 Freq:0Hz Lamp Flux:451.587x1 lm		
NAME: LED-1-S6W-30K	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.: ADS	SUR.:	Shielding Angle:

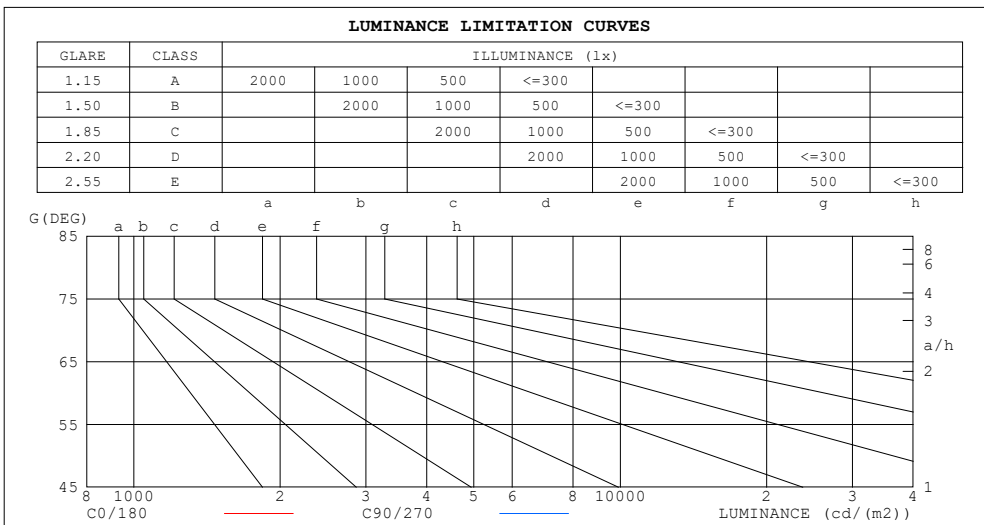

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	115	22
80	160	162
75	195	193
70	223	230
65	262	260
60	346	337
55	400	395
50	488	457
45	628	566


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-06-10

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:23.927V I:0.2799A P:6.6956W PF:0.9998 Freq:0Hz Lamp Flux:451.587x1 lm		
NAME: LED-1-S6W-30K	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.: ADS	SUR.:	Shielding Angle:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.07	1.05	1.08	1.05	1.03	1.04	1.02	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.01	.97	.93	.00	.96	.92	.96	.93	.90	.93	.91	.88	.91	.88	.86	.85
3.0	.94	.89	.84	.93	.88	.84	.90	.86	.82	.87	.84	.81	.85	.82	.80	.78
4.0	.87	.82	.77	.86	.81	.77	.84	.79	.76	.82	.78	.75	.80	.77	.74	.72
5.0	.82	.76	.71	.81	.75	.71	.79	.74	.70	.77	.73	.69	.76	.72	.69	.67
6.0	.77	.70	.66	.76	.70	.66	.74	.69	.65	.73	.68	.65	.72	.68	.64	.63
7.0	.72	.66	.62	.72	.66	.61	.70	.65	.61	.69	.64	.61	.68	.64	.60	.59
8.0	.68	.62	.58	.68	.62	.58	.67	.61	.57	.65	.61	.57	.64	.60	.57	.56
9.0	.65	.59	.54	.64	.58	.54	.63	.58	.54	.62	.57	.54	.61	.57	.54	.52
10.0	.61	.55	.52	.61	.55	.51	.60	.55	.51	.59	.54	.51	.59	.54	.51	.50

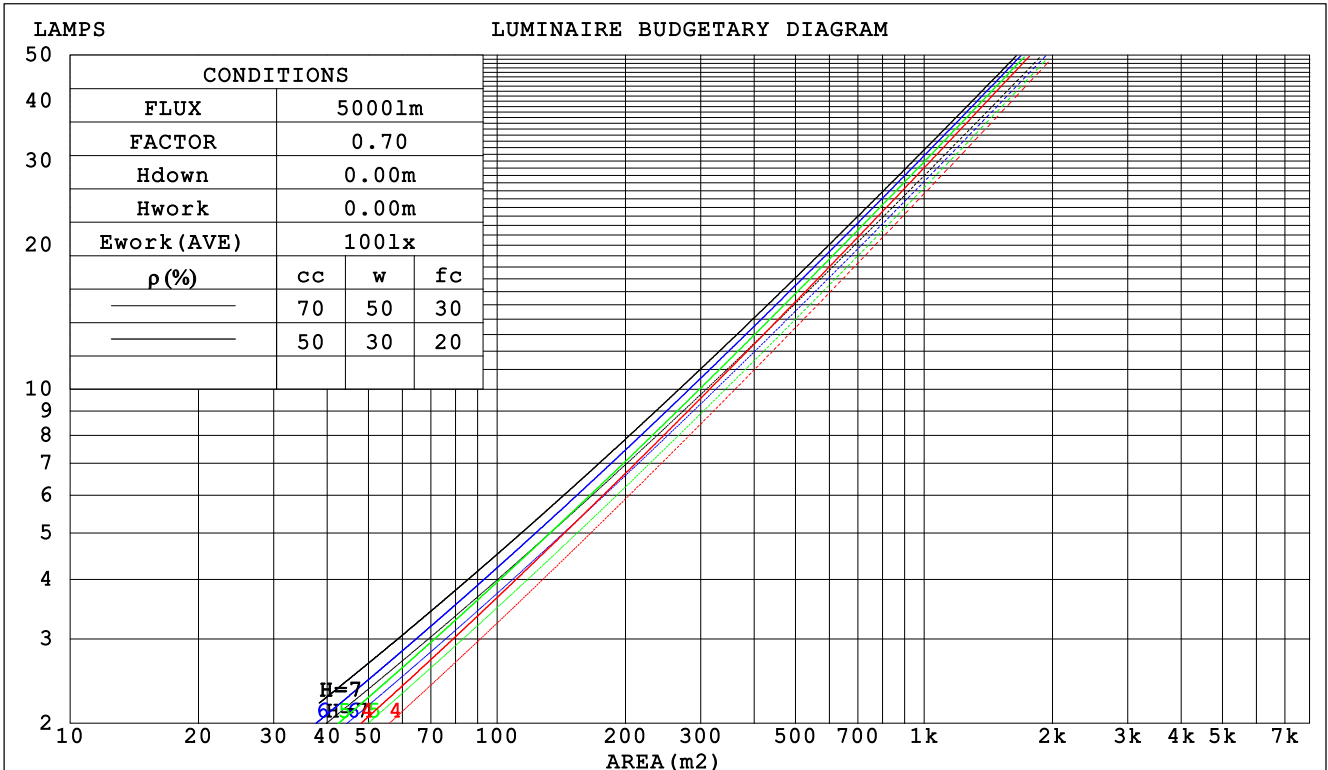

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-06-10

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:23.927V I:0.2799A P:6.6956W PF:0.9998 Freq:0Hz Lamp Flux:451.587x1 lm		
NAME: LED-1-S6W-30K	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.: ADS	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.196	.112	.035	.190	.108	.034	.177	.102	.032	.165	.095	.031	.155	.090	.029	
2.0	.187	.103	.031	.181	.100	.031	.171	.095	.029	.161	.090	.028	.152	.086	.027	
3.0	.177	.094	.028	.172	.092	.028	.162	.088	.027	.154	.084	.026	.146	.081	.025	
4.0	.166	.086	.025	.162	.085	.025	.154	.082	.024	.147	.079	.024	.140	.076	.023	
5.0	.157	.080	.023	.153	.079	.023	.146	.076	.022	.140	.074	.022	.134	.071	.021	
6.0	.148	.074	.021	.145	.073	.021	.139	.071	.021	.133	.069	.020	.128	.067	.020	
7.0	.141	.070	.020	.138	.069	.020	.132	.067	.019	.127	.065	.019	.123	.064	.019	
8.0	.134	.065	.018	.131	.065	.018	.126	.063	.018	.122	.062	.018	.117	.060	.018	
9.0	.127	.062	.017	.125	.061	.017	.121	.060	.017	.116	.058	.017	.113	.057	.017	
10.0	.121	.058	.016	.119	.058	.016	.115	.057	.016	.112	.055	.016	.108	.054	.016	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.172	.157	.143	.148	.135	.123	.101	.093	.085	.058	.054	.050	.019	.017	.016	
2.0	.158	.132	.111	.136	.114	.096	.093	.079	.067	.054	.046	.039	.017	.015	.013	
3.0	.146	.114	.088	.126	.098	.076	.086	.068	.053	.050	.040	.031	.016	.013	.010	
4.0	.136	.099	.071	.117	.086	.061	.081	.060	.043	.047	.035	.026	.015	.011	.008	
5.0	.128	.088	.058	.110	.076	.051	.076	.053	.036	.044	.031	.021	.014	.010	.007	
6.0	.120	.078	.049	.103	.068	.042	.071	.048	.030	.041	.028	.018	.013	.009	.006	
7.0	.113	.071	.041	.098	.061	.036	.067	.043	.025	.039	.025	.015	.013	.008	.005	
8.0	.107	.065	.035	.093	.056	.031	.064	.039	.022	.037	.023	.013	.012	.008	.004	
9.0	.102	.059	.031	.088	.052	.027	.061	.036	.019	.035	.021	.011	.011	.007	.004	
10.0	.097	.055	.027	.084	.048	.024	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-06-10

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:23.927V I:0.2799A P:6.6956W PF:0.9998 Freq:0Hz Lamp Flux:451.587x1 lm		
NAME: LED-1-S6W-30K	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.: ADS	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.4	10.5	9.7	10.6	10.8	9.3	10.3	9.5	10.5	10.7
3H	10.0	10.9	10.2	11.1	11.3	9.8	10.8	10.1	11.0	11.2
4H	10.1	11.0	10.4	11.2	11.5	10.0	10.9	10.3	11.2	11.4
6H	10.3	11.1	10.6	11.3	11.6	10.2	11.0	10.5	11.2	11.5
8H	10.3	11.1	10.6	11.3	11.6	10.2	11.0	10.5	11.3	11.5
12H	10.3	11.0	10.6	11.3	11.6	10.2	10.9	10.5	11.2	11.5
4H 2H	9.6	10.5	9.9	10.7	10.9	9.5	10.4	9.8	10.6	10.8
3H	10.3	11.0	10.6	11.3	11.6	10.2	10.9	10.5	11.2	11.5
4H	10.5	11.2	10.9	11.5	11.8	10.5	11.2	10.8	11.5	11.8
6H	10.7	11.3	11.1	11.7	12.0	10.7	11.3	11.0	11.6	12.0
8H	10.8	11.3	11.2	11.7	12.1	10.7	11.3	11.1	11.7	12.0
12H	10.8	11.3	11.2	11.7	12.1	10.7	11.2	11.1	11.6	12.0
8H 4H	10.6	11.1	11.0	11.5	11.9	10.5	11.1	10.9	11.4	11.8
6H	10.9	11.3	11.3	11.7	12.1	10.8	11.3	11.2	11.7	12.1
8H	10.9	11.4	11.4	11.8	12.2	10.9	11.3	11.3	11.7	12.2
12H	11.0	11.3	11.4	11.8	12.2	10.9	11.2	11.4	11.7	12.2
12H 4H	10.6	11.1	11.0	11.4	11.8	10.5	11.0	10.9	11.4	11.8
6H	10.8	11.3	11.3	11.7	12.1	10.8	11.2	11.2	11.6	12.1
8H	10.9	11.3	11.4	11.7	12.2	10.9	11.3	11.4	11.7	12.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.9 / - 1.0					+ 1.1 / - 1.1				
1.5H	+ 1.7 / - 1.0					+ 2.0 / - 0.9				
2.0H	+ 1.5 / - 1.0					+ 1.1 / - 0.9				

CIE Pub.117, 451.6 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.8)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-06-10

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:23.927V I:0.2799A P:6.6956W PF:0.9998 Freq:0Hz Lamp Flux:451.587x1 lm		
NAME: LED-1-S6W-30K	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.: ADS	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	81	73	69	80	73	69	79	73	68	64
0.80	89	82	77	88	81	77	87	81	77	72
1.00	94	87	83	93	87	83	92	87	82	78
1.25	99	93	88	98	92	88	96	91	87	82
1.50	102	96	92	101	96	92	98	94	91	86
2.00	106	101	97	104	100	96	101	98	95	89
2.50	108	103	100	106	102	99	103	100	97	91
3.00	110	106	102	108	104	101	104	102	99	92
4.00	112	109	106	110	107	105	106	104	102	95
5.00	114	111	109	112	109	107	107	106	104	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-06-10

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:23.927V I:0.2799A P:6.6956W PF:0.9998 Freq:0Hz Lamp Flux:451.587x1 lm		
NAME: LED-1-S6W-30K	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.: ADS	SUR.:	Shielding Angle:

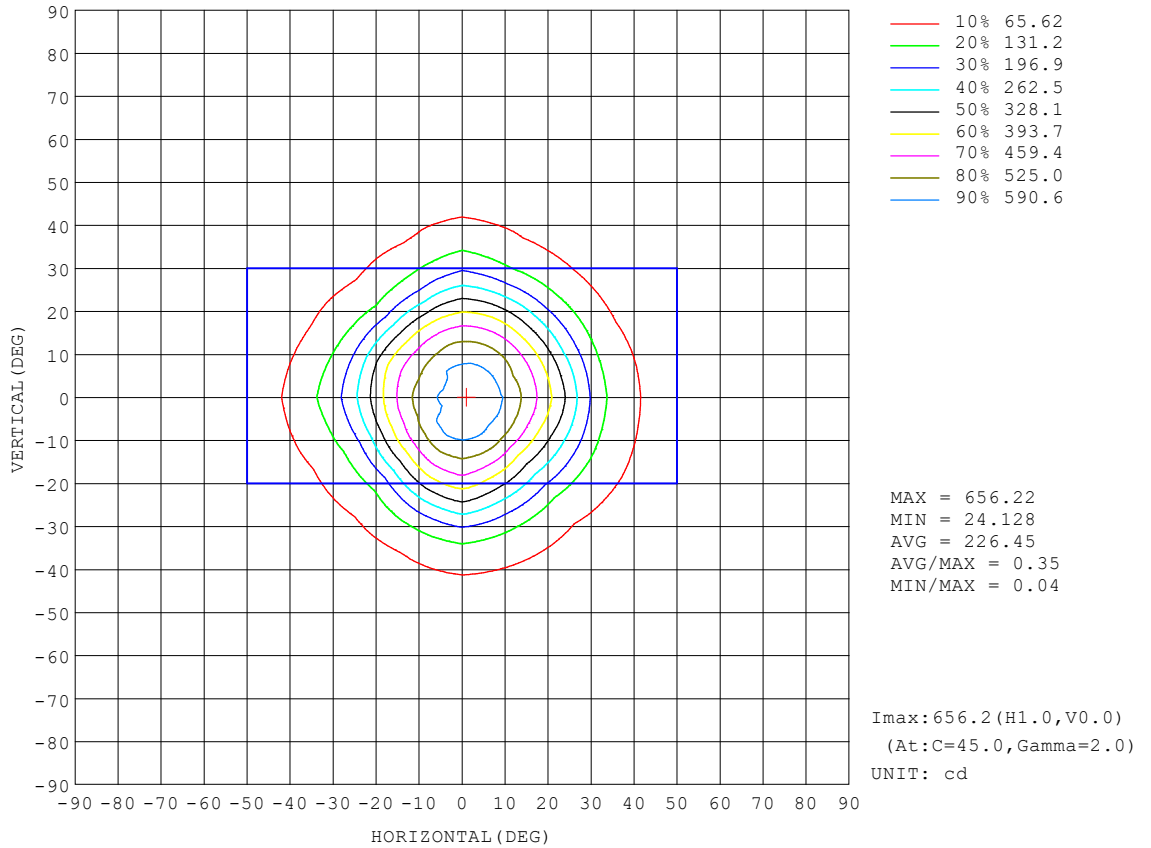


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2020-06-10

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:23.927V I:0.2799A P:6.6956W PF:0.9998 Freq:0Hz Lamp Flux:451.587x1 lm		
NAME: LED-1-S6W-30K	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.: ADS	SUR.:	Shielding Angle:

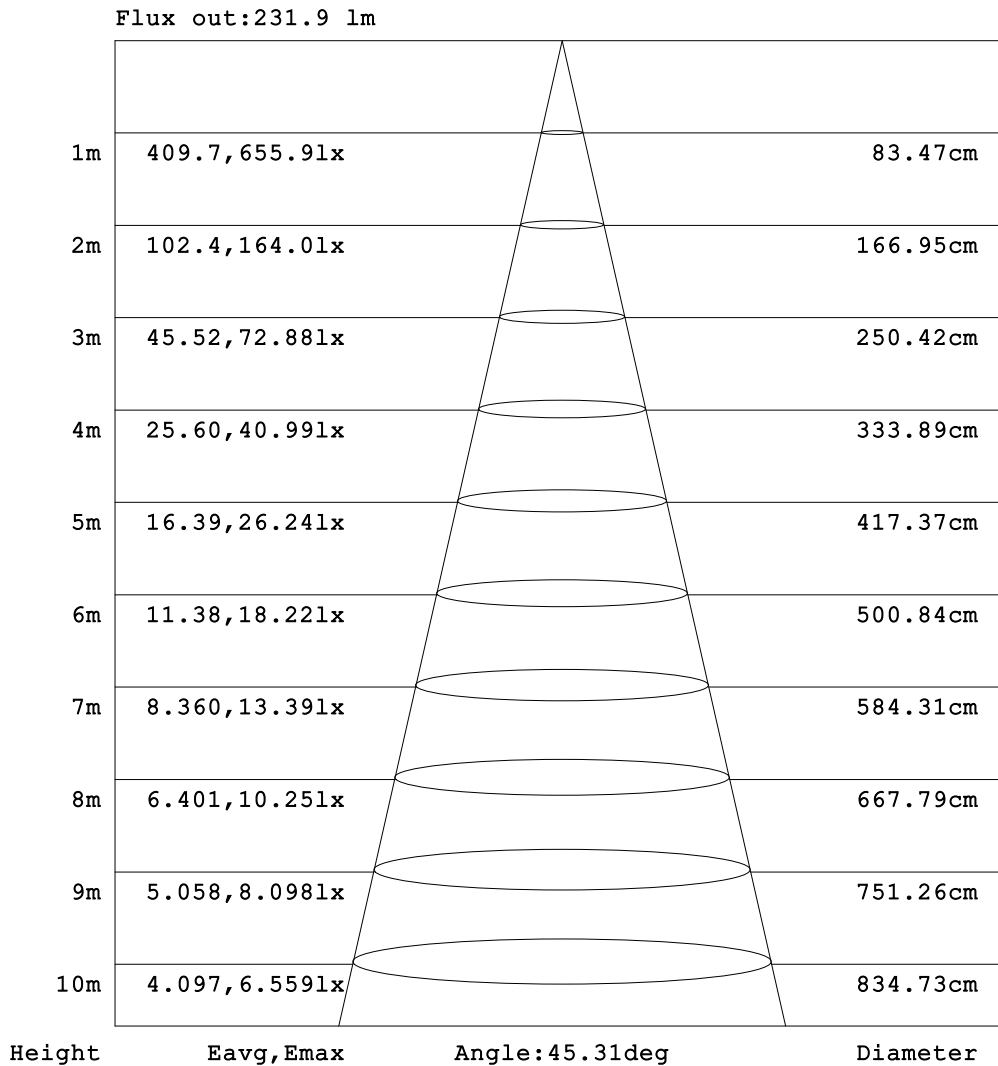


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-06-10

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:23.927V I:0.2799A P:6.6956W PF:0.9998 Freq:0Hz Lamp Flux:451.587x1 lm		
NAME: LED-1-S6W-30K	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.: ADS	SUR.:	Shielding Angle:

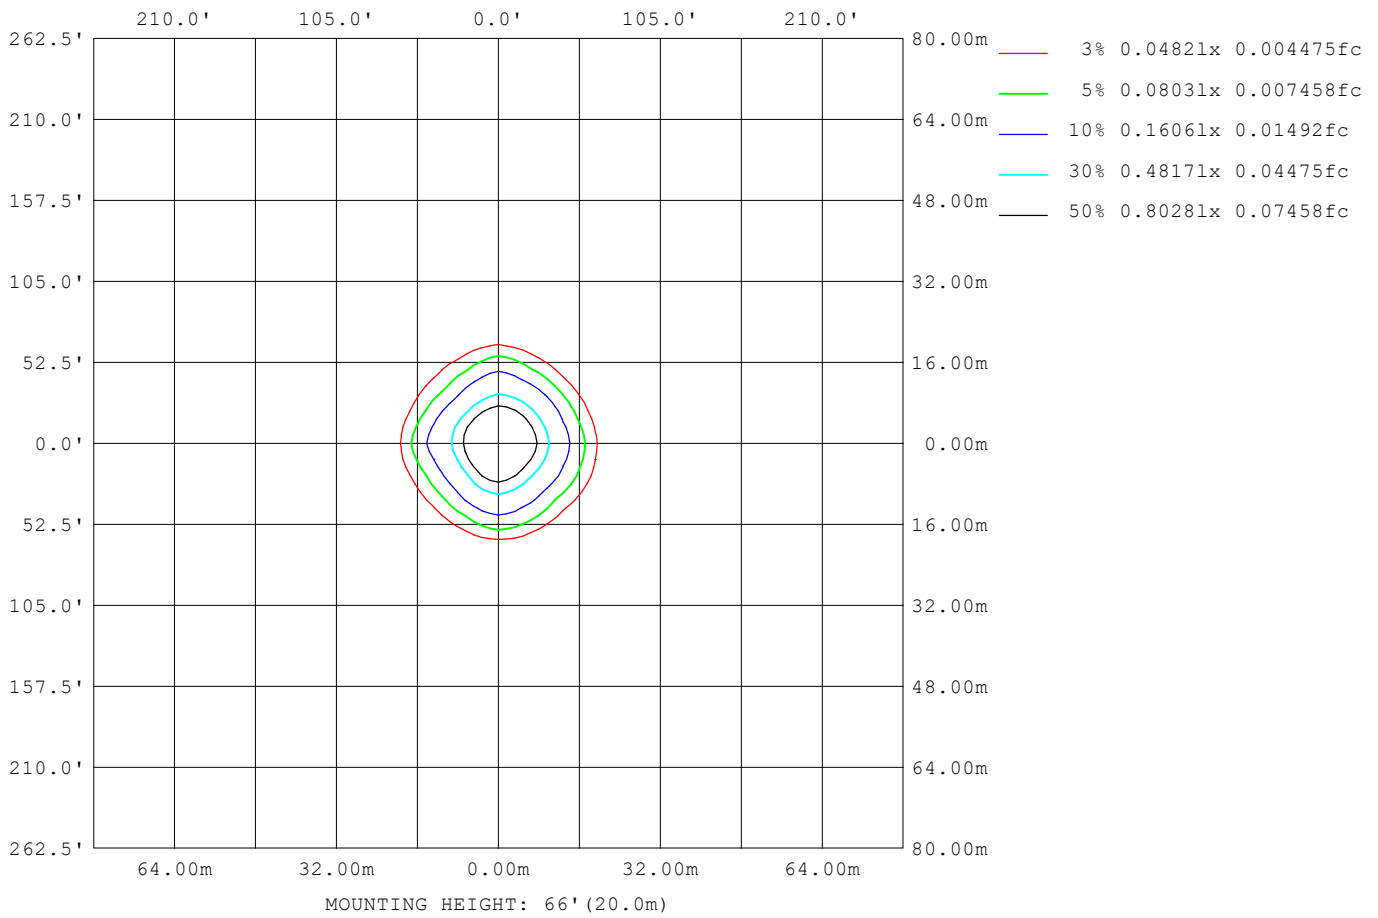

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-06-10

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:23.927V I:0.2799A P:6.6956W PF:0.9998 Freq:0Hz Lamp Flux:451.587x1 lm		
NAME: LED-1-S6W-30K	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.: ADS	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	284
L_0~180 (75) av	203
L_0~180 (85) av	118
L_90~270 (65) av	281
L_90~270 (75) av	202
L_90~270 (85) av	27
L_45 (65) av	273
L_45 (75) av	204
L_45 (85) av	65

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-06-10

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

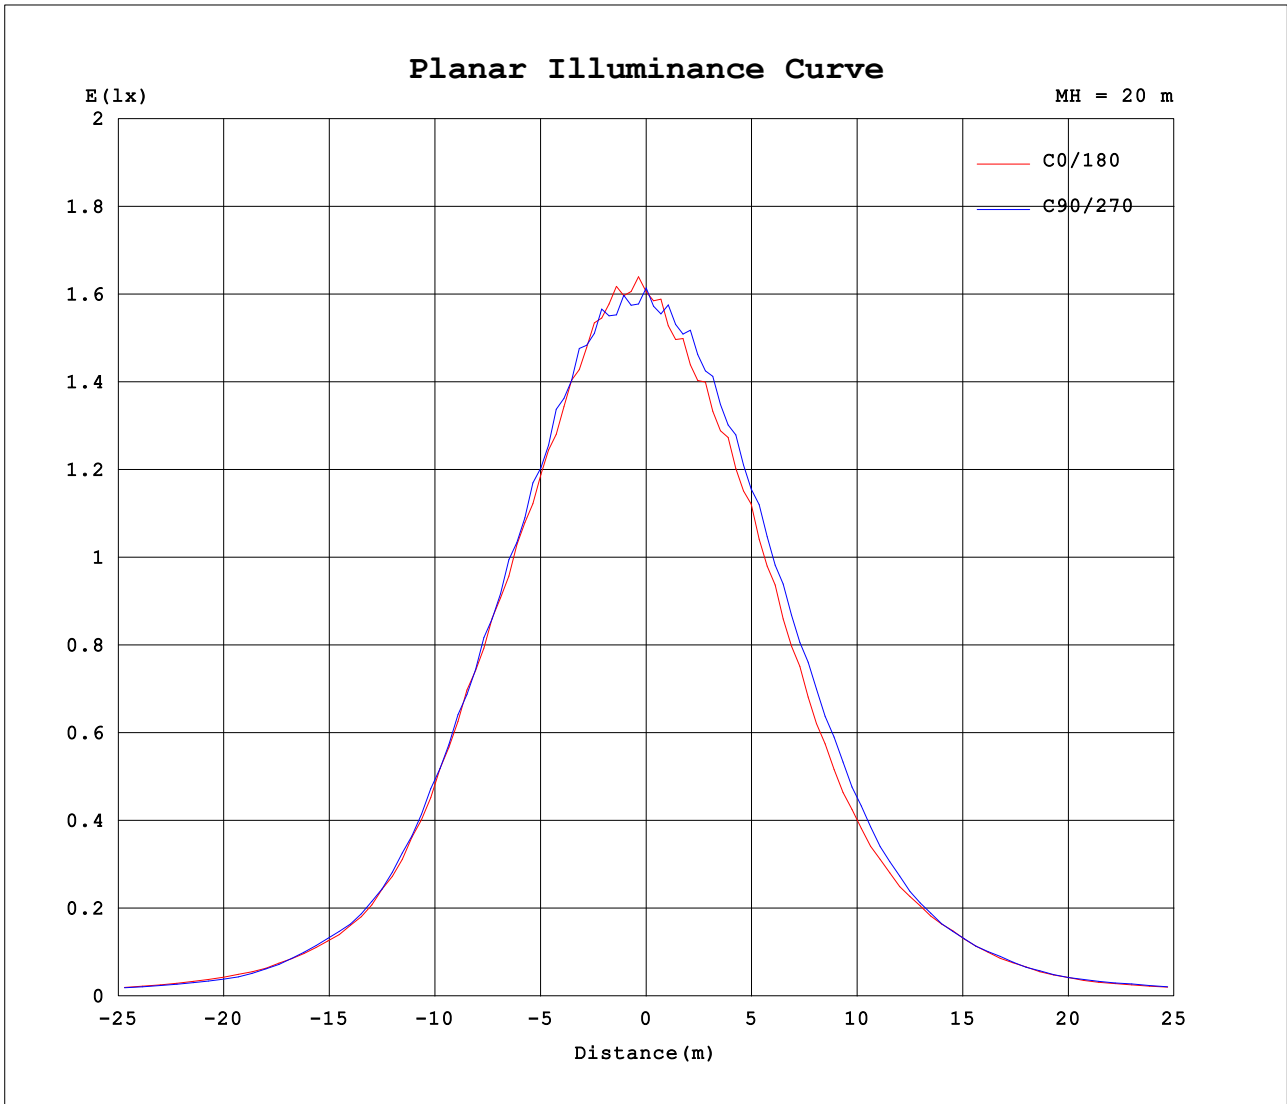

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2020-06-10

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.927V I:0.2799A P:6.6956W PF:0.9998 Freq:0Hz Lamp Flux:451.587x1 lm		
NAME: LED-1-S6W-30K	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:
MFR.: ADS	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ $\gamma$ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	638	638	638	638	638	638	638	638	638	638	638	638	638	638	638	638			
5	634	645	648	630	620	623	627	598	602	583	594	597	603	615	631	645			
10	584	576	578	579	580	579	567	561	536	544	550	556	558	577	590	579			
15	495	496	484	504	513	506	477	460	459	462	462	465	491	489	500	496			
20	412	382	370	384	410	391	353	342	360	359	349	353	384	387	389	405			
25	303	275	251	272	305	271	213	219	248	241	210	237	283	272	271	279			
30	191	183	154	178	198	170	123	134	172	141	116	138	187	160	166	175			
35	117	101	86.6	98.6	118	95.4	76.6	86.4	119	90.6	74.6	86.3	119	95.3	95.0	100			
40	75.8	70.4	58.3	66.6	75.8	57.9	52.9	57.8	76.3	56.8	51.2	56.2	79.8	63.1	59.7	63.6			
45	49.0	48.5	40.2	42.0	43.9	41.9	39.7	42.7	48.0	42.0	42.5	44.1	47.7	42.3	40.4	44.0			
50	34.6	30.4	29.7	29.6	32.2	31.8	31.3	32.7	34.3	34.0	33.6	34.3	36.4	32.5	31.6	32.2			
55	25.3	24.8	23.4	24.2	24.9	24.7	24.9	26.1	27.3	26.9	27.0	27.7	28.0	26.8	25.7	25.5			
60	19.1	17.3	15.9	17.1	18.5	19.2	18.4	20.3	21.3	21.1	20.9	21.2	21.1	20.1	18.1	19.1			
65	12.2	12.4	11.8	12.3	12.0	12.8	12.6	13.4	14.5	14.6	13.8	14.3	14.3	13.4	13.0	13.2			
70	8.43	8.75	8.16	8.67	8.62	9.22	9.01	9.56	9.29	9.74	9.52	9.87	9.48	9.42	8.88	8.95			
75	5.56	5.55	5.35	5.52	5.49	6.04	5.99	6.30	6.14	6.45	6.38	6.43	6.11	6.03	5.77	5.85			
80	3.06	3.09	2.93	3.07	3.08	3.43	3.45	3.74	3.59	3.85	3.82	3.90	3.61	3.55	3.40	3.33			
85	1.10	1.08	0.71	0.25	0.21	0.29	0.51	1.45	1.19	1.57	0.81	0.38	0.32	0.30	0.48	1.16			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2020-06-10

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
Humidity:65.0%  
Test Distance:3.080m [K=1.0000]  
Remarks: