
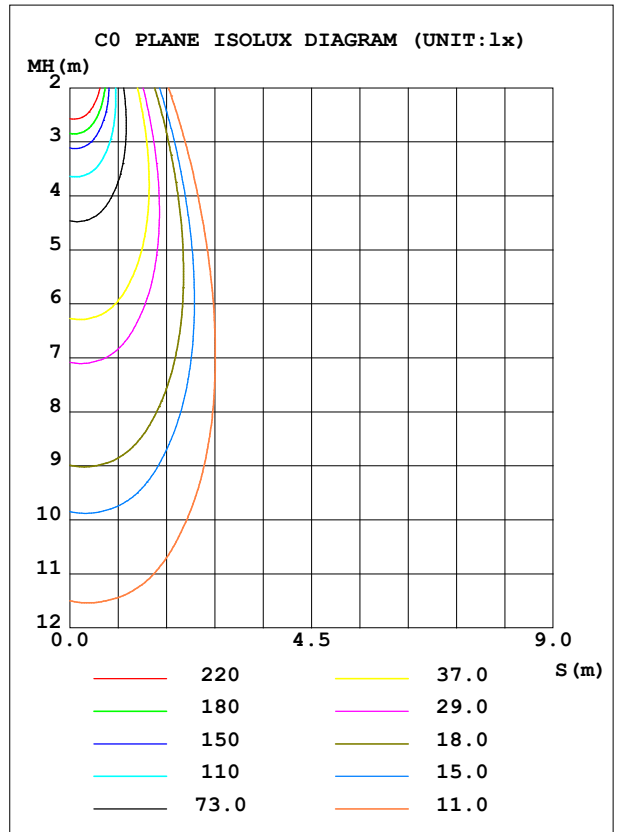


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.73V I:0.0905A P:10.660W PF:0.9835 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:795.456x1 lm		
NAME: LED-2-S11W-5CCTWH-EY-T	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	1496	S/MH (C0/180)	0.53
NOMINAL POWER (W)	11	LOR (%)	100.0	S/MH (C90/270)	0.71
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	795.46	η UP, DN (C0-180)	0.0,46.3
NOMINAL FLUX (lm)	795.456	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0,53.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	0.65

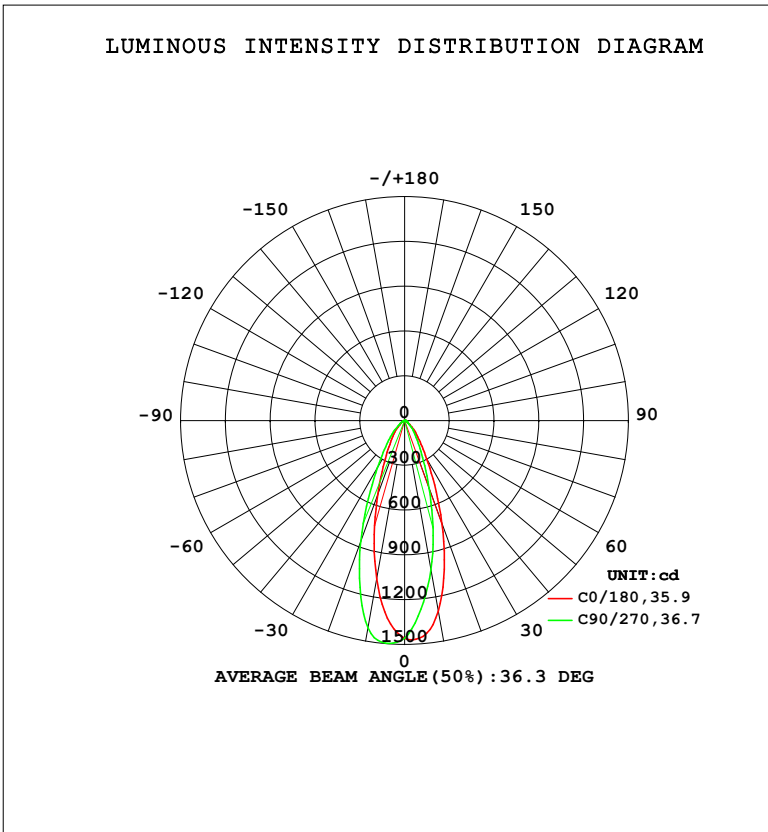

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1298	1121	1017	1109	1078	1242	1411	1317	0- 10	126.6	126.6	15.9,15.9
20	731.7	581.3	482.1	569.9	531.2	665.5	863.0	747.1	10- 20	253.2	379.8	47.7,47.7
30	300.0	240.8	197.2	236.2	223.5	278.8	365.2	294.7	20- 30	193.7	573.5	72.1,72.1
40	131.9	110.3	96.35	108.1	106.9	126.5	156.2	127.3	30- 40	111.5	685.0	86.1,86.1
50	52.00	46.68	41.67	44.65	43.78	48.49	56.19	48.33	40- 50	62.80	747.8	94,94
60	20.50	19.81	18.12	19.00	19.78	21.38	22.76	19.11	50- 60	28.56	776.3	97.6,97.6
70	6.806	6.978	7.129	6.886	6.753	6.960	7.425	6.492	60- 70	12.35	788.7	99.2,99.2
80	3.207	3.164	2.694	2.942	3.125	3.270	3.478	3.230	70- 80	5.378	794.1	99.8,99.8
90	0.0866	0.0682	0.0704	0.0760	0.0515	0.0758	0.2360	0.2054	80- 90	1.384	795.5	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.73V I:0.0905A P:10.660W PF:0.9835 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:795.456x1 lm		
NAME: LED-2-S11W-5CCTWH-EY-T	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

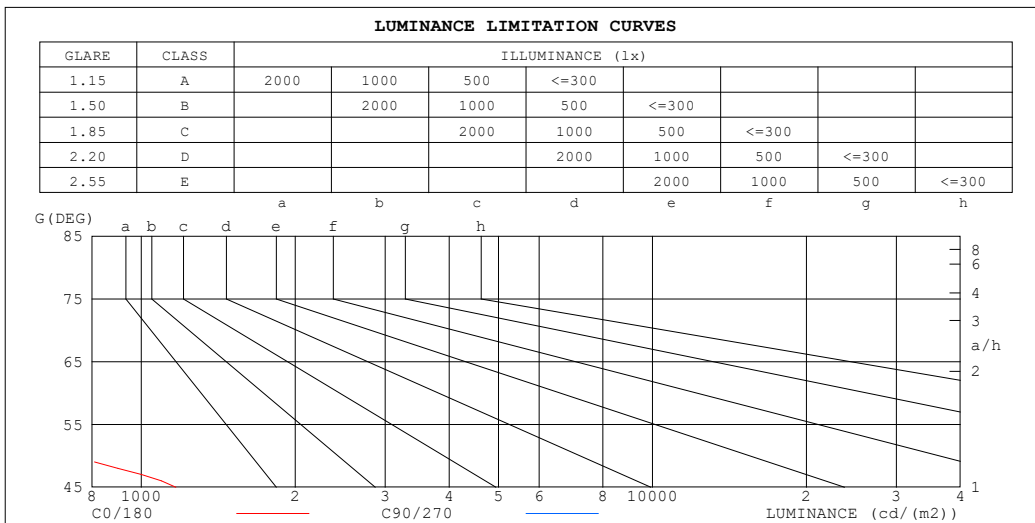

LUMINANCE cd/ (m2)		
G (DEG)	C0/180	C90/270
85	115	74
80	166	138
75	178	177
70	179	185
65	268	223
60	368	322
55	527	429
50	726	577
45	1168	819


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.73V I:0.0905A P:10.660W PF:0.9835 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:795.456x1 lm		
NAME: LED-2-S11W-5CCTWH-EY-T	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.08	1.06	1.08	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.95	1.01	.97	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.89	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.89	.84	.80	.87	.82	.79	.85	.81	.78	.83	.79	.77	.75
5.0	.84	.79	.74	.83	.78	.74	.82	.77	.73	.80	.76	.73	.78	.75	.72	.71
6.0	.80	.74	.69	.79	.73	.69	.77	.72	.69	.76	.72	.68	.75	.71	.68	.66
7.0	.75	.69	.65	.75	.69	.65	.73	.68	.65	.72	.68	.64	.71	.67	.64	.63
8.0	.71	.66	.62	.71	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.61	.59
9.0	.68	.62	.58	.67	.62	.58	.66	.61	.58	.66	.61	.58	.65	.61	.58	.56
10.0	.65	.59	.55	.64	.59	.55	.63	.58	.55	.63	.58	.55	.62	.58	.55	.54

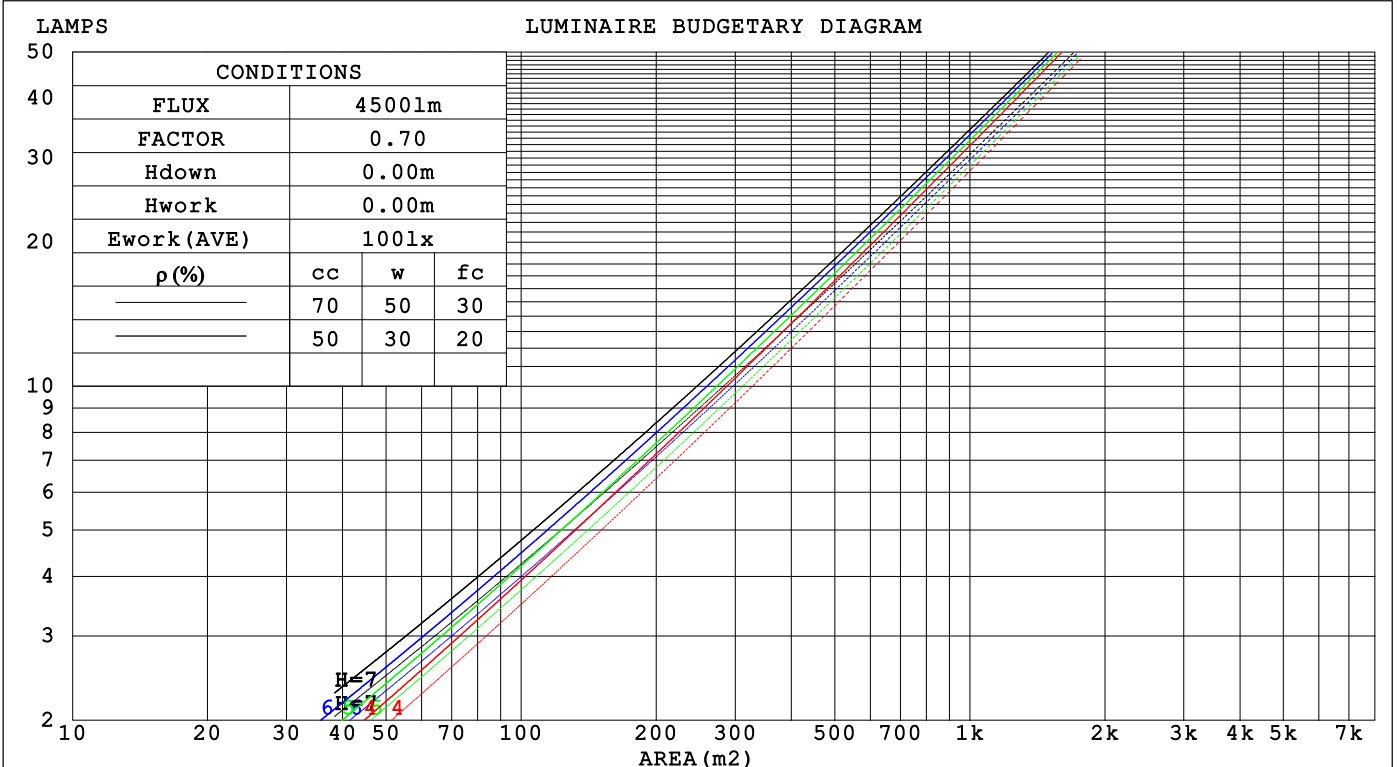

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.73V I:0.0905A P:10.660W PF:0.9835 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:795.456x1 lm		
NAME: LED-2-S11W-5CCTWH-EY-T	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.182	.103	.033	.175	.100	.032	.162	.093	.030	.151	.087	.028	.140	.081	.026	
2.0	.173	.095	.029	.168	.092	.028	.157	.087	.027	.147	.083	.026	.138	.078	.025	
3.0	.164	.087	.026	.159	.085	.026	.150	.081	.025	.142	.078	.024	.134	.074	.023	
4.0	.155	.081	.024	.151	.079	.023	.143	.076	.023	.136	.073	.022	.129	.070	.021	
5.0	.147	.075	.022	.143	.074	.021	.136	.071	.021	.130	.069	.020	.124	.066	.020	
6.0	.139	.070	.020	.136	.069	.020	.130	.067	.019	.125	.065	.019	.119	.063	.019	
7.0	.132	.065	.019	.130	.065	.018	.124	.063	.018	.119	.061	.018	.115	.060	.018	
8.0	.126	.062	.017	.124	.061	.017	.119	.059	.017	.114	.058	.017	.110	.057	.016	
9.0	.120	.058	.016	.118	.058	.016	.114	.056	.016	.110	.055	.016	.106	.054	.016	
10.0	.115	.055	.015	.113	.055	.015	.109	.053	.015	.106	.052	.015	.102	.051	.015	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.144	.147	.135	.124	.100	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.156	.132	.112	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.144	.114	.089	.124	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.134	.099	.072	.115	.085	.063	.079	.060	.044	.046	.035	.026	.015	.011	.009	
5.0	.125	.087	.060	.107	.076	.052	.074	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.117	.078	.050	.101	.067	.043	.069	.047	.031	.040	.028	.018	.013	.009	.006	
7.0	.110	.070	.042	.095	.061	.037	.066	.043	.026	.038	.025	.016	.012	.008	.005	
8.0	.104	.064	.036	.090	.056	.032	.062	.039	.022	.036	.023	.013	.012	.008	.004	
9.0	.099	.059	.032	.085	.051	.028	.059	.036	.020	.034	.021	.012	.011	.007	.004	
10.0	.094	.054	.028	.081	.047	.024	.056	.033	.017	.033	.020	.010	.011	.006	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.73V I:0.0905A P:10.660W PF:0.9835 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:795.456x1 lm		
NAME: LED-2-S11W-5CCTWH-EY-T	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.5	9.4	8.7	9.6	9.8	7.2	8.1	7.4	8.3	8.5
3H	8.5	9.4	8.8	9.6	9.8	7.3	8.2	7.6	8.4	8.6
4H	8.6	9.4	8.8	9.6	9.8	7.4	8.2	7.7	8.5	8.7
6H	8.6	9.4	8.9	9.6	9.8	7.5	8.2	7.7	8.5	8.7
8H	8.6	9.3	8.9	9.6	9.8	7.4	8.2	7.7	8.4	8.7
12H	8.6	9.3	8.9	9.5	9.8	7.4	8.1	7.7	8.4	8.7
4H 2H	8.4	9.3	8.7	9.5	9.7	7.2	8.1	7.5	8.3	8.5
3H	8.6	9.3	8.9	9.5	9.8	7.5	8.2	7.8	8.5	8.7
4H	8.6	9.3	9.0	9.6	9.9	7.6	8.3	8.0	8.6	8.9
6H	8.7	9.3	9.1	9.6	10.0	7.7	8.3	8.1	8.6	9.0
8H	8.7	9.3	9.1	9.6	10.0	7.7	8.3	8.1	8.6	9.0
12H	8.7	9.2	9.1	9.6	10.0	7.7	8.2	8.1	8.6	8.9
8H 4H	8.6	9.1	9.0	9.5	9.8	7.6	8.1	8.0	8.5	8.9
6H	8.7	9.2	9.1	9.5	10.0	7.8	8.2	8.2	8.6	9.0
8H	8.8	9.1	9.2	9.6	10.0	7.8	8.2	8.3	8.6	9.1
12H	8.8	9.1	9.2	9.5	10.0	7.8	8.1	8.3	8.6	9.0
12H 4H	8.6	9.0	9.0	9.4	9.8	7.6	8.1	8.0	8.4	8.8
6H	8.7	9.1	9.1	9.5	9.9	7.8	8.1	8.2	8.6	9.0
8H	8.7	9.1	9.2	9.5	10.0	7.8	8.1	8.3	8.6	9.0

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 1.6 / - 2.2	+ 1.3 / - 1.9
1.5H	+ 2.3 / - 1.9	+ 1.4 / - 1.2
2.0H	+ 3.5 / - 2.3	+ 2.2 / - 1.7

CIE Pub.117, 795.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.8)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.73V I:0.0905A P:10.660W PF:0.9835 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:795.456x1 lm		
NAME: LED-2-S11W-5CCTWH-EY-T	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	83	76	71	82	75	71	81	75	71	67
0.80	91	84	80	90	84	80	89	83	79	75
1.00	96	90	86	95	89	85	94	89	85	80
1.25	101	95	91	100	94	90	97	93	90	85
1.50	104	98	95	102	98	94	100	96	93	88
2.00	107	102	99	105	101	98	103	99	96	91
2.50	109	105	101	107	103	100	104	101	98	92
3.00	111	107	104	109	105	103	105	103	101	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	106	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.73V I:0.0905A P:10.660W PF:0.9835 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:795.456x1 lm		
NAME: LED-2-S11W-5CCTWH-EY-T	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

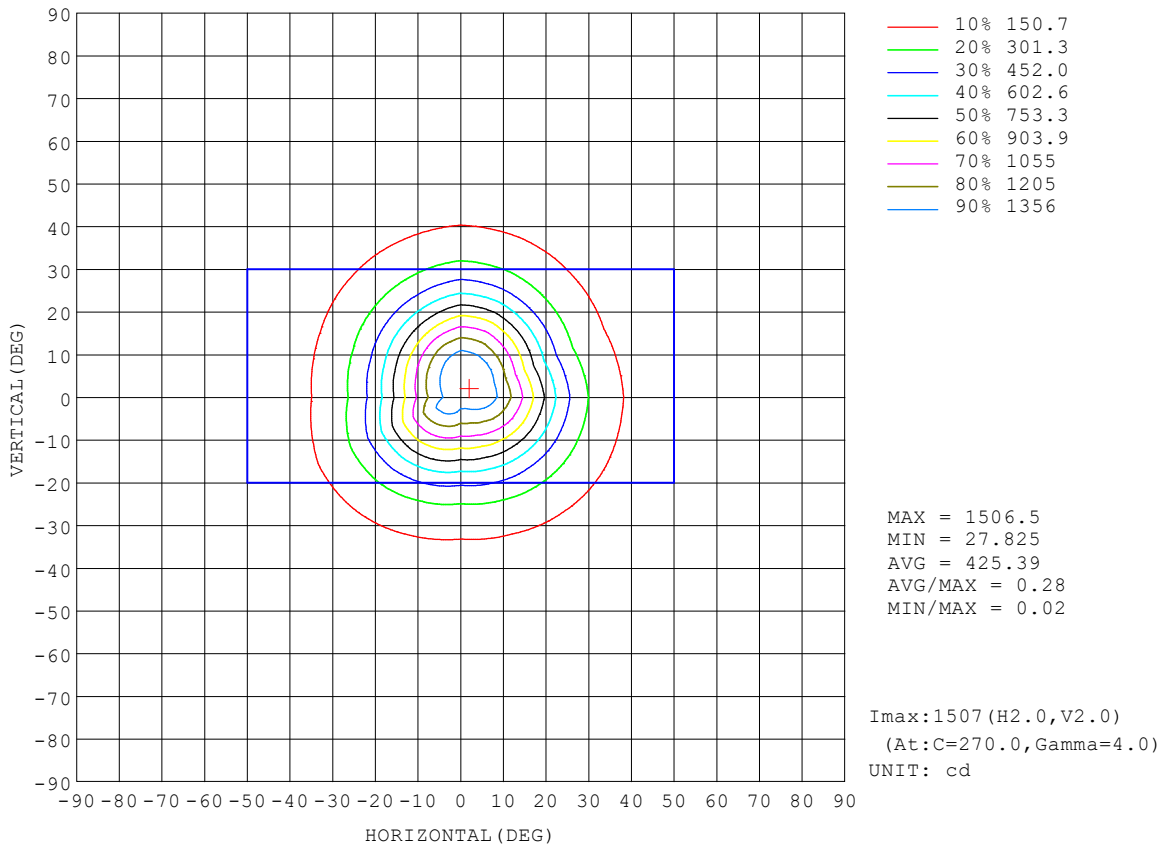


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.73V I:0.0905A P:10.660W PF:0.9835 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:795.456x1 lm		
NAME: LED-2-S11W-5CCTWH-EY-T	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

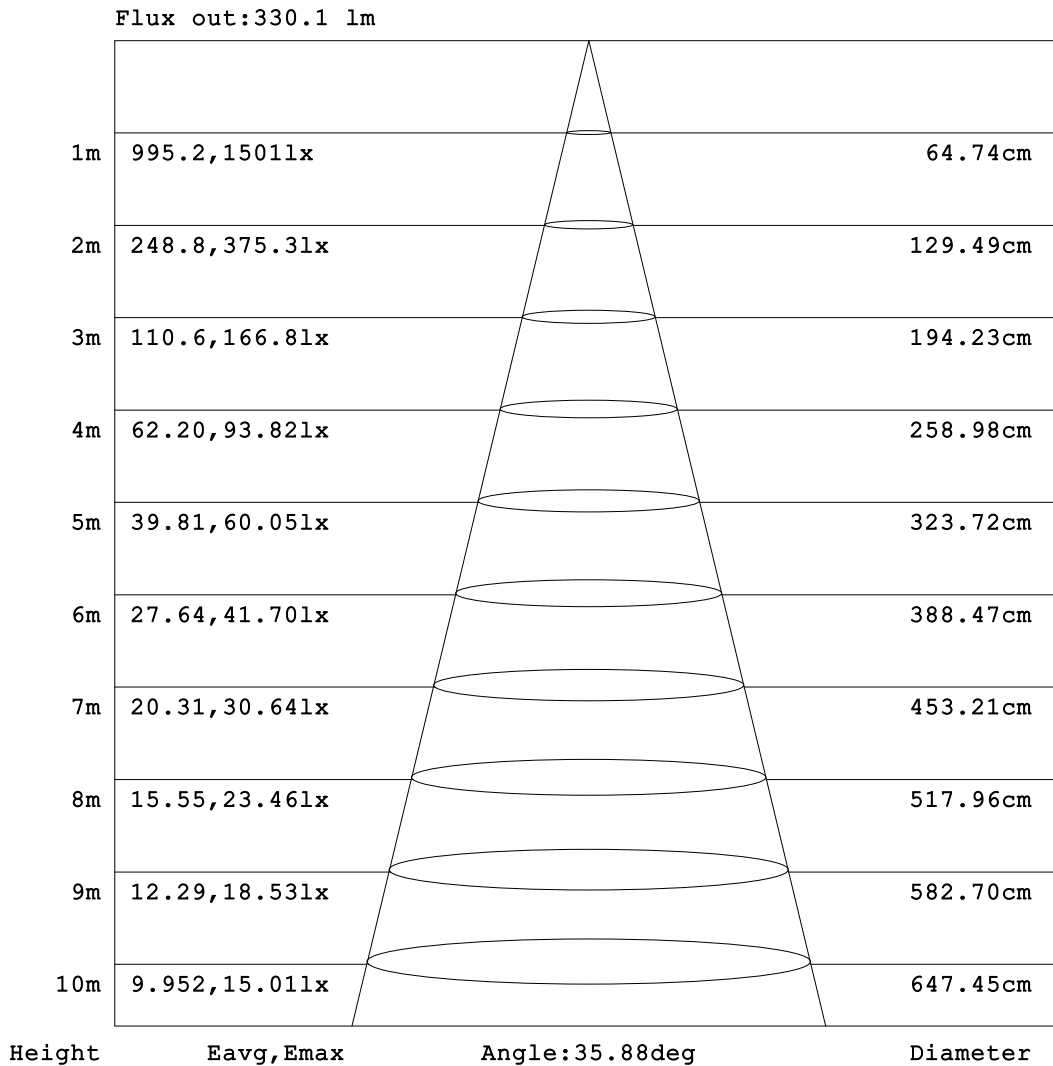


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:
 Test Date:2022-12-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.73V I:0.0905A P:10.660W PF:0.9835 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:795.456x1 lm		
NAME: LED-2-S11W-5CCTWH-EY-T	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

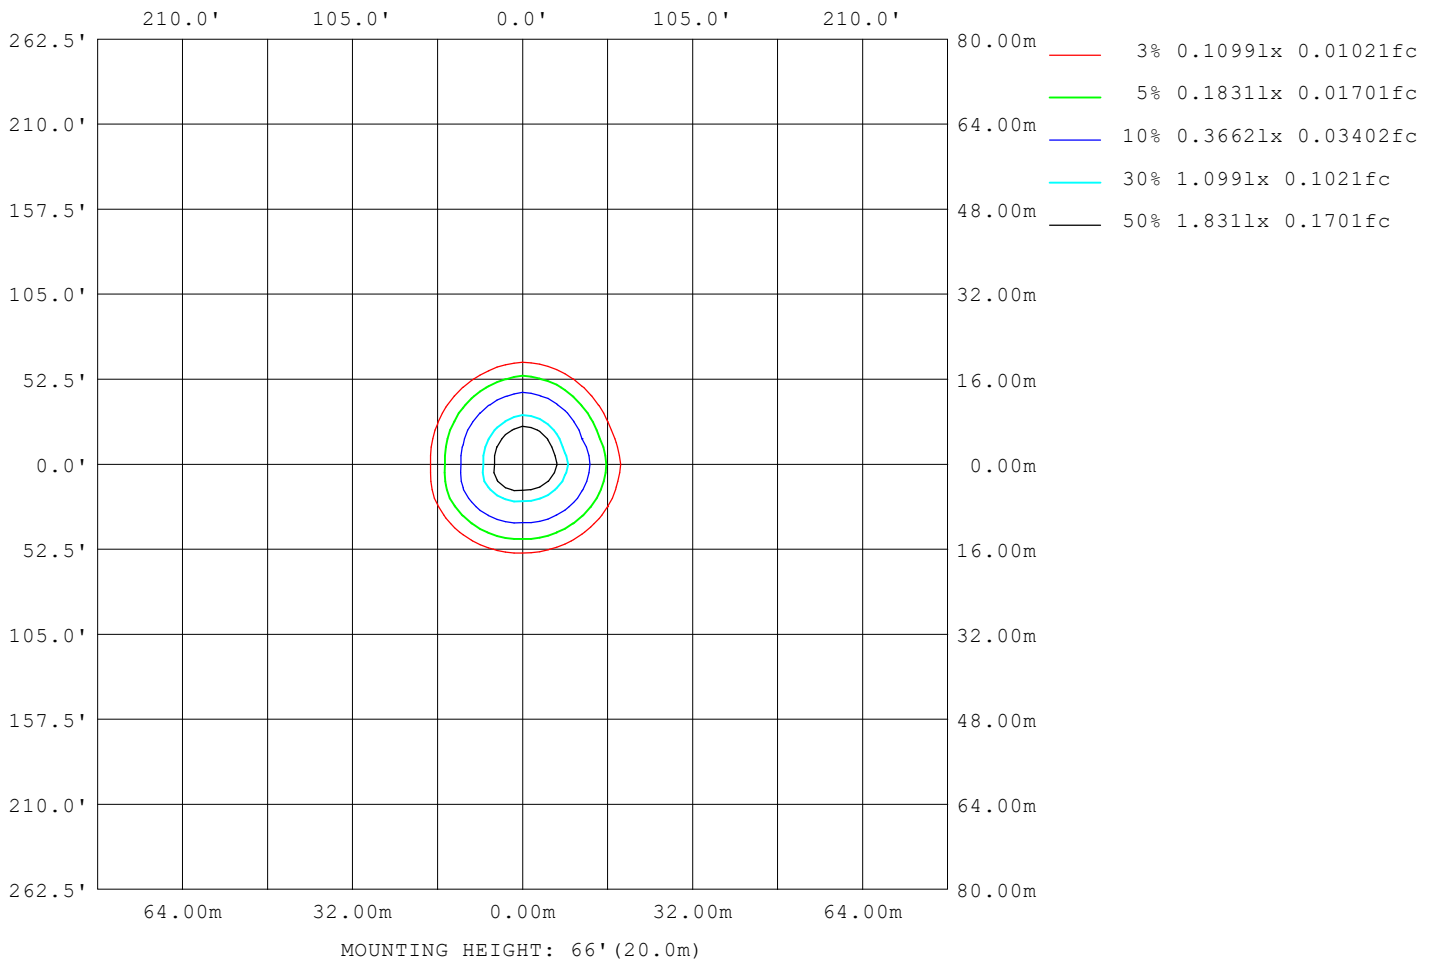

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.73V I:0.0905A P:10.660W PF:0.9835 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:795.456x1 lm		
NAME: LED-2-S11W-5CCTWH-EY-T	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	260
L_0~180 (75) av	181
L_0~180 (85) av	107
L_90~270 (65) av	266
L_90~270 (75) av	179
L_90~270 (85) av	115
L_45 (65) av	255
L_45 (75) av	181
L_45 (85) av	105

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-12-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

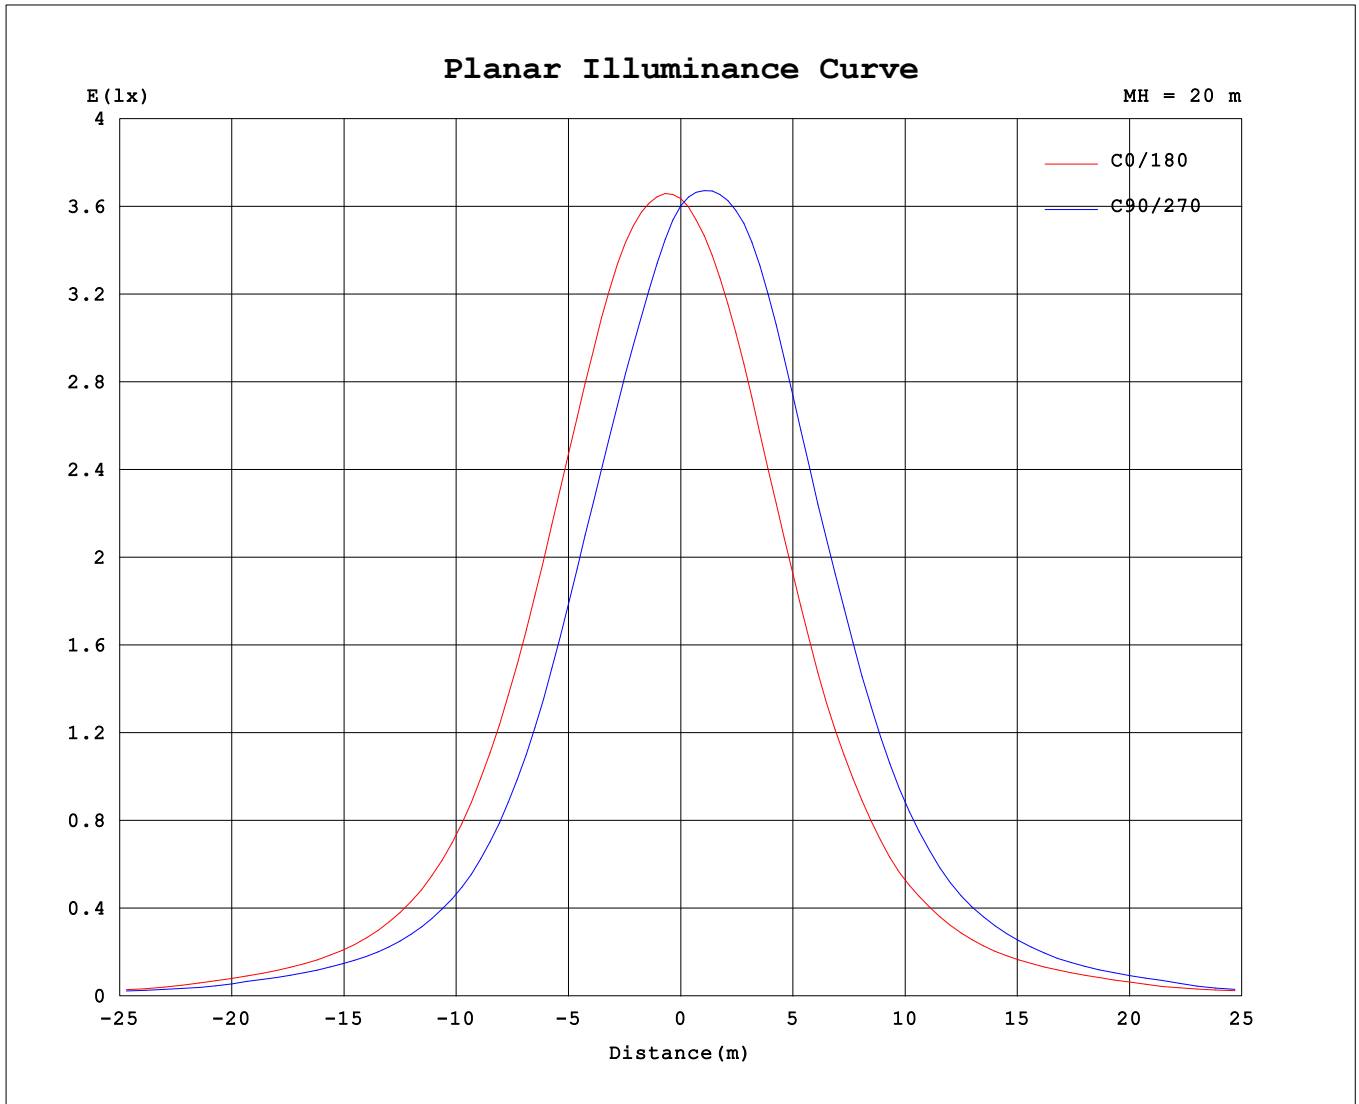

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-12-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.73V I:0.0905A P:10.660W PF:0.9835 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:795.456x1 lm		
NAME: LED-2-S11W-5CCTWH-EY-T	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5				
0	1458	1458	1458	1458	1458	1458	1458	1458	1458	1458	1458	1458	1458	1458	1458	1458				
5	1450	1404	1339	1289	1268	1307	1346	1368	1328	1369	1421	1467	1496	1492	1468	1435				
10	1298	1218	1121	1050	1017	1060	1109	1148	1078	1147	1242	1343	1411	1373	1317	1248				
15	1031	948	851	776	738	791	841	865	790	855	953	1071	1158	1129	1050	958				
20	732	661	581	520	482	523	570	595	531	579	665	759	863	831	747	652				
25	477	431	375	330	303	329	370	391	341	378	438	502	576	543	480	414				
30	300	275	241	211	197	213	236	251	223	245	279	319	365	338	295	256				
35	194	180	158	142	134	142	154	164	150	163	185	210	236	218	190	169				
40	132	123	110	101	96.3	101	108	114	107	115	127	140	156	144	127	116				
45	92.0	85.4	77.0	69.1	65.1	71.3	75.2	79.7	73.2	79.5	89.1	98.8	108	98.3	86.6	79.5				
50	52.0	50.4	46.7	43.6	41.7	42.2	44.7	45.1	43.8	45.3	48.5	50.5	56.2	51.4	48.3	45.5				
55	33.7	33.1	31.1	28.9	27.6	27.4	29.3	30.1	30.8	32.1	33.5	34.7	36.8	33.6	31.2	30.6				
60	20.5	20.2	19.8	19.2	18.1	18.0	19.0	19.2	19.8	20.4	21.4	22.0	22.8	20.4	19.1	18.9				
65	12.6	12.4	12.0	11.7	10.6	10.4	11.1	11.3	11.8	12.3	13.2	13.9	14.4	12.6	11.5	11.5				
70	6.81	6.86	6.98	7.28	7.13	7.04	6.89	6.50	6.75	6.74	6.96	7.17	7.42	6.79	6.49	6.50				
75	5.14	5.30	5.41	5.50	5.15	5.10	5.21	5.03	5.26	5.18	5.13	5.04	5.14	5.20	5.11	5.12				
80	3.21	3.22	3.16	3.11	2.69	2.71	2.94	2.91	3.12	3.16	3.27	3.32	3.48	3.38	3.23	3.17				
85	1.11	1.01	0.90	0.86	0.73	0.65	0.74	0.78	0.96	1.03	1.19	1.33	1.50	1.40	1.24	1.16				
90	0.09	0.07	0.07	0.07	0.07	0.07	0.08	0.07	0.05	0.05	0.08	0.09	0.24	0.34	0.21	0.08				

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:
Test Date:2022-12-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: