
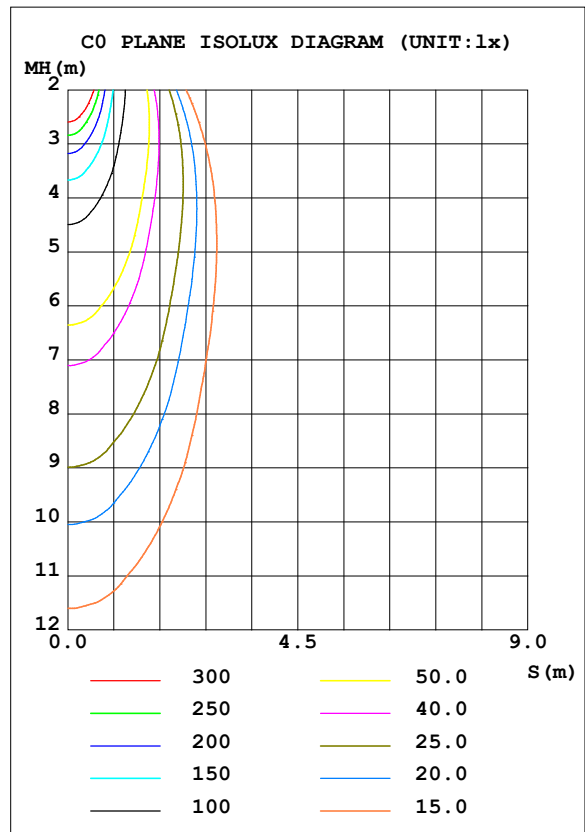


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.94V I:0.1179A P:13.951W PF:0.9484 Freq:59.98Hz Lamp Flux:1519.72x1 lm		
NAME: LED-6-S15W-3K-FG-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 108.93 lm/W			
MODEL		I _{max} (cd)	2002	S/MH (C0/180)	0.58
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.61
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1519.7	<input type="checkbox"/> UP, DN (C0-180)	0.0, 49.2
NOMINAL FLUX (lm)	1519.72	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 50.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.70

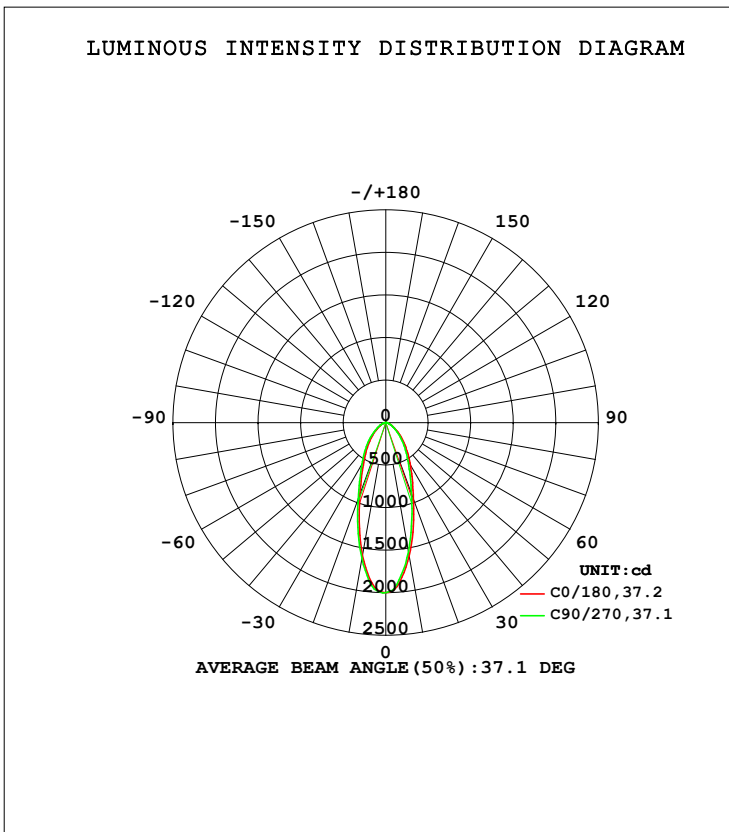

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-08-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks: PORTER

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum,lamp
10	1591	1560	1539	1533	1585	1621	1623	1617	0- 10	170.1	170.1	11.2,11.2
20	954.4	923.2	887.1	870.5	894.0	925.0	955.5	962.1	10- 20	340.7	510.7	33.6,33.6
30	581.7	558.3	527.7	510.5	512.2	533.5	561.1	581.8	20- 30	324.0	834.8	54.9,54.9
40	358.0	341.0	322.6	309.5	308.6	326.0	348.2	361.2	30- 40	269.0	1104	72.6,72.6
50	201.3	189.7	179.9	171.5	169.5	181.4	199.4	207.4	40- 50	196.9	1301	85.6,85.6
60	101.4	95.60	91.68	86.98	85.27	91.35	102.0	105.9	50- 60	121.9	1423	93.6,93.6
70	45.42	42.10	40.58	38.62	38.28	41.65	46.81	48.16	60- 70	65.88	1489	97.9,97.9
80	13.96	11.18	7.748	10.15	11.80	12.49	12.44	14.85	70- 80	27.35	1516	99.7,99.7
90	0.0830	0.0832	0.0866	0.0876	0.1484	0.1281	0.1254	0.1215	80- 90	3.834	1520	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-03

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

LUMINANCE LIMITATION CURVES

Test:U:119.94V I:0.1179A P:13.951W PF:0.9484 Freq:59.98Hz Lamp Flux:1519.72x1 lm		
NAME: LED-6-S15W-3K-FG-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

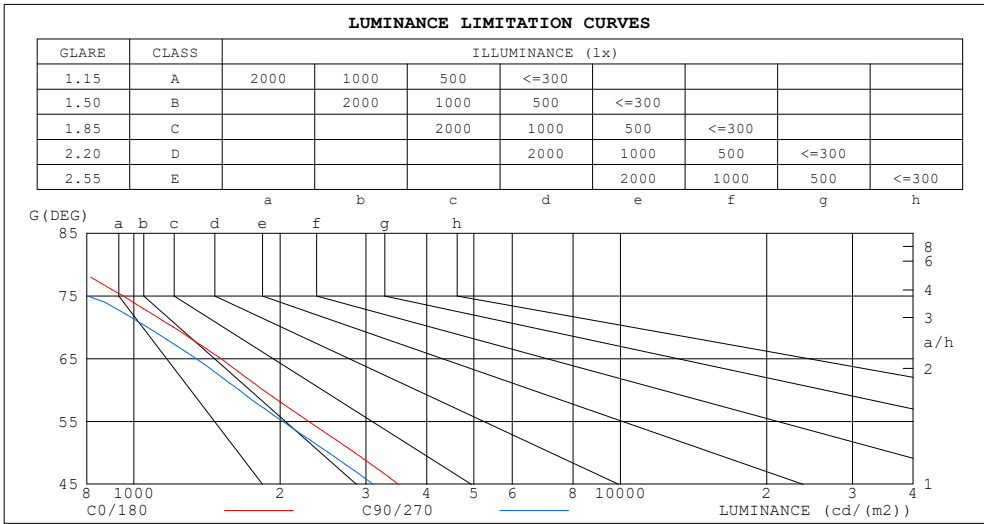

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	354	14
80	731	401
75	950	800
70	1207	1066
65	1510	1342
60	1843	1647
55	2286	2025
50	2846	2514
45	3497	3107


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.94V I:0.1179A P:13.951W PF:0.9484 Freq:59.98Hz Lamp Flux:1519.72x1 lm		
NAME: LED-6-S15W-3K-FG-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.09	1.06	1.03	1.07	1.04	1.01	1.02	1.00	.98	.99	.97	.95	.95	.94	.93	.91
2.0	.99	.94	.90	.97	.93	.89	.94	.90	.87	.91	.88	.85	.88	.86	.83	.82
3.0	.91	.85	.80	.89	.84	.79	.87	.82	.78	.84	.80	.77	.82	.78	.76	.74
4.0	.84	.77	.72	.82	.76	.72	.80	.75	.71	.78	.73	.70	.76	.72	.69	.67
5.0	.77	.70	.65	.76	.70	.65	.74	.69	.64	.73	.68	.64	.71	.67	.63	.62
6.0	.72	.65	.60	.71	.64	.60	.69	.64	.59	.68	.63	.59	.66	.62	.58	.57
7.0	.67	.60	.55	.66	.60	.55	.65	.59	.55	.64	.58	.54	.62	.58	.54	.53
8.0	.63	.56	.51	.62	.56	.51	.61	.55	.51	.60	.55	.51	.59	.54	.50	.49
9.0	.59	.52	.48	.58	.52	.48	.57	.52	.48	.56	.51	.47	.56	.51	.47	.46
10.0	.56	.49	.45	.55	.49	.45	.54	.49	.45	.53	.48	.44	.53	.48	.44	.43

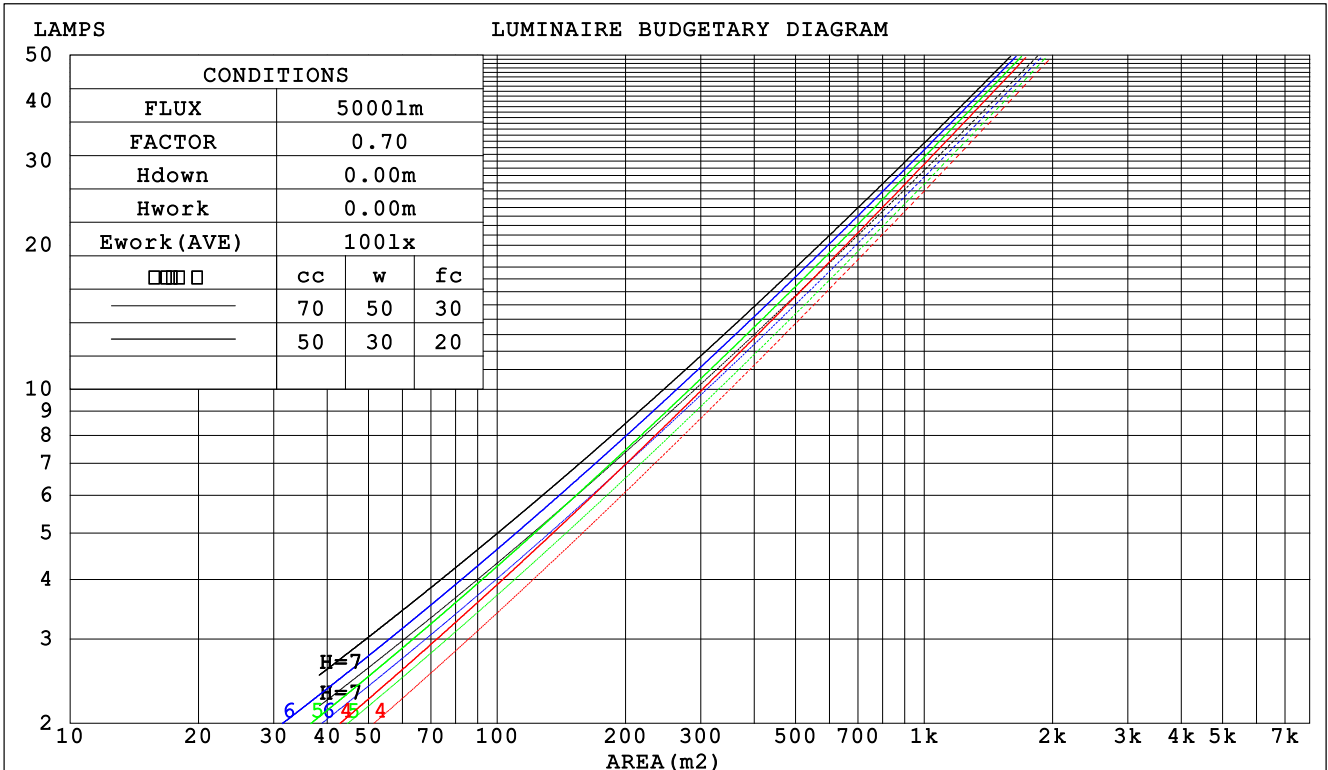

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-03

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

WEC AND CCEC

Test:U:119.94V I:0.1179A P:13.951W PF:0.9484 Freq:59.98Hz Lamp Flux:1519.72x1 lm		
NAME: LED-6-S15W-3K-FG-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.216 .123 .039	.209 .119 .038	.196 .112 .036	.184 .106 .034	.173 .100 .032	
2.0	.208 .114 .035	.202 .111 .034	.191 .106 .033	.181 .101 .032	.171 .097 .031	
3.0	.196 .105 .031	.191 .102 .031	.182 .099 .030	.173 .095 .029	.165 .091 .028	
4.0	.185 .096 .028	.181 .095 .028	.172 .091 .027	.165 .088 .027	.158 .086 .026	
5.0	.174 .089 .026	.170 .088 .025	.163 .085 .025	.156 .083 .025	.150 .080 .024	
6.0	.164 .082 .024	.161 .081 .023	.155 .079 .023	.149 .077 .023	.143 .075 .022	
7.0	.155 .077 .022	.152 .076 .022	.147 .074 .021	.141 .072 .021	.136 .071 .021	
8.0	.147 .072 .020	.144 .071 .020	.139 .070 .020	.134 .068 .020	.130 .067 .019	
9.0	.139 .067 .019	.137 .067 .019	.132 .065 .019	.128 .064 .018	.124 .063 .018	
10.0	.132 .064 .018	.130 .063 .018	.126 .062 .017	.122 .061 .017	.119 .060 .017	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.174 .157 .142	.149 .135 .122	.102 .093 .084	.059 .054 .049	.019 .017 .016	
2.0	.161 .132 .108	.138 .114 .094	.095 .079 .065	.054 .046 .038	.017 .015 .012	
3.0	.150 .114 .085	.129 .098 .073	.088 .068 .052	.051 .040 .030	.016 .013 .010	
4.0	.141 .100 .068	.121 .086 .059	.083 .060 .042	.048 .035 .025	.015 .011 .008	
5.0	.133 .088 .055	.114 .076 .048	.079 .053 .034	.046 .031 .020	.015 .010 .007	
6.0	.126 .079 .046	.108 .069 .040	.074 .048 .028	.043 .028 .017	.014 .009 .006	
7.0	.119 .072 .039	.102 .062 .034	.071 .044 .024	.041 .026 .014	.013 .008 .005	
8.0	.113 .066 .034	.097 .057 .029	.067 .040 .021	.039 .024 .012	.013 .008 .004	
9.0	.108 .061 .029	.093 .053 .026	.064 .037 .018	.037 .022 .011	.012 .007 .004	
10.0	.103 .056 .026	.088 .049 .023	.061 .034 .016	.036 .020 .010	.012 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

UGR(Unified Glare Rating) Table

Test:U:119.94V I:0.1179A P:13.951W PF:0.9484 Freq:59.98Hz Lamp Flux:1519.72x1 lm		
NAME: LED-6-S15W-3K-FG-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.7	13.8	12.9	14.0	14.2	12.2	13.3	12.4	13.5	13.7
3H	13.2	14.2	13.4	14.4	14.6	12.7	13.7	12.9	13.9	14.1
4H	13.3	14.3	13.6	14.5	14.8	12.8	13.8	13.1	14.0	14.2
6H	13.4	14.3	13.7	14.6	14.8	12.8	13.7	13.1	14.0	14.2
8H	13.4	14.3	13.7	14.5	14.8	12.7	13.6	13.1	13.9	14.2
12H	13.3	14.2	13.7	14.5	14.8	12.7	13.6	13.0	13.8	14.1
4H 2H	12.8	13.8	13.1	14.1	14.3	12.4	13.4	12.7	13.6	13.9
3H	13.5	14.3	13.8	14.6	14.9	13.0	13.9	13.4	14.2	14.4
4H	13.7	14.5	14.0	14.8	15.1	13.2	14.0	13.6	14.3	14.6
6H	13.8	14.5	14.2	14.8	15.2	13.2	13.9	13.6	14.3	14.6
8H	13.8	14.5	14.2	14.8	15.2	13.2	13.8	13.6	14.2	14.6
12H	13.8	14.4	14.2	14.7	15.1	13.2	13.7	13.6	14.1	14.5
8H 4H	13.7	14.3	14.1	14.7	15.0	13.2	13.9	13.6	14.2	14.6
6H	13.9	14.4	14.3	14.8	15.2	13.3	13.8	13.7	14.2	14.6
8H	13.9	14.4	14.3	14.8	15.2	13.3	13.7	13.7	14.1	14.6
12H	13.9	14.3	14.4	14.7	15.2	13.2	13.6	13.7	14.1	14.5
12H 4H	13.6	14.2	14.1	14.6	15.0	13.2	13.8	13.6	14.2	14.6
6H	13.8	14.3	14.3	14.7	15.2	13.3	13.7	13.7	14.2	14.6
8H	13.9	14.3	14.3	14.7	15.2	13.2	13.6	13.7	14.1	14.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.7 / - 0.9					+ 0.8 / - 1.1				
1.5H	+ 0.6 / - 0.6					+ 0.6 / - 0.6				
2.0H	+ 1.5 / - 1.3					+ 1.5 / - 1.3				

CIE Pub.117, 1520 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.5)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

UTILIZATION FACTORS TABLE

Test:U:119.94V I:0.1179A P:13.951W PF:0.9484 Freq:59.98Hz Lamp Flux:1519.72x1 lm		
NAME: LED-6-S15W-3K-FG-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	74	66	60	74	65	60	73	65	60	55
0.80	83	75	70	82	75	70	81	74	69	64
1.00	90	82	77	89	82	77	87	82	76	71
1.25	95	88	83	94	88	83	92	86	82	77
1.50	99	92	88	98	92	87	95	90	86	81
2.00	104	98	94	102	97	93	99	95	91	85
2.50	106	101	97	104	100	96	101	97	94	87
3.00	108	104	100	106	102	99	103	100	97	90
4.00	111	107	104	109	106	103	105	102	100	92
5.00	113	109	107	110	108	105	106	104	102	94
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

ISOCANDELA DIAGRAM

Test:U:119.94V I:0.1179A P:13.951W PF:0.9484 Freq:59.98Hz Lamp Flux:1519.72x1 lm		
NAME: LED-6-S15W-3K-FG-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

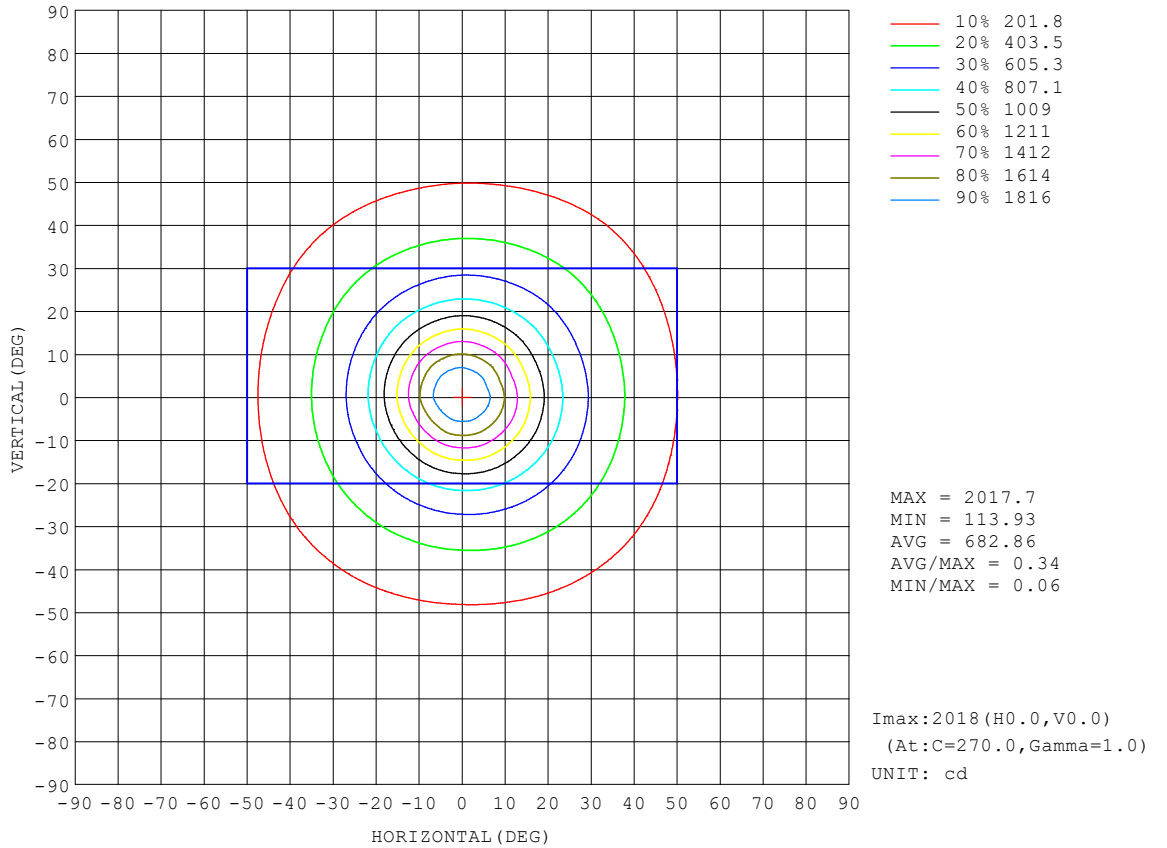


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

AAI Figure

Test:U:119.94V I:0.1179A P:13.951W PF:0.9484 Freq:59.98Hz Lamp Flux:1519.72x1 lm		
NAME: LED-6-S15W-3K-FG-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

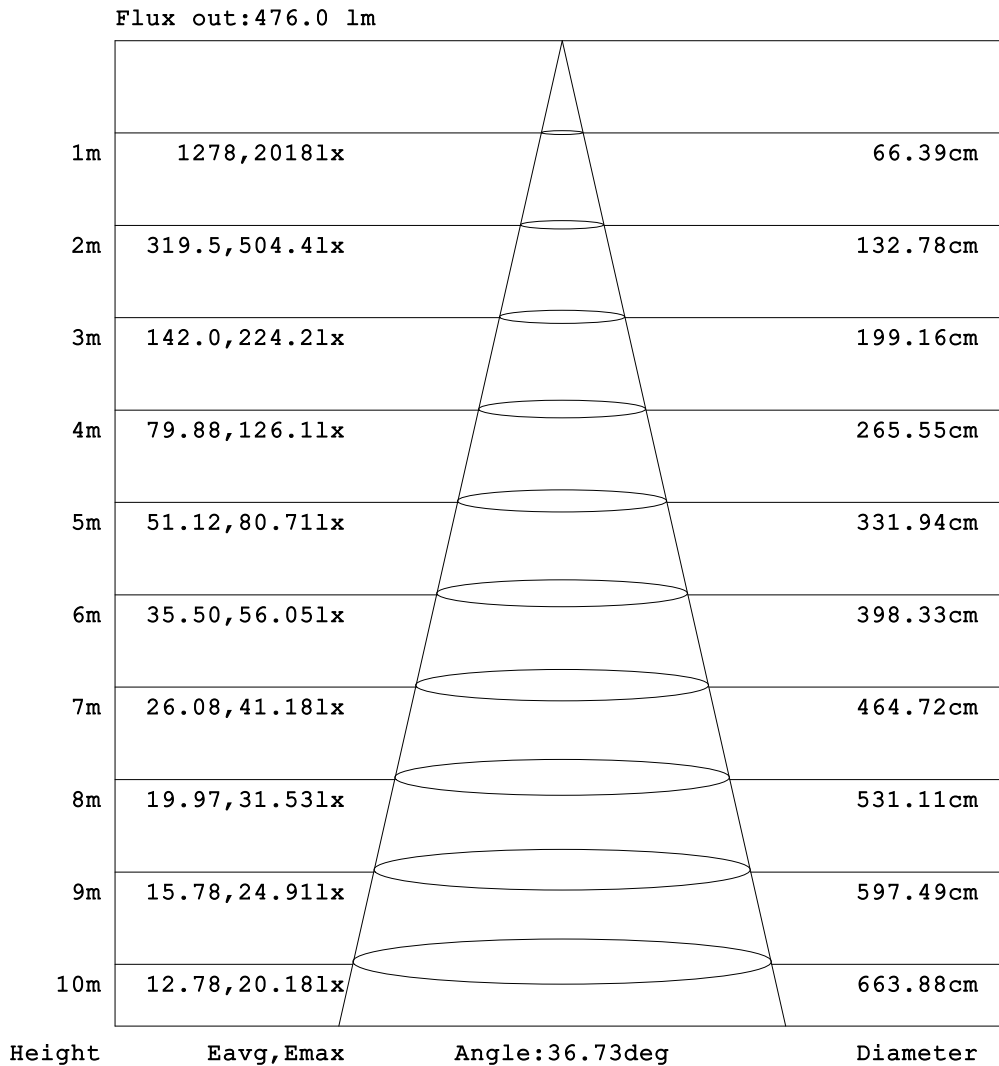


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

ISOLUX DIAGRAM

Test:U:119.94V I:0.1179A P:13.951W PF:0.9484 Freq:59.98Hz Lamp Flux:1519.72x1 lm		
NAME: LED-6-S15W-3K-FG-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

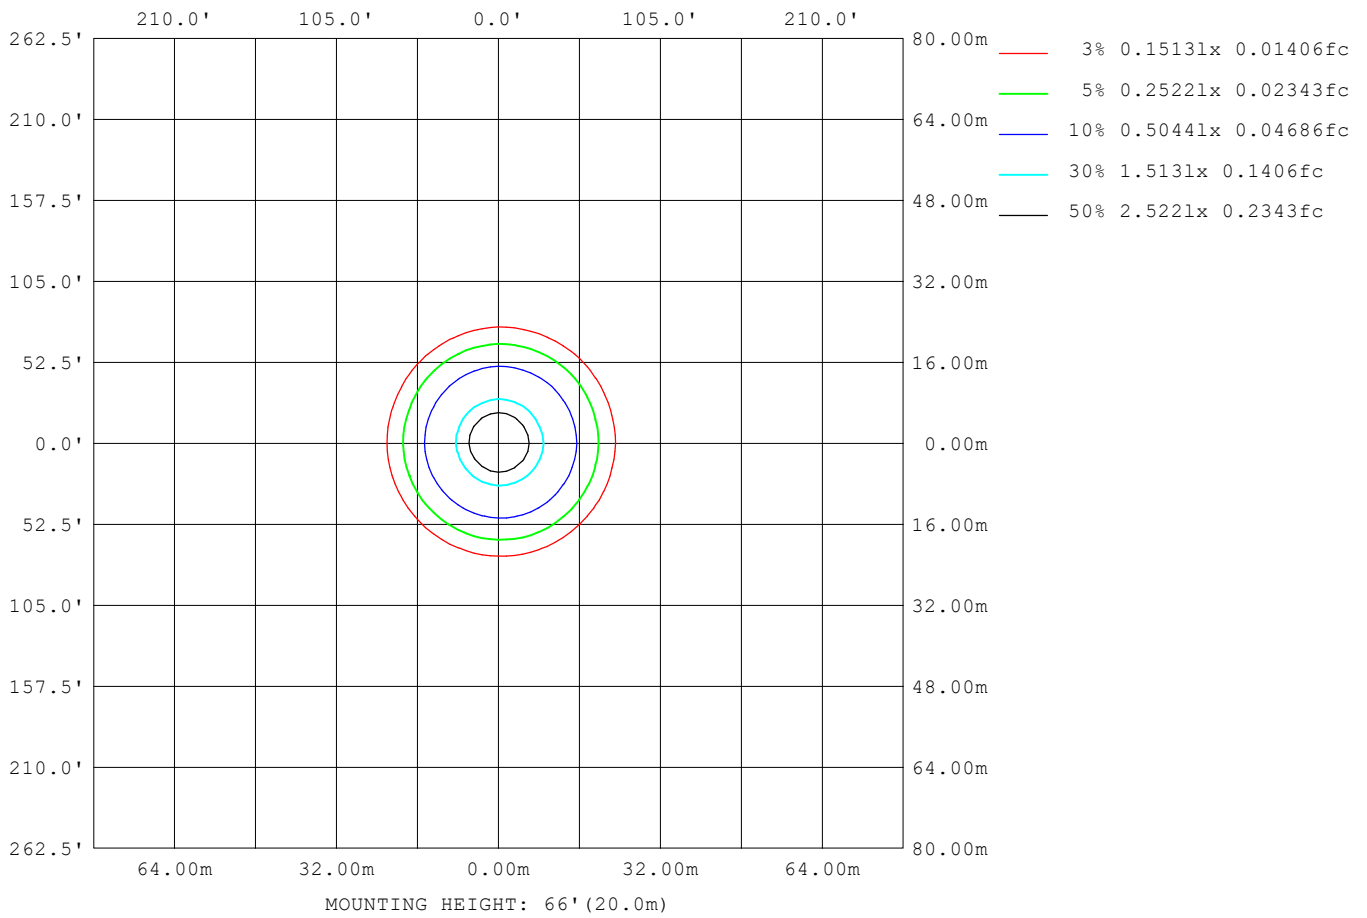

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

LED Avg.L Report

Test:U:119.94V I:0.1179A P:13.951W PF:0.9484 Freq:59.98Hz Lamp Flux:1519.72x1 lm		
NAME: LED-6-S15W-3K-FG-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1378
L_0~180 (75) av	869
L_0~180 (85) av	323
L_90~270 (65) av	1427
L_90~270 (75) av	894
L_90~270 (85) av	81
L_45 (65) av	1398
L_45 (75) av	883
L_45 (85) av	195

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

Planar Illuminance Curve

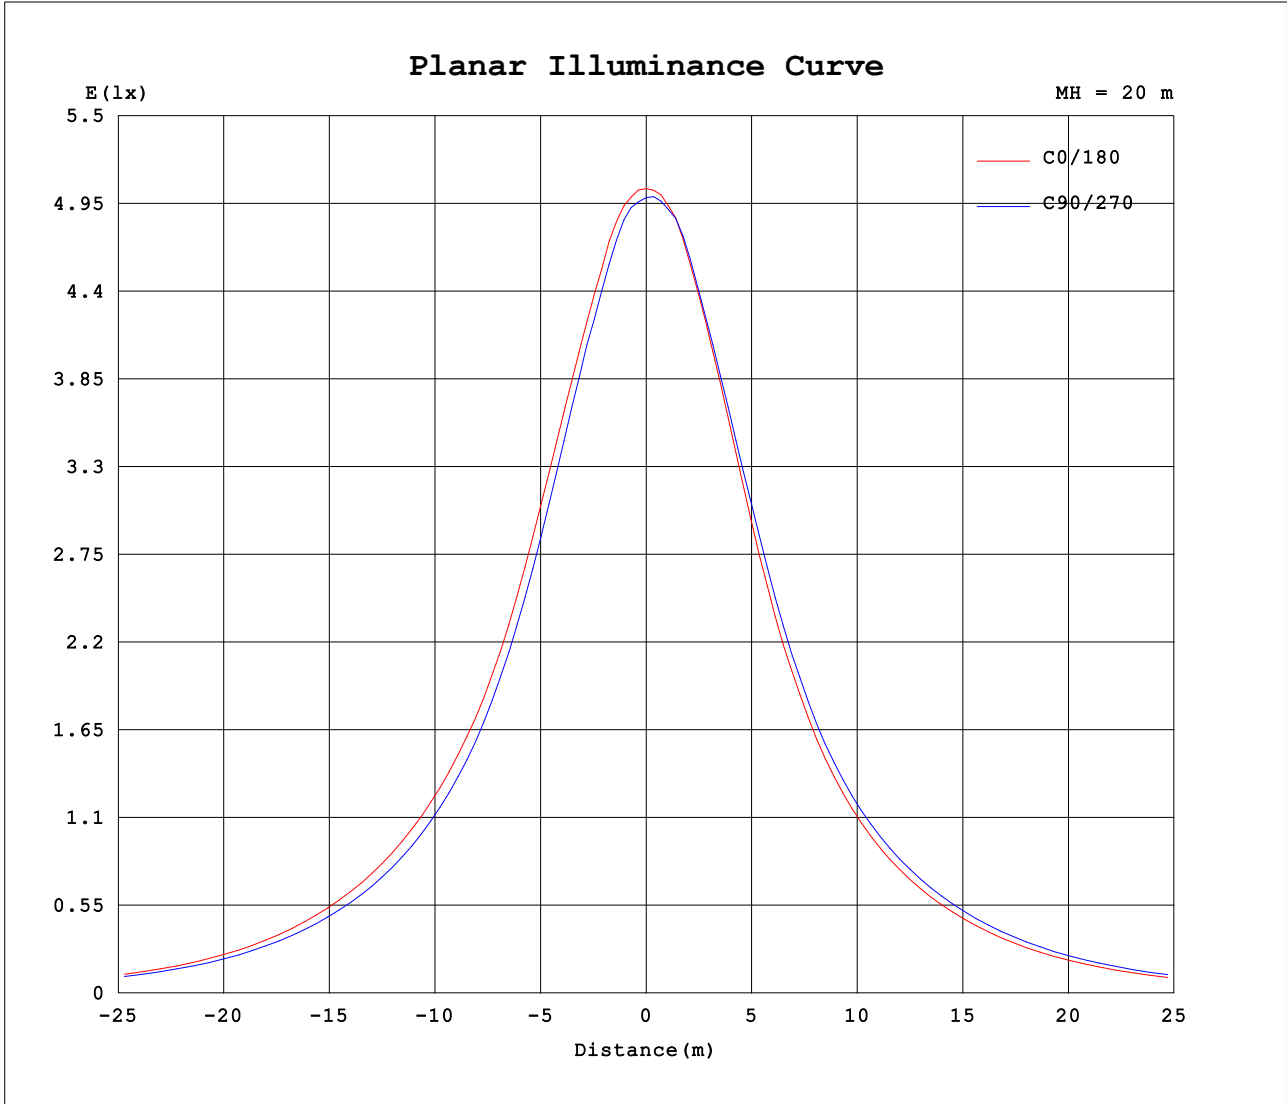

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-08-03

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks: PORTER

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.94V I:0.1179A P:13.951W PF:0.9484 Freq:59.98Hz Lamp Flux:1519.72x1 lm		
NAME: LED-6-S15W-3K-FG-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1998	1998	1998	1998	1998	1998	1998	1998	1998	1998	1998	1998	1998	1998	1998	1998			
5	1888	1880	1859	1860	1852	1860	1865	1885	1894	1902	1917	1915	1924	1912	1913	1894			
10	1591	1582	1560	1551	1539	1542	1533	1560	1585	1597	1621	1616	1623	1617	1617	1595			
15	1258	1250	1223	1206	1185	1184	1173	1192	1208	1224	1249	1257	1277	1269	1276	1263			
20	954	945	923	903	887	881	871	880	894	909	925	935	956	958	962	959			
25	739	732	712	693	677	664	656	661	667	676	692	704	720	729	742	740			
30	582	574	558	542	528	518	511	510	512	521	534	545	561	570	582	582			
35	459	451	439	427	415	406	400	400	400	405	418	430	443	450	459	461			
40	358	350	341	333	323	315	310	310	309	312	326	337	348	354	361	362			
45	272	266	258	252	245	239	234	234	232	235	247	257	268	272	278	277			
50	201	197	190	186	180	176	171	171	170	172	181	190	199	203	207	205			
55	144	141	136	133	129	127	123	122	121	123	130	136	144	148	150	147			
60	101	99.3	95.6	93.6	91.7	89.9	87.0	85.7	85.3	86.9	91.4	96.1	102	105	106	103			
65	70.2	68.6	65.6	64.3	63.1	62.2	60.1	59.2	59.1	60.6	63.5	66.6	70.9	73.0	73.4	71.6			
70	45.4	44.2	42.1	41.2	40.6	40.2	38.6	38.1	38.3	39.5	41.7	43.9	46.8	48.1	48.2	46.5			
75	27.0	26.1	24.7	23.8	23.1	23.1	22.7	22.6	22.9	23.7	25.2	26.6	28.4	29.1	28.9	27.7			
80	14.0	13.4	11.2	8.92	7.75	8.44	10.1	11.5	11.8	12.3	12.5	11.9	12.4	13.2	14.9	14.4			
85	3.40	3.62	1.38	0.20	0.13	0.13	0.97	2.45	2.86	3.09	2.02	1.40	1.44	1.89	3.20	4.72			
90	0.08	0.09	0.08	0.08	0.09	0.08	0.09	0.09	0.15	0.14	0.13	0.13	0.13	0.13	0.12	0.12			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-03

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER