
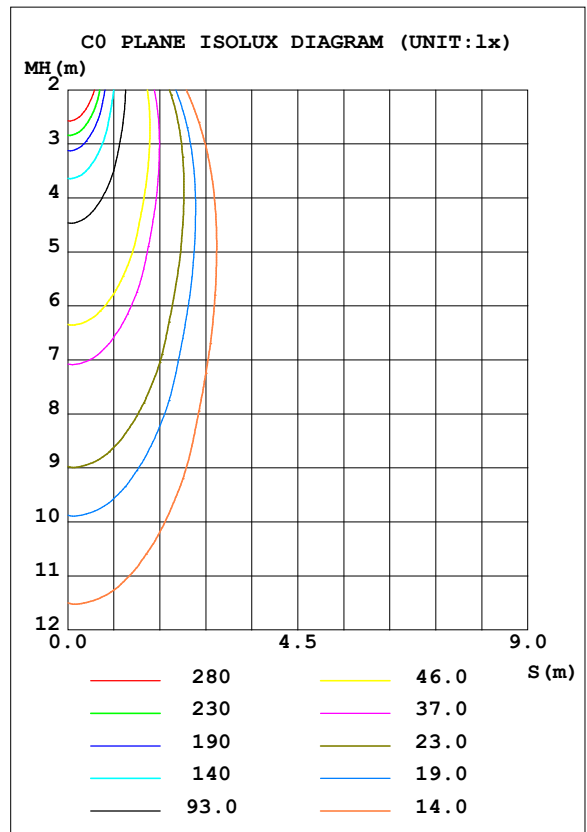


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.94V I:0.1144A P:13.525W PF:0.9503 Freq:59.98Hz Lamp Flux:1441.44x1 lm		
NAME: LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 106.58 lm/W			
MODEL		Imax (cd)	1861	S/MH (C0/180)	0.58
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.62
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1441.4	<input type="checkbox"/> UP, DN (C0-180)	0.0, 48.9
NOMINAL FLUX (lm)	1441.44	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 51.1
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.70

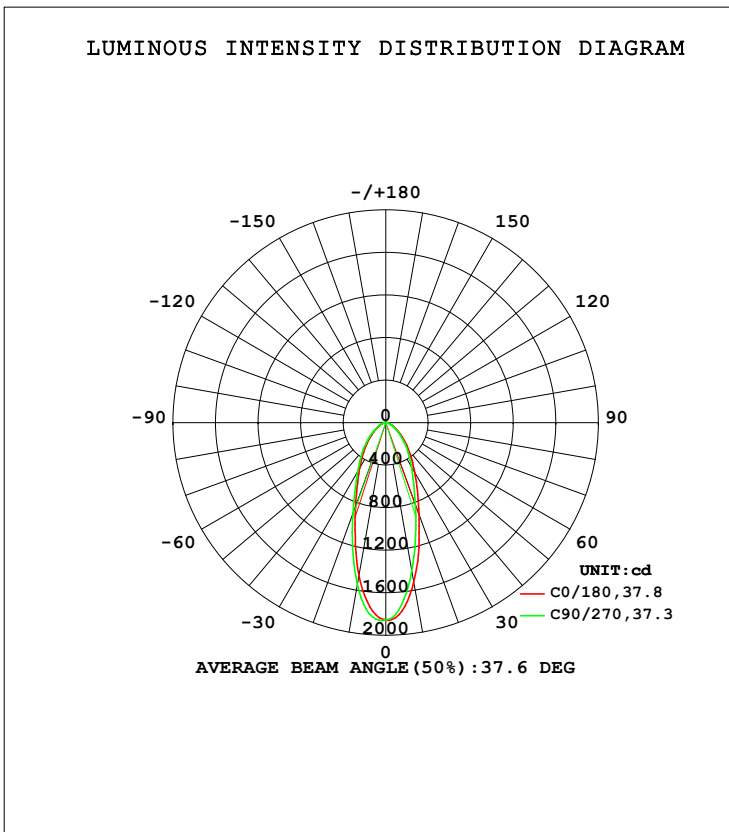

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-08-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks: PORTER

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1522	1466	1416	1417	1459	1510	1543	1554	0- 10	158.9	158.9	11,11
20	915.0	868.1	816.1	806.3	834.8	868.3	905.4	925.0	10- 20	320.4	479.3	33.3,33.3
30	548.2	520.8	487.4	479.9	490.1	506.3	527.0	548.0	20- 30	305.1	784.5	54.4,54.4
40	336.0	319.9	300.8	295.6	297.2	311.5	328.5	343.0	30- 40	253.8	1038	72,72
50	191.6	180.0	169.7	167.0	167.7	176.4	190.0	198.9	40- 50	187.5	1226	85,85
60	99.78	92.43	88.09	87.07	87.57	91.41	99.59	103.3	50- 60	118.4	1344	93.2,93.2
70	46.51	42.15	40.00	39.53	39.89	41.89	46.57	48.07	60- 70	65.67	1410	97.8,97.8
80	15.09	11.41	7.306	10.24	12.10	12.24	12.17	15.44	70- 80	27.76	1438	99.7,99.7
90	0.0805	0.0768	0.0801	0.0865	0.1392	0.1298	0.1149	0.1189	80- 90	3.875	1441	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-04

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

LUMINANCE LIMITATION CURVES

Test:U:119.94V I:0.1144A P:13.525W PF:0.9503 Freq:59.98Hz Lamp Flux:1441.44x1 lm		
NAME: LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

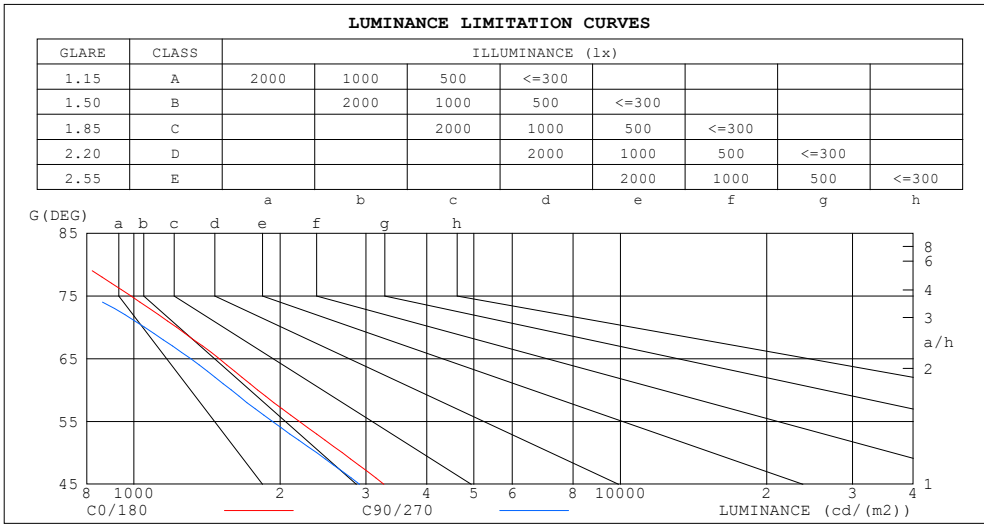

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	396	13
80	782	379
75	985	789
70	1224	1052
65	1496	1308
60	1796	1585
55	2187	1924
50	2682	2375
45	3264	2912


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.94V I:0.1144A P:13.525W PF:0.9503 Freq:59.98Hz Lamp Flux:1441.44x1 lm		
NAME: LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.09	1.06	1.03	1.06	1.04	1.01	1.02	1.00	.98	.99	.97	.95	.95	.94	.92	.91
2.0	.99	.94	.90	.97	.93	.89	.94	.90	.87	.91	.88	.85	.88	.85	.83	.81
3.0	.91	.85	.80	.89	.84	.79	.86	.82	.78	.84	.80	.77	.82	.78	.75	.74
4.0	.83	.77	.72	.82	.76	.71	.80	.74	.70	.78	.73	.69	.76	.72	.69	.67
5.0	.77	.70	.65	.76	.69	.65	.74	.68	.64	.72	.67	.63	.71	.66	.63	.61
6.0	.71	.64	.59	.71	.64	.59	.69	.63	.59	.67	.62	.58	.66	.62	.58	.56
7.0	.67	.60	.55	.66	.59	.55	.65	.59	.54	.63	.58	.54	.62	.57	.54	.52
8.0	.62	.56	.51	.62	.55	.51	.61	.55	.51	.59	.54	.50	.58	.54	.50	.48
9.0	.59	.52	.47	.58	.52	.47	.57	.51	.47	.56	.51	.47	.55	.50	.47	.45
10.0	.55	.49	.44	.55	.49	.44	.54	.48	.44	.53	.48	.44	.52	.47	.44	.43

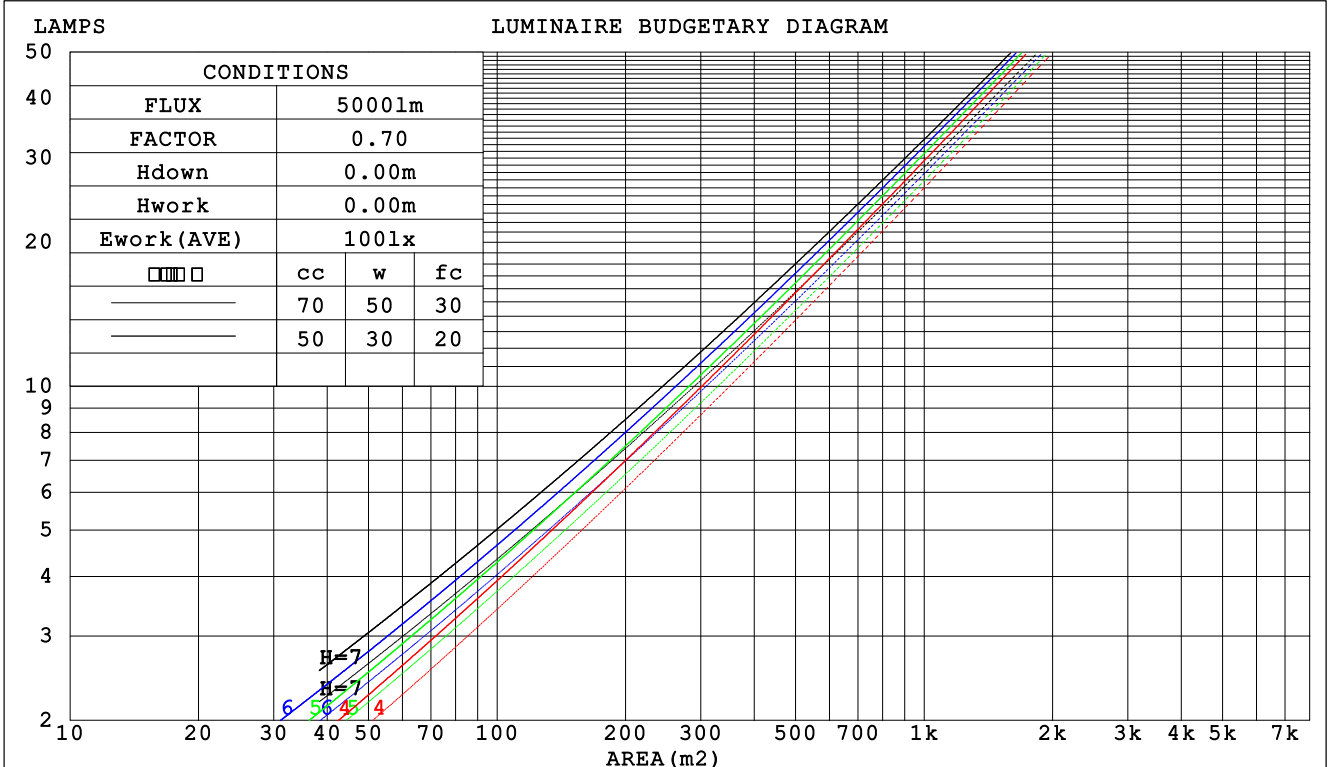

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-04

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

WEC AND CCEC

Test:U:119.94V I:0.1144A P:13.525W PF:0.9503 Freq:59.98Hz Lamp Flux:1441.44x1 lm		
NAME: LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.217 .124 .039	.211 .120 .038	.198 .113 .036	.186 .107 .034	.175 .102 .033	
2.0	.209 .115 .035	.203 .112 .035	.193 .107 .033	.182 .102 .032	.173 .098 .031	
3.0	.198 .105 .032	.193 .103 .031	.183 .099 .030	.175 .096 .029	.167 .092 .029	
4.0	.186 .097 .028	.182 .095 .028	.174 .092 .028	.166 .089 .027	.159 .086 .026	
5.0	.176 .089 .026	.172 .088 .026	.164 .086 .025	.158 .083 .025	.151 .081 .024	
6.0	.165 .083 .024	.162 .082 .024	.156 .080 .023	.150 .078 .023	.144 .076 .023	
7.0	.156 .077 .022	.153 .076 .022	.147 .075 .021	.142 .073 .021	.137 .071 .021	
8.0	.148 .072 .020	.145 .071 .020	.140 .070 .020	.135 .069 .020	.131 .067 .020	
9.0	.140 .068 .019	.138 .067 .019	.133 .066 .019	.129 .065 .018	.125 .063 .018	
10.0	.133 .064 .018	.131 .063 .018	.127 .062 .018	.123 .061 .017	.119 .060 .017	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.174 .157 .142	.149 .135 .122	.102 .093 .084	.059 .054 .049	.019 .017 .016	
2.0	.161 .132 .108	.138 .114 .093	.095 .079 .065	.055 .046 .038	.018 .015 .012	
3.0	.151 .114 .084	.129 .098 .073	.089 .068 .051	.051 .040 .030	.016 .013 .010	
4.0	.141 .100 .068	.121 .086 .059	.083 .060 .041	.048 .035 .024	.016 .011 .008	
5.0	.133 .088 .055	.114 .076 .048	.079 .053 .034	.046 .031 .020	.015 .010 .007	
6.0	.126 .079 .046	.108 .069 .040	.075 .048 .028	.043 .028 .017	.014 .009 .006	
7.0	.119 .072 .039	.103 .062 .034	.071 .044 .024	.041 .026 .014	.013 .008 .005	
8.0	.113 .066 .034	.098 .057 .029	.067 .040 .021	.039 .024 .012	.013 .008 .004	
9.0	.108 .061 .029	.093 .053 .025	.064 .037 .018	.037 .022 .011	.012 .007 .004	
10.0	.103 .057 .026	.089 .049 .022	.061 .035 .016	.036 .020 .010	.012 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

UGR(Unified Glare Rating) Table

Test:U:119.94V I:0.1144A P:13.525W PF:0.9503 Freq:59.98Hz Lamp Flux:1441.44x1 lm										
NAME: LED-6-S15W-5CCT-FG-WH					TYPE:			WEIGHT:		
SPEC.:3500K 90					DIM.:			SERIAL No.:		
MFR.: Light by Lotus					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.7	13.8	12.9	14.0	14.2	12.2	13.3	12.4	13.5	13.7
3H	13.2	14.3	13.5	14.5	14.7	12.7	13.8	13.0	14.0	14.2
4H	13.4	14.4	13.7	14.6	14.9	12.8	13.8	13.1	14.1	14.3
6H	13.5	14.4	13.8	14.7	15.0	12.8	13.8	13.1	14.0	14.3
8H	13.5	14.4	13.8	14.7	15.0	12.8	13.7	13.1	14.0	14.2
12H	13.5	14.4	13.8	14.6	14.9	12.7	13.6	13.1	13.9	14.2
4H 2H	12.9	13.8	13.1	14.1	14.3	12.4	13.4	12.7	13.7	13.9
3H	13.6	14.4	13.9	14.7	15.0	13.1	14.0	13.4	14.2	14.5
4H	13.8	14.6	14.2	14.9	15.2	13.3	14.1	13.7	14.4	14.7
6H	14.0	14.7	14.4	15.0	15.4	13.3	14.0	13.7	14.4	14.7
8H	14.0	14.7	14.4	15.0	15.4	13.3	13.9	13.7	14.3	14.7
12H	14.0	14.6	14.4	15.0	15.4	13.2	13.8	13.7	14.2	14.6
8H 4H	13.8	14.5	14.2	14.8	15.2	13.3	14.0	13.7	14.3	14.7
6H	14.1	14.6	14.5	15.0	15.4	13.4	13.9	13.8	14.3	14.8
8H	14.1	14.6	14.6	15.0	15.4	13.4	13.8	13.8	14.3	14.7
12H	14.1	14.5	14.6	15.0	15.4	13.3	13.7	13.8	14.2	14.6
12H 4H	13.8	14.4	14.2	14.8	15.2	13.3	13.9	13.7	14.3	14.7
6H	14.0	14.5	14.5	14.9	15.4	13.4	13.9	13.8	14.3	14.7
8H	14.1	14.5	14.6	14.9	15.4	13.4	13.8	13.8	14.2	14.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.8					+ 0.7 / - 1.0				
1.5H	+ 0.5 / - 0.5					+ 0.6 / - 0.6				
2.0H	+ 1.4 / - 1.1					+ 1.4 / - 1.2				

CIE Pub.117, 1441 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.3)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

UTILIZATION FACTORS TABLE

Test:U:119.94V I:0.1144A P:13.525W PF:0.9503 Freq:59.98Hz Lamp Flux:1441.44x1 lm		
NAME: LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	74	65	60	73	65	60	72	65	60	55
0.80	83	75	69	82	74	69	81	74	69	64
1.00	90	82	77	89	81	76	87	82	76	71
1.25	95	88	83	94	87	82	92	86	82	76
1.50	99	92	87	97	91	87	95	90	86	80
2.00	103	98	93	102	97	92	99	94	91	85
2.50	106	101	97	104	99	96	101	97	94	87
3.00	108	104	100	106	102	99	103	99	97	89
4.00	111	107	104	109	105	103	105	102	100	92
5.00	113	109	107	110	108	105	106	104	102	94
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

ISOCANDELA DIAGRAM

Test:U:119.94V I:0.1144A P:13.525W PF:0.9503 Freq:59.98Hz Lamp Flux:1441.44x1 lm		
NAME: LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

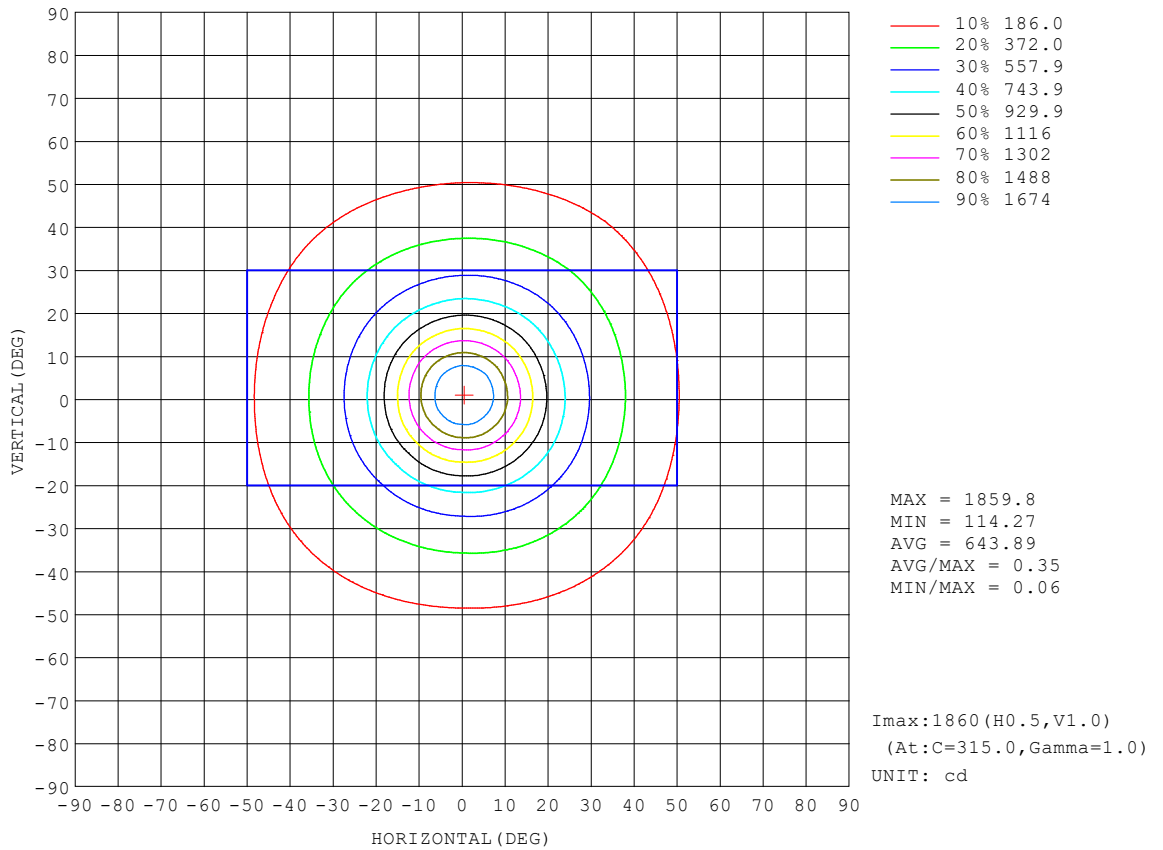


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

AAI Figure

Test:U:119.94V I:0.1144A P:13.525W PF:0.9503 Freq:59.98Hz Lamp Flux:1441.44x1 lm		
NAME: LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

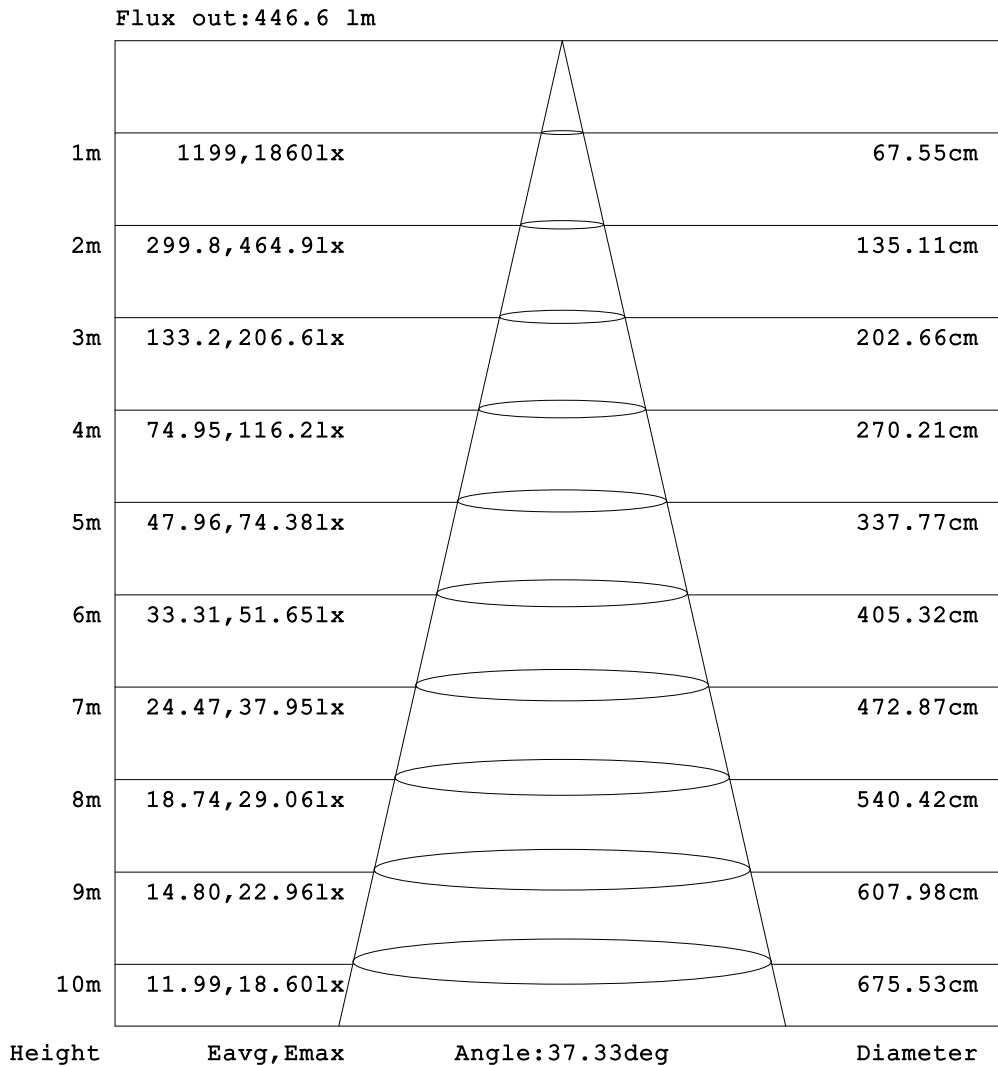


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

ISOLUX DIAGRAM

Test:U:119.94V I:0.1144A P:13.525W PF:0.9503 Freq:59.98Hz Lamp Flux:1441.44x1 lm		
NAME: LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

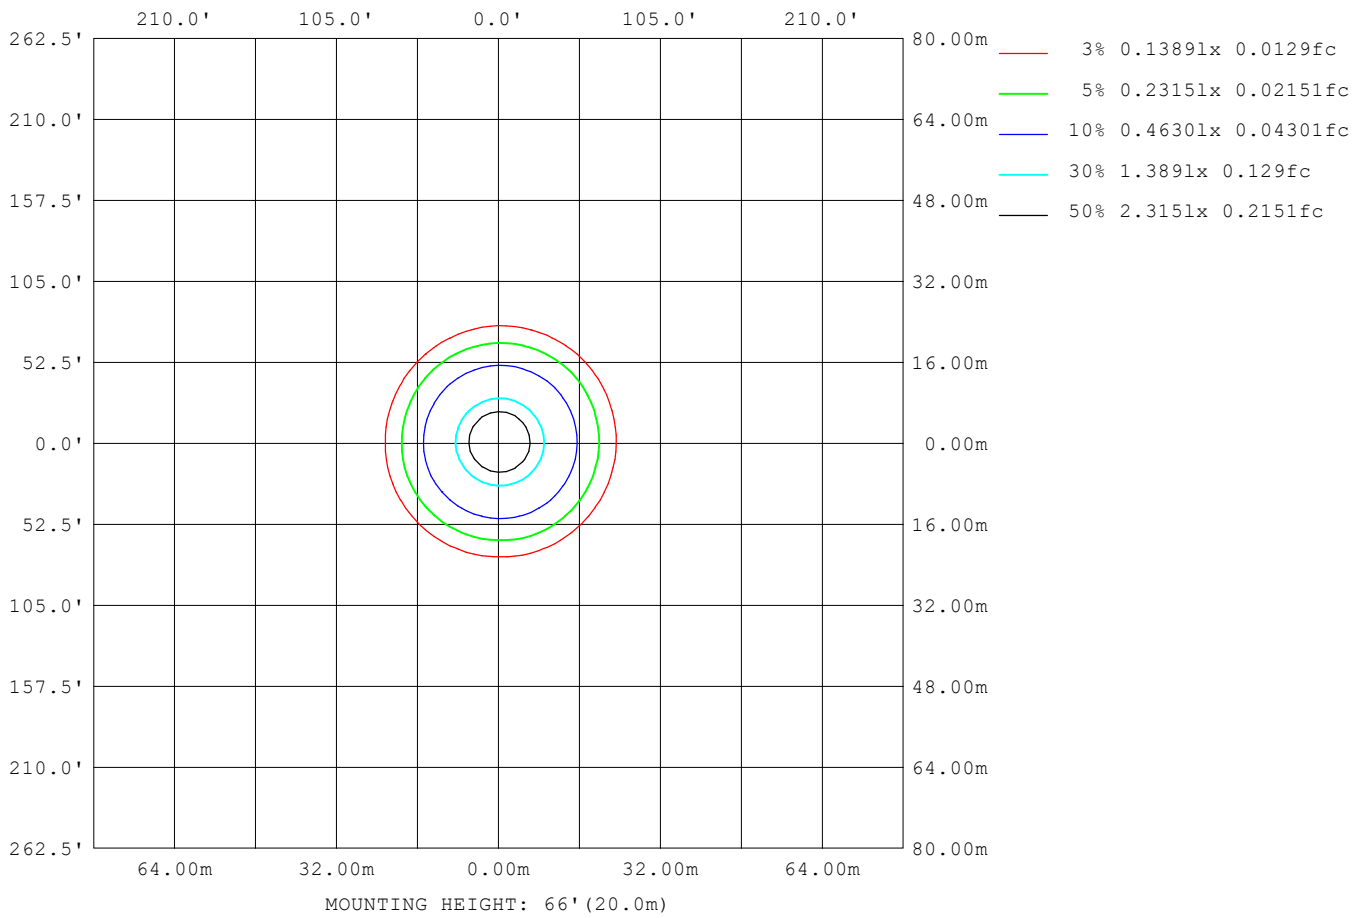

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

LED Avg.L Report

Test:U:119.94V I:0.1144A P:13.525W PF:0.9503 Freq:59.98Hz Lamp Flux:1441.44x1 lm		
NAME: LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1403
L_0~180 (75) av	907
L_0~180 (85) av	343
L_90~270 (65) av	1403
L_90~270 (75) av	889
L_90~270 (85) av	76
L_45 (65) av	1396
L_45 (75) av	900
L_45 (85) av	196

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: PORTER

Planar Illuminance Curve

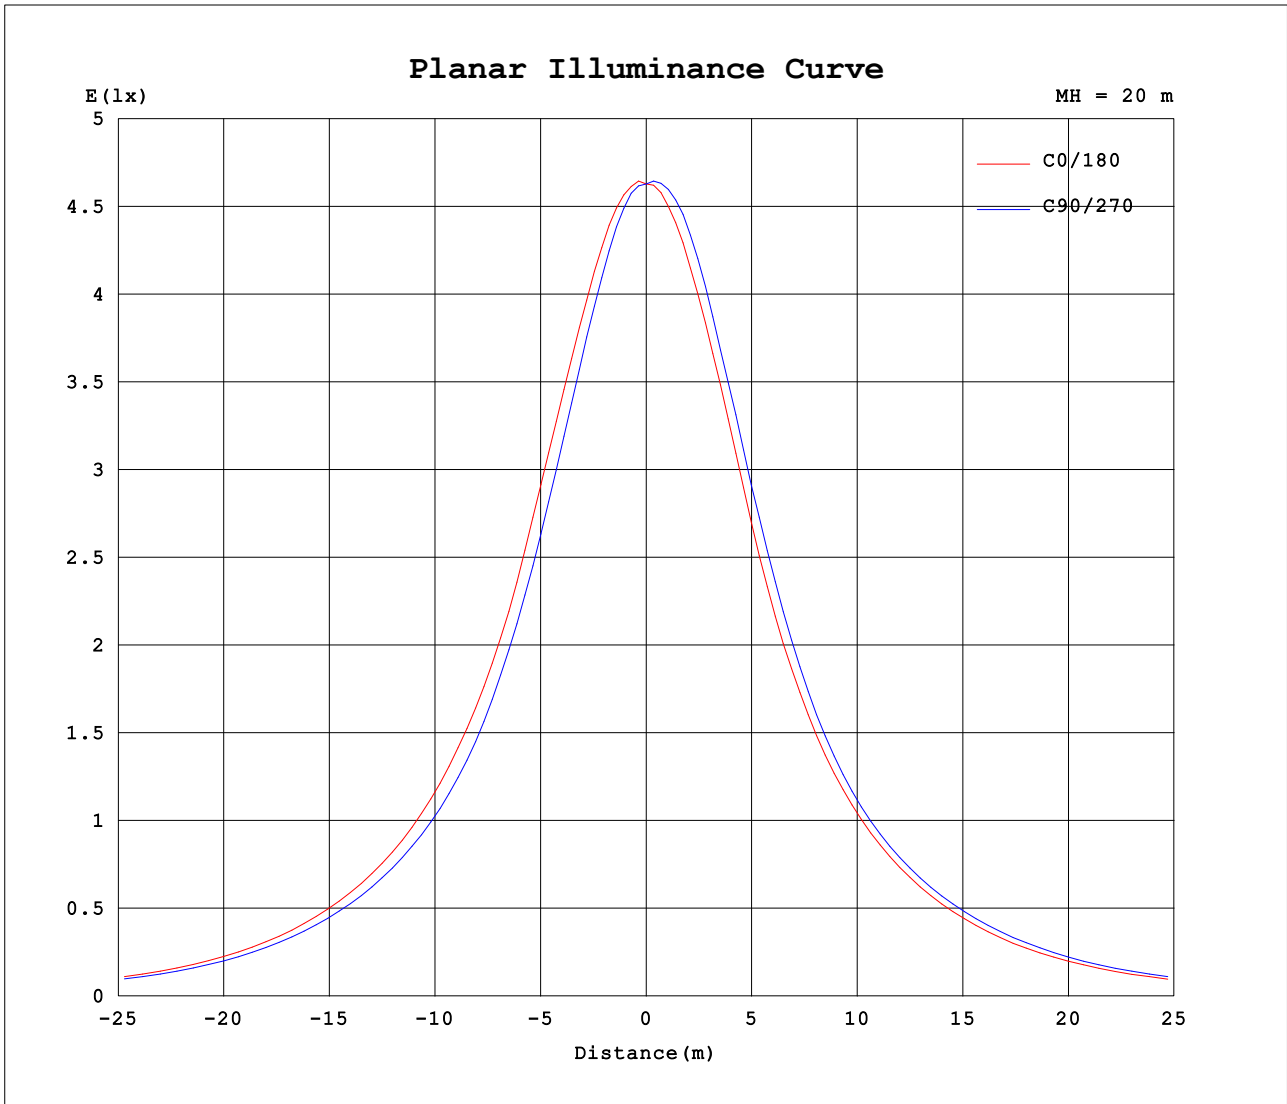

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-08-04

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks: PORTER

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.94V I:0.1144A P:13.525W PF:0.9503 Freq:59.98Hz Lamp Flux:1441.44x1 lm		
NAME: LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1852	1852	1852	1852	1852	1852	1852	1852	1852	1852	1852	1852	1852	1852	1852	1852			
5	1778	1759	1743	1732	1719	1718	1718	1727	1737	1747	1772	1787	1804	1807	1804	1784			
10	1522	1498	1466	1440	1416	1413	1417	1437	1459	1482	1510	1529	1543	1550	1554	1532			
15	1212	1184	1149	1117	1089	1086	1085	1103	1114	1137	1171	1191	1212	1221	1228	1218			
20	915	898	868	839	816	810	806	821	835	850	868	884	905	916	925	917			
25	705	692	668	644	621	616	614	625	633	641	653	665	679	690	703	705			
30	548	539	521	504	487	481	480	486	490	497	506	514	527	539	548	550			
35	431	421	410	399	385	379	379	382	384	389	399	407	417	425	434	433			
40	336	328	320	312	301	296	296	298	297	301	312	319	328	335	343	340			
45	256	250	243	237	229	226	225	227	226	229	238	245	253	259	265	262			
50	192	186	180	175	170	168	167	168	168	170	176	182	190	194	199	195			
55	139	135	130	126	123	122	121	122	122	123	128	132	139	142	145	142			
60	99.8	96.5	92.4	90.0	88.1	87.8	87.1	87.5	87.6	88.7	91.4	94.9	99.6	102	103	101			
65	70.3	67.8	64.6	62.8	61.4	61.3	60.9	61.3	61.4	62.1	64.2	66.7	70.3	72.1	72.5	71.3			
70	46.5	44.6	42.2	40.8	40.0	40.0	39.5	39.9	39.9	40.3	41.9	43.8	46.6	47.8	48.1	47.1			
75	28.3	27.1	25.4	23.7	22.7	23.0	23.5	23.8	23.8	24.1	25.2	26.5	28.4	29.2	29.4	28.7			
80	15.1	14.2	11.4	8.68	7.31	7.96	10.2	11.9	12.1	12.4	12.2	11.6	12.2	13.2	15.4	15.4			
85	3.84	3.92	1.39	0.12	0.13	0.10	1.01	2.40	2.80	2.99	1.91	1.28	1.34	1.85	3.29	5.13			
90	0.08	0.09	0.08	0.07	0.08	0.08	0.09	0.09	0.14	0.14	0.13	0.12	0.11	0.12	0.12	0.13			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-04

□ Range: 0 - 90DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks: PORTER